CITY OF IRWINDALE

5050 N. IRWINDALE AVE., IRWINDALE CA 91706 • PHONE: (626) 430-2200

NOTICE AND AGENDA FOR THE SPECIAL AND REGULAR MEETING OF THE

CITY COUNCIL

SUCCESSOR AGENCY TO THE IRWINDALE COMMUNITY REDEVELOPMENT AGENCY

HOUSING AUTHORITY

February 25, 2026

SPECIAL MEETING – 5:00 p.m.
REGULAR MEETING – 6:00 PM

H. MANUEL ORTIZ - Mayor

ALBERT F. AMBRIZ - Mayor Pro Tem

MARK A. BRECEDA - Councilmember

LARRY G. BURROLA - Councilmember

MANUEL R. GARCIA - Councilmember

Via Zoom Webinar: https://us02web.zoom.us/j/87104592389

In the event that a Zoom broadcast is unavailable, staff will promptly notify the public through its social media platforms. The public meeting will proceed in accordance with The Brown Act.

Listen Over Phone: 1-669-900-6833; Webinar ID: 871-0459-2389

Spontaneous Communications: The public is encouraged to address the City Council on any matter listed on the agenda or on any other matter within its jurisdiction. The City Council will hear public comments on items listed on the agenda during discussion of the matter and prior to a vote. The City Council will hear public comments on matters not listed on the agenda during the Spontaneous Communications period.

Pursuant to provisions of the **Brown Act**, no action may be taken on a matter unless it is listed on the agenda, or unless certain emergency or special circumstances exist. The City Council may direct staff to investigate and/or schedule certain matters for consideration at a future City Council meeting.

Americans with Disabilities Act: In compliance with the ADA and Government Code section 54953(g), the City Council has adopted a reasonable accommodation policy to swiftly resolve accommodation requests. The policy can be found on the City's website: https://www.irwindaleca.gov/DocumentCenter/View/8075/AB-2449-Reasonable-Accommodation-Policy. If you need special assistance to participate in a City Council or Commission meeting or other services offered by this City, including an electronic or printed copy of the City's reasonable accommodation policy, please contact City Hall at (626) 430-2200. Notification of at least 48 hours prior to the meeting or time when services are needed will assist the City staff in assuring that reasonable arrangements can be made to provide accessibility to the meeting or service.

Note: Staff reports are available for inspection at the office of the Chief Deputy City Clerk, City Hall, 5050 N. Irwindale Avenue, during regular business hours (8:00 a.m. to 6:00 p.m., Monday through Thursday).

Compensation for Board Members: Compensation for the members of the Irwindale City Council is $750.16 a month. In accordance with Government Code Section 54952.3, Councilmembers will not receive any additional compensation or stipend for the convening of the regular meetings of the Successor Agency to the Irwindale Community Redevelopment Agency. Councilmembers will receive additional compensation of $50/meeting, not to exceed $150 per month, for the convening the regular meetings of the Irwindale Housing Authority and an additional compensation of $300/meeting for convening the regular meetings of the Irwindale Reclamation Authority.

Code of Ethics

As City of Irwindale Council Members, our fundamental duty is to serve the public good. We are committed to the principle of an efficient and professional local government. We will be exemplary in obeying the letter and spirit of Local, State and Federal laws and City policies affecting the operation of the government and in our private life. We will be independent and impartial in our judgment and actions.

We will work for the common good of the City of Irwindale community and not for any private or personal interest. We will endeavor to treat all people with respect and civility. We will commit to observe the highest standards of morality and integrity, and to faithfully discharge the duties of our office regardless of personal consideration. We shall refrain from abusive conduct, personal charges or verbal attacks upon the character or motives of others.

We will inform ourselves on public issues, listen attentively to public discussions before the body, and focus on the business at hand. We will base our decisions on the merit and substance of that business. We will be fair and equitable in all actions, claims or transactions. We shall not use our official position to influence government decisions in which we have a financial interest or where we have a personal relationship that could present a conflict of interest, or create a perception of a conflict of interest.

We shall not take advantage of services or opportunities for personal gain by virtue of our public office that are not available to the public in general. We shall refrain from accepting gifts, favors or promises of future benefit that might compromise our independence of judgment or action or give the appearance of being compromised.

We will behave in a manner that does not bring discredit or embarrassment to the City of Irwindale. We will be honest in thought and deed in both our personal and official lives.

Ultimate responsibility for complying with this Code of Ethics rests with the individual elected official. In addition to any other penalty as provided by law, violation of this Code of Ethics may be used as a basis for disciplinary action or censure of a Council Member.

These things we hereby pledge to do in the interest and purposes for which our government has been established.

IRWINDALE CITY COUNCIL

SPECIAL MEETING

1. CALL TO ORDER

2. ROLL CALL: Councilmembers: Mark A. Breceda, Larry G. Burrola, Manuel R. Garcia; Mayor Pro Tem Albert F. Ambriz; Mayor H. Manuel Ortiz

3. AB 2449 DISCLOSURES

Remote participation by a member of the legislative body for just cause or emergency circumstances

4. SPONTANEOUS COMMUNICATIONS

Spontaneous communications are limited to the special meeting agenda items only.

5. RECESS TO CLOSED SESSION

A. Public Employee Performance Evaluation
Pursuant to California Government Code Section 54957

Title: City Manager

B. Conference with Legal Counsel - Anticipated Litigation
Initiation of litigation [Pursuant to Government Code Section 54956.9 (d)(4)]

Number of Cases: One

C. Conference with Legal Counsel - Existing Litigation
Pursuant to Government Code Sections 54954.5(c), 54956.9(d)(1)

Name of Case: Luz Aguilar v. City of Irwindale
Case Number: 24STCV04897

D. Conference with Labor Negotiator
Pursuant to California Government Code Section 54957.6

Agency Designated Representatives: Julian A. Miranda, City Manager; Adrian Guerra, Legal Counsel; Mary Hull, Human Resources Manager

Employee Organizations: IPOA

E. Conference with Real Property Negotiator
Pursuant to California Government Code Section 54956.8

Property: 16359 Arrow Highway
Agency Negotiator: Julian A. Miranda, City Manager

Negotiating Parties: 39 Dalton Financial Ltd. Partnership
Under Negotiation: Acquisition of Property

6. RECONVENE IN OPEN SESSION

7. REPORT FROM CLOSED SESSION

8. ADJOURNMENT

REGULAR MEETING

9. CALL TO ORDER

10. PLEDGE OF ALLEGIANCE

11. INVOCATION

12. ROLL CALL: Councilmembers: Mark A. Breceda, Larry G. Burrola, Manuel R. Garcia; Mayor Pro Tem Albert F. Ambriz; Mayor H. Manuel Ortiz

13. AB 2449 DISCLOSURES

Remote participation by a member of the legislative body for just cause or emergency circumstances

14. CHANGES TO THE AGENDA

15. COUNCIL MEMBER TRAVEL REPORTS

16. COUNCILMEMBER COMMENTS

17. INTRODUCTION OF NEW EMPLOYEES/PROMOTIONS

A. Introduction of Public Services Office Specialist Eliana Arastu

B. Introduction of Irwindale Library Technician Lizette Lizardi

18. PROCLAMATIONS / PRESENTATIONS / COMMENDATIONS

A. Recognition of Irwindale Citizen of the Year Linda Marez

B. Recognition of Irwindale Resident Las Palmas Middle School Students Brooklyn Carr, Autumn Duran, Emma Frymark, Riley Hickman, and Darrick Kelly for exceptional CAASPP performance

C. Chamber of Commerce Quarterly Update

19. CONSENT CALENDAR

A. Warrants / Demands / Payroll
Department: Finance

Recommendation: Approve

B. Authorize City Manager to Approve Personnel Investigative Services Expenditures
Department: Human Resources

Recommendation: The City Council authorize an increase in expenditure authority under the professional services agreement with Susan Woolley, Esq., in an amount not to exceed $167,500, and authorize the City Manager to approve related expenditures necessary to process the final invoice for services rendered.

C. Adopt a Revised Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks
Department: Public Services

Recommendation: **Adopt Resolution No. 2026-10-3721**, entitled "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE RESCINDING RESOLUTION NO. 2024-80-3557 AND ADOPTING A REVISED FACILITY & OPEN SPACE RENTAL POLICY FOR THE DAN DIAZ RECREATION CENTER, IRWINDALE AQUATICS CENTER, AND IRWINDALE PARKS" by title only, with further reading waived. Approve revisions to the Irwindale Recreation's Assumption of Risk, Waiver and Release of Liability form to include the new language prohibiting the use of the Dan Diaz Recreation Center Gymnasium for organized play and group or individual coaching/training during open play times.

D. Designation of Authorized Agents to Act on behalf of the City to Obtain Emergency Financial Assistance
Department: Administration

Recommendation: **Adopt Resolution No. 2026-13-3724 entitled:** "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE DESIGNATING AUTHORIZED AGENTS TO ACT ON BEHALF OF THE CITY TO OBTAIN STATE AND FEDERAL FINANCIAL ASSISTANCE, AND APPROVE CAL OES FORM 130, 'DESIGNATION OF APPLICANT'S AGENT RESOLUTION FOR NON-STATE AGENCIES'".

E. Waive the Formal Bidding Procedures and Authorize the Issuance of a Puchase Order with Libraria for the Irwindale Public Library Opening Day Book Collection
Department: Library

Recommendation:
That the City Council of the City of Irwindale **adopt Resolution No. 2026-14-3725** entitled, "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE, CALIFORNIA, WAIVING FORMAL BIDDING PROCEDURES PURSUANT TO IRWINDALE MUNICIPAL CODE SECTION 3.44.080(H), AUTHORIZING THE ISSUANCE OF A PURCHASE ORDER TO LIBRARIA FOR THE CHILDREN, TEEN, AND ADULT OPENING DAY BOOK COLLECTION FOR THE IRWINDALE PUBLIC LIBRARY ".

20. SPONTANEOUS COMMUNICATIONS

This is the time set aside for members of the audience speak on items not on this agenda that are within the City Council's subject matter jurisdiction. State law prohibits any Council discussion or action on such communications unless 1) the Council by majority vote finds that a catastrophe or emergency exists; or 2) the Council by at least four votes finds that the matter (and need for action thereon) arose within the last five days. Since the Council cannot participate (except as stated), it is requested that all such communications be made in writing to be included on the next agenda for full discussion and action

All members of the public are asked to observe the City's Rules of Procedure and Public Meeting Decorum. The City's Rules of Procedure and Public Meeting Decorum can be found on the City's website, and Chapter 2.40 of the Irwindale Municipal Code. You may also contact the City Clerk's Office for copies.

Each speaker will be limited to 3 minutes unless such time limits are extended. If a member of the public wishes to donate their time to another speaker, both persons must be physically present and in attendance of the meeting. The Presiding Officer may, in his or her discretion, extend the 3-minute time limitation for the particular subject for all speakers. Organized groups of persons wishing to address the Council on the same subject should select a spokesperson to represent the group, so as to avoid unnecessary repetition. In no event shall the total amount of speaking time for exceed 6 minutes per person for the subject under discussion.

The Council may regulate a speaker who is speaking too long or out of order, being unduly repetitious, discussing irrelevancies, or extending to items not within its subject matter jurisdiction. Please be reminded that discrimination, abusive use of profanity, unruly disruption, and violent or physically threatening conduct is discouraged. Members of the public shall not disrupt the orderly conduct of the meeting. The Presiding Officer will request that a person cease any disruptive conduct, and if not immediately stopped, will direct the person to be removed from the meeting.

Public Comments will be heard in the following order:

1: In-person attendees

2: Teleconference attendees

3: In-person and teleconference attendees who have not previously provided comments on the matter(s) being discussed by the legislative body

21. NEW BUSINESS

At this time, members of the audience may ask to be heard regarding an item on New Business.

A. Syserco Energy Solutions- Energy Assessment Review
Department: Administration

Recommendation: Receive, file, and provide direction.

B. Building Plan Check Fee Waiver Request by Saint Cyril of Alexandria Coptic Orthodox Church
Department: Administration

Recommendation: That the Irwindale City Council discuss the options presented and provide direction to staff regarding the Saint Cyril of Alexandria Coptic Orthodox Church's Building Plan Check Fee Waiver Request:

OPTION 1. Deny Saint Cyril of Alexandria Coptic Orthodox Church building plan check fee waiver request; or

OPTION 2. **Adopt Resolution No. 2026-11-3722** entitled, "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE, FINDING THAT A PUBLIC PURPOSE WOULD BE SERVED BY APPROVING A FEE WAIVER TO SAINT CYRIL OF ALEXANDRIA COPTIC ORTHODOX CHURCH FOR BUILDING PLAN CHECK FEES OF $15,925.82", or

OPTION 3. Provide alternative direction to staff.

C. 1st Reading of Ordinance No. 815 - Reorganization of the City Council
Department: City Clerk

Recommendation: **Introduce for first reading Ordinance No. 815** entitled, "AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF IRWINDALE AMENDING SECTION 2.04.050 OF THE CITY OF IRWINDALE MUNICIPAL CODE TO UPDATE THE OCCASIONS OF THE CITY COUNCIL REORGANIZATION" reading by title only and waiving further reading thereof.

D. Discussion and Direction on Proposed Invocation Policy
Department: City Clerk

Recommendation: Review and discuss the proposed Invocation Policy, and provide direction to staff.

E. Mid-Year Financial Review and Adjustments to the FY 2025-2026 Budget
Department: Finance

Recommendation: It is recommended that the City Council adopt Resolution No. 2026-15-3726 entitled: "**A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE APPROVING ADJUSTMENTS TO THE BUDGET AND AUTHORIZING BUDGET AMENDMENT TO THE FY 2025-2026 ADOPTED BUDGET BY APPROPRIATING ADDITIONAL $424,170 FROM THE GENERAL FUND RESERVE FOR THE PROPOSED MID-YEAR EXPENDITURES."**

22. PUBLIC HEARINGS

At this time, members of the audience may ask to be heard regarding an item on Public Hearings.

A. Public Hearing and 2nd Reading and Adoption of Ordinance No. 817
Department: Engineering

Recommendation: That the City Council: 1) conduct the duly noticed public hearing; 2) Direct the City Attorney to read the title of **Ordinance No. 817** amending Title 15 of Irwindale Municipal Code by adding Chapter 15.05 – Existing Building Code and adopting by reference the 2026 Los Angeles County Building, Electrical, Plumbing, Mechanical, Residential, Green Building standards and Existing Building, Codes with County and City Amendments, waive further reading and adopt the ordinance on a roll call vote; and 3) direct the Engineering Department to file the adopted ordinance with the City amendments along with the findings and justification with the State Buildng Standards Commission.

23. CITY MANAGER'S REPORT

24. REQUESTS FOR AGENDA ITEMS BY CITY COUNCIL

If a City Council Member is interested in a task or project, the City Council Member shall request that the item be agendized in this section.

25. ADJOURN

SUCCESSOR AGENCY TO THE IRWINDALE COMMUNITY REDEVELOPMENT AGENCY

26. AB 2449 DISCLOSURES

Remote participation by a member of the legislative body for just cause or emergency circumstances

27. CONSENT CALENDAR

A. Minutes of the Regular Meeting held December 10, 2025
Department: City Clerk

Recommendation: Approve

28. SPONTANEOUS COMMUNICATIONS

This is the time set aside for members of the audience to speak on items not on this agenda. Spontaneous Communications for the Successor Agency are subject to the same State prohibitions and City guidelines as cited on the City Council agenda.

29. ADJOURN

HOUSING AUTHORITY

30. AB 2449 DISCLOSURES

Remote participation by a member of the legislative body for just cause or emergency circumstances

31. CONSENT CALENDAR

A. Minutes of the Regular Meeting held December 10, 2025
Department: City Clerk

Recommendation: Approve

32. SPONTANEOUS COMMUNICATIONS

This is the time set aside for members of the audience to speak on items not on this agenda. Spontaneous Communications for the Housing Authority are subject to the same State prohibitions and City guidelines as cited on the City Council agenda.

33. ADJOURN

AFFIDAVIT OF POSTING

I, Laura M. Nieto, Chief Deputy City Clerk, certify that I caused the agenda for the regular meeting of the City Council, Irwindale Successor Agency to the Irwindale Community Redevelopment Agency and Housing Authority, to be held on February 25, 2026, be posted at the City Hall, Library, and Post Office on **February 19, 2026**.

Laura M. Nieto

_____

Laura M. Nieto, MMC
Chief Deputy City Clerk

CIUDAD DE IRWINDALE

5050 N. IRWINDALE AVE., IRWINDALE CA 91706 • TELÉFONO: (626) 430-2200

AVISO Y AGENDA PARA LA REUNIÓN ESPECIAL Y REGULAR DE LA

AGENCIA SUCESORA DEL AYUNTAMIENTO

DE LA
AGENCIA DE REURBANIZACIÓN COMUNITARIA DE IRWINDALE

AUTORIDAD DE VIVIENDA

25 de febrero de 2026

REUNIÓN EXTRAORDINARIA – 17:00. REUNIÓN ORDINARIA – 18:00

H. MANUEL ORTIZ - Alcalde

ALBERT F. AMBRIZ - Alcalde Pro Tempore

MARK A. BRECEDA - Concejal

LARRY G. BURROLA - Concejal

MANUEL R. GARCIA - Concejal

A través de un seminario web por Zoom: https://us02web.zoom.us/j/87104592389
En caso de que no haya una emisión por Zoom disponible, el personal notificará rápidamente al público a través de sus plataformas de redes sociales. La reunión pública se llevará a cabo conforme a la Ley Brown.
Escuchar por teléfono: 1-669-900-6833; ID del seminario web: 871-0459-2389

Comunicaciones Espontáneas: Se anima al público a dirigirse al Ayuntamiento sobre cualquier asunto listado en la agenda o sobre cualquier otro asunto dentro de su jurisdicción. El Ayuntamiento escuchará los comentarios públicos sobre los puntos listados en la agenda durante la discusión del asunto y antes de la votación. El Ayuntamiento escuchará comentarios públicos sobre asuntos que no figuren en la agenda durante el periodo de Comunicaciones Espontáneas.

De acuerdo con las disposiciones de la **Ley Brown**, no se puede tomar ninguna medida sobre un asunto a menos que esté listado en la agenda, o salvo que existan ciertas circunstancias de emergencia o especiales. El Ayuntamiento puede ordenar al personal que investigue y/o programe ciertos asuntos para su consideración en una futura reunión del Ayuntamiento.

Ley de Estadounidenses con Discapacidades: En cumplimiento de la ADA y la sección 54953(g) del Código Gubernamental, el Ayuntamiento ha adoptado una política de adaptaciones razonables para resolver rápidamente las solicitudes de adaptaciones. La política puede consultarse en la página web de la ciudad: https://www.irwindaleca.gov/DocumentCenter/View/8075/AB-2449-Reasonable-Accommodation-Policy. Si necesita asistencia especial para participar en una reunión del Ayuntamiento o de la Comisión u otros servicios ofrecidos por esta ciudad, incluyendo una copia electrónica o impresa de la política de adaptaciones razonables de la ciudad, por favor contacte con el Ayuntamiento en el (626) 430-2200. La notificación con al menos 48 horas de antelación a la reunión o a la hora en que se necesiten servicios ayudará al personal de la ciudad a garantizar que se puedan hacer arreglos razonables para facilitar la accesibilidad a la reunión o servicio.

Nota: Los informes del personal están disponibles para su inspección en la oficina del Subsecretario Jefe de la Ciudad, Ayuntamiento, 5050 N. Irwindale Avenue, durante el horario laboral habitual (de 8:00 a.m. a 6:00 p.m., de lunes a jueves).

Remuneración para los miembros de la Junta: La remuneración para los miembros del Ayuntamiento de Irwindale es de 750,16 dólares al mes. De acuerdo con la Sección 54952.3 del Código de Gobierno, los concejales no recibirán ninguna compensación ni asignación adicional por la convocatoria de las reuniones regulares de la Agencia Sucesora de la Agencia de Reurbanización Comunitaria de Irwindale. Los concejales recibirán una compensación adicional de 50 dólares por reunión, que no excederá los 150 dólares mensuales, por convocar las reuniones ordinarias de la Autoridad de Vivienda de Irwindale y una compensación adicional de 300 dólares por reunión por convocar las reuniones ordinarias de la Autoridad de Reclamación de Irwindale.

Código de Ética

Como miembros del Consejo de la Ciudad de Irwindale, nuestro deber fundamental es servir al bien público. Estamos comprometidos con el principio de un gobierno local eficiente y profesional. Seremos ejemplares en obedecer la letra y el espíritu de las leyes locales, estatales y federales y de las políticas municipales que afectan al funcionamiento del gobierno y a nuestra vida privada. Seremos independientes e imparciales en nuestro juicio y acciones.

Trabajaremos por el bien común de la comunidad de la ciudad de Irwindale y no por ningún interés privado o personal. Nos esforzaremos por tratar a todas las personas con respeto y cortesía. Nos comprometeremos a observar los más altos estándares de moralidad e integridad, y a cumplir fielmente con los deberes de nuestro cargo sin importar las consideraciones personales. Nos abstendremos de conductas abusivas, acusaciones personales o ataques verbales al carácter o los motivos de otros.

Nos informaremos sobre asuntos públicos, escucharemos atentamente los debates públicos ante el órgano y nos centraremos en los asuntos que tenemos entre manos. Basaremos nuestras decisiones en el mérito y el fondo de ese negocio. Seremos justos y equitativos en todas las acciones, reclamaciones o transacciones. No utilizaremos nuestra posición oficial para influir en decisiones gubernamentales en las que tengamos un interés financiero o cuando tengamos una relación personal que pueda suponer un conflicto de intereses, o crear la percepción de un conflicto de interés.

No aprovecharemos servicios u oportunidades para beneficio personal en virtud de nuestro cargo público que no estén disponibles para el público en general. Nos abstendremos de aceptar regalos, favores o promesas de beneficio futuro que puedan comprometer nuestra independencia de juicio o acción o dar la apariencia de que lo estamos.

Nos comportaremos de una manera que no traiga descrédito ni vergüenza a la ciudad de Irwindale. Seremos honestos en pensamiento y en hechos tanto en nuestra vida personal como oficial.

La responsabilidad última de cumplir con este Código de Ética recae en el cargo electo individual. Además de cualquier otra sanción prevista por la ley, la violación de este Código de Ética puede utilizarse como base para acciones disciplinarias o censura de un miembro del Consejo.

Estas cosas nos comprometemos a hacer en el interés y los fines para los que se ha establecido nuestro gobierno.

AYUNTAMIENTO DE IRWINDALE

REUNIÓN ESPECIAL

1. LLAMADA AL ORDEN

2. PASE NOMINAL: **Concejales: Mark A. Breceda, Larry G. Burrola, Manuel R. García; el alcalde pro tempore Albert F. Ambriz; Alcalde H. Manuel Ortiz**

3. DIVULGACIONES DE LA LEY LEY 2449

Participación remota de un miembro del órgano legislativo por causa justificada o circunstancias de emergencia

4. COMUNICACIONES ESPONTÁNEAS

Las comunicaciones espontáneas se limitan únicamente a los puntos de la agenda de la reunión extraordinaria.

5. RECESO A SESIÓN CERRADA

Un. Evaluación del desempeño del empleado público
conforme al Código del Gobierno de California, Sección 54957 Título: Administrador de la Ciudad

B. Conferencia con Asesor Legal - Inicio previsto
de litigios [Conforme a la Sección 54956.9 (d)(4)] del Código de Gobierno.

Número de casos: Uno

C. Conferencia con el Asesor Legal - Litigio Existente
conforme al Código de Gobierno Secciones 54954.5(c), 54956.9(d)(1) Nombre del caso: Luz Aguilar contra la Ciudad de Irwindale Número de caso: 24STCV04897

D. Conferencia con el negociador laboral
conforme al Código del Gobierno de California Sección 54957.6
Representantes designados de la Agencia: Julian A. Miranda, gerente municipal; Adrian Guerra, asesor legal; Mary Hull, Responsable de Recursos Humanos

de Organizaciones de Empleados: IPOA

E. Conferencia con el Negociador de Bienes Raíces
Conforme al Código de Gobierno de California Sección 54956.8

Propiedad: 16359 Arrow Highway Negociador de la Agencia: Julian A. Miranda, Gerente Municipal
Partes negociadoras: 39 Dalton Financial Ltd. Sociedad En Negociación: Adquisición de Propiedad

6. RECONVOCAR EN SESIÓN ABIERTA

7. INFORME DE LA SESIÓN A PUERTA CERRADA

8. Suspensión

REUNIÓN REGULAR

9. LLAMADA AL ORDEN

10. JURAMENTO A LA BANDERA

11. INVOCACIÓN

12. PASE NOMINAL: **Concejales: Mark A. Breceda, Larry G. Burrola, Manuel R. García; el alcalde pro tempore Albert F. Ambriz; Alcalde H. Manuel Ortiz**

13. DIVULGACIONES DE LA LEY LEY 2449

Participación remota de un miembro del órgano legislativo por causa justificada o circunstancias de emergencia

14. CAMBIOS EN LA AGENDA

15. INFORMES DE VIAJE DE LOS MIEMBROS DEL CONCEJO

16. COMENTARIOS DE UN CONCEJAL

17. INTRODUCCIÓN DE NUEVOS EMPLEADOS/PROMOCIONES

Un. Introducción de la Especialista en Oficina de Servicios Públicos Eliana Arastu

B. Introducción de la técnica de la biblioteca de Irwindale, Lizette Lizardi

18. PROCLAMACIONES / PRESENTACIONES / CONDECORACIONES

Un. Reconocimiento a Linda Marez, Ciudadana del Año de Irwindale

B. Reconocimientos a los estudiantes residentes de Irwindale en Las Palmas Middle School Brooklyn Carr, Autumn Duran, Emma Frymark, Riley Hickman y Darrick Kelly por su excepcional actuación en CAASPP

C. Actualización trimestral de la Cámara de Comercio

19. CALENDARIO DE CONSENTIMIENTO

Un. Órdenes de garantía / Demandas / Departamento de nóminas
: Finanzas

Recomendación: Aprobar

B. Autorizar al Gerente Municipal a Aprobar Gastos de Servicios de Investigación de Personal Departamento
: Recursos Humanos

Recomendación: El Ayuntamiento autoriza un aumento de la autoridad de gasto bajo el acuerdo de servicios profesionales con Susan Woolley, Esq., por una cantidad que no exceda los 167.500 dólares, y autoriza al Gerente Municipal a aprobar los gastos relacionados necesarios para tramitar la factura final por servicios prestados.

C. Adoptar una Política Revisada de Alquiler de Instalaciones y Espacios Abiertos para el Centro Recreativo Dan Díaz, el Centro Acuático de Irwindale y el Departamento de Parques de Irwindale
: Servicios Públicos

Recomendación: **Adoptar la Resolución Nº 2026-10-3721**, titulada "RESOLUCIÓN DEL AYUNTAMIENTO DE LA CIUDAD DE IRWINDALE DE RESCINDIR RESOLUCIÓN Nº 2024-80-3557 Y QUE ADOPTA UNA POLÍTICA REVISADA DE ALQUILER DE INSTALACIONES Y ESPACIOS ABIERTOS PARA EL CENTRO RECREATIVO DAN DÍAZ, EL CENTRO ACUÁTICO DE IRWINDALE Y LOS PARQUES IRWINDALE" solo por título, con exención de lecturas adicionales. Aprobar revisiones al formulario de Asunción de Riesgo, Exención y Liberación de Responsabilidad de Irwindale Recreation para incluir el nuevo texto que prohíbe el uso del Gimnasio Dan Diaz Recreation Center para juegos organizados y entrenamiento/entrenamiento grupal o individual durante los horarios de juego abiertos.

D. Designación de Agentes Autorizados para Actuar en nombre de la Ciudad y así obtener Asistencia Financiera de Emergencia
Departamento de Administración: Administración

Recomendación: **Adoptar la Resolución Nº 2026-13-3724 titulada:** "RESOLUCIÓN DEL AYUNTAMIENTO DE LA CIUDAD DE IRWINDALE DESIGNANDO AGENTES AUTORIZADOS PARA ACTUAR EN NOMBRE DE LA CIUDAD Y OBTENER ASISTENCIA FINANCIERA ESTATAL Y FEDERAL, Y APROBAR EL FORMULARIO CAL OES 130, 'RESOLUCIÓN DE DESIGNACIÓN DE AGENTES DEL SOLICITANTE PARA AGENCIAS NO ESTATALES'".

E. Renunciar a los procedimientos formales de licitación y autorizar la emisión de una orden de compra con la Biblioteca para la Biblioteca Pública de Irwindale Departamento de Colección de Libros del Día
de Inauguración: Biblioteca

Recomendación:
Que el Ayuntamiento de la Ciudad de Irwindale **adopte la Resolución Nº 2026-14-3725** titulada, "UNA RESOLUCIÓN DEL AYUNTAMIENTO DE LA CIUDAD DE IRWINDALE, CALIFORNIA, QUE RENUNCIA A LOS PROCEDIMIENTOS FORMALES DE LICITACIÓN CONFORME A LA SECCIÓN

3.44.080(H) DEL CÓDIGO MUNICIPAL DE IRWINDALE, AUTORIZANDO LA EMISIÓN DE UNA ORDEN DE COMPRA A LIBRARIA PARA LA COLECCIÓN DE LIBROS DEL DÍA DE APERTURA PARA NIÑOS, ADOLESCENTES Y ADULTOS DE LA BIBLIOTECA PÚBLICA DE IRWINDALE".

20. COMUNICACIONES ESPONTÁNEAS

Este es el tiempo reservado para que los miembros del público hablen sobre asuntos que no están en esta agenda y que están dentro de la competencia del Ayuntamiento. La ley estatal prohíbe cualquier discusión o acción del Consejo sobre dichas comunicaciones a menos que 1) el Consejo determine por mayoría que existe una catástrofe o emergencia; o 2) que el Consejo, por al menos cuatro votaciones, determine que el asunto (y la necesidad de actuar al respecto) surgió en los últimos cinco días. Dado que el Consejo no puede participar (salvo lo que se indique en el caso), se solicita que todas estas comunicaciones se hagan por escrito para incluirlas en la siguiente agenda y su plena discusión y acción

. Se pide a todos los miembros del público que respeten las Normas de Procedimiento y el Decoro de las Reuniones Públicas de la Ciudad. Las Normas de Procedimiento de la Ciudad y el Decoro en las Reuniones Públicas pueden consultarse en la página web de la Ciudad y en el Capítulo 2.40 del Código Municipal de Irwindale. También puede contactar con la Oficina del Secretario Municipal para obtener copias.

Cada ponente estará limitado a 3 minutos a menos que se amplíen dichos límites de tiempo. Si un miembro del público desea donar su tiempo a otro orador, ambas deben estar físicamente presentes y asistir a la reunión. El Presidente de la Mesa podrá, a su discreción, extender el límite de tiempo de 3 minutos para el tema concreto para todos los oradores. Los grupos organizados de personas que deseen dirigirse al Consejo sobre el mismo tema deben elegir a un portavoz para representar al grupo, con el fin de evitar repeticiones innecesarias. En ningún caso el tiempo total de intervención por persona debe superar los 6 minutos por persona para el tema en cuestión.

El Consejo puede regular a un orador que hable demasiado o fuera de lugar, que sea excesivamente repetitivo, que discuta irrelevancias o que extienda asuntos que no estén dentro de su jurisdicción. Por favor, recuerda que se desaconseja la discriminación, el uso abusivo de palabrotas, la interrupción descontrolada y la conducta violenta o físicamente amenazante. Los ciudadanos no deben interrumpir el orden de la reunión. El Presidente solicitará que una persona cese cualquier conducta disruptiva y, si no se detiene de inmediato, ordenará que la persona sea apartada de la reunión.

Los comentarios públicos se escucharán en el siguiente orden:

1: Asistentes presenciales

2: Asistentes a la teleconferencia

3: Asistentes presenciales y por teleconferencia que no hayan ofrecido comentarios previamente sobre el(los) asunto(s) que está tratando el órgano legislativo

21. NUEVOS NEGOCIOS

En este momento, los miembros del público pueden pedir que se escuchen sobre un tema de Nuevos Negocios.

Un. Syserco Energy Solutions - Departamento de Revisión de Evaluación Energética
: Administración

Recomendación: Recibir, presentar y dar instrucciones.

B. Solicitud de exención de tasas de comprobación de planos de construcción por parte de San Cirilo de Alejandría Departamento de la Iglesia Copta Ortodoxa
: Administración

Recomendación: Que el Ayuntamiento de Irwindale discuta las opciones presentadas y proporcione orientación al personal respecto a la solicitud de exención de la tasa de inspección del plano de construcción de la Iglesia Ortodoxa Copta de San Cirilo de Alejandría:

OPCIÓN 1. Negar la solicitud de exención de cuotas de la iglesia ortodoxa copta de San Cirilo de Alejandría; o

OPCIÓN 2. **Adoptar la Resolución Nº 2026-11-3722** titulada, "UNA RESOLUCIÓN DEL AYUNTAMIENTO DE LA CIUDAD DE IRWINDALE, QUE DETERMINA QUE SE CUMPLIRÍA UN PROPÓSITO PÚBLICO APROBANDO UNA EXENCIÓN DE TASAS PARA LA IGLESIA COPTA ORTODOXA DE SAN CIRILO DE ALEJANDRÍA POR TASAS DE REVISIÓN DE PLANOS DE CONSTRUCCIÓN DE $15,925,82", o

OPCIÓN 3. Proporciona una dirección alternativa al personal.

C. 1ª Lectura de la Ordenanza nº 815 - Reorganización del Departamento del Ayuntamiento
: Secretario Municipal

Recomendación: **Presentar para primera lectura la Ordenanza nº 815** titulada "UNA ORDENANZA DEL AYUNTAMIENTO DE LA CIUDAD DE IRWINDALE QUE MODIFICA LA SECCIÓN 2.04.050 DEL CÓDIGO MUNICIPAL DE LA CIUDAD DE IRWINDALE PARA ACTUALIZAR LOS MOTIVOS DE LA REORGANIZACIÓN DEL AYUNTAMIENTO" leyéndose solo por título y renunciando a su lectura adicional.

D. Discusión y orientación sobre la propuesta
de invocación Departamento de Política: Secretario Municipal

Recomendación: Revisar y debatir la propuesta de Política de Invocación y proporcionar instrucciones al personal.

E. Revisión Financiera a mitad de año y ajustes al Departamento Presupuestario del Año Fiscal 2025-2026
: Finanzas

Recomendación: Se recomienda que el Ayuntamiento adopte la Resolución Nº 2026-15-3726 titulada: "**UNA RESOLUCIÓN DEL AYUNTAMIENTO DE LA CIUDAD DE IRWINDALE APROBANDO AJUSTES AL PRESUPUESTO Y AUTORIZANDO LA ENMIENDA PRESUPUESTARIA AL PRESUPUESTO ADOPTADO PARA EL AÑO FISCAL 2025-2026 MEDIANTE LA ASIGNACIÓN ADICIONAL DE 424.170 DÓLARES DE LA RESERVA DEL FONDO GENERAL PARA LOS GASTOS PROPUESTOS A MITAD DE AÑO."**

22. AUDIENCIAS PÚBLICAS

En este momento, los miembros del público pueden solicitar ser escuchados respecto a un tema relacionado con las Audiencias Públicas.

Un. Audiencia pública y segunda lectura y adopción de la Ordenanza nº 817
Departamento de Ingeniería

Recomendación: Que el Ayuntamiento: 1) lleve a cabo la audiencia pública debidamente notificada; 2) Ordenar al Fiscal de la Ciudad que lea el título de **la Ordenanza nº 817** que modifica el Título 15 del Código Municipal de Irwindale añadiendo el Capítulo 15.05 – Código de Edificación Existente y adoptando por referencia los estándares de Edificación, Electricidad, Fontanería, Mecánica, Residencial, Construcción Ecológica y Códigos de Edificios Existentes del Condado de Los Ángeles de 2026 y Enmiendas del Condado y Ciudad Existentes, renunciar a lecturas adicionales y adoptar la ordenanza en votación nominal; y 3) ordenar al Departamento de Ingeniería que presente el la ordenanza adoptada junto con las enmiendas de la ciudad junto con los hallazgos y justificaciones ante la Comisión Estatal de Normas de Construcción.

23. INFORME DEL GERENTE MUNICIPAL

24. SOLICITUDES DE PUNTOS DEL ORDEN DEL DÍA POR PARTE DEL AYUNTAMIENTO

Si un concejal está interesado en una tarea o proyecto, deberá solicitar que el punto sea agendizado en esta sección.

25. Levante la sesión

AGENCIA SUCESORA DE LA AGENCIA DE REURBANIZACIÓN COMUNITARIA DE IRWINDALE

26. DIVULGACIONES DE LA LEY LEY 2449

Participación remota de un miembro del órgano legislativo por causa justificada o circunstancias de emergencia

27. CALENDARIO DE CONSENTIMIENTO

Un. Acta de la reunión ordinaria celebrada el 10 de diciembre de 2025
Departamento: Secretario Municipal

Recomendación: Aprobar

28. COMUNICACIONES ESPONTÁNEAS

Este es el tiempo reservado para que los miembros del público hablen sobre asuntos que no están en esta agenda. Las comunicaciones espontáneas para la Agencia Sucesora están sujetas a las mismas prohibiciones estatales y directrices municipales que se citan en la agenda del Ayuntamiento.

29. Levante la sesión

AUTORIDAD DE VIVIENDA

30. DIVULGACIONES DE LA LEY LEY 2449

Participación remota de un miembro del órgano legislativo por causa justificada o circunstancias de emergencia

31. CALENDARIO DE CONSENTIMIENTO

Un. Acta de la reunión ordinaria celebrada el 10 de diciembre de 2025
Departamento: Secretario Municipal

Recomendación: Aprobar

32. COMUNICACIONES ESPONTÁNEAS

Este es el tiempo reservado para que los miembros del público hablen sobre asuntos que no están en esta agenda. Las Comunicaciones Espontáneas para la Autoridad de Vivienda están sujetas a las mismas prohibiciones estatales y directrices municipales que se citan en la agenda del Ayuntamiento.

33. Levante la sesión

DECLARACIÓN JURADA DE PUBLICACIÓN

Yo, Laura M. Nieto, Subsecretaria Adjunta Jefe de la Ciudad, certifico que organicé que la agenda de la reunión ordinaria del Ayuntamiento, Agencia Sucesora de Irwindale de la Agencia de Reurbanización Comunitaria de Irwindale y la Autoridad de Vivienda, que se celebrará el 25 de febrero de 2026, se publique en el Ayuntamiento, la Biblioteca y la Oficina de Correos el **19 de febrero de 2026**.

Laura M. Nieto

_____Laura M. Nieto, MMCCuyp secretario adjunto de la ciudad

Accounts Payable

Checks by Date - Summary by Check Number

User: kzhang
Printed: 2/17/2026 4:33 PM

Check No	Vendor No	Vendor Name	Check Date	Check Amount
107512	CALIFO56	California State Disbursement Unit	02/05/2026	604.15
107513	CALIFO57	California State Disbursement Unit	02/05/2026	143.07
107514	LOSANG31	Los Angeles County Sheriff's Dept.	02/05/2026	99.25
107515	ALESHIRE	Aleshire & Wynder, LLP	02/05/2026	34,526.00
107516	BATE01	Elior Inc.	02/05/2026	17,573.75
107517	FCG01	FCG Consultants Inc.	02/05/2026	19,975.70
107518	FEDEX	FedEx	02/05/2026	86.67
107519	GEOLOG	Geologic Associates	02/05/2026	26,136.20
107520	INTELL01	Intelli-tech, Inc.	02/05/2026	141,835.69
107521	IRWIND21	Irwindale Hand Wash & Auto Detail	02/05/2026	244.93
107522	AMAZON1	Amazon Capital Services, Inc.	02/05/2026	2,423.90
107523	ARMS01	James Armstrong	02/05/2026	465.03
107524	AT&T06	AT & T	02/05/2026	168.55
107525	CINGULAR	AT & T Mobility	02/05/2026	1,557.21
107526	ATHENS	Athens Services	02/05/2026	6,049.43
107527	Ayala01	Leonor Ayala	02/05/2026	760.00
107528	AZUSALW	Azusa Light & Water	02/05/2026	96.80
107529	CALIFO01	California Contract Cities	02/05/2026	15,000.00
107530	CATALI	Catalina Channel Express	02/05/2026	2,040.00
107531	CHARTE01	Charter Communications	02/05/2026	2,806.63
107532	CHARTE04	Charter Communicatons	02/05/2026	187.28
107533	EDDCAS	Employment Development Dept.	02/05/2026	2,541.00
107534	ESPI11	Victoria M. Espino	02/05/2026	60.00
107535	EVANS02	Gloria Evans	02/05/2026	225.00
107536	FEDEX	FedEx	02/05/2026	70.31
107537	FLOR11	Alejandra Flores	02/05/2026	75.00
107538	FLORE01	Karla Flores	02/05/2026	840.00
107539	FRONT01	Frontier Communications	02/05/2026	750.64
107540	GAMEZ01	Pablo Gamez	02/05/2026	75.00
107541	SOUTHE17	Golden State Water Company	02/05/2026	2,764.25
107542	GONZAL35	Arnold Gonzalez	02/05/2026	75.00
107543	GRAING	Grainger	02/05/2026	19.60
107544	HINDER	Hinderliter, De Llamas & Assoc	02/05/2026	34.56
107545	HOYEN	Noelle Hoye	02/05/2026	1,050.00
107546	JOHNNY02	Johnny's Pool Service	02/05/2026	59.64
107547	L&LBUI	L & L Building Materials	02/05/2026	44.14
107548	LAWE01	Law Enforcement Medical Services, Inc.	02/05/2026	825.00
107549	LEDEZMA	Erica Ledezma	02/05/2026	480.00
107550	LEWISE	Lewis Engraving, Inc.	02/05/2026	26.52
107551	LOPEZJ01	Jade Lopez	02/05/2026	54.26
107552	LANCES	LSL, LLP	02/05/2026	6,225.00
107553	MIRAND25	Blanche V. Miranda	02/05/2026	260.00
107554	NAVARR04	Humberto Navarro Jr.	02/05/2026	250.00
107555	OFFICE03	ODP Business Solutions, LLC	02/05/2026	766.19
107556	OPTUM01	OptumRx, Inc.	02/05/2026	39,241.24
107557	PACH02	Adriana Pacheco	02/05/2026	300.00

Accounts Payable

Checks by Date - Summary by Check Number

User: kzhang
Printed: 2/17/2026 4:33 PM

Check No	Vendor No	Vendor Name	Check Date	Check Amount
107558	PEER01	Peerless Network, Inc	02/05/2026	1,411.78
107559	PETTYC05	City of Irwindale-Admin Petty Cash	02/05/2026	748.70
107560	SCHO02	Susan Schock	02/05/2026	120.00
107561	SERRA10	Teresa Serrano	02/05/2026	10.00
107562	GASCOM	SoCalGas	02/05/2026	872.99
107563	SCE02	Southern California Edison	02/05/2026	40,059.90
107564	TABI01	Matthew Tabizon	02/05/2026	73.95
107565	VALLEY09	Valley View Mutual Water Co.	02/05/2026	151.67
107566	VILLA12	Carmen Villalobos	02/05/2026	20.00
107567	VISION01	Vision Service Plan - (CA)	02/05/2026	2,796.57
107568	WAGONER	Pamela Wagoner	02/05/2026	560.00
107569	WILL01	April Williams	02/05/2026	315.00
107570	GAMEZ01	Pablo Gamez	02/05/2026	580.40
107571	ALLCI01	All City Management Services, Inc	02/12/2026	1,121.70
107572	AMAZON1	Amazon Capital Services, Inc.	02/12/2026	224.85
107573	AZBUS01	A-Z Bus Sales	02/12/2026	39.18
107574	AZUSALW	Azusa Light & Water	02/12/2026	193.60
107575	MIJACA	Bay Alarm Company	02/12/2026	422.00
107576	BENE02	Benefit Coordinator Corporation (BCC)	02/12/2026	3,378.60
107577	BLANCO01	Mario Blanco	02/12/2026	525.00
107578	WOOD02	Nathaniel Burrola-Woodard	02/12/2026	44.47
107579	CALIFO02	California American Water	02/12/2026	524.13
107580	CARRIL11	Vincent Carrillo	02/12/2026	3,000.00
107581	CINTAS	Cintas Corporation #693	02/12/2026	846.01
107582	CITYOF23	City Of West Covina	02/12/2026	7,650.00
107583	CONCE01	Concentra	02/12/2026	64.00
107584	ESPINO10	Iris Espino	02/12/2026	193.92
107585	FFCAI	Foster & Foster Consulting Actuaries, Inc.	02/12/2026	2,880.00
107586	HOMEDE	Home Depot Credit Services	02/12/2026	1,405.89
107587	HOVE01	Armando Hovey	02/12/2026	500.00
107588	IRWIND21	Irwindale Hand Wash & Auto Detail	02/12/2026	1,308.62
107589	LEON03	Sandra Leon	02/12/2026	35.83
107590	LEWISE	Lewis Engraving, Inc.	02/12/2026	132.60
107591	MEJIA10	Giselle Mejia	02/12/2026	300.00
107592	MMASC	MMASC	02/12/2026	125.00
107593	OFFICE03	ODP Business Solutions, LLC	02/12/2026	1,660.28
107594	ORKINP	Orkin Pest Control	02/12/2026	350.00
107595	PHASEII	PARS	02/12/2026	1,750.00
107596	PEER01	Peerless Network, Inc	02/12/2026	1,413.12
107597	PETTYC05	City of Irwindale-Admin Petty Cash	02/12/2026	446.67
107598	RANCHO01	Rancho Duarte Florist	02/12/2026	155.00
107599	SCFUELS	SC Fuels	02/12/2026	7,055.57
107600	SCE02	Southern California Edison	02/12/2026	634.43
107601	SUNBEL02	Sunbelt Rentals	02/12/2026	357.00
107602	TEXAS01	Texas Life Insurance Co.	02/12/2026	4,167.78
107603	VALLEY01	Valley County Water District	02/12/2026	278.43

Accounts Payable

Checks by Date - Summary by Check Number

User: kzhang
Printed: 2/17/2026 4:33 PM

Check No	Vendor No	Vendor Name	Check Date	Check Amount
107604	VDM01	Van Dermyden Makus	02/12/2026	2,199.50
107605	verizonw	Verizon Wireless	02/12/2026	2,943.60
107606	WALT01	Walters Wholesale Electric Co.	02/12/2026	295.77
107607	HDSUP01	WHITE CAP, L.P.	02/12/2026	191.15
107608	WOLL02	Susan Margaret Woolley	02/12/2026	45,590.50
107609	YANE01	Vanessa Yanez	02/12/2026	44.08
107610	ACCO01	ACCO Engineered Systems	02/25/2026	2,556.00
107611	ALLCI01	All City Management Services, Inc	02/25/2026	1,009.53
107612	AMERI02	American Business Bank	02/25/2026	28,023.48
107613	BAXTER01	Badge Frame, Inc	02/25/2026	1,536.24
107614	CALI12	California Consulting Inc.	02/25/2026	4,900.00
107615	CANYON01	Canyon Auto Services LLC	02/25/2026	692.27
107616	CITY0F01	City of Pasadena	02/25/2026	13,717.00
107617	CITYOF23	City Of West Covina	02/25/2026	5,550.00
107618	COSTA01	Costar Realty Information, Inc.	02/25/2026	460.41
107619	CWE01	CWE	02/25/2026	27,055.20
107620	DURATE01	DuraTech USA, Inc.	02/25/2026	11,257.83
107621	BATE01	Elior Inc.	02/25/2026	8,351.25
107622	FCG01	FCG Consultants Inc.	02/25/2026	28,644.40
107623	GEO20	Geo-Advantec , Inc.	02/25/2026	9,287.50
107624	GEOLOG	Geologic Associates	02/25/2026	33,977.30
107625	INTELL01	Intelli-tech, Inc.	02/25/2026	39,599.24
107626	ITERIS	Iteris, Inc.	02/25/2026	200.00
107627	JOEAGO	Joe A. Gonsalves & Son	02/25/2026	2,375.00
107628	KIDDER01	Kidder Mathews of California Inc	02/25/2026	1,600.00
107629	LSA01	LSA Associates, Inc.	02/25/2026	52,975.31
107630	MAINTE01	Maintex	02/25/2026	978.48
107631	MIDAS	Manuel C Muratalla	02/25/2026	1,283.61
107632	MARIPO	Mariposa Landscapes, Inc.	02/25/2026	9,196.00
107633	ROBERT10	RC Construction Service Inc. Robert Clapper (	02/25/2026	532,446.00
107634	SIERRA11	Sierra Monrovia Chevrolet, LLC	02/25/2026	812.43
107635	UNITED05	United Rentals, Inc.	02/25/2026	627.03
107636	VALLEY01	Valley County Water District	02/25/2026	49,871.58
107637	WESTCO05	West Coast Arborists, Inc.	02/25/2026	1,487.30

Report Total (126 checks): 1,342,532.22

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Authorize City Manager to Approve Personnel Investigative Services Expenditures

City Manager's Recommendation:

The City Council authorize an increase in expenditure authority under the professional services agreement with Susan Woolley, Esq., in an amount not to exceed $167,500, and authorize the City Manager to approve related expenditures necessary to process the final invoice for services rendered.

Administrative Action:

Submitted by:

Julian A. Miranda, City Manager

Prepared by:

Mary Hull, Human Resources/Risk Manager

Reviewed by:

Adrian R. Guerra, City Attorney

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager

Background and Analysis:

In July 2025, the City Manager, on behalf of the City of Irwindale ("City"), entered into a professional services agreement with Susan Woolley, Esq., a licensed attorney specializing in employment investigations, to conduct three personnel investigations. The initial amount authorized was $30,000, which is within the City Manager's spending authority as established by City Council Resolution No. 2019-27-3111 and pursuant to Section 2.13.040(H) of the Irwindale Municipal Code.

Due to the scope and complexity of the investigations, the services required exceeded the original authorization. On November 12, 2025, the City Council approved an increase in the agreement to $115,000 to accommodate the expanded investigative work. As final billing has been received, it is necessary to further increase the total expenditure authority to $167,500 in order to process payment of the final invoice for services rendered.

The original agreement did not reflect a maximum compensation amount. Accordingly, no amendment to the agreement is required to reflect the additional expenditure.

Fiscal Impact:

Sufficient funds are available in the Risk Management Liability Claims account to cover the additional expenditure. No additional appropriation is required.

Attachments:

None

Item #19.C.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Adopt a Revised Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks

City Manager's Recommendation:

Adopt Resolution No. 2026-10-3721, entitled "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE RESCINDING RESOLUTION NO. 2024-80-3557 AND ADOPTING A REVISED FACILITY & OPEN SPACE RENTAL POLICY FOR THE DAN DIAZ RECREATION CENTER, IRWINDALE AQUATICS CENTER, AND IRWINDALE PARKS" by title only, with further reading waived. Approve revisions to the Irwindale Recreation's Assumption of Risk, Waiver and Release of Liability form to include the new language prohibiting the use of the Dan Diaz Recreation Center Gymnasium for organized play and group or individual coaching/training during open play times.

Administrative Action:

Submitted/Prepared by:

Elizabeth Rodriguez, Public Services Director


Reviewed by:

Adrian R. Guerra, City Attorney

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager



Background and Analysis:

On February 7, 2024, the Parks & Recreation Commission recommended approval of the Facility & Open Space Rental Policy("Rental Policy") for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks to the City Council. On March 13, 2024, City Council adopted Resolution No. 2024-16-3493, entitled, **"A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE ADOPTING THE FACILITY & OPEN SPACE RENTAL POLICY FOR THE DAN DIAZ RECREATION CENTER, IRWINDALE AQUATICS CENTER, AND IRWINDALE PARKS."** As part of the adoption of this policy, City Council requested a flyer be distributed to all residents informing them of this new policy and its effective date, which was on May 20, 2024.

During the first three months of implementation, staff monitored the new policy and gathered feedback from the community. Based on this review, modifications to the policy were presented to the Parks & Recreation Commission and the City Council. On October 9, 2024, City Council adopted Resolution No. 2024-80-3557 entitled, **"A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE RECINDING RESOLUTION NO. 2024-16-3493 AND ADOPTING A REVISED FACILITY & OPEN SPACE RENTAL POLICY FOR THE DAN DIAZ RECREATION CENTER, IRWINDALE AQUATICS CENTER, AND IRWINDALE PARKS,"** which included the following revisions:

1. All fees must be paid at the time the application is submitted in order to secure the rental, except any rental that requires approval from management/administration. All fees associated with these rentals will be paid for upon approval.
2. Change the rental fees for the new Picnic Shelter east of the Bus Turnabout and the Margaret Diaz Pavilion from the Picnic Shelter fees to the Picnic Area fees.
3. Identify the Picnic Shelter east of the Bus Turnabout as Picnic Area 4; and
4. Identify the Margaret Diaz Pavilion as Picnic Area 5; and
5. Change the word should to must under Pets and Service Animals to read as follows: All dogs must be led by a leash or chain not more than 6 feet long and under the full control of its owner or custodian. (IMC 9.16.020 A); and
6. Ensure all City employees have a City ID if they will be renting facilities as residents.

In 2025, City staff noticed an increase in the number of one-on-one basketball coaches and basketball teams using the Dan Diaz Recreation Center during open play basketball. Staff addressed the issue by placing notices in the lobby and gym floor stating these coaches and teams could not use the gym for these purposes. The Parks & Recreation Commission requested this item be placed on the September 3, 2025 agenda for their review and discussion. At this meeting, the Parks & Recreation Commission requested an additional change to the policy: to include language stating that organized teams are not allowed to conduct practices or hold games inside the Dan Diaz Recreation Center Gymnasium during open play time.

Staff revised the Rental Policy and presented it to the Parks & Recreation Commission at its regularly scheduled January 7, 2026 meeting. The Parks & Recreation Commission recommended approval of the revised Rental Policy to City Council. The additional language includes the following:

- Add definitions for Coaching/Coaches/Trainers, Organized Play, and Practice
- Revise the section on the approved use of the Dan Diaz Recreation Center Gymnasium to address the issues with organized teams and coaches/trainers using the gym for organized play, practice and training.
- Add consequences for failure to comply with this section of the policy.

Additionally, the Parks & Recreation Commission requested that Irwindale Recreation's Assumption of Risk, Waiver and Release of Liability form be revised to include the new language prohibiting the use of the Dan Diaz Recreation Center Gymnasium for organized play and group or individual coaching/training during open play times.

Fiscal Impact:

None.

Attachments:

1.	Facility & Open Space Rental Policy for DDRC & IAC - LIABILITY WAIVER
2.	Facility & Open Space Rental Policy for DDRC & IAC - REVISED REDLINED POLICY
3.	Facility & Open Space Rental Policy for DDRC & IAC - RESOLUTION

Customer Information Sheet

	Complete the Information Below with information for Head of Household		
	Last Name:	First Name:	Birth date:
	Address:	City/Zip	State:
	Email:	Primary Phone:	Secondary Phone:
	Gender: Male Female	Resident ID #: Exp Date:	Opt in Emails: YES NO Opt in Mail: YES NO
	Please list the information for the other members of your household (ex. Spouse, significant other, or minor children)		
1	Last Name:	First Name:	Birth date:
	Email:	Primary Phone:	Secondary Phone:
	Resident ID #: Exp Date:	Grade Level (Minors only)	Gender: Male Female
2	Last Name:	First Name:	Birth date:
	Email:	Primary Phone:	Secondary Phone:
	Resident ID #: Exp Date:	Grade Level (Minors only)	Gender: Male Female
3	Last Name:	First Name:	Birth date:
	Email:	Primary Phone:	Secondary Phone:
	Resident ID #: Exp Date:	Grade Level (Minors only)	Gender: Male Female
4	Last Name:	First Name:	Birth date:
	Email:	Primary Phone:	Secondary Phone:
	Resident ID #: Exp Date:	Grade Level (Minors only)	Gender: Male Female
5	Last Name:	First Name:	Birth date:
	Email:	Primary Phone:	Secondary Phone:
	Resident ID #: Exp Date:	Grade Level (Minors only)	Gender: Male Female

Emergency Contact **Please list at least TWO emergency contacts. For other members of your household, you may choose to be the emergency contact**		
I would like head of household to be listed as emergency contact for all others in household. YES NO		
Name:	Relationship:	Primary Phone #:
Email:		Secondary Phone #:
Name:	Relationship:	Primary Phone #:
Email:		Secondary Phone #:
Name:	Relationship:	Primary Phone #:
Email:		Secondary Phone #:
Name:	Relationship:	Primary Phone #:
Email:		Secondary Phone #:
Name:	Relationship:	Primary Phone #:
Email:		Secondary Phone #:

Medical Information and/or Important Notes **(Example: allergies, custody alert, medical conditions)**		
Name:	Allergies/Medical Condition:	Notes:
Name:	Allergies/Medical Condition:	Notes:
Name:	Allergies/Medical Condition:	Notes:
Name:	Allergies/Medical Condition:	Notes:

Are you or a family member a City of Irwindale Employee? ***Please note: Verification of employment may be required***		
Employee Name:	**Department:**	**Supervisors Name:**

For office use only

Resident ID CARD and/or Drivers License copy must be attached

Received By _____ Date _____

Application Entered By_____ Date_____

Data Entry Verified by_____ Date_____

Verification of City Employee Status_____Date_____

ASSUMPTION OF RISK, WAIVER AND RELEASE OF LIABILITY

Thank you for choosing to engage yourself and/or your minor child, in a program of self-improvement through involvement in one or more programs/classes/events offered by the City of Irwindale at the Dan Diaz Recreation Center. In furtherance thereof, we request that you carefully read this document, obtaining legal assistance, if necessary, in order to fully understand all of its terms and provisions. In order to fully protect your legal rights, we request that you do not sign this document unless you do so with a full understanding of its terms and provisions.

I, _____, on behalf of myself and/or minor child(ren) _____, declare that, following an evaluation of my and/or my minor child's physical condition and abilities, it is my intent to participate and/or allow my child(ren) to participate in some or all of the activities, programs, classes, use of facilities, and/or services offered by the City of Irwindale through the Irwindale Recreation Department. I understand that some or all of these activities, programs, classes, facilities, and/or services involve the use of exercise equipment or participation is strenuous activities. In that regard, I understand that each person, including myself and/or my minor child(ren), has a different ability to safely participate in such activities, classes, facilities, programs and services, and that I should consult with a medical doctor prior to my participation and/or my child(ren)'s participation. In furtherance thereof, I have evaluated my and/or my child(ren)'s physical ability to participate therein, either with or without consulting a medical doctor. Based upon such evaluation, it is my decision to go forward and participate and/or permit my child(ren) to participate and/or utilize, those activities, facilities, programs, classes and services, subject to any restrictions and/or limitations which I perceive exist with respect to my and/or my child'(ren)s physical abilities and/or past or existing state of health. In doing so, I understand that my and/or my child(ren)'s participation is entirely at my own and/or my child(ren)'s own risk and that I have not and/or my child(ren) have not been evaluated in any manner with respect to my state and/or their state of health or physical abilities, by any volunteer, employee or agent of the City of Irwindale.

I further understood that the activities, facilities, programs, classes and/or services offered by the City of Irwindale at the Dan Diaz Recreation Center may be conducted or operated by City employees and/or volunteers who may not be licensed, certified, or otherwise specifically skilled to render advice. I understand and except the fact that the skills and competency of each employee and/or volunteer will vary according to the training and experience of each and that neither the City of Irwindale, nor any of its officers, employees, agents or volunteers, make any claim whatsoever as to the abilities of said personnel. Further, I understand that neither the City of Irwindale, nor any of its officers, employees, agents or volunteers has made any representation or assessment, or recommended any treatment, with respect to any mental or physical disease or condition which I and/or my child(ren) may have, in connection with my and/or my child(ren)'s participation in the various recreation activities herein.

I have made myself aware of the nature of the activities, facilities, programs and/or services offered by the City of Irwindale through its Recreation Department. In that regard, I understand that while participating in strenuous exercise, I and/or my child(ren) may subject myself/themselves to potentially serious health risks which could result in my and/or my child(ren) suffering a serious health condition and/or death. Nevertheless, and understanding the nature of these risks, on behalf of my child(ren), hereby voluntarily assume all risks to my and/or my child(ren)'s health which could incur as a result of my and/or their participation in the activities, use of facilities, programs, classes and/or services offered by the City of Irwindale through its Recreation Department, and further, I hereby agree to hold free and harmless, waive and release, covenant not to sue the City of Irwindale or any of its officers, employees, agents, and/or volunteers, as to any and all claims for illness, bodily injury, and/or death which may accrue to me, my child, my and/or my child's successors or heirs in interest, as a result of my and/or my child(ren)'s participation in the activities, facilities, programs, and/or services offered by the City of Irwindale Recreation Department.

I also hereby acknowledge during open-play hours, organized team activities, practices, games or instruction by individual coaches or trainers are not permitted. Organized teams or individual coaches or trainers (i.e. performance, strength and condition, exercise, etc.) are required to rent the gymnasium during non-operating hours or designated rental hours for practices and/or games. To help ensure fair access and a positive experience for everyone, steps will be taken to ensure this policy is followed and are outlined in the Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics, and Irwindale Parks.

I hereby state and represent that I have read the foregoing, that by signing this document I understand that I may be giving up important legal rights on my and my child's behalf and that I, my child and any of my and/or my child's successors in interest will be prevented from seeking legal damages from the City of Irwindale in the event I and/or my child incur any injury, illness or death as a result of my/their participation in the activities described herein.

Date _____

Signatures on next page

_____	_____
Name of Applicant/Parent/Legal Guardian	**Applicant/Parent/Legal Guardian's Signature**
_____	_____
Name of Co-Applicant/Parent/Legal Guardian	**Co-Applicant/Parent/Legal Guardian's Signature**
_____	_____
Name of Minor	**Name of Minor**
_____	_____
Name of Minor	**Name of Minor**

City of Irwindale

Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks

REVISED FEBRUARY 25, 2026~~: OCTOBER 9, 2024~~

684.1

I. SCOPE

This policy will provide guidelines as it relates to the facility and open space rentals provided by and through the Dan Diaz Recreation Center and Irwindale Aquatics Center.

II. PURPOSE

The purpose of this policy is to establish guidelines that will govern the process by which staff is able rent out facilities at and through the Dan Diaz Recreation Center and Irwindale Aquatics Center.

III. DEFINITIONS

a. Applicant. The person renting the facility or open space.

b. City. The City of Irwindale.

~~b.~~c. ~~Coaching/Coaches/Trainers~~Coach or Trainer. An individual who has an agreement, structured partnership, or other affiliation as part of an organization that helps someone, or group of individuals, improve their skills, performance, or personal development by providing guidance, support, and feedback ~~supports individuals or organizations~~ in ~~clarifying~~ sports, including but not limited to basketball ~~such as basketball goals, strengthening capabilities, and achieving meaningful, sustainable change~~.

~~c.~~d. Facility. A public building or infrastructure such as the Dan Diaz Recreation Center, the Irwindale Aquatics Center, the Swimming Pool, the Picnic Shelter, Picnic Area, etc.

~~d.~~e. Irwindale Business. A business located in the City of Irwindale with a valid City of Irwindale Business License.

~~e.~~f. Non-Profit. A bona-fide 501(c) organization or government agency.

~~f.~~g. Non-resident. A person that does not live in the City of Irwindale, does not have an active Resident Identification Card, is not a City of Irwindale Employee, or is not a business located in the City of Irwindale.

h. Open Space. Any City park, picnic area, grass area, plaza, basketball court, tennis court, volleyball court, etc.

i. Organized Play. Organized play as it relates to sports is structured physical activity governed by formal rules, scheduled practices or competitions, and oversight by coaches or officials, designed to develop skills, teamwork, and sportsmanship.

~~g.~~j. **Practice. Practice is the intentional and repeated performance of an activity to develop, improve, or maintain skills, knowledge, or proficiency.**

~~h.~~k. **Resident Identification Card.** This card is to provide a method by which City staff can accurately identify eligible residents of the City of Irwindale for the purpose of providing a variety of benefits (i.e., rentals, programs, classes, etc.).

~~i.~~l. **Resident.** A person that lives in the City of Irwindale and has an active Resident Identification Card. A City of Irwindale Employee is also able to sign up as a resident participant and must present their employee identification card at the time of signup.

~~j.~~m. **Staff.** Any City employee who works at Irwindale City Hall, the Irwindale Aquatics Center, or the Dan Diaz Recreation Center.

IV. PROCEDURES

These procedures have been established by the City of Irwindale in an effort to ensure there is an established policy for facility and open space rentals that provides information on the following:

- List of Facilities for Rent; and
- Use of Facilities and Open Spaces; and
- Rental rates, with discounts for residents and non-profit organizations; and
- Scheduling, changes, and cancellation; and
- Security Deposits and payment; and
- Approval of rentals; and
- Liability and insurance requirements; and
- Parking and noise; and
- Prohibited activities.; and
- Decorating; and
- Pets and service animals; and
- Facility & open space cleanup; and
- City-Sponsored Events; and
- Other Permits Required; and
- Appeals Process.

List of Facilities for Rent

There are various indoor and outdoor facilities and spaces in the City of Irwindale that are available to rent. Applications are accepted on a first come, first serve basis and must be submitted no later than one week prior to the rental. For long-term rentals, applications must be submitted 30 days prior to the first rental date. The following lists the facilities available to rent as part of this policy:

1. Dan Diaz Recreation Center
    a. Dan Diaz Recreation Center Gymnasium
    b. Alfred F. Herrera Memorial Field (Softball Field)
    c. Irwindale Park
        i. Picnic Shelter (Near Playground)
        ii. Picnic Area 1a (West of Swimming Pool)
        iii. Picnic Area 1b (West of Swimming Pool)
        iv. Picnic Area 2 (Adjacent to Playground)
        v. Picnic Area 3 (Adjacent to outdoor Volleyball pit)
        vi. Picnic Area 4 (East of the Bus Turnabout)
        vii. Picnic Area 5 – Margaret Diaz Pavilion (North of Irwindale Plaza)
    d. Jardin de Roca Park
        i. Picnic Area 1 (West of Tot Lot)
        ii. Picnic Area 2 (South of Tennis Courts)

2. Irwindale Aquatics Center
    a. Swimming Pool

A map of these areas is attached to this policy as Exhibit "A".

To rent any of the City facilities or open spaces, please contact or visit the following centers as applicable:

Dan Diaz Recreation Center (626) 430-2224
16053 Calle de Paseo
Irwindale, CA 91706

Irwindale Aquatics Center (626) 430-2248
16053 Calle de Paseo
Irwindale, CA 91706

Not all rooms in a facility or open spaces are available for rental. Most open spaces are available on a first come, first serve basis. The picnic areas at Little Park of Irwindale and El Nido Park are available on a first come, first serve basis. The Picnic Shelter east of the Bus Turnabout and the Irwindale Park Trellis north of the Irwindale Plaza are available to rent. The rental fee is identified under Picnic Area in the City of Irwindale Comprehensive Schedule of Fees & Charges.

Facility Uses

The facility uses are approved for but not limited to the following:

1. Dan Diaz Recreation Center
    a. Dan Diaz Recreation Center Gymnasium: Gymnasium rentals are approved in accordance with the rules and regulations for but not limited

to Basketball, Pickleball, Volleyball, Cheer, T-ball, Whiffle ball, etc. This includes practices, games, tournaments, and competitions.
The Dan Diaz Recreation Center Gymnasium is open to the public for open play basketball and pickleball during designated times. During open-play hours, organized play, organized team activities, practices, games or instruction by individual coaches or trainers are not permitted. Organized teams or individual coaches or trainers (i.e. performance, strength and condition, exercise, etc.) are required to rent the gymnasium during non-operating hours or designated rental hours for practice and/or games. To help ensure fair access and a positive experience for everyone, the following steps will be taken if this section of the policy is not followed:

i. 1st Offense: Friendly reminder from Recreation Staff and a request to discontinue the activity or transition out of the gymnasium.
ii. 2nd Offense: Removal from the facility for the remainder of the week and written notice of policy violation.
~~i.~~iii. 3rd Offense: Temporary suspension of gymnasium rental privileges and/or facility use for a period determined by the Public Services Director.

b. Alfred F. Herrera Memorial Field (Softball Field): The softball field rentals are primarily approved in accordance with the rules and regulations for but not limited to softball practices, games, and tournaments. However, the use of this field is approved for City-sponsored events such as flag football and soccer, and soccer and baseball as outlined in Irwindale Municipal Code Chapter 9.16.050 – Soccer in parks, and 9.16.060 Baseball (hardball) in parks.
c. Irwindale and Jardin de Roca Park: The use of these picnic shelters and areas are approved for but not limited to birthday, anniversary, retirement, etc. parties; family reunions; receptions; memorials; etc. (Larger events and the use of specific equipment may require a special event, building, electrical, etc. permits).

2. Irwindale Aquatics Center
    a. Swimming Pool: Rentals are approved in accordance with the rules and regulations for but not limited to pool parties, swim meets, water polo, AquaVolleyball, fitness, etc. This includes any practices, games, and tournaments.

No facility may be rented more than two times a week by the same person, organization, non-profit, or business.

Facility Rental Fees

The rental fees are tied to the most recently approved and adopted City of Irwindale Comprehensive Schedule of Fees & Charges, which can be found on the City's website at www.irwindaleca.gov.

Dan Diaz Recreation Center Gymnasium		
Rental Fee	**Fee Amount**	**Notes**
Resident	25.00	Hourly, 2 Hour Minimum
Irwindale Business/Non-Profit Organization	75.00	Hourly, 2 Hour Minimum
Non-Resident	100.00	Hourly, 2 Hour Minimum
Other Fees		
Scoreboard/Keeper Staff Time	At Cost	Charged at Sr. Rec Leaders Rate
Security Deposit	200.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Picnic Shelter		
Rental Fee	**Fee Amount**	**Notes**
Resident	10.00	Hourly
Irwindale Business/Non-Profit Organization	15.00	Hourly
Non-Resident (only if less than 30 days to event)	300.00	Per Day
Other Fees		
Security Deposit	75.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Picnic Area		
Rental Fee	**Fee Amount**	**Notes**
Resident	15.00	Daily
Irwindale Business/Non-Profit Organization	25.00	Daily
Non-Resident	35.00	Daily
Other Fees		
Power Outlet Convenience Fee	15.00	Daily

Alfred F. Herrera Memorial Field (Softball Field)		
Rental Fee	**Fee Amount**	**Notes**

Resident	25.00	Hourly
Irwindale Business/Non-Profit Organization	35.00	Hourly
Non-Resident	50.00	Hourly
Softball Field Lighting Rental		
Resident	15.00	Hourly
Irwindale Business/Non-Profit Organization	25.00	Hourly
Non-Resident	30.00	Hourly
Other Fees		
Scoreboard/Keeper Staff Time	At Cost	Charged at Sr. Rec Leaders Hourly Rate
Security Deposit	200.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Swimming Pool		
Rental Fee	**Fee Amount**	**Notes**
Resident	200.00	Hourly
Irwindale Business/Non-Profit Organization	300.00	Hourly
Non-Resident	400.00	Hourly
Other Fees		
Assistant Pool Manager	At Cost	
Sr. Lifeguards	At Cost	
Security Deposit	300.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Schedules, Changes, and Cancellation

For Irwindale Residents, all facility and open space rentals are available for rent up to one week prior to a planned event as long as an Application is submitted, approved, and paid for at least one week prior to the planned event (assuming no other conflicting rental Application has been submitted and approved). Any changes to the Application must be made prior to the event. Irwindale Businesses, Non-Profit Organizations, Non-Residents and long-term rentals regardless of resident, non-resident, business, or non-profit status must apply for a rental one month prior to their event and any changes to the rental must be made one week prior to the rental.

Facility and open space rentals are subject to a cancellation fee based on the number of days prior to the event the rental was cancelled. The Cancellation Fees are listed as follows:

Cancellation Fees		
Cancellation Fee: 60+ Days Prior to Event	10%	10% of Rental Fee; Charged to Security Deposit
Cancellation Fee: 6-59 Days Prior to Event	30%	30% of Rental Fee; Charged to Security Deposit
Cancellation Fee: 0-5 Days Prior to Event	100%	100% of Rental Fee; Charged to Security Deposit

Security Deposits and Payments

Security Deposits and all fees, including insurance if purchasing from the City, must be paid for at the time the application is submitted in order to secure the rental, with the exception of any rental that requires approval from management/administration. The Security Deposit and all fees associated with these rentals will be paid for upon approval. The Security Deposit will be refunded by a City check to the Applicant, or head of household, stated on the application within 30 days upon inspection of the facility and open space area(s), confirmation that no property damage was made or prohibited activities occurred, and there is no additional clean up required as a result of the event. A staff member will be assigned to verify the condition of the rental at the end of the event. The refundable security deposit is forfeited if:

a. The Facility or Open Space area is damaged in any way, including damaged, broken and/or missing equipment/picnic benches, graffiti, vandalism, or similar damage.
b. The Facility, parking lot, city vehicles or any other city-owned property is damaged or left in an unacceptable manner.
c. The Facility or Open Space area is not left properly clean.
d. The Applicant or a member of the event engaged in prohibited activities as outlined in the Irwindale Municipal Code Section 9.16.020 and activities identified in the Prohibited Activities section of this policy.

Approval of Rentals

The Application, Security Deposit and all fees, including insurance if purchasing from the City, must be paid for at the time the application is submitted in order to secure the rental, with the exception of any rental that requires approval from management/administration. All fees associated with these rentals will be paid for upon approval. The City of Irwindale may impose additional requirements as deemed necessary to protect the health, safety, and/or welfare of the community. The facility shall be used for the purpose stated in this Agreement and no other use will be permitted.

The Picnic Shelter and the Picnic Area rentals are processed through the Dan Diaz Recreation Center. Recreation Staff is authorized to process and approve Picnic Shelter and Picnic Area rentals. Rentals for the Dan Diaz Recreation Gymnasium, the Alfred F.

Herrera Memorial Field, and the Irwindale Swimming Pool will need to be routed to and approved by the Recreation Manager/Aquatics Supervisor, Public Services Director, and the Assistant City Manager.

Any rental may be terminated for just cause.

Liability and Insurance Requirements

All uses of City facilities will be subject to the following regulations and restrictions:

A. Insurance and Indemnification.

a. When it is deemed to be in the best interest of the general public, the City will require the Applicant to furnish a Certificate of Insurance naming the City as additionally insured. The amount of the insurance shall not be less than $1,000,000 per occurrence of commercial general liability insurance.
b. Insurance is also available for purchase through the City's Insurance. Staff will obtain a quote for insurance, which is based on type of rental, type of event, and number of rental days requested:
    i. Note, if insurance is purchased from the City and Applicant cancels within 15 days of rental date, insurance will be returned minus a $10.00 administrative fee.
c. To the full extent permitted by law, Applicant agrees to indemnify, defend and hold harmless the City, its officers, employees and agents ("Indemnified Parties") against, and will hold and save them and each of them harmless from, any and all actions, either judicial, administrative, arbitration or regulatory claims, damages to persons or property, losses, costs, penalties, obligations, errors, omissions or liabilities whether actual or threatened (herein "claims or liabilities") that may be asserted or claimed by any person, firm or entity arising out of or in connection with the use of the City's facilities provided herein by Applicant, its guests, employees, agents, subcontractors, or invitees ("indemnors") and in connection therewith:
    i. Applicant will defend any action or actions filed in connection with any of said claims or liabilities and will pay all costs and expenses, including legal costs and attorneys' fees incurred in connection therewith;
    ii. Applicant will promptly pay any judgment rendered against the City, its officers, agents or employees for any such claims or liabilities arising out of or in connection with the use of the City's facilities provided herein by indemnors; and Applicant agrees to save and hold the City, its officers, agents, and employees harmless therefrom;
    iii. In the event the City, its officers, agents or employees is made a party to any action or proceeding filed or prosecuted against Applicant for such damages or other claims arising out of or in connection with the use of the City's facilities provided herein, Applicant agrees to pay to the City, its officers, agents or employees, any and all costs and expenses incurred by the City, its officers, agents or employees in such action or proceeding, including but not limited to, legal costs and attorneys' fees.

iv. Applicant shall be fully responsible to indemnify City hereunder therefore, and failure of City to monitor compliance with these provisions shall not be a waiver hereof. This indemnification includes claims or liabilities arising from use of the City's facilities hereunder.

v. The provisions of this Section do not apply to claims or liabilities occurring as a result of City's sole negligence or willful acts or omissions, but, to the fullest extent permitted by law, shall apply to claims and liabilities resulting in part from City's negligence, except that design professionals' indemnity hereunder shall be limited to claims and liabilities arising out of the negligence, recklessness or willful misconduct of the design professional. The indemnity obligation shall be binding on successors and assigns of Applicant and shall survive termination of this Agreement.

B. Applicant is solely responsible for supervising all individuals at the City facility and open spaces during the event. The City is not responsible for providing this supervision.

Parking and Noise

Parking for events is limited to public parking spaces and street parking. There is absolutely no parking in any area where the curb is painted red, resident and service road driveways, the bus turnabout, emergency access gates, and the entrance to the David Fraijo Martinez Public Works Building. These areas should never be blocked by vehicles. No parking is allowed in adjacent business parking lots.

Irwindale Municipal Code (IMC) Section 9.28 describes the regulations for noise. While music from a radio or phone with a small portable speaker is allowed, the ambient noise level should not exceed 50 decibels between the hours of 7am and 10pm, per IMC Section 9.28.30, in any City Park, Facility or Open Space. Any noise at a level which exceeds the ambient or the ambient base level as set forth above by more than 10 dB when measured at any boundary line of the property from which the noise emanates shall constitute proof of a violation.

Prohibited Activities

An extensive list of prohibited activities in the City of Irwindale Parks can be found under Irwindale Municipal Code Section 9.16.020. For the purposes of this policy, the following activities are prohibited and the applicant will forfeit their security deposit if the applicant or anyone at the event is caught engaging in such activity:

- No smoking within any City Facility including restrooms and within 20 feet of an entrance of a facility;
- No unauthorized vehicles are allowed in the park at any time, this includes loading and unloading;

- No roping off areas or placing personal items (such as ice chests, chairs, blankets, etc.) to reserve additional picnic tables in the park that are on a first come, first serve basis;
- No amplified music (a personal radio or phone with small portable speaker is allowed), bands, DJs, carnival rides, moon bounces, tents, or animals (except on leash or Service Animals) allowed on the park grounds unless the activity is a City Sponsored event; and
- No alcohol is allowed at any parks, the Alfred F. Herrera Memorial Field, the Dan Diaz Recreation Center or the Irwindale Aquatics Center;
- No gambling of any kind shall be conducted on, or in, City facilities, and the Applicant shall ensure that no disorderly or illegal conduct shall be allowed in any facility. Charitable events and/or fundraisers in support of non-profit organizations that include a “Casino Night” or similar event where no monies are wagered are excluded from this prohibition.
- No smoking within 20 feet of main entrances, exits, and operable windows of a public building/space.

The Irwindale Police Department will be contacted if the applicant or anyone in the party uses a tent, jumper, trampoline, bounce house, or moonbounce.

Decorating

Decorating is allowed in the Picnic Shelter, Picnic Areas, the Dan Diaz Recreation Center Gymnasium and the Irwindale Aquatics Center. Decorations are to be immediately taken down and removed at the end of the event. This includes but is not limited to tape, string, or other mounting mechanisms.

Pets and Service Animals

All dogs must be led by a leash or chain not more than 6 feet long and under the full control of its owner or custodian (IMC 9.16.020 A.)

Facility & Open Space Cleanup

All food, trash, decorations, etc. must be cleaned up and properly disposed of in a trash can located in the facility or open space area. If the trash can is full, the Applicant must find another trash can to use. If any taco carts, or equivalent, are used, all oil/grease must be properly disposed of and cleaned. To properly dispose of the oil, place it in a leak proof container with tightfitting lids and discard in the trash with the lid secured. Do not pour oil/grease down sinks, storm drains/grates, or on the ground. If the oil/grease is not properly disposed of, then the security deposit will be forfeited.

City-Sponsored Events/Operations

City-Sponsored Events will take precedence over all rentals. The Dan Diaz Recreation Center Gymnasium and the Irwindale Aquatics Center's Swimming Pool will only be available to rent outside existing hours of operation and when no events are scheduled. No rentals at the Dan Diaz Recreation Center, Irwindale Aquatics Center, Alfred F. Herrera Memorial Field or at Irwindale Park will be approved or allowed during City-Sponsored Events including but not limited to the Easter Eggstravaganza, Red, White and You BBQ, Halloween Spooktacular, Christmas Spectacular & Mayor's Tree Lighting Ceremony. Limited rentals will be allowed during Music in the Park and MariachiFest including but not limited to the Picnic Shelters and Picnic Areas; however, large attended rentals will not be approved during Music in the Park and MariachiFest in order to accommodate the City-Sponsored Events.

Other Permits

A Special Event Permit may be required with the City's Community Development Department for any private event including but not limited to family reunions, corporate picnics, funerals, weddings, parties exceeding a specific number, etc. Any use of temporary equipment such as oversized tents, fencing, booths; entertainment, and the presence of vendors will require a Special Event Permit. Additional permits may also include an Amplified Sound Registration Statement Form, Building Permits, and Electrical Permits to name a few.


Appeals Process

Any determination on issues or concerns such as a forfeit of security deposit will be made to the Office of the City Manager. Appeals must be submitted in writing for consideration by the Office of the City Manager. Forms may be submitted to the Office of the City Clerk at cityclerk@irwindaleca.gov no later than 3 days after the event and are available at the Dan Diaz Recreation Center and Irwindale Aquatics Center. The determination of the City Manager may be appealed to the City Council in the same manner and must be received in writing by the Office of the City Clerk no later than 3 days after the determination of the City Manager.

This policy will be reviewed one year after its approval to receive feedback from the public and staff on how this policy is impacting the community.

This policy is subject to change due to a local emergency, county, or state emergency.

Exhibit A

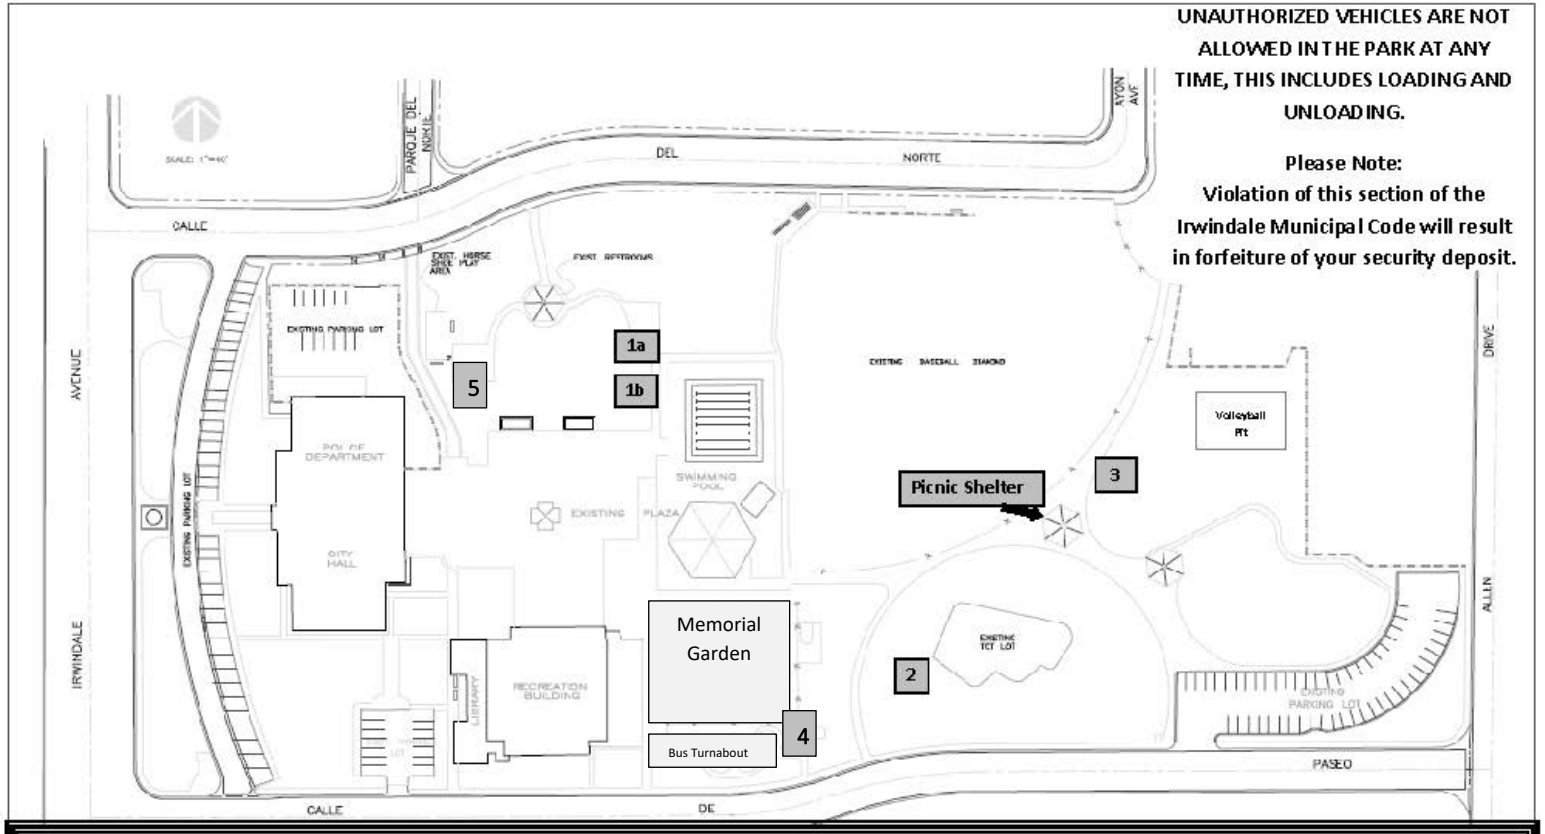


Group Picnic Area Reservation Policy

Irwindale Residents may reserve any of the . picnic areas in Irwindale Park by submitting an application to the Recreation Department. Applications must be submitted at least one week prior to the planned event. Applications are subject to approval by the Recreation Manager. Fees for reserving a group picnic area are as follows: $75.00 security deposit PLUS $15.00 a day (Irwindale Residents) or $35.00 a day (Non Residents). Some area's may be reserved together or with the Picnic Shelter with one deposit, however separate fee's apply. Non Residents may only reserve area's within one month of their event.

Area 1a – 5 picnic tables, west of Swimming Pool (can be reserved with 1b)
Area 1b – 5 picnic tables, west of Swimming Pool (can be reserved with 1a)
Area 2 – 4 picnic tables, adjacent to playground
Area 3 – 5 picnic tables, adjacent to outdoor Volleyball pit (can be reserved with Picnic Shelter)
Area 4 – 4 picnic tables, east of Bus Turnabout
Area 5 – 6 picnic tables, Margaret Diaz Pavilion

Picnic tables that are not within the designated group areas are available for use on a first come, first serve basis and are deemed 'taken" ONLY if someone is present to reserve the table(s). The City of Irwindale does not permit roping off of areas or placing personal items (ice chests, chairs, blankets, etc.) to reserve picnic areas. Amplified music, bands, carnival rides, moon bounces, tents, or animals (dogs on a leash are ok) are not allowed on the park grounds unless the activity is a City Sponsored event. Amplified music or bands may be possible with a City permit. Special fees, restrictions and conditions may apply.

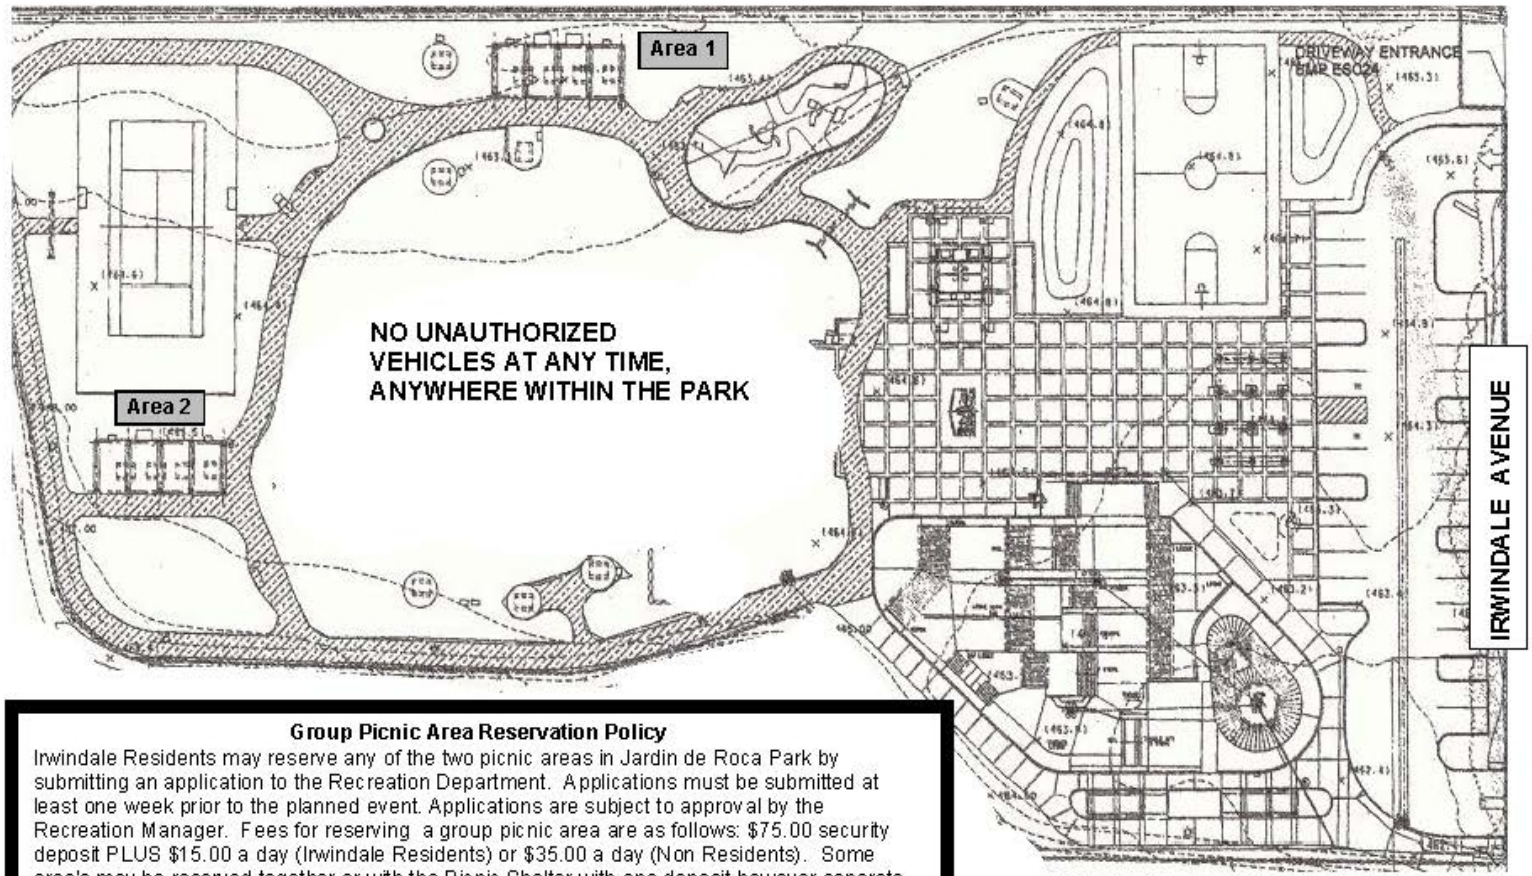

Group Picnic Area Reservation Policy

Irwindale Residents may reserve any of the two picnic areas in Jardin de Roca Park by submitting an application to the Recreation Department. Applications must be submitted at least one week prior to the planned event. Applications are subject to approval by the Recreation Manager. Fees for reserving a group picnic area are as follows: $75.00 security deposit PLUS $15.00 a day (Irwindale Residents) or $35.00 a day (Non Residents). Some area's may be reserved together or with the Picnic Shelter with one deposit however seperate fee's apply. Non Residents may only reserve area's within one month of their event.

Area 1 – 4 picnic tables, west of Tot Lot
Area 2 – 4 picnic tables, south of Tennis Courts

Picnic tables that are not within the designated group areas are available for use on a first come, first serve basis and are deemed 'taken" ONLY if someone is present to reserve the table(s). The City of Irwindale does not permit roping off of areas or placing personal items (ice chests, chairs, blankets, etc.) to reserve picnic areas. Amplified music, bands, carnival rides, moon bounces, tents, or animals (dogs on a leash are ok) are not allowed on the park grounds unless the activity is a City Sponsored event. Amplified music or bands may be possible with a City permit. Special fees, restrictions and conditions may apply.

UNAUTHORIZED VEHICLES ARE NOT ALLOWED IN THE PARK AT ANY TIME, THIS INCLUDES LOADING AND UNLOADING.

Please Note:
Violation of this section of the Irwindale Municipal Code will result in forfeiture of your security deposit.

RESOLUTION NO. 2026-10-3721

A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE RECINDING RESOLUTION NO. 2024-80-3557 AND ADOPTING A REVISED FACILITY & OPEN SPACE RENTAL POLICY FOR THE DAN DIAZ RECREATION CENTER, IRWINDALE AQUATICS CENTER, AND IRWINDALE PARKS.

WHEREAS, at the February 7, 2024 regularly scheduled Parks & Recreation Commission Meeting, the Commission completed a final review of the Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale parks (Rental Policy) and recommended approval to the City Council; and

WHEREAS, on March 13, 2024, the City Council adopted Resolution No. 2024-16-3493, entitled, "A Resolution of the City Council of the City of Irwindale Adopting the Facility & Open Space Rental for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks"; and

WHEREAS, after monitoring the policy for the past three months, revisions were required based on staff and public feedback and to provide quality customer service to all patrons; and

WHEREAS, the changes include: 1) All fees must be paid at the time the application is submitted in order to secure the rental, with the exception of any rental that requires approval from management/administration. All fees associated with these rentals will be paid for upon approval; 2) Change the rental fees for the new Picnic Shelter east of the Bus Turnabout (Picnic Area 4) and the Margaret Diaz Pavilion (Picnic Area 5) from the Picnic Shelter fees to the Picnic Area fees, which reduces the cost of the rentals to be consistent with other City Park Picnic Areas; and 3) Change the word should to must under the "Pets and Service Animals" section so the sentence reads as follows: "All dogs must be led by a leash or chain not more than 6 feet long and under the full control of its owner or custodian (IMC 9.16.020 A); and

WHEREAS, the Rental Policy provides that it shall be reviewed one year after its approval to receive feedback from the public and staff on how the Rental Policy has impacted the community; and

WHEREAS, on September 4, 2024, the Parks & Recreation Commission reviewed these revisions and recommended approval to the City Council; and

WHEREAS, based on the revised recommendations from the Parks & Recreation Commission, the City Council adopted the Rental Policy on October 9, 2024 under Resolution No. 2024-80-3557, entitled "A Resolution of the City Council of the City of Irwindale Rescinding Resolution No. 2024-16-3493 and Adopting a Revised Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks; and

WHEREAS, in 2025, City Staff noticed an increase in the number of one-on-one basketball coaches and organized basketball teams using the Dan Diaz Recreation

Center during open play basketball. Staff placed notices in the lobby and gym floor stating organized teams are not allowed to conduct practices or hold games inside the Dan Diaz Recreation Center Gymnasium during open play time; and

WHEREAS, the Parks & Recreation Commission requested this item be placed on the September 3, 2025 Agenda for review, discussion and potential updates. At this meeting, the Commission requested language on this issue be added to the Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks; and

WHEREAS, on January 7, 2026, the Parks & Recreation Commission reviewed these revisions and recommended approval to the City Council; and

WHEREAS, the changes include: 1) add definitions for Coaching/Coaches/Trainers, Organized Play, and Practice, 2) revise the section on the approved use of the Dan Diaz Recreation Center Gymnasium to address issues with organized teams and coaches/trainers using the gym for organized play, practice and training, 3) add consequences for failure to comply with this section of the policy; and

WHEREAS, based on the revised recommendations from the Parks & Recreation Commission, the City Council hereby desires to approve revisions identified above and adopt the City of Irwindale Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale parks.

NOW, THEREFORE, THE CITY COUNCIL OF THE CITY OF IRWINDALE DOES HEREBY RESOLVE, DETERMINE, AND ORDER AS FOLLOWS:

SECTION 1. The City Council hereby adopts the Recitals above as true and correct and incorporates them herein by reference.

SECTION 2. The City Council hereby approves and adopts the City of Irwindale Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale parks (Rental Policy). City staff is hereby authorized to utilize and implement the Rental Policy, attached hereto as **Exhibit** "**A**".

SECTION 3. If any section, subsection, sentence, clause, phrase, or portion of this Resolution, or the application thereof to any person or circumstances, is, for any reason, held invalid or unconstitutional by any court of competent jurisdiction, such invalidity or unconstitutionality shall not affect the application of any other section, subsection, sentence, clause, phrase, or portion of this Resolution, and to this end the invalid or unconstitutional section, subsection, sentence, clause, phrase of this Resolution are declared to be severable. The City Council hereby declares that it would have adopted this Resolution and each section, subsection, sentence, clause, phrase, part or portion thereof, irrespective of the fact that any one or more sections, subsections, sentences, clauses, phrases, parts or portions thereof be declared invalid or unconstitutional.

SECTION 4. The Chief Deputy City Clerk shall certify the adoption of this Resolution which shall, in turn, have immediate effect.

PASSED, APPROVED and ADOPTED this 25th day of February 2026.

_____
H. Manuel Ortiz, Mayor

ATTEST:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

STATE OF CALIFORNIA }
COUNTY OF LOS ANGELES } ss.
CITY OF IRWINDALE }

I, Laura M. Nieto, Chief Deputy City Clerk of the City of Irwindale, do hereby certify that the foregoing Resolution No. 2026-10-3721 duly adopted by the City Council of the City of Irwindale, at a regular meeting held on the 25th day of February 2026, by the following vote:

AYES: Councilmembers:

NOES: Councilmembers:

ABSENT: Councilmembers:

ABSTAIN: Councilmembers:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

City of Irwindale

Facility & Open Space Rental Policy for the Dan Diaz Recreation Center, Irwindale Aquatics Center, and Irwindale Parks

REVISED FEBRUARY 25, 2026

I. SCOPE

This policy will provide guidelines as it relates to the facility and open space rentals provided by and through the Dan Diaz Recreation Center and Irwindale Aquatics Center.

II. PURPOSE

The purpose of this policy is to establish guidelines that will govern the process by which staff is able rent out facilities at and through the Dan Diaz Recreation Center and Irwindale Aquatics Center.

III. DEFINITIONS

a. **Applicant.** The person renting the facility or open space.

b. **City.** The City of Irwindale.

c. **Coaching/Coaches/Trainers.** An individual who has a structured partnership that supports individuals or organizations in clarifying sports such as basketball goals, strengthening capabilities, and achieving meaningful, sustainable change.

d. **Facility.** A public building or infrastructure such as the Dan Diaz Recreation Center, the Irwindale Aquatics Center, the Swimming Pool, the Picnic Shelter, Picnic Area, etc.

e. **Irwindale Business.** A business located in the City of Irwindale with a valid City of Irwindale Business License.

f. **Non-Profit.** A bona-fide 501(c) organization or government agency.

g. **Non-resident.** A person that does not live in the City of Irwindale, does not have an active Resident Identification Card, is not a City of Irwindale Employee, or is not a business located in the City of Irwindale.

h. **Open Space.** Any City park, picnic area, grass area, plaza, basketball court, tennis court, volleyball court, etc.

i. **Organized Play.** Organized play as it relates to sports is structured physical activity governed by formal rules, scheduled practices or competitions, and oversight by coaches or officials, designed to develop skills, teamwork, and sportsmanship.

j. **Practice.** Practice is the intentional and repeated performance of an activity to develop, improve, or maintain skills, knowledge, or proficiency.

k. **Resident Identification Card.** This card is to provide a method by which City staff can accurately identify eligible residents of the City of Irwindale for the purpose of

providing a variety of benefits (i.e., rentals, programs, classes, etc.).

l. **Resident.** A person that lives in the City of Irwindale and has an active Resident Identification Card. A City of Irwindale Employee is also able to sign up as a resident participant and must present their employee identification card at the time of signup.

m. **Staff.** Any City employee who works at Irwindale City Hall, the Irwindale Aquatics Center, or the Dan Diaz Recreation Center.

IV. PROCEDURES

These procedures have been established by the City of Irwindale in an effort to ensure there is an established policy for facility and open space rentals that provides information on the following:

- List of Facilities for Rent; and
- Use of Facilities and Open Spaces; and
- Rental rates, with discounts for residents and non-profit organizations; and
- Scheduling, changes, and cancellation; and
- Security Deposits and payment; and
- Approval of rentals; and
- Liability and insurance requirements; and
- Parking and noise; and
- Prohibited activities.; and
- Decorating; and
- Pets and service animals; and
- Facility & open space cleanup; and
- City-Sponsored Events; and
- Other Permits Required; and
- Appeals Process.

List of Facilities for Rent

There are various indoor and outdoor facilities and spaces in the City of Irwindale that are available to rent. Applications are accepted on a first come, first serve basis and must be submitted no later than one week prior to the rental. For long-term rentals, applications must be submitted 30 days prior to the first rental date. The following lists the facilities available to rent as part of this policy:

1. Dan Diaz Recreation Center
    a. Dan Diaz Recreation Center Gymnasium
    b. Alfred F. Herrera Memorial Field (Softball Field)

c. Irwindale Park
    i. Picnic Shelter (Near Playground)
    ii. Picnic Area 1a (West of Swimming Pool)
    iii. Picnic Area 1b (West of Swimming Pool)
    iv. Picnic Area 2 (Adjacent to Playground)
    v. Picnic Area 3 (Adjacent to outdoor Volleyball pit)
    vi. Picnic Area 4 (East of the Bus Turnabout)
    vii. Picnic Area 5 – Margaret Diaz Pavilion (North of Irwindale Plaza)
d. Jardin de Roca Park
    i. Picnic Area 1 (West of Tot Lot)
    ii. Picnic Area 2 (South of Tennis Courts)

2. Irwindale Aquatics Center
    a. Swimming Pool

A map of these areas is attached to this policy as Exhibit “A”.

To rent any of the City facilities or open spaces, please contact or visit the following centers as applicable:

Dan Diaz Recreation Center (626) 430-2224
16053 Calle de Paseo
Irwindale, CA 91706

Irwindale Aquatics Center (626) 430-2248
16053 Calle de Paseo
Irwindale, CA 91706

Not all rooms in a facility or open spaces are available for rental. Most open spaces are available on a first come, first serve basis. The picnic areas at Little Park of Irwindale and El Nido Park are available on a first come, first serve basis. The Picnic Shelter east of the Bus Turnabout and the Irwindale Park Trellis north of the Irwindale Plaza are available to rent. The rental fee is identified under Picnic Area in the City of Irwindale Comprehensive Schedule of Fees & Charges.

Facility Uses

The facility uses are approved for but not limited to the following:

1. Dan Diaz Recreation Center
    a. Dan Diaz Recreation Center Gymnasium: Gymnasium rentals are approved in accordance with the rules and regulations for but not limited to Basketball, Pickleball, Volleyball, Cheer, T-ball, Whiffle ball, etc. This includes practices, games, tournaments, and competitions.
    The Dan Diaz Recreation Center Gymnasium is open to the public for open play basketball and pickleball during designated times. During open-

play hours, organized team activities, practices, games or instruction by individual coaches or trainers are not permitted. Organized teams or individual coaches or trainers (i.e. performance, strength and condition, exercise, etc.) are required to rent the gymnasium during non-operating hours or designated rental hours for practice and/or games. To help ensure fair access and a positive experience for everyone, the following steps will be taken if this section of the policy is not followed:

i. 1st Offense: Friendly reminder from Recreation Staff and a request to discontinue the activity or transition out of the gymnasium.
ii. 2nd Offense: Removal from the facility for the remainder of the week and written notice of policy violation.
iii. 3rd Offense: Temporary suspension of gymnasium rental privileges and/or facility use for a period determined by the Public Services Director.

b. Alfred F. Herrera Memorial Field (Softball Field): The softball field rentals are primarily approved in accordance with the rules and regulations for but not limited to softball practices, games, and tournaments. However, the use of this field is approved for City-sponsored events such as flag football and soccer, and soccer and baseball as outlined in Irwindale Municipal Code Chapter 9.16.050 – Soccer in parks, and 9.16.060 Baseball (hardball) in parks.
c. Irwindale and Jardin de Roca Park: The use of these picnic shelters and areas are approved for but not limited to birthday, anniversary, retirement, etc. parties; family reunions; receptions; memorials; etc. (Larger events and the use of specific equipment may require a special event, building, electrical, etc. permits).

2. Irwindale Aquatics Center
    a. Swimming Pool: Rentals are approved in accordance with the rules and regulations for but not limited to pool parties, swim meets, water polo, AquaVolleyball, fitness, etc. This includes any practices, games, and tournaments.

No facility may be rented more than two times a week by the same person, organization, non-profit, or business.

Facility Rental Fees

The rental fees are tied to the most recently approved and adopted City of Irwindale Comprehensive Schedule of Fees & Charges, which can be found on the City's website at www.irwindaleca.gov.

Dan Diaz Recreation Center Gymnasium		
Rental Fee	**Fee Amount**	**Notes**
Resident	25.00	Hourly, 2 Hour Minimum
Irwindale Business/Non-Profit Organization	75.00	Hourly, 2 Hour Minimum
Non-Resident	100.00	Hourly, 2 Hour Minimum
Other Fees		
Scoreboard/Keeper Staff Time	At Cost	Charged at Sr. Rec Leaders Rate
Security Deposit	200.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Picnic Shelter		
Rental Fee	**Fee Amount**	**Notes**
Resident	10.00	Hourly
Irwindale Business/Non-Profit Organization	15.00	Hourly
Non-Resident (only if less than 30 days to event)	300.00	Per Day
Other Fees		
Security Deposit	75.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Picnic Area		
Rental Fee	**Fee Amount**	**Notes**

Resident	15.00	Daily
Irwindale Business/Non-Profit Organization	25.00	Daily
Non-Resident	35.00	Daily
Other Fees		
Power Outlet Convenience Fee	15.00	Daily

Alfred F. Herrera Memorial Field (Softball Field)		
Rental Fee	**Fee Amount**	**Notes**
Resident	25.00	Hourly
Irwindale Business/Non-Profit Organization	35.00	Hourly
Non-Resident	50.00	Hourly
Softball Field Lighting Rental		
Resident	15.00	Hourly
Irwindale Business/Non-Profit Organization	25.00	Hourly
Non-Resident	30.00	Hourly
Other Fees		
Scoreboard/Keeper Staff Time	At Cost	Charged at Sr. Rec Leaders Hourly Rate
Security Deposit	200.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Swimming Pool		
Rental Fee	**Fee Amount**	**Notes**
Resident	200.00	Hourly

Irwindale Business/Non-Profit Organization	300.00	Hourly
Non-Resident	400.00	Hourly
Other Fees		
Assistant Pool Manager	At Cost	
Sr. Lifeguards	At Cost	
Security Deposit	300.00	
Insurance (if obtained through City)	At Cost	Varies per Type of Event

Schedules, Changes, and Cancellation

For Irwindale Residents, all facility and open space rentals are available for rent up to one week prior to a planned event as long as an Application is submitted, approved, and paid for at least one week prior to the planned event (assuming no other conflicting rental Application has been submitted and approved). Any changes to the Application must be made prior to the event. Irwindale Businesses, Non-Profit Organizations, Non-Residents and long-term rentals regardless of resident, non-resident, business, or non-profit status must apply for a rental one month prior to their event and any changes to the rental must be made one week prior to the rental.

Facility and open space rentals are subject to a cancellation fee based on the number of days prior to the event the rental was cancelled. The Cancellation Fees are listed as follows:

Cancellation Fees		
Cancellation Fee: 60+ Days Prior to Event	10%	10% of Rental Fee; Charged to Security Deposit
Cancellation Fee: 6-59 Days Prior to Event	30%	30% of Rental Fee; Charged to Security Deposit
Cancellation Fee: 0-5 Days Prior to Event	100%	100% of Rental Fee; Charged to Security Deposit

Security Deposits and Payments

Security Deposits and all fees, including insurance if purchasing from the City, must be paid for at the time the application is submitted in order to secure the rental, with the exception of any rental that requires approval from management/administration. The Security Deposit and all fees associated with these rentals will be paid for upon approval. The Security Deposit will be refunded by a City check to the Applicant, or head of household, stated on the application within 30 days upon inspection of the facility and open space area(s), confirmation that no property damage was made or prohibited activities occurred, and there is no additional clean up required as a result of the event. A staff member will be assigned to verify the condition of the rental at the end of the event. The refundable security deposit is forfeited if:

a. The Facility or Open Space area is damaged in any way, including damaged, broken and/or missing equipment/picnic benches, graffiti, vandalism, or similar damage.
b. The Facility, parking lot, city vehicles or any other city-owned property is damaged or left in an unacceptable manner.
c. The Facility or Open Space area is not left properly clean.
d. The Applicant or a member of the event engaged in prohibited activities as outlined in the Irwindale Municipal Code Section 9.16.020 and activities identified in the Prohibited Activities section of this policy.

Approval of Rentals

The Application, Security Deposit and all fees, including insurance if purchasing from the City, must be paid for at the time the application is submitted in order to secure the rental, with the exception of any rental that requires approval from management/administration. All fees associated with these rentals will be paid for upon approval. The City of Irwindale may impose additional requirements as deemed necessary to protect the health, safety, and/or welfare of the community. The facility shall be used for the purpose stated in this Agreement and no other use will be permitted.

The Picnic Shelter and the Picnic Area rentals are processed through the Dan Diaz Recreation Center. Recreation Staff is authorized to process and approve Picnic Shelter and Picnic Area rentals. Rentals for the Dan Diaz Recreation Gymnasium, the Alfred F. Herrera Memorial Field, and the Irwindale Swimming Pool will need to be routed to and approved by the Recreation Manager/Aquatics Supervisor, Public Services Director, and the Assistant City Manager.

Any rental may be terminated for just cause.

Liability and Insurance Requirements

All uses of City facilities will be subject to the following regulations and restrictions:

A. Insurance and Indemnification.

a. When it is deemed to be in the best interest of the general public, the City will require the Applicant to furnish a Certificate of Insurance naming the City as additionally insured. The amount of the insurance shall not be less than $1,000,000 per occurrence of commercial general liability insurance.
b. Insurance is also available for purchase through the City's Insurance. Staff will obtain a quote for insurance, which is based on type of rental, type of event, and number of rental days requested:
    i. Note, if insurance is purchased from the City and Applicant cancels within 15 days of rental date, insurance will be returned minus a $10.00 administrative fee.
c. To the full extent permitted by law, Applicant agrees to indemnify, defend and hold harmless the City, its officers, employees and agents ("Indemnified Parties") against, and will hold and save them and each of them harmless from, any and all actions, either judicial, administrative, arbitration or regulatory claims, damages to persons or property, losses, costs, penalties, obligations, errors, omissions or liabilities whether actual or threatened (herein "claims or liabilities") that may be asserted or claimed by any person, firm or entity arising out of or in connection with the use of the City's facilities provided herein by Applicant, its guests, employees, agents, subcontractors, or invitees ("indemnors") and in connection therewith:
    i. Applicant will defend any action or actions filed in connection with any of said claims or liabilities and will pay all costs and expenses, including legal costs and attorneys' fees incurred in connection therewith;
    ii. Applicant will promptly pay any judgment rendered against the City, its officers, agents or employees for any such claims or liabilities arising out of or in connection with the use of the City's facilities provided herein by indemnors; and Applicant agrees to save and hold the City, its officers, agents, and employees harmless therefrom;
    iii. In the event the City, its officers, agents or employees is made a party to any action or proceeding filed or prosecuted against Applicant for such damages or other claims arising out of or in connection with the use of the City's facilities provided herein, Applicant agrees to pay to the City, its officers, agents or employees, any and all costs and expenses incurred by the City, its officers, agents or employees in such action or proceeding, including but not limited to, legal costs and attorneys' fees.
    iv. Applicant shall be fully responsible to indemnify City hereunder therefore, and failure of City to monitor compliance with these provisions shall not be a waiver hereof. This indemnification includes claims or liabilities arising from use of the City's facilities hereunder.
    v. The provisions of this Section do not apply to claims or liabilities occurring as a result of City's sole negligence or willful acts or omissions, but, to the fullest extent permitted by law, shall apply to claims and liabilities resulting in part from City's negligence, except that design professionals' indemnity hereunder shall be limited to claims and

liabilities arising out of the negligence, recklessness or willful misconduct of the design professional. The indemnity obligation shall be binding on successors and assigns of Applicant and shall survive termination of this Agreement.

B. Applicant is solely responsible for supervising all individuals at the City facility and open spaces during the event. The City is not responsible for providing this supervision.

Parking and Noise

Parking for events is limited to public parking spaces and street parking. There is absolutely no parking in any area where the curb is painted red, resident and service road driveways, the bus turnabout, emergency access gates, and the entrance to the David Fraijo Martinez Public Works Building. These areas should never be blocked by vehicles. No parking is allowed in adjacent business parking lots.

Irwindale Municipal Code (IMC) Section 9.28 describes the regulations for noise. While music from a radio or phone with a small portable speaker is allowed, the ambient noise level should not exceed 50 decibels between the hours of 7am and 10pm, per IMC Section 9.28.30, in any City Park, Facility or Open Space. Any noise at a level which exceeds the ambient or the ambient base level as set forth above by more than 10 dB when measured at any boundary line of the property from which the noise emanates shall constitute proof of a violation.

Prohibited Activities

An extensive list of prohibited activities in the City of Irwindale Parks can be found under Irwindale Municipal Code Section 9.16.020. For the purposes of this policy, the following activities are prohibited and the applicant will forfeit their security deposit if the applicant or anyone at the event is caught engaging in such activity:

- No smoking within any City Facility including restrooms and within 20 feet of an entrance of a facility;
- No unauthorized vehicles are allowed in the park at any time, this includes loading and unloading;
- No roping off areas or placing personal items (such as ice chests, chairs, blankets, etc.) to reserve additional picnic tables in the park that are on a first come, first serve basis;
- No amplified music (a personal radio or phone with small portable speaker is allowed), bands, DJs, carnival rides, moon bounces, tents, or animals (except on leash or Service Animals) allowed on the park grounds unless the activity is a City Sponsored event; and
- No alcohol is allowed at any parks, the Alfred F. Herrera Memorial Field, the Dan Diaz Recreation Center or the Irwindale Aquatics Center;

- No gambling of any kind shall be conducted on, or in, City facilities, and the Applicant shall ensure that no disorderly or illegal conduct shall be allowed in any facility. Charitable events and/or fundraisers in support of non-profit organizations that include a “Casino Night” or similar event where no monies are wagered are excluded from this prohibition.
- No smoking within 20 feet of main entrances, exits, and operable windows of a public building/space.

The Irwindale Police Department will be contacted if the applicant or anyone in the party uses a tent, jumper, trampoline, bounce house, or moonbounce.

Decorating

Decorating is allowed in the Picnic Shelter, Picnic Areas, the Dan Diaz Recreation Center Gymnasium and the Irwindale Aquatics Center. Decorations are to be immediately taken down and removed at the end of the event. This includes but is not limited to tape, string, or other mounting mechanisms.

Pets and Service Animals

All dogs must be led by a leash or chain not more than 6 feet long and under the full control of its owner or custodian (IMC 9.16.020 A.)

Facility & Open Space Cleanup

All food, trash, decorations, etc. must be cleaned up and properly disposed of in a trash can located in the facility or open space area. If the trash can is full, the Applicant must find another trash can to use. If any taco carts, or equivalent, are used, all oil/grease must be properly disposed of and cleaned. To properly dispose of the oil, place it in a leak proof container with tightfitting lids and discard in the trash with the lid secured. Do not pour oil/grease down sinks, storm drains/grates, or on the ground. If the oil/grease is not properly disposed of, then the security deposit will be forfeited.

City-Sponsored Events/Operations

City-Sponsored Events will take precedence over all rentals. The Dan Diaz Recreation Center Gymnasium and the Irwindale Aquatics Center’s Swimming Pool will only be available to rent outside existing hours of operation and when no events are scheduled. No rentals at the Dan Diaz Recreation Center, Irwindale Aquatics Center, Alfred F. Herrera Memorial Field or at Irwindale Park will be approved or allowed during City-Sponsored Events including but not limited to the Easter Eggstravaganza, Red, White and You BBQ, Halloween Spooktacular, Christmas Spectacular & Mayor’s Tree Lighting Ceremony. Limited rentals will be allowed during Music in the Park and MariachiFest including but not limited to the Picnic Shelters and Picnic Areas; however, large attended

rentals will not be approved during Music in the Park and MariachiFest in order to accommodate the City-Sponsored Events.

Other Permits

A Special Event Permit may be required with the City's Community Development Department for any private event including but not limited to family reunions, corporate picnics, funerals, weddings, parties exceeding a specific number, etc. Any use of temporary equipment such as oversized tents, fencing, booths; entertainment, and the presence of vendors will require a Special Event Permit. Additional permits may also include an Amplified Sound Registration Statement Form, Building Permits, and Electrical Permits to name a few.


Appeals Process

Any determination on issues or concerns such as a forfeit of security deposit will be made to the Office of the City Manager. Appeals must be submitted in writing for consideration by the Office of the City Manager. Forms may be submitted to the Office of the City Clerk at cityclerk@irwindaleca.gov no later than 3 days after the event and are available at the Dan Diaz Recreation Center and Irwindale Aquatics Center. The determination of the City Manager may be appealed to the City Council in the same manner and must be received in writing by the Office of the City Clerk no later than 3 days after the determination of the City Manager.

This policy will be reviewed one year after its approval to receive feedback from the public and staff on how this policy is impacting the community.

This policy is subject to change due to a local emergency, county, or state emergency.

Exhibit A

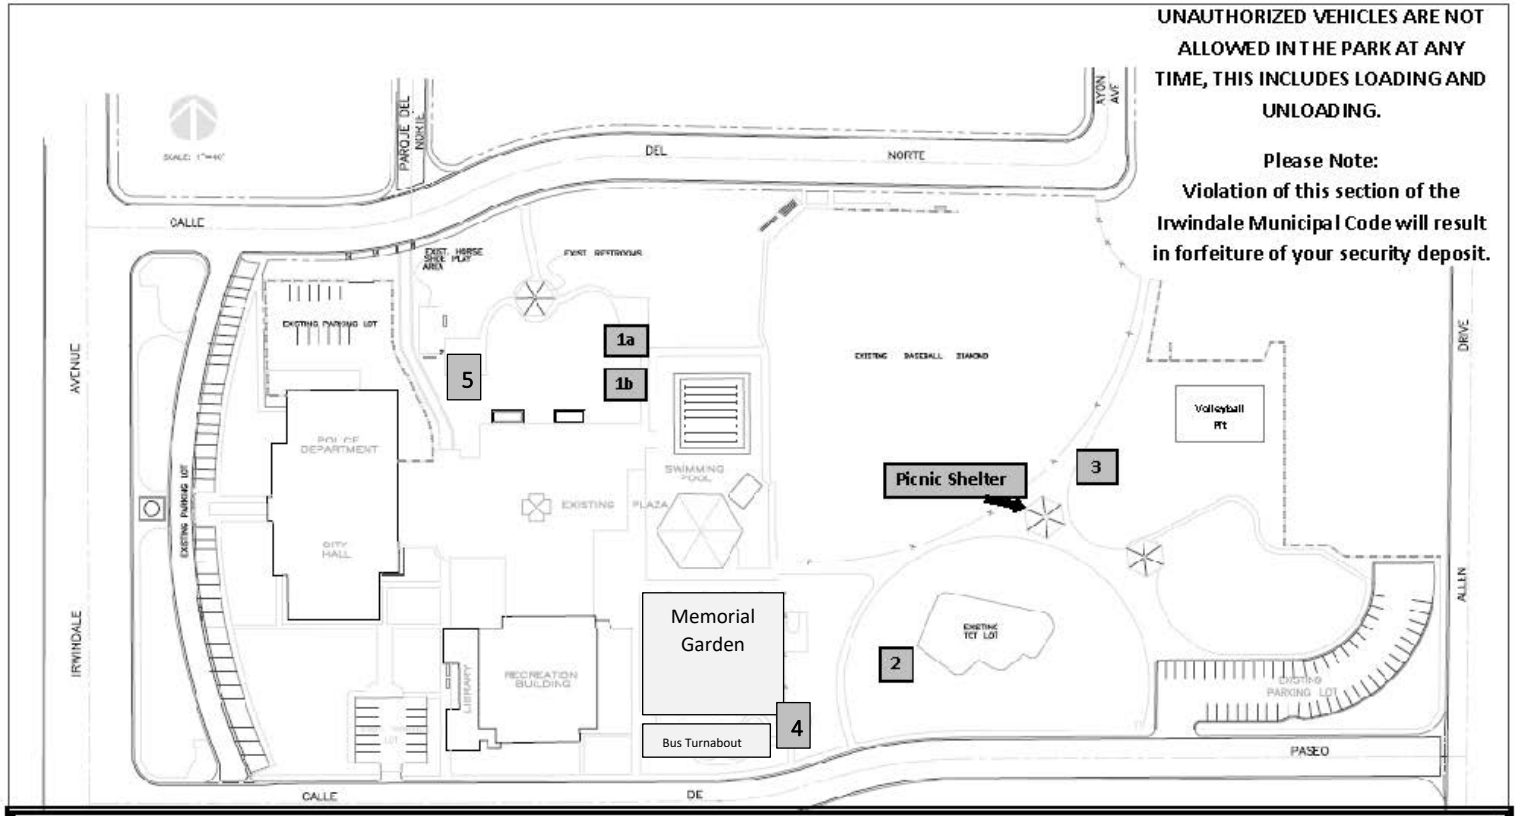


Group Picnic Area Reservation Policy

Irwindale Residents may reserve any of the picnic areas in Irwindale Park by submitting an application to the Recreation Department. Applications must be submitted at least one week prior to the planned event. Applications are subject to approval by the Recreation Manager. Fees for reserving a group picnic area are as follows: $75.00 security deposit PLUS $15.00 a day (Irwindale Residents) or $35.00 a day (Non Residents). Some area's may be reserved together or with the Picnic Shelter with one deposit, however separate fee's apply. Non Residents may only reserve area's within one month of their event.

Area 1a – 5 picnic tables, west of Swimming Pool (can be reserved with 1b)
Area 1b – 5 picnic tables, west of Swimming Pool (can be reserved with 1a)
Area 2 – 4 picnic tables, adjacent to playground
Area 3 – 5 picnic tables, adjacent to outdoor Volleyball pit (can be reserved with Picnic Shelter)
Area 4 – 4 picnic tables, east of Bus Turnabout
Area 5 – 6 picnic tables, Margaret Diaz Pavilion

Picnic tables that are not within the designated group areas are available for use on a first come, first serve basis and are deemed 'taken" ONLY if someone is present to reserve the table(s). The City of Irwindale does not permit roping off of areas or placing personal items (ice chests, chairs, blankets, etc.) to reserve picnic areas. Amplified music, bands, carnival rides, moon bounces, tents, or animals (dogs on a leash are ok) are not allowed on the park grounds unless the activity is a City Sponsored event. Amplified music or bands may be possible with a City permit. Special fees, restrictions and conditions may apply.

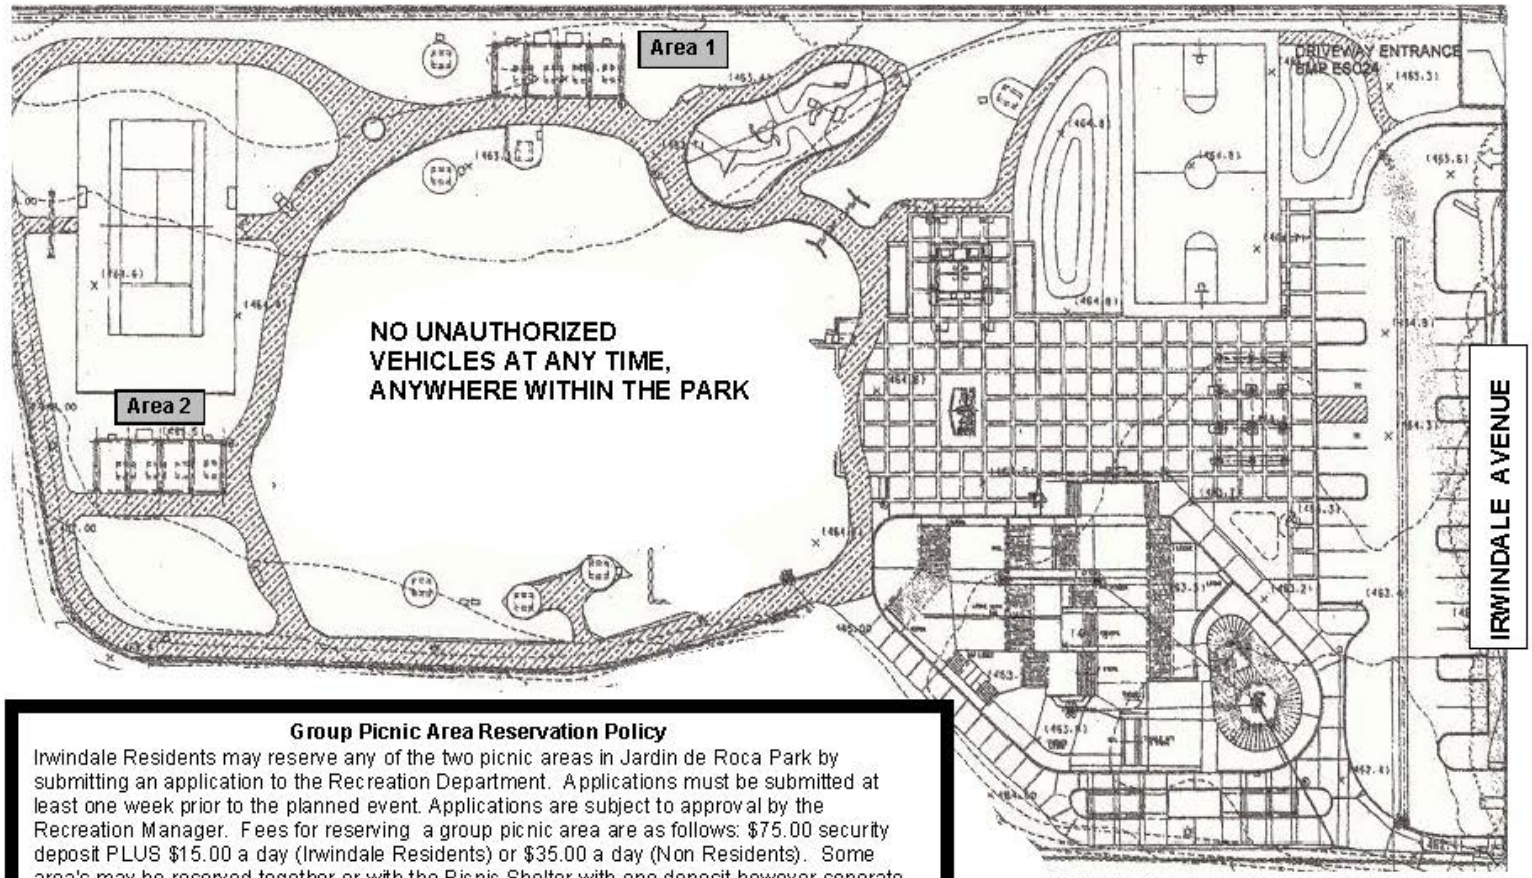

Group Picnic Area Reservation Policy

Irwindale Residents may reserve any of the two picnic areas in Jardin de Roca Park by submitting an application to the Recreation Department. Applications must be submitted at least one week prior to the planned event. Applications are subject to approval by the Recreation Manager. Fees for reserving a group picnic area are as follows: $75.00 security deposit PLUS $15.00 a day (Irwindale Residents) or $35.00 a day (Non Residents). Some area's may be reserved together or with the Picnic Shelter with one deposit however seperate fee's apply. Non Residents may only reserve area's within one month of their event.

Area 1 – 4 picnic tables, west of Tot Lot
Area 2 – 4 picnic tables, south of Tennis Courts

Picnic tables that are not within the designated group areas are available for use on a first come, first serve basis and are deemed 'taken" ONLY if someone is present to reserve the table(s). The City of Irwindale does not permit roping off of areas or placing personal items (ice chests, chairs, blankets, etc.) to reserve picnic areas. Amplified music, bands, carnival rides, moon bounces, tents, or animals (dogs on a leash are ok) are not allowed on the park grounds unless the activity is a City Sponsored event. Amplified music or bands may be possible with a City permit. Special fees, restrictions and conditions may apply.

UNAUTHORIZED VEHICLES ARE NOT ALLOWED IN THE PARK AT ANY TIME, THIS INCLUDES LOADING AND UNLOADING.

Please Note:
Violation of this section of the Irwindale Municipal Code will result in forfeiture of your security deposit.

Item #19.D.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Designation of Authorized Agents to Act on behalf of the City to Obtain Emergency Financial Assistance

City Manager's Recommendation:

Adopt Resolution No. 2026-13-3724 entitled: "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE DESIGNATING AUTHORIZED AGENTS TO ACT ON BEHALF OF THE CITY TO OBTAIN STATE AND FEDERAL FINANCIAL ASSISTANCE, AND APPROVE CAL OES FORM 130, 'DESIGNATION OF APPLICANT'S AGENT RESOLUTION FOR NON-STATE AGENCIES'".

Administrative Action:

Submitted by:

Theresa Olivares, Assistant City Manager

Prepared by:

Berlyn Aguila, Management Analyst

Reviewed by:

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager

Background and Analysis:

The Federal Emergency Management Agency (FEMA) and the California Governor's Office of Emergency Services (Cal OES) provide local jurisdictions with specific guidelines for managing and administering disaster assistance programs. These guidelines detail activities and expenditures that are allowable under their respective programs established by the Robert T. Stafford Disaster Relief and Emergency Assistance Act of 1988 (Stafford Act) and the California Disaster Assistance Act (CDAA).

To participate in the disaster assistance programs, the City Council must designate agents authorized to act on behalf of the City to obtain State and Federal financial assistance through the disaster assistance programs. In addition, the Office of Emergency Services recommends maintaining a current Resolution every three (3) years to mitigate funding delays during a crisis.

The City Council previously adopted Cal OES Form 130, or Designation of Applicant's Agent Resolution for Non-State Agencies, on March 22, 2023. The Resolution is effective for all open and future disasters up to three (3) years following the approval date. Therefore, an updated Form 130 and active Resolution are required before the City receives reimbursement for emergency services. Staff recommends that the City Manager, Chief of Police, and Finance Director/City Treasurer each be authorized to act on behalf of the City for this purpose.

Fiscal Impact:

There is no fiscal impact. However, the adoption of the Resolution is a requirement by Cal OES for the City to be eligible for State and Federal financial assistance during an emergency.

Attachments:

1.	Resolution No. 2026-13-3724
2.	Cal OES Form 130

RESOLUTION NO. 2026-13-3724

A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE, CALIFORNIA, DESIGNATING AUTHORIZED AGENTS TO ACT ON BEHALF OF THE CITY TO OBTAIN STATE AND FEDERAL FINANCIAL ASSISTANCE

WHEREAS, The City Council of the City of Irwindale desires to appoint and authorize agents of the City to apply for reimbursement for disaster-related expenditures under the Federal Emergency Management Agency (FEMA) and the California Governor's Office of Emergency Services (Cal OES) disaster assistance programs; and

WHEREAS, An updated Form 130 and an active Resolution are required before the City receives reimbursement for emergency assistance; and

WHEREAS, The City Council designates the City Manager, Chief of Police, or Finance Director/City Treasurer as authorized agents to act on the City's behalf for the purpose of obtaining State and Federal Financial Assistance.

NOW, THEREFORE, THE CITY COUNCIL OF THE CITY OF IRWINDALE, CALIFORNIA, DOES HEREBY RESOLVE, DETERMINE, AND ORDER AS FOLLOWS:

SECTION 1. The foregoing recitals are true and correct and are incorporated herein by this reference.

SECTION 2. The City Manager, Chief of Police, or Finance Director/City Treasurer are hereby authorized to execute for and on behalf of the City of Irwindale, a public entity established under the laws of the State of California, the financial assistance application and filing with the California Governor's Office of Emergency Services to obtain certain federal financial assistance under Public Law 93-288 as amended by the Robert T. Stafford Disaster Relief and Emergency Assistance Act of 1988, and/or state financial assistance under the California Disaster Assistance Act.

SECTION 3. The City of Irwindale, a public entity established under the laws of the State of California, hereby authorizes its agent(s) to provide to the California Governor's Office of Emergency Services, for all matters pertaining to such state disaster assistance, the assurances and agreements required.

SECTION 4. The Resolution is effective for all open and future disasters up to three (3) years following the approval date.

SECTION 5. The Chief Deputy City Clerk shall certify the adoption of this resolution, which shall, in turn, have immediate effect.

PASSED, APPROVED, and ADOPTED this 25th day of February 2026.

_____
H. Manuel Ortiz, Mayor

ATTEST:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

STATE OF CALIFORNIA }
COUNTY OF LOS ANGELES } ss.
CITY OF IRWINDALE }

I, Laura M. Nieto, Chief Deputy City Clerk of the City of Irwindale, do hereby certify that the foregoing Resolution No. 2026-13-3724 was adopted at a regular meeting of the Irwindale City Council held on the 25th day of February 2026, by the following vote of the Council:

AYES: Councilmembers:

NOES: Councilmembers:

ABSTAIN: Councilmembers:

ABSENT: Councilmembers:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

DESIGNATION OF APPLICANT'S AGENT RESOLUTION FOR NON-STATE AGENCIES

BE IT RESOLVED BY THE City Council OF THE City of Irwindale
(Governing Body) (Name of Applicant)

THAT City Manager, OR
(Title of Authorized Agent)

Chief of Police, OR
(Title of Authorized Agent)

Finance Director/City Treasurer
(Title of Authorized Agent)

is hereby authorized to execute for and on behalf of the City of Irwindale,
(Name of Applicant)
a public entity established under the laws of the State of California, this application and to file it with the California Governor's Office of Emergency Services for the purpose of obtaining federal financial assistance for any existing or future grant program, including, but not limited to any of the following:

- **Federally declared Disaster (DR), Fire Mitigation Assistance Grant (FMAG), California State Only Disaster (CDAA), Immediate Services Program (ISP), Hazard Mitigation Grant Program (HMGP), Building Resilient Infrastructure and Communities (BRIC), Legislative Pre-Disaster Mitigation Program (LPDM),** under
- Public Law 93-288 as amended by the Robert T. Stafford Disaster Relief and Emergency Assistance Act of 1988, and/or state financial assistance under the California Disaster Assistance Act.
- **Flood Mitigation Assistance Program (FMA)**, under Section 1366 of the National Flood Insurance Act of 1968.
- **National Earthquake Hazards Reduction Program (NEHRP)** 42 U.S. Code 7704 (b) ((2) (A) (ix) and 42 U.S. Code 7704 (b) (2) (B) National Earthquake Hazards Reduction Program, and also The Consolidated Appropriations Act, 2018, Div. F, Department of Homeland Security Appropriations Act, 2018, Pub. L. No. 115-141
- **California Early Earthquake Warning (CEEW)** under CA Gov Code – Gov, Title 2, Div. 1, Chapter 7, Article 5, Sections 8587.8, 8587.11, 8587.12

That the City of Irwindale, a public entity established under the
(Name of Applicant)
laws of the State of California, hereby authorizes its agent(s) to provide to the Governor's Office of Emergency Services for all matters pertaining to such state disaster assistance the assurances and agreements required.

DESIGNATION OF APPLICANT'S AGENT RESOLUTION NON-STATE AGENCIES

OES-FPD-130 (Rev. 10-2022)

Please check the appropriate box below

☑ This is a universal resolution and is effective for all open and future disasters/grants declared up to three (3) years following the date of approval.

☐ This is a disaster/grant specific resolution and is effective for only disaster/grant number(s):_____

Passed and approved this 25 day of February, 20 26

H. Manuel Ortiz, Mayor
(Name and Title of Governing Body Representative)

Albert F. Ambriz, Mayor Pro-Tem
(Name and Title of Governing Body Representative)

Larry G. Burrola, Mark A. Breceda, Manuel R. Garcia, Councilmembers
(Name and Title of Governing Body Representative)

CERTIFICATION

I, Laura M. Nieto (Name), duly appointed and Chief Deputy City Clerk (Title) of City of Irwindale (Name of Applicant), do hereby certify that the above is a true and correct copy of a resolution passed and approved by the City Council (Governing Body) of the City of Irwindale (Name of Applicant) on the 25 day of February, 20 26.

Chief Deputy City Clerk

(Signature) (Title)

Cal OES Form 130 Instructions

A Designation of Applicant's Agent Resolution for Non-State Agencies is required of all Applicants to be eligible to receive funding. A new resolution must be submitted if a previously submitted resolution is older than three (3) years from the last date of approval, is invalid, or has not been submitted.

When completing the Cal OES Form 130, Applicants should fill in the blanks on pages 1 and 2. The blanks are to be filled in as follows:

Resolution Section:

Governing Body: This is the group responsible for appointing and approving the Authorized Agents.

Examples include: Board of Directors, City Council, Board of Supervisors, Board of Education, etc.

Name of Applicant: The public entity established under the laws of the State of California.

Examples include: School District, Office of Education, City, County or Non-profit agency that has applied for the grant, such as: City of San Diego, Sacramento County, Burbank Unified School District, Napa County Office of Education, University Southern California.

Authorized Agent: These are the individuals that are authorized by the Governing Body to engage with the Federal Emergency Management Agency and the California Governor's Office of Emergency Services regarding grants for which they have applied. There are two ways of completing this section:

1. Titles Only: The titles of the Authorized Agents should be entered here, not their names. This allows the document to remain valid if an Authorized Agent leaves the position and is replaced by another individual. If "Titles Only" is the chosen method, this document must be accompanied by either a cover letter naming the Authorized Agents by name and title, or the Cal OES AA Names document. The supporting document can be completed by any authorized person within the Agency (e.g., administrative assistant, the Authorized Agent, secretary to the Director). It does not require the Governing Body's signature.

2. Names and Titles: If the Governing Body so chooses, the names **and** titles of the Authorized Agents would be listed. A new Cal OES Form 130 will be required if any of the Authorized Agents are replaced, leave the position listed on the document, or their title changes.

Checking Universal or Disaster-Specific Box: A Universal resolution is effective for all past disasters and for those declared up to three (3) years following the date of approval. Upon expiration it is no longer effective for new disasters, but it remains in effect for disasters declared prior to expiration. It remains effective until the disaster goes through closeout unless it is superseded by a newer resolution.

Governing Body Representative: These are the names and titles of the approving Board Members.

Examples include: Chairman of the Board, Director, Superintendent, etc. The names and titles **cannot** be one of the designated Authorized Agents. A minimum of three (3) approving board members must be listed. If less than three are present, meeting minutes must be attached in order to verify a quorum was met.

Certification Section:

Name and Title: This is the individual in attendance who recorded the creation and approval of this resolution.

Examples include: City Clerk, Secretary to the Board of Directors, County Clerk, etc. This person **cannot** be one of the designated Authorized Agents or Approving Board Member. If a person holds two positions (such as City Manager and Secretary to the Board) and the City Manager is to be listed as an Authorized Agent, then that person could sign the document as Secretary to the Board (not City Manager) to eliminate "Self-Certification."

Item #19.E.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Waive the Formal Bidding Procedures and Authorize the Issuance of a Puchase Order with Libraria for the Irwindale Public Library Opening Day Book Collection

City Manager's Recommendation:

That the City Council of the City of Irwindale **adopt Resolution No. 2026-14-3725** entitled, "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE, CALIFORNIA, WAIVING FORMAL BIDDING PROCEDURES PURSUANT TO IRWINDALE MUNICIPAL CODE SECTION 3.44.080(H), AUTHORIZING THE ISSUANCE OF A PURCHASE ORDER TO LIBRARIA FOR THE CHILDREN, TEEN, AND ADULT OPENING DAY BOOK COLLECTION FOR THE IRWINDALE PUBLIC LIBRARY ".

Administrative Action:

Submitted by:

Theresa Olivares, Assistant City Manager

Prepared by:

Shayna Balli, City Librarian


Reviewed by:

Adrian R. Guerra, City Attorney

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager



Background and Analysis:

In preparation for the opening of the new Irwindale Public Library, staff has developed a comprehensive Opening Day Collection to ensure a functional, engaging, and relevant selection of materials is available immediately upon opening. The collection is designed to satisfy patron needs by ensuring availability of popular titles, bestselling works, and other high-interest materials to encourage strong initial circulation and community engagement.

On October 6, 2025, Baker & Taylor (B&T), a distributor of books to public and academic libraries and a longstanding supplier of books to Irwindale Public Library, announced that the company would be winding down operations and would shut down by the beginning of 2026, canceling all existing orders and agreements including those associated with the Library's Opening Day Collection.

As a result, staff acted immediately to secure an alternative vendor capable of meeting the Library's required timeline. Staff conducted due diligence by contacting multiple book distributors and soliciting project quotes. However, due to the B&T's closure, many distributors, nationwide, were unable to accept new accounts or meet the required timeline the City was looking for due to a significant influx of requests from libraries across the country. Despite these challenges, staff successfully established a new partnership with Libraria, which not only provides a vast, curated selection of books suitable for libraries, they are also known for providing rapid delivery with outstanding fill rates which, combined, will help procure all materials required for the Library's Opening Day Collection and maintain the project schedule.

Irwindale Municipal Code ("IMC") Section 3.44.080(H) states that the bidding process can be waived "when the city council determines by resolution it would be in the best interest of the city to dispense with bidding; provided, however, that the city council shall state the basis of its determination." It is in the best interest of the City of Irwindale to dispense with formal bidding as Libraria is the only distributor able to provide materials for the Library's Opening Day Collection in time for the opening of the Library.

Fiscal Impact:

The FY 2025-2026 adopted budget includes a Capital Improvement Program (CIP) Project No. 8251 for Phase II of the City of Irwindale Public Library Improvement, which can be used for this Opening Day Collection expenditure of $142,422.43.

Attachments:

1.	Resolution No. 2026-14-3725
2.	Attachment "A"

RESOLUTION NO. 2026-14-3725

A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE, CALIFORNIA, WAIVING FORMAL BIDDING PROCEDURES PURSUANT TO IRWINDALE MUNICIPAL CODE SECTION 3.44.080(H), AUTHORIZING THE ISSUANCE OF A PURCHASE ORDER TO LIBRARIA FOR THE CHILDREN, TEEN AND ADULT OPENING DAY BOOK COLLECTION FOR THE IRWINDALE PUBLIC LIBRARY

WHEREAS, the Irwindale Public Library is currently under construction and will require books for the opening day book collection, including children, teen, and adult books; and

WHEREAS, Irwindale Municipal Code Section 3.44.080(H), outlines that bidding may be waived "when the city council determines by resolution it would be in the best interest of the city to dispense with bidding; provided, however, that the city council shall state the basis of its determination"; and

WHEREAS, the City Council of the City of Irwindale hereby determines that it is in the best interest of the City of Irwindale to dispense with formal bidding, as Libraria is the only distributor who is able to accept Irwindale as a new client and provide the required books and materials in time for the opening of the Irwindale Public Library.

NOW, THEREFORE, THE CITY COUNCIL OF THE CITY OF IRWINDALE DOES HEREBY RESOLVE, DETERMINE, AND ORDER AS FOLLOWS:

SECTION 1. The City Council hereby finds the Recitals above true and correct and incorporates them herein by this reference.

SECTION 2. The City Council of the City of Irwindale hereby waives the formal bidding process pursuant to Irwindale Municipal Code Section 3.44.080(H) and approves Libraria as the book distributor able to accept Irwindale as a new client and provide the required books and materials in time for the opening of the Irwindale Public Library.

SECTION 3. The City Council of the City of Irwindale hereby authorizes the Assistant City Manager to execute a Purchase Order for Libraria in an amount not to exceed $142,422.43 (Attachment “A”).

SECTION 4. If any section, subsection, sentence, clause, phase, or portion of this Resolution, or the application thereof to any person or circumstances, is, for any reason, held invalid or unconstitutional by any court of competent jurisdiction, such invalidity or unconstitutionality shall not affect the application of any other section, subsection, sentence, clause, phrase, or portion of this Resolution, and to this end the invalid or unconstitutional section, subsection, sentence, clause, phrase of this Resolution are declared to be severable. The City Council hereby declares that it would have adopted this Resolution and each section, subsection, sentence, clause, phrase, part or portion thereof, irrespective of the fact that any one or more sections, subsections, sentences, clauses, phrases, parts or portions thereof be declared invalid or unconstitutional.

SECTION 5. This Resolution shall take effect immediately and the Chief Deputy City Clerk shall attest to the adoption of this Resolution.

PASSED, APPROVED and ADOPTED this 25th day of February 2026.

.

_____
H. Manuel Ortiz, Mayor

ATTEST:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

STATE OF CALIFORNIA }
COUNTY OF LOS ANGELES } ss.
CITY OF IRWINDALE }

I, Laura M. Nieto, Chief Deputy City Clerk of the City of Irwindale, do hereby certify that the foregoing Resolution No. 2026-14-3725 duly adopted by the City Council of the City of Irwindale, at a regular meeting held on the 25th day of February 2026, by the following vote:

YES: Councilmembers:

NOES: Councilmembers:

ABSENT: Councilmembers:

ABSTAIN: Councilmembers:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: TEEN SPANISH ODC 1
List#: 201426
Date: 2/17/2026 6:21:58 PM
Total quantity: 159 Titles(159 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions

Barcode Range Start

Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	159	$524.70

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2462437	978-84-10489-26-4	Black River: Un Mordisco Puede Cambiarlo Todo (Black River: One Bite Can Change Everything) by Ruby Jean Cottle	Fic	$16.07	1	$16.07
2414284	978-84-19252-83-8	Entes De Huesos (The Bone Houses) by Emily Jones	Fic	$14.67	1	$14.67
2388384	978-84-19357-37-3	Binding 13 (Spanish Edition) by Chloe Walsh	Fic	$13.97	1	$13.97
2391091	978-84-19746-99-3	Keeping 13 (Spanish Edition) by Chloe Walsh	Fic	$15.37	1	$15.37
2416552	978-84-10298-31-6	Redeeming 6 (Spanish Edition) by Chloe Walsh	Fic	$15.37	1	$15.37
2493217	978-84-19848-22-2	Releasing 10 (Spanish Edition) by Chloe Walsh	Fic	$16.07	1	$16.07
2397841	978-84-19746-97-9	Saving 6 (Spanish Edition) by Chloe Walsh	Fic	$15.37	1	$15.37
2434347	978-84-10298-19-4	Taming 7 (Spanish Edition) by Chloe Walsh	Fic	$15.37	1	$15.37
2416584	978-607-39-1536-6	Dulce Pesadilla (Sweet Nightmare) by Tracy Wolff	Fic	$20.97	1	$20.97
2418268	978-84-10239-16-6	Caraval (Spanish Edition) by Stephanie Garber	Fic	$20.97	1	$20.97
2418269	978-84-10239-18-0	Finale (Spanish Edition) by Stephanie Garber	Fic	$20.97	1	$20.97
2418272	978-84-10239-17-3	Legendary (Spanish Edition) by Stephanie Garber	Fic	$20.97	1	$20.97
2418273	978-84-10239-19-7	Spectacular (Spanish Edition) by Stephanie Garber	Fic	$18.87	1	$18.87
2414271	978-84-19252-80-7	Chaos and Flame (Spanish Edition) by Tessa Gratton	Fic	$16.77	1	$16.77
2416553	978-607-39-1314-0	Guardian de Espadas (Sword Catcher) by Cassandra Clare	Fic	$16.07	1	$16.07
2409449	978-84-204-7154-9	Historia Interminable (The Neverending Story) by Michael Ende	Fic	$12.57	1	$12.57
2436119	978-84-19501-49-3	Rebel Witch (Spanish Edition) by Kristen Ciccarelli	Fic	$15.37	1	$15.37
2402140	978-84-19252-70-8	Jardin de Los Malditos (Garden of the Cursed) by Katty Rose Pool	Fic	$17.47	1	$17.47
2438375	978-0-593-96974-8	Como Funciona la Biologia (How Biology Works)	570	$17.50	1	$17.50
2451599	978-84-10489-79-0	Dias para Tenerte (The Days to Have You) by Andrea Serraz	Fic	$13.97	1	$13.97
2442677	978-84-272-4677-5	Camino de Huesos (The Road of Bones) by Demi Winters	Fic	$15.37	1	$15.37
2453894	978-84-272-4786-4	Reino de Garras (Kingdom of Claw) by Demi Winters	Fic	$15.37	1	$15.37

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2493045	979-8-89098-573-6	Querido Manny (Dear Manny) by Nic Stone	Fic			$10.47 | $10.47
2414001	979-8-89098-262-9	Querido Martin (Dear Martin) by Nic Stone	Fic			$10.47 | $10.47
2431790	978-1-64614-517-1	Elatsoe (Spanish Edition) by Darcie Little Badger	Fic			$9.09 | $9.09
2446408	978-84-10396-19-7	Problemas de Emma (Emma's Many Problems) by Susana Rubio	Fic			$13.27 | $13.27
2436110	978-84-10298-25-5	Suenos de Emma (Emma's Dreams) by Susana Rubio	Fic			$13.27 | $13.27
2453454	978-607-39-2712-3	Princesa Encantada (Fallen Princess) by Mona Kasten	Fic			$13.97 | $13.97
2411741	978-607-38-4320-1	Oscuros (Fallen) by Lauren Kate	Fic			$12.57 | $12.57
2393169	978-607-38-4284-6	Poder de las Sombras (Torment) by Lauren Kate	Fic			$12.57 | $12.57
2441395	978-1-324-08270-5	Almuerzo Gratis (Free Lunch) by Rex Ogle	362.7			$6.99 | $6.99
2422242	979-8-89098-362-6	Amanecer en la Cosecha (Sunrise on the Reaping) by Suzanne Collins	Fic			$13.97 | $13.97
2397836	978-84-19746-43-6	Abraza Tus Sombras, Descubre Tu Luz (Embrace Your Shadows, Discover) by Maria Muebra	615.5			$13.97 | $13.97
2493186	978-84-272-4280-7	Ano de Las Segundas Oportunidades (The Year of Second Chances) by Leticia Rios Rodriguez	Fic			$13.97 | $13.97
2438945	978-84-10239-38-8	Apuesto por nosotros (Betting on You) by Lynn Painter	Fic			$17.47 | $17.47
2451956	978-84-10239-44-9	Atlas de nosotros (The Atlas of Us) by Kristin Dwyer	Fic			$17.47 | $17.47
2393177	978-84-19746-58-0	Aunque Llueva en Primavera (Even If It Rains in Spring) by Cherry Chic	Fic			$15.37 | $15.37
2453133	978-607-39-2797-0	Beso Final (This Fatal Kiss) by Alicia Jasinska	Fic			$15.37 | $15.37
2414274	978-84-19252-82-1	Bestias y Bellas: Doce Cuentos Peligrosos (Beasts and Beauty) by Soman Chainani	Fic			$20.27 | $20.27
2265761	978-84-18483-94-3	Blackout (Spanish Edition) by Dhonielle Clayton	Fic			$13.97 | $13.97
2456920	978-84-10239-47-0	Bruja salvaje (Wild is the Witch) by Rachel Griffin	Fic			$15.37 | $15.37
2402087	978-84-96886-97-1	Carta de Ivy Aberdeen Al Mundo (Ivy Aberdeen's Letters To The World) by Ashley Herring Blake	Fic			$13.97 | $13.97
2438361	978-84-10239-35-7	Cartas de Otro Mundo (The Otherwhere Post) by Emily J. Taylor	Fic			$17.47 | $17.47
2401978	978-84-18509-74-2	Circo de las luces (The First Bright Thing) by J. R. Dawson	Fic			$16.07 | $16.07
2493181	978-607-38-6569-2	Cometas En El Cielo (Kite Runner) by Khaled Hosseini	Fic			$11.87 | $11.87
2459979	978-84-10239-04-3	Cortes inmortales (Court of the Undying Seasons) by A. M. Strickland	Fic			$17.47 | $17.47
2437180	978-1-6659-6085-4	Criaturas Islenas (Island Creatures) by Margarita Engle	Fic			$13.99 | $13.99
2459526	978-84-19848-44-4	Cuando Solo Quedemos Nosotros (When Only We Remain) by Ines Garber	Fic			$16.07 | $16.07
2402139	978-84-19252-74-6	Darkhearts: Una Segunda Oportunidad (Darkhearts) by James Sutter	Fic			$17.47 | $17.47
2429779	978-84-10239-23-4	Decimotercera hija (The Thirteenth Child) by Erin A. Craig	Fic			$18.17 | $18.17
2438943	978-84-10239-39-5	Delirio Encantador (The Beautiful Maddening) by Shea Ernshaw	Fic			$15.37 | $15.37
2438946	978-84-10239-40-1	Done Duermen Las Chicas Perdidas (Where Sleeping Girls Lie) by Faridah Abike-Iyimide	Fic			$20.27 | $20.27
2404166	979-8-89098-180-6	En Llamas (Up in Flames) by Hailey Alcaraz	Fic			$12.57 | $12.57
2434199	978-84-272-4633-1	Ese No Es Mi Nombre (That's Not My Name) by Megan Lally	Fic			$13.97 | $13.97
2422961	978-607-07-9821-4	Esta Noche Llegan Las Perseidas (The Perseids Arrive Tonight) by Raul Anibal Vargas	Fic			$9.07 | $9.07
2422706	978-607-07-5482-1	Golazo: una Tragedia (Golazo: a Tragedy) by Cesar Aristides	Fic			$9.07 | $9.07
2432625	978-607-39-1911-1	Gran Desaparicion (Great Disappearance) by Leon Krauze	Fic			$11.87 | $11.87
2493209	978-84-264-3290-2	Hacia la Hierba Salvaje (Into the Uncut Grass) by Trevor Noah	Fic			$18.17 | $18.17
2440015	978-84-10396-14-2	Hasta Desgastar el Cielo (Until the Sky Is Worn Out) by Ester Isel	Fic			$15.37 | $15.37
2437375	979-8-89098-299-5	Hazme una Sena (Give Me a Sign) by Anna Sortino	Fic			$12.57 | $12.57
2446406	978-84-10298-71-2	Heartbreak Point (Spanish Edition) by Juan Arcones	Fic			$13.97 | $13.97
2451144	979-8-89098-454-8	Historia de Mi Furia (The Story of My Anger) by Jasminne Mendez	Fic			$10.47 | $10.47
2414302	978-84-19252-71-5	Ilusiones Perversas (Cruel Illusions) by Margie Fuston	Fic			$18.87 | $18.87
2402085	978-84-19252-89-0	Incendiary (Spanish Edition) by Zoraida Cordova	Fic			$19.57 | $19.57
2393176	978-84-19746-53-5	Inesperado Nosotros (An Unexpected Us) by Andrea Smith	Fic			$13.27 | $13.27
2438360	978-84-10239-33-3	Inmensa Alegria (An Emotion of Great Delight) by Tahereh Mafi	Fic			$13.97 | $13.97
2451600	978-84-10396-07-4	Juego de Dioses (Games of Gods) by Hazel Riley	Fic			$13.97 | $13.97
2493228	979-8-89098-601-6	Ladrona de Libros (The Book Thief) by Markus Zusak	Fic			$20.97 | $20.97
2397862	979-8-89098-135-6	Manos (Hands) by Torrey Maldonado	Fic			$9.07 | $9.07
2422729	978-607-07-5645-0	Mensajeros (Messengers) by Francisca Solar	Fic			$9.07 | $9.07
2404144	978-84-10050-62-4	Mensis: Dos Almas. Dos Cuerpos. Un Mismo Mar. (Mensis: Two Souls. Two Bodies. One Same Sea.) by Aria Bedmar	Fic			$13.27 | $13.27
2459559	978-84-10190-90-0	Mentira Peligrosa (A Dangerous Lie) by Elia Barcelo	Fic			$12.57 | $12.57
2396649	978-84-19252-26-5	Mentiras a Medianoche (Lies at Midnight) by Marie Rutkoski	Fic			$16.07 | $16.07

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2459539	978-84-272-4584-6	Mi Enemigo Favorito (My Favorite Enemy) by Rodrigo Paniagua	Fic			$15.37 | $15.37
2461738	978-84-10239-51-7	Mordida (Bitten) by Jordan Stephanie Gray	Fic			$19.57 | $19.57
2422921	978-607-07-7475-1	Mundo Nuevo (A New World) by Diego Paszkowski	Fic			$9.77 | $9.77
2423036	978-607-39-1700-1	Nada Nunca Termina, pero Hay Que Decir Adios (Nothing Ever Really Ends, but We Have to Say Goodbye) by Alberto Villarreal	152.4			$12.57 | $12.57
2436098	979-8-89098-301-5	No Preguntes de donde Soy (Don't Ask Me Where I'm From) by Jennifer De Leon	Fic			$11.87 | $11.87
2404151	978-84-19848-65-9	Nosotros Nunca (Us, Never) by Natalia Lopez	Fic			$13.27 | $13.27
2446409	978-84-10396-32-6	Nuevo Comienzo: Encajar o Ser Yo Misma? (A New Beginning: Fit in or Be Myself?) by Marina Mese	Fic			$11.87 | $11.87
2377721	978-8-4191-3011-2	Nuevos comienzos(So Many Beginnings) by Bethany C. Morrow	Fic			$10.47 | $10.47
2451601	978-84-19514-51-6	Nunca Nos Pillaran (They'll Never Catch Us) by Jessica Goodman	Fic			$14.67 | $14.67
2436109	978-84-10190-34-4	Por Verte Sonreir (Just So I Can See You Smile) by Esmeralda Romero	Fic			$13.97 | $13.97
2422933	978-607-07-8300-5	Prohibido Entrar (Forbidden Entry) by Francisca Solar	Fic			$9.77 | $9.77
2414033	978-84-10050-89-1	Quien Cono Soy?: la Guia Que Necesitas para Aprender a Quererte (Who the Hell Am I?: the Guide You Need to Learn to Love Yourself) by Corina Randazzo	158.1			$16.07 | $16.07
2422997	978-607-39-1877-0	Rafa y Sus Espantos: la Leyenda de el Dorado (Rafa and His Horrors: the Legend of el Dorado) by Loki Valente	Fic			$11.17 | $11.17
2463012	978-84-10239-54-8	Rebelion de la mariposa (The Butterfly Rebellion) by Miriam Isabel Mosquera	Fic			$20.97 | $20.97
2451960	978-607-39-2416-0	Rey Entre Sombras (The Half King) by Melissa Landers	Fic			$13.97 | $13.97
2459525	978-84-10050-25-9	Rey de Invierno (A Winter King) by Juan Arcones	Fic			$15.37 | $15.37
2393181	978-84-19848-69-7	Rey de Verano (A Summer King) by Juan Arcones	Fic			$13.97 | $13.97
2451954	978-84-10425-14-9	Royal Bodyguard (Spanish Edition) by Aimee Lou	Fic			$16.77 | $16.77
2460225	978-84-10298-42-2	Sombras de Azul (A Hue of Blu) by Marie-France Leger	Fic			$13.97 | $13.97
2401995	978-84-19252-69-2	Sonata de verano (A Summer Sonata) by Belen Martinez	Fic			$16.07 | $16.07
2437201	978-1-6659-5067-1	Suenos Salvajes (Wild Dreamers) by Margarita Engle	Fic			$13.99 | $13.99
2391094	978-84-19743-75-6	Tal Como Soy (The Way I Am Now) by Amber Smith	Fic			$15.37 | $15.37
2393178	978-84-19746-79-5	Templo Encantador (An Enchanting Temple) by Heather Del Rey	Fic			$13.27 | $13.27
2409404	979-8-89098-131-8	Tension (Tight) by Torrey Maldonado	Fic			$10.47 | $10.47
2397834	978-84-19688-99-6	Todo Lo Que Nunca Dijimos (Everything We Never Said) by Sloan Harlow	Fic			$15.37 | $15.37
2422932	978-607-07-8207-7	Todo el Mundo Tiene Su Fabula (Everyone Has Their Fable) by Humberto Jarrin	Fic			$9.77 | $9.77
2437508	978-84-272-4990-5	Todo lo Que Te Prometi (Everything I Promised You) by Katy Upperman	Fic			$14.67 | $14.67
2440012	978-84-10396-12-8	Todos Los Deseos Que Escribi Sin Ti (All the Wishes I Made Without You) by Cherry Chic	Fic			$15.37 | $15.37
2414038	978-84-19982-03-2	Tres Crimenes Reales Sin Resolver (Three Real Unsolved Crimes) by Martha Caballero	364.1			$15.37 | $15.37
2397830	978-84-19688-48-4	Tu Futuro Lo Eliges Tu (You Choose Your Own Future) by Adriana Carvajal	650.14			$13.97 | $13.97
2462402	978-607-38-6249-3	Tumbas de Sangre (Blood-Soaked Graves) by Xavier M. Sotelo	Fic			$14.67 | $14.67
2433020	979-8-89098-321-3	Verano Que Recorde Todo (The Summer I Remembered Everything) by Catherine Con Morse	Fic			$11.87 | $11.87
2402002	978-84-19252-68-5	Visiones de carne y sangre (Visions of Flesh and Blood) by Jennifer L. Armentrout	Fic			$18.87 | $18.87
2485979	978-1-5458-2362-0	Voyage de Gourmet (Spanish Edition) by Paul Tobin	741.5			$10.49 | $10.49
2404091	978-84-19743-27-5	Zendaya: Una Biografia No Autorizada (Zendaya: The Unauthorized Biography) by Alison James	791.4302			$11.87 | $11.87
2432676	978-607-38-5072-8	Piramide Roja (The Red Pyramid) by Rick Riordan	Fic			$11.17 | $11.17
2438046	978-607-39-2217-3	Desolado Rey Elfo (The Broken Elf King) by Leia Stone	Fic			$11.87 | $11.87
2416582	978-607-39-1455-0	Ultimo Rey Dragon (Last Dragon King) by Leia Stone	Fic			$13.27 | $13.27
2439859	978-1-6699-4509-3	Ya No Hay Quijotes? (Are There No More Quixotes Left?) by Rosana Acquarani	Fic			$9.07 | $9.07
2463013	978-84-19130-73-0	Promesas Crueles (Ruthless Vows) by Rebecca Ross	Fic			$12.57 | $12.57
2448412	978-84-19130-59-4	Rivales Divinos (Divine Rivals) by Rebecca Ross	Fic			$11.87 | $11.87
2460255	978-84-1314-889-2	Cielo Lleno de Estrellas (A Sky Full of Stars) by Susana Rubio	Fic			$11.17 | $11.17
2446580	978-84-1314-888-5	Cielo Lleno de Nubes (A Sky Full of Clouds) by Susana Rubio	Fic			$11.17 | $11.17
2413999	978-84-9793-569-2	Ciudad de Las Bestias (City of the Beasts) by Isabel Allende	Fic			$11.17 | $11.17
2416546	978-84-9793-570-8	Reino Del Dragon de Oro (The Kingdom of the Golden Dragon) by Isabel Allende	Fic			$11.17 | $11.17

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2446398	978-607-38-5638-6	Cuentos Extranos para ninos Peculiares (Tales of the Peculiar) by Ransom Riggs	Fic			$9.07 | $9.07
2432627	978-607-39-1929-6	Matar a una Sombra (To Kill a Shadow) by Katherine Quinn	Fic			$13.97 | $13.97
2424381	979-8-88989-795-8	Real Madrid (Spanish Edition) by Jim Whiting	796.334			$34.95 | $34.95
2424383	979-8-88989-797-2	Santos FC (Spanish Edition) by Jim Whiting	796.334			$34.95 | $34.95
2461743	978-84-10425-24-8	Inmune a Ti (The Score) by Elle Kennedy	Fic			$10.47 | $10.47
2461742	978-84-10425-23-1	Objetivo Tu Y Yo (The Mistake) by Elle Kennedy	Fic			$10.47 | $10.47
2461741	978-84-10425-22-4	Prohibido enamorarse (The Deal) by Elle Kennedy	Fic			$10.47 | $10.47
2463007	978-84-19130-80-8	Balada de nunca jamas (The Ballad of Never After) by Stephanie Garber	Fic			$11.87 | $11.87
2448410	978-84-19130-63-1	Erase una vez un corazon roto (Once Upon A Broken Heart) by Stephanie Garber	Fic			$11.87 | $11.87
2462375	979-8-89098-616-0	Fearful: Una Historia de Powerless (Fearful: A Powerless Story) by Lauren Roberts	Fic			$17.47 | $17.47
2407989	978-607-38-4882-4	Powerful (Spanish Edition) by Lauren Roberts	Fic			$13.97 | $13.97
2411057	978-607-38-5056-8	Reckless (Spanish Edition) by Lauren Roberts	Fic			$13.97 | $13.97
2418275	978-84-10239-07-4	Juego de Reinas (Queen's Game) by Katharine McGee	Fic			$16.77 | $16.77
2456930	978-84-10239-49-4	Circulo Rubi: todos nuestros secretos (The Ruby Circle) by Jana Hoch	Fic			$16.77 | $16.77
2451146	979-8-89098-468-5	Santuario (Sanctuary) by Paola Mendoza	Fic			$11.87 | $11.87
2459551	979-8-89098-466-1	Solis (Spanish Edition) by Paola Mendoza	Fic			$11.87 | $11.87
2451013	978-1-64379-701-4	Otono de Las Luciernagas (Fall of the Fireflies) by Guadalupe Garcia McCall	Fic			$16.77 | $16.77
2414324	978-84-19252-96-8	Asesino de Brujas (Blood and Honey) by Shelby Mahurin	Fic			$18.87 | $18.87
2414323	978-84-19252-88-3	Asesino de brujas (Serpent and Dove) by Shelby Mahurin	Fic			$18.87 | $18.87
2422807	978-84-19252-97-5	Dioses y Monstruos (Gods and Monsters) (Deluxe Edition) by Shelby Mahurin	Fic			$20.27 | $20.27
2416550	978-607-38-4893-0	Alguien para Mi (Someone for Me) by Juan Arcones	Fic			$13.97 | $13.97
2437502	978-607-38-5553-2	Alguien para Nosotros (Someone for Us) by Juan Arcones	Fic			$13.97 | $13.97
2452091	978-607-39-2471-9	Portadora de Estrellas (Star Bringer) by Tracy Wolff	Fic			$17.47 | $17.47
2402080	978-84-19252-73-9	Trono del Prisionero (The Prisoner's Throne) by Holly Black	Fic			$16.77 | $16.77
2452968	978-607-39-2407-8	Portador Del Polvo (The Bearer of Dust) by J. M. Miro	Fic			$13.97 | $13.97
2440058	978-84-272-4797-0	Mundo a Punto de Arder (Them and the Fire) by Alice Doublier	Fic			$16.77 | $16.77
2461737	978-84-10239-50-0	Al final el superviviente quiere morir (The Survivor Wants to Die at the End) by Adam Silvera	Fic			$20.97 | $20.97
2429776	978-84-10239-22-7	Gloria retorcida (All This Twisted Glory) by Tahereh Mafi	Fic			$16.77 | $16.77
2462415	978-84-19275-96-7	Tres Muertes de la Reina (The Queen's Three Deaths) by Marina Tena Tena	Fic			$12.57 | $12.57
2459555	978-607-38-5789-5	Imperio Del Caos (The Empire of Chaos) by Selene M. Pascual	Fic			$14.67 | $14.67
2423537	978-1-5364-9159-3	Lu (Spanish Edition) by Jason Reynolds	Fic			$17.95 | $17.95
2451955	978-607-39-2509-9	Luces de Septiembre (The Watcher in the Shadows) by Carlos Ruiz Zafon	Fic			$13.97 | $13.97
2451958	978-607-39-2507-5	Palacio de la Medianoche (The Midnight Palace) by Carlos Ruiz Zafon	Fic			$13.97 | $13.97
2451953	978-607-39-2508-2	Principe de la Niebla (The Prince of Mist) by Carlos Ruiz Zafon	Fic			$11.87 | $11.87
2422232	978-84-10298-88-0	Especiales (Specials) by Scott Westerfeld	Fic			$16.07 | $16.07
2422234	978-84-10298-89-7	Extras (Spanish Edition) by Scott Westerfeld	Fic			$16.07 | $16.07
2414035	978-84-10298-82-8	Pretties (Spanish Edition) by Scott Westerfeld	Fic			$16.07 | $16.07
2414034	978-84-10298-81-1	Uglies (Spanish Edition) by Scott Westerfeld	Fic			$16.07 | $16.07
2365953	978-84-19743-67-1	Tal como era (The Way I Used To Be) by Amber Smith	Fic			$15.37 | $15.37
2493064	978-84-19868-58-9	Seremos Mentirosos (We Fell Apart) by E. Lockhart	Fic			$13.97 | $13.97
2438940	978-84-10239-14-2	Caida de las Brujas (The Fall of the Witches) by Belen Martinez	Fic			$17.47 | $17.47
		Total quantity				159 Titles(159 Books)
		Subtotal				$2,345.00
		Processing Options Total				$524.70
		Shipping & Handling				$46.90
		Shipping Discount				-$46.90
		Tax				$294.14
		Grand Total				$3,163.84

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: TEEN NONFICTION ODC 1
List#: 201424
Date: 2/17/2026 6:21:23 PM
Total quantity: 234 Titles(234 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions

Barcode Range Start

Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	234	$772.20

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2428731	978-1-62795-200-2	Computer Science: An Illustrated History of the World's Smallest Machines by Tom Jackson	004	$17.47	1	$17.47
2429079	978-1-62795-195-1	Engineering: An Illustrated History From Ancient Craft to Modern Technology by Tom Jackson	609	$17.47	1	$17.47
2429083	978-1-62795-197-5	Physics: An Illustrated History of the Foundations of Science by Tom Jackson	530	$17.47	1	$17.47
2496643	978-1-7253-4249-1	Importance of Sleep by Greg Roza	610	$25.10	1	$25.10
2428647	978-1-6782-0968-1	Human Circulatory System by Chelsea Xie	612.1	$33.95	1	$33.95
2428648	978-1-6782-0958-2	Human Digestive System by Sue Bradford Edwards	612.3	$33.95	1	$33.95
2428649	978-1-6782-0960-5	Human Muscular System by Samantha S. Bell	612.7	$33.95	1	$33.95
2428650	978-1-6782-0966-7	Human Nervous System by Chelsea Xie	612.8	$33.95	1	$33.95
2428651	978-1-6782-0964-3	Human Respiratory System by Tammy Gagne	612.2	$33.95	1	$33.95
2428652	978-1-6782-0962-9	Human Skeletal System by Tammy Gagne	612.7	$33.95	1	$33.95
2401553	979-8-89250-210-8	Mosquitoes Infect by Catherine L. Osornio	595.77	$24.95	1	$24.95
2401631	979-8-89250-223-8	Astronauts by Christina Dendy	629.45	$24.95	1	$24.95
2401634	979-8-89250-224-5	Cave Researchers by Julie Kentner	551.44	$24.95	1	$24.95
2401635	979-8-89250-225-2	Forest Canopy Ecologists by Natasha Vizcarra	577	$24.95	1	$24.95
2401638	979-8-89250-226-9	Mountain Researchers by Sara Petersohn	551.43	$24.95	1	$24.95
2401640	979-8-89250-227-6	Volcanologists by Julie Kentner	551.21	$24.95	1	$24.95
2446324	978-1-5235-2593-5	Big Fat High School Algebra 2 Workbook: 400+ Algebra 2 Practice Exercises	371	$16.99	1	$16.99
2433887	978-1-63889-440-7	Agriculture, Food, and Natural Resources	650	$20.95	1	$20.95
2433895	978-1-63889-446-9	Art and Design	650	$20.95	1	$20.95
2433902	978-1-63889-434-6	Auto and Equipment Mechanics	650	$20.95	1	$20.95
2399298	978-1-4994-7677-4	Basics of Chemistry by Allan B. Cobb	540	$29.83	1	$29.83
2399299	978-1-4994-7680-4	Basics of Metals and Metalloids by Krista West	546	$29.83	1	$29.83

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2399300	978-1-4994-7683-5	Basics of Nonmetals by Allan B. Cobb	546			$29.83 | $29.83
2399301	978-1-4994-7686-6	Basics of Organic Chemistry by Martin Clowes	547			$29.83 | $29.83
2399302	978-1-4994-7689-7	Basics of the Periodic Table by Leon Gray	546			$29.83 | $29.83
2428175	978-1-4994-7799-3	Basics of Heat by John O. E. Clark	536			$29.83 | $29.83
2428176	978-1-4994-7802-0	Basics of Light by John O. E. Clark	535			$29.83 | $29.83
2456975	978-0-593-96685-3	How Science Works: The Facts Simply Explained (New Edition)	500			$19.59 | $19.59
2455619	978-1-4222-5022-8	Danger Zone: Why Fentanyl is So Risky by Miron Amanda	615			$27.95 | $27.95
2497289	978-1-6782-1218-6	Careers If You Like Problem-Solving by Leanne Currie-McGhee	331.702			$33.95 | $33.95
2497290	978-1-6782-1220-9	Careers If You Like Research and Analysis by Andrea C. Nakaya	331.702			$33.95 | $33.95
2497292	978-1-6782-1222-3	Careers If You Like Travel by Stuart A. Kallen	910.23			$33.95 | $33.95
2497293	978-1-6782-1224-7	Careers If You Like Working with People by Carla Mooney	331.702			$33.95 | $33.95
2497294	978-1-6782-1226-1	Careers If You Like Working with Your Hands by Stuart A. Kallen	331.702			$33.95 | $33.95
2497291	978-1-6782-1216-2	Careers If You Like the Creative Arts by Stuart A. Kallen	700.23			$33.95 | $33.95
2455831	978-1-6782-1034-2	Heroes and Villains of Norse Mythology by Don Nardo	293			$33.95 | $33.95
2428653	978-1-6782-0982-7	Jobs If You Like History by Don Nardo	331.702			$33.95 | $33.95
2428657	978-1-6782-0988-9	Jobs If You Like Writing by Stuart A. Kallen	808.02023			$33.95 | $33.95
2428656	978-1-6782-0980-3	Jobs If You Like the Arts by Terri Dougherty	700.23			$33.95 | $33.95
2409226	978-1-4222-4787-7	Corvette: The Classic American Sports Car by Anne Newson	629.222			$28.95 | $28.95
2409227	978-1-4222-4788-4	Ferrari: Pure Passion and Power by Anne Newson	629.222			$28.95 | $28.95
2409230	978-1-4222-4791-4	Mercedes-Benz: German Engineering Excellence by Anne Newson	629.222			$28.95 | $28.95
2409231	978-1-4222-4792-1	Mustang: The American Muscle Car by Anne Newson	629.222			$28.95 | $28.95
2495034	978-1-917509-04-6	Beating Natural Disasters: From Ancient Survival to a Disaster-Proof Future by Sarah Eason	600			$26.99 | $26.99
2495126	978-1-917509-08-4	Construction: From Creating Early Shelters to Building a Sustainable Future by Sarah Eason	600			$26.99 | $26.99
2495275	978-1-917509-12-1	Harnessing Energy: From Powering the Past to Creating a Cleaner Future by Sarah Eason	600			$26.99 | $26.99
2426492	978-1-0982-9530-1	How Supermarkets Work by Liz Sonneborn	338.197			$29.95 | $29.95
2394193	978-1-0982-9341-3	Animal Conservation by Carla Mooney	333.951			$29.95 | $29.95
2394332	978-1-0982-9342-0	Climate Change by Carla Mooney	333.951			$29.95 | $29.95
2394386	978-1-0982-9343-7	Energy Extraction by Rebecca Rowell	333.951			$29.95 | $29.95
2394551	978-1-0982-9344-4	Land Preservation by A. W. Buckey	333.951			$29.95 | $29.95
2394594	978-1-0982-9345-1	Marine Conservation by Carol Hand	333.951			$29.95 | $29.95
2394706	978-1-0982-9346-8	Pollution by A. W. Buckey	363.73			$29.95 | $29.95
2426500	978-1-0982-9533-2	Edmund Kemper: The Co-Ed Killer by Judy Dodge Cummings	364.15232			$29.95 | $29.95
2426501	978-1-0982-9534-9	Harold Shipman: Dr. Death by Carla Mooney	364.15232			$29.95 | $29.95
2426502	978-1-0982-9535-6	John Wayne Gacy: The Killer Clown by Tom Streissguth	364.15232			$29.95 | $29.95
2426503	978-1-0982-9536-3	Joseph James DeAngelo: The Golden State Killer by Rebecca Morris	364.15232			$29.95 | $29.95
2426504	978-1-0982-9537-0	Richard Ramirez: The Night Stalker by Carla Mooney	364.15232			$29.95 | $29.95
2426505	978-1-0982-9538-7	Ted Bundy: The Campus Killer by Rebecca Morris	364.15232			$29.95 | $29.95
2405309	979-8-7656-1134-0	Borrowing Basics: A Teen Guide to Credit and Debt by Nicholas Suivski	332.7			$25.99 | $25.99
2405307	979-8-7656-1132-6	Dollars and Sense: A Teen Guide to Managing Money by Nicholas Suivski	332.024			$25.99 | $25.99
2405306	979-8-7656-1131-9	First Job 101: A Teen Guide to Employment by Nicholas Suivski	650.14			$25.99 | $25.99
2405308	979-8-7656-1133-3	Life after High School: A Teen Guide to Career Planning by Nicholas Suivski	650.14			$25.99 | $25.99
2428659	978-1-6782-0994-0	Ghost Hunters by Carla Mooney	133.1			$33.95 | $33.95
2428660	978-1-6782-0992-6	Ghosts by Doreen Staskal	133.1			$33.95 | $33.95
2428661	978-1-6782-0996-4	Hauntings by Stuart A. Kallen	133.1			$33.95 | $33.95
2428662	978-1-6782-0998-8	Poltergeists by Craig E. Blohm	133.1			$33.95 | $33.95
2455839	978-1-6782-1178-3	Haunted Asylums & Hospitals by Richard Sebra	133.1			$33.95 | $33.95
2455840	978-1-6782-1180-6	Haunted Graveyards by Carla Mooney	133.10973			$33.95 | $33.95
2455841	978-1-6782-1182-0	Haunted Hotels by Laura Stickney	133.10973			$33.95 | $33.95
2455842	978-1-6782-1184-4	Haunted Houses & Mansions by Janie Havemeyer	133.10973			$33.95 | $33.95
2455843	978-1-6782-1186-8	Haunted Ships & Lighthouses by Heather C. Hudak	133.10973			$33.95 | $33.95
2405377	979-8-7656-2697-9	Beyond Distraction: Understanding ADHD by Amy Farrar	618.92			$28.99 | $28.99
2405378	979-8-7656-2698-6	Not Just a Bad Day: Understanding Depression by Wendy Moragne	616.85			$28.99 | $28.99
2399545	978-1-64190-099-7	From the Mid-1900s to the Late 1900s: Charles Stark Draper to Gertrude B. Elion by Robert Curley	509			$29.15 | $29.15
2399371	978-1-64190-087-4	From the Paleolithic Period to the Early 1800s: Cro-Magnons to Robert Fulton by Robert Curley	509			$29.15 | $29.15

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2399553	978-1-64190-114-7	From the Early 1900s to the Mid-1900s: Rabindranath Tagore to George Orwell by J. E. Luebering	920			$29.15 | $29.15
2399555	978-1-64190-111-6	From the Mid-1800s to the Late 1800s: Walt Whitman to Anton Chekhov by J. E. Luebering	920			$29.15 | $29.15
2399556	978-1-64190-117-8	From the Mid-1900s to the 2000s: Pablo Neruda to Toni Morrison by J. E. Luebering	920			$29.15 | $29.15
2397772	978-1-5026-7183-7	Body by Kate Barnes	612			$23.15 | $23.15
2397773	978-1-5026-7186-8	Environment by Michael Allaby	577			$23.15 | $23.15
2397774	978-1-5026-7189-9	Flight by Bill Gunston	629.13			$23.15 | $23.15
2397777	978-1-5026-7207-0	Weather by Michael Allaby	551.6			$23.15 | $23.15
2454457	979-8-7656-7094-1	Beyonce: Renaissance Woman by Lisa M. Bolt Simons	782.42164092			$27.99 | $27.99
2454458	979-8-7656-7095-8	Taylor Swift: Queen of Reinvention by Carla Mooney	782.42164092			$27.99 | $27.99
2392714	978-0-7440-9879-2	Supernatural Creatures: Mythical and Sacred Creatures from Around the World	398.24			$17.50 | $17.50
2331803	978-0-06-322085-0	21: The True Story of the Youth Who Sued the US Government over Climate Change by Elizabeth Rusch	363.738			$13.99 | $13.99
2471119	978-1-64742-904-1	26 Seconds: Grief and Blame in the Aftermath of Losing My Brother in a Plane Crash by Rossana D'antonio	387			$12.59 | $12.59
2403244	978-1-266-70833-6	5 Steps to a 5: AP English Language and Composition by Barbara Murphy	371			$20.52 | $20.52
2403253	978-1-266-71663-8	5 Steps to a 5: AP World History	371			$20.52 | $20.52
2121523	978-1-62979-775-5	Accused! The Trials of the Scottsboro Boys: Lies, Prejudice, and the Fourteenth Amendment by Larry Dane Brimner	345.761			$13.29 | $13.29
2423290	978-1-63592-805-1	American Spirits: The Famous Fox Sisters and the Mysterious Fad That Haunted a Nation by Barb Rosenstock	133.909747			$17.49 | $17.49
2419656	979-8-7656-2742-6	Arm in Arm: The Grimke Sisters' Fight for Abolition and Women's Rights by Angelica Shirley Carpenter	326			$29.99 | $29.99
2446010	978-0-06-309993-7	Bad Boy: A Graphic Memoir by Walter Dean Myers	813.54			$16.79 | $16.79
2404417	978-1-6659-5255-2	Ballerina of Auschwitz by Edith Eva Eger	940.5			$13.99 | $13.99
2405472	979-8-7656-2997-0	Ban This!: How One School Fought Two Book Bans and Won (and How You Can Too) by Patricia Jackson	025.2			$28.99 | $28.99
2434218	978-1-5248-9399-6	Beyond They/Them: 20 Influential Nonbinary and Gender-Diverse People You Should Know by Em Dickson	306			$15.39 | $15.39
2435145	978-1-4197-6002-0	Beyond the Board: The Untold Story of the World's Most Daring Big Wave Surfer by Maya Gabeira	797.3			$13.99 | $13.99
2428665	978-1-6782-1006-9	Breathe: A Guide to Managing Anxiety in a Turbulent World by Barbara Sheen	616.85			$33.95 | $33.95
2402522	978-1-4338-4353-2	Carol Gilligan and the Search for Voice by Bill Cole	150.19			$8.92 | $8.92
2451832	978-0-7603-9927-9	Chappell Roan: A Vibrant Journey Through the Career and Influence of the Indie-Pop Superstar by Harbert Day	781			$13.99 | $13.99
2455857	978-1-6782-1070-0	Climate Change: Can Humanity Adapt? by Andrea C. Nakaya	304.2			$33.95 | $33.95
2446931	978-1-947440-10-4	Daring: The Life and Art of Elisabeth Vigee le Brun by Jordana Pomeroy	759.4			$15.37 | $15.37
2423429	978-0-593-48006-9	Death in the Jungle: Murder, Betrayal, and the Lost Dream of Jonestown by Candace Fleming	988.1			$13.99 | $13.99
2405451	978-1-7284-9328-2	Deathly Compendium of Poisonous Plants: Wicked Weeds and Sinister Seeds by Rebecca E. Hirsch	581.6			$28.99 | $28.99
2405460	979-8-7656-0800-5	Design Thinking: A Guide to Innovation by Fred Estes	670			$28.99 | $28.99
2419610	979-8-7656-2759-4	Disconnected: Understanding Alzheimer's Disease by Connie Goldsmith	616.8			$27.99 | $27.99
2293796	978-1-7284-2029-5	Don't Sit On the Baby, 2nd Edition: The Ultimate Guide to Sane, Skilled, and Safe Babysitting by Hailey Bondy	649.1			$10.49 | $10.49
2415486	978-0-593-81188-7	Eve: How the Female Body Shaped Human Evolution (Adapted for Young Adults) by Cat Bohannon	613			$14.69 | $14.69
2436053	978-1-324-05353-8	Fight AIDS!: How Activism, Art, and Protest Changed the Course of a Deadly Epidemic and Reshaped a Nation by Michael G. Long	306.76			$13.99 | $13.99
2182720	978-1-62979-751-9	Finding a Way Home: Mildred and Richard Loving and the Fight for Marriage Equality by Larry Dane Brimner	306.845			$13.29 | $13.29
2400801	978-0-374-39124-9	Flamboyants: The Queer Harlem Renaissance I Wish I'd Known by George M. Johnson	700.9			$13.29 | $13.29
2433041	978-1-64379-520-1	Generation Queer: Stories of Youth Organizers, Artists, and Educators by Kimm Topping	306.7			$16.07 | $16.07
2451985	978-1-5416-0417-9	Giant Leap: Why Space Is the Next Frontier in the Evolution of Life by Caleb Scharf	919.9			$22.40 | $22.40
2438279	978-1-83600-189-8	Girls with Goals: How Women's Soccer Took Over the World by Clelia Castro-Malaspina	796			$13.99 | $13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2433212	978-0-593-64909-1	Hick: The Trailblazing Journalist Who Captured Eleanor Roosevelt's Heart by Sarah Miller	305			$14.69 | $14.69
2446485	978-0-593-71222-1	Home Edit for Teens: How to Edit Your Space, Express Your Style, and Get Things Done! by Clea Shearer	648			$13.99 | $13.99
2308980	978-0-593-46160-0	How to Be a (Young) Antiracist by Ibram X. Kendi	305.800973			$13.99 | $13.99
2443112	978-1-5362-1553-3	I Wish I Didn't Have to Tell You This by Eugene Yelchin	920			$16.09 | $16.09
2436693	978-1-83874-339-0	Illustrated History of Ghosts by Adam Allsuch Boardman	133.109			$13.99 | $13.99
2402457	978-1-83874-910-1	Illustrated History of Urban Legends by Adam Allsuch Boardman	398.2			$13.99 | $13.99
2455867	978-1-6782-1086-1	Inspirational Women of Today by Barbara Sheen	305.4092			$33.95 | $33.95
2413883	978-1-5416-0436-0	Into the Unknown: The Quest to Understand the Mysteries of the Cosmos by Kelsey Johnson	523.1			$22.75 | $22.75
2071238	978-0-525-58003-4	Just Mercy: A True Story of the Fight for Justice (Adapted for Young Adults) by Bryan Stevenson	340.092			$13.99 | $13.99
2438763	978-1-6659-7754-8	Knocking on Windows: A Memoir by Jeannine Atkins	813			$13.99 | $13.99
2414475	978-0-06-329605-3	Knucklehead by Tony Keith	811			$13.99 | $13.99
2418664	978-1-83600-120-1	Messi Mania: The Ultimate Story of the World's Greatest Soccer Star by Luis Miguel Echegaray	796.334			$11.19 | $11.19
2418547	978-3-7913-7590-8	Metaphors: Understanding Philosophy Through Images by Pedro Alcalde	121			$17.49 | $17.49
2455870	978-1-6782-1092-2	Mindfulness: A Guide to Reducing Stress and Anxiety by Diane Gimpel	158.1			$33.95 | $33.95
2435668	978-0-593-85552-2	Most Perilous World: The True Story of the Young Abolitionists and Their Crusade Against Slavery by Kristina R. Gaddy	973.7			$13.99 | $13.99
2423166	978-0-7624-8937-4	Novel Life of Jane Austen: A Graphic Biography by Janine Barchas	970			$19.60 | $19.60
2455872	978-1-6782-1192-9	Optimism: The Power of Positive Thinking by James Roland	155.2			$33.95 | $33.95
2425036	978-1-77321-953-0	Ours to Tell: Reclaiming Indigenous Stories by Eldon Yellowhorn	305			$17.49 | $17.49
2453094	978-1-5362-3489-3	Phenomenal Moments: Revealing the Hidden Science Around Us by Felice Frankel	540			$15.39 | $15.39
2402158	978-0-316-58414-2	Poems for Tortured Souls by Liz Ison	808.81			$11.19 | $11.19
2426809	978-1-59580-140-1	Pork Belly Tacos with a Side of Anxiety: My Journey Through Depression, Bulimia, and Addiction by Yvonne Castaneda	616.85263			$24.47 | $24.47
2455873	978-1-6782-1194-3	Power of Music: Healing and Health by Don Nardo	615.8			$33.95 | $33.95
2449421	978-1-6626-8039-7	Pushing Hope: An Illustrated Memoir of Survival by Raymond Santana	303			$17.49 | $17.49
2497306	978-1-6782-1244-5	Quick Guide to ADHD by Carla Mooney	616.858			$33.95 | $33.95
2451834	978-0-7603-9929-3	Sabrina Carpenter: A Vibrant Journey Through the Career and Influence of a Pop Princess by Selena Fragassi	781			$13.99 | $13.99
2402566	978-1-338-70199-9	Salt Thief: Gandhi's Heroic March to Freedom by Neal Bascomb	954			$13.99 | $13.99
2402526	978-0-7112-9780-7	Seriously Happy: 10 Life-Changing Philosophy Lessons from Stoicism to Zen to Supercharge Your Mindset by Ben Aldridge	158.1			$9.09 | $9.09
2455874	978-1-6782-1196-7	Sharks: Threatened Ocean Predators by Hal Marcovitz	578			$33.95 | $33.95
2455875	978-1-6782-1198-1	Silencing Voices: Book Bans, Cancel Culture, and Other Forms of Censorship by Robert Lerose	302			$33.95 | $33.95
2428669	978-1-6782-1010-6	Teen Culture Across the Generations by Naomi Rockler	305.235			$33.95 | $33.95
2428670	978-1-6782-1012-0	Teen Guide to Becoming a Medical Doctor by Sara Rowe Mount	610.69			$33.95 | $33.95
2454538	979-8-7656-8922-6	Timeline: A Visual History of Our World (Revised Edition) by Peter Goes	900			$20.99 | $20.99
2419658	979-8-7656-4806-3	To the Stars: The Story of NASA by Ron Miller	629.40973			$27.99 | $27.99
2432457	978-1-5362-1923-4	Trans History: From Ancient Times to the Present Day by Alex L. Combs	306			$17.49 | $17.49
2497311	978-1-6782-1254-4	Transformative Technology: Teens and AI by John Allen	006.3			$33.95 | $33.95
2492879	978-1-5416-0334-9	Treekeepers: The Race for a Forested Future by Lauren E. Oakes	634.9			$21.00 | $21.00
2392987	978-1-250-29060-1	Ultimate Driving Book: The Essential Guide For First-Time Drivers and Car Owners by Emma Carlson Berne	629.28			$11.89 | $11.89
2454540	979-8-7656-4706-6	Ultrawild: An Audacious Plan for Rewilding Every City on Earth by Steve Mushin	363.7			$22.99 | $22.99
2428671	978-1-6782-1016-8	Voicing Dissent: The Power and Pitfalls of Student Protests by Carla Mooney	323			$33.95 | $33.95
2449435	979-8-217-11381-1	We Can Be Brave: How We Learn to Be Brave in Life's Decisive Moments by Mariann Edgar Budde	303			$13.99 | $13.99
2436770	978-0-281-08943-7	We Need to Talk... about Race: Christian Faith and Racial Justice - A Young Person's Guide by Ben Lindsay	302			$10.49 | $10.49
2493668	978-1-63727-947-2	We Run This House: The Girls' Guide to Flag Football by AnnaSofia Dickens	790			$15.40 | $15.40
2440097	978-1-250-81657-3	White Lies: How the South Lost the Civil War, Then Rewrote the History by Ann Bausum	973.711			$17.49 | $17.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2497312	978-1-6782-1256-8	Wildfires: Why They Are Increasing and How We Can Adapt by Carla Mooney	363.379			$33.95 | $33.95
2409092	978-0-310-16599-6	Your Brightest Life: Tips for Navigating Relationships, Health, Faith, Mindset, and More by Jessie Minassian	248.8			$13.29 | $13.29
2454559	979-8-7656-4414-0	Fight over Choice: The History and Future of Reproductive Rights by Lauren Kukla	306.4			$26.99 | $26.99
2454560	979-8-7656-4412-6	Native to This Land: A History of Indigenous Rights in North America by Heather Bruegl	970.004			$26.99 | $26.99
2419484	979-8-7656-2721-1	To Arm or Disarm?: Addressing Gun Violence by Denise Clay-Murray	363.33			$26.99 | $26.99
2452929	978-1-64741-144-2	Engineering: How the Six Simple Machines Support the World by Carla Mooney	621			$17.47 | $17.47
2454567	978-1-917187-88-6	Having Anxiety: Stories from Survivors by Sarah Eason	362			$24.99 | $24.99
2454568	978-1-917187-92-3	Having Body Dysmorphia: Stories from Survivors by Sarah Eason	362			$24.99 | $24.99
2455225	978-1-83572-060-8	Air and Space by Anne O'Daly	629.13			$33.95 | $33.95
2455228	978-1-83572-063-9	Medicine and Health by Anne O'daly	613			$33.95 | $33.95
2455235	978-1-83572-080-6	Magnetism by Anne O'daly	500			$33.95 | $33.95
2455236	978-1-83572-081-3	Matter, Energy, and Heat by Anne O'Daly	530			$33.95 | $33.95
2455882	978-1-6782-1038-0	Facts About Gun Violence by Carla Mooney	363.330973			$33.95 | $33.95
2455645	978-1-4222-4965-9	Paying for College: Financing Your Future by Tell Julia	378			$27.95 | $27.95
2455646	978-1-4222-4967-3	Thriving in College: Your Guide to Student Life by Thomas Mercy	378			$27.95 | $27.95
2450109	978-1-4994-7955-3	Understanding Anxiety Disorders by Amy Holt	362			$29.10 | $29.10
2450110	978-1-4994-7967-6	Understanding Bipolar Disorder by Simon Pierce	614			$29.10 | $29.10
2450111	978-1-4994-7958-4	Understanding Depression by Jennifer Lombardo	614			$29.10 | $29.10
2450112	978-1-4994-7964-5	Understanding Eating Disorders by Donna Reynolds	616			$29.10 | $29.10
2450113	978-1-4994-7961-4	Understanding OCD by Jennifer Lombardo	362			$29.10 | $29.10
2450114	978-1-4994-7970-6	Understanding Substance Use Disorders by Simon Pierce	362			$29.10 | $29.10
2495096	978-1-917509-60-2	Budgeting: A Teen Guide to Managing Money by Sarah Eason	332.024			$25.99 | $25.99
2497315	978-1-6782-1232-2	Egyptian Myths by Don Nardo	299			$33.95 | $33.95
2497316	978-1-6782-1234-6	Greek Myths by Don Nardo	292.1			$33.95 | $33.95
2497317	978-1-6782-1236-0	Native American Myths by Don Nardo	299.7113			$33.95 | $33.95
2455275	979-8-88989-645-6	Conquistadors by Jessica Gunderson	946			$35.95 | $35.95
2455302	979-8-88989-650-0	Samurai by Rachael Hanel	952			$35.95 | $35.95
2455303	979-8-88989-651-7	Vikings by Jessica Gunderson	948			$35.95 | $35.95
2424386	979-8-88989-308-0	BASE Jumping by Eric Savon	796.04			$34.95 | $34.95
2424387	979-8-88989-311-0	Big Wave Surfing by Jordan Fargo	797.3			$34.95 | $34.95
2424388	979-8-88989-309-7	Cave Diving by Jocelyn Kelly	797.2			$34.95 | $34.95
2424391	979-8-88989-310-3	Free Solo Climbing by Tracey Miller	796.522			$34.95 | $34.95
2429039	978-1-5345-1014-2	Animal Rights by Avery Elizabeth Hurt	636			$40.34 | $40.34
2497133	978-1-5345-1043-2	U.S. Juvenile Justice System by Audrey Lawrence	345.73			$40.34 | $40.34
2428420	978-1-5383-1284-1	COVID's Lasting Impacts	614.5			$32.95 | $32.95
2399735	978-1-7253-5166-0	End of the World	001.9			$32.95 | $32.95
2399736	978-1-7253-5184-4	Engineering for the Future by Scientific American Editors	620.001			$32.95 | $32.95
2496551	978-1-5383-1400-5	Explaining the Paranormal by Scientific American Editors	130			$32.95 | $32.95
2399737	978-1-7253-5178-3	How the Brain Works by Scientific American Editors	612.8			$32.95 | $32.95
2496692	978-1-5383-1406-7	Prehistoric Life by Scientific American Editors	550			$32.95 | $32.95
2399739	978-1-7253-5172-1	Science of Addiction	616.86			$32.95 | $32.95
2428422	978-1-5383-1290-2	Science of Death	155.9			$32.95 | $32.95
2399740	978-1-7253-5169-1	Science of Elections	324.973			$32.95 | $32.95
2399741	978-1-7253-5175-2	Science of Mental Health by Scientific American Editors	362.2			$32.95 | $32.95
2496714	978-1-5383-1403-6	Science of Sustainability by Scientific American Editors	508			$32.95 | $32.95
2428423	978-1-5383-1293-3	Science's Greatest Mysteries	500			$32.95 | $32.95
2271217	978-1-4994-7213-4	What Are HPV and Genital Warts? by Rosie Banks	614.5			$27.10 | $27.10
2271172	978-1-4994-7216-5	What Are Urinary Tract Infections? by Sadie Silva	616.6			$27.10 | $27.10
2054157	978-1-4814-7659-1	59 Hours by Johnny Kovatch	364.152			$9.09 | $9.09
2455659	978-1-4222-4859-1	Great Accomplishments in Space by Havelka Jacqueline	520			$27.95 | $27.95
2450310	978-1-4994-7940-9	Science of Basketball by Amy B. Rogers	796.323			$29.10 | $29.10
2405919	979-8-7656-1008-4	Communication through the Ages: From Speech to Smartphones by Mary B. Woods	302.2			$27.99 | $27.99
2405921	979-8-7656-1010-7	Construction through the Ages: From Pyramids to Plumbing by Mary B. Woods	624.09			$27.99 | $27.99
2405920	979-8-7656-1009-1	Transportation through the Ages: From Stirrups to Steam by Mary B. Woods	629.0409			$27.99 | $27.99
2405918	979-8-7656-1007-7	Warfare through the Ages: From Bows to Bombs by Mary B. Woods	355			$27.99 | $27.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2495508	978-1-917509-36-7	Spotting a Scam by Jennifer Sanderson	302			$25.99 1 $25.99
2495536	978-1-917509-40-4	Understanding Deepfakes by Jennifer Sanderson	302			$25.99 1 $25.99
2399922	978-1-4994-7783-2	Digital Age by Craig Boutland	609			$27.10 1 $27.10
2455663	978-1-4222-5025-9	Assassination of JFK: Secrets by Peters Jackson	364			$26.95 1 $26.95
2455662	978-1-4222-5024-2	September 11th 2001: A Story of Tragedy, Terror, & Heroism by Peters Jackson	364			$26.95 1 $26.95
2409293	978-1-4222-4899-7	Cancer Prevention by Susan Greer	616.99			$27.95 1 $27.95
2409294	978-1-4222-4900-0	Caring for Loved Ones with Cancer by Susan Greer	362.19699			$27.95 1 $27.95
2409296	978-1-4222-4901-7	Emerging Cancer Research and Treatments by Susan Greer	616.99			$27.95 1 $27.95
2409297	978-1-4222-4902-4	What is Cancer? by Susan Greer	616.99			$27.95 1 $27.95
1981109	978-0-19-870616-8	Human Rights: A Very Short Introduction by Andrew Clapham	323			$8.37 1 $8.37
1717750	978-0-19-953217-9	Meaning of Life by Terry Eagleton	128			$8.37 1 $8.37
1717688	978-0-19-285382-0	Music by Nicholas Cook	780			$8.37 1 $8.37
1717693	978-0-19-285421-6	Philosophy by Edward Craig	100			$8.37 1 $8.37
1690560	978-0-19-959511-2	Roman Republic by David M. Gwynn	937.02			$8.37 1 $8.37
2455452	979-8-88989-638-8	E. E. Cummings by S. L. Berry	811			$30.95 1 $30.95
2455453	979-8-88989-639-5	Edgar Allan Poe by Aaron Frisch	818			$30.95 1 $30.95
2455454	979-8-88989-640-1	Emily Dickinson by S. L. Berry	811			$30.95 1 $30.95
2455455	979-8-88989-641-8	Langston Hughes by S. L. Berry	818			$30.95 1 $30.95
2428470	978-1-4994-7868-6	Revolutionary and Napoleonic Wars by Ian Westwell	904.724			$28.10 1 $28.10
2428477	978-1-4994-7877-8	World War I by David Sommerville	940.324			$28.10 1 $28.10
2428478	978-1-4994-7880-8	World War II by Mike Sharpe	940.5324			$28.10 1 $28.10

Total quantity	234 Titles(234 Books)
Subtotal	$6,078.44
Processing Options Total	$772.20
Shipping & Handling	$121.57
Shipping Discount	-$121.57
Tax	$702.19
Grand Total	**$7,552.83**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: TEEN GRAPHIC ODC 1
List#: 201422
Date: 2/17/2026 6:20:40 PM
Total quantity: 488 Titles(488 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	488	$1,610.40

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2433700	979-8-8554-1732-6	13th Footprint, Vol. 01 by Kei Sanbe	741.5	$12.60	1	$12.60
2455488	979-8-8554-1734-0	13th Footprint, Vol. 02 by Kei Sanbe	741.5	$12.60	1	$12.60
2448300	978-1-64651-134-1	Akira, Vol. 01 by Katsuhiro Otomo	741.5	$24.49	1	$24.49
2448520	978-1-5067-5050-7	Lost Adventures and Team Avatar Tales Omnibus by Gene Luen Yang	741.5	$20.99	1	$20.99
2437843	978-1-5067-4697-5	Wedding of B.D. Belgique by Paul Tobin	741.5	$12.59	1	$12.59
2281913	978-1-64827-076-5	Berserk of Gluttony, Vol. 01 by Isshiki Ichika	741.5	$9.09	1	$9.09
2459906	979-8-8554-2261-0	Bride's Story, Vol. 15 by Abigail Blackman	741.5	$11.90	1	$11.90
2438553	978-1-63715-799-2	Wild, Wild Life by Dan White	741.5	$13.99	1	$13.99
2461094	978-1-4451-9777-7	Shakespeare's Romeo and Juliet by Steve Barlow	741.5	$13.99	1	$13.99
2448395	979-8-4005-0888-2	Raising Dragons by Bryan Davis	741.5	$13.99	1	$13.99
2483500	978-1-77492-065-7	Visions From The Fire by Wanda John-Kehewin	741.5	$13.99	1	$13.99
2425375	979-8-88877-020-7	Gachiakuta, Vol. 01 by Kei Urana	741.5	$9.09	1	$9.09
2435413	979-8-88877-094-8	Gachiakuta, Vol. 02 by Kei Urana	741.5	$9.09	1	$9.09
2393705	979-8-88877-095-5	Gachiakuta, Vol. 03 by Kei Urana	741.5	$9.09	1	$9.09
2404803	979-8-88877-096-2	Gachiakuta, Vol. 04 by Kei Urana	741.5	$9.09	1	$9.09
2412043	979-8-88877-097-9	Gachiakuta, Vol. 05 by Kei Urana	741.5	$9.09	1	$9.09
2460531	979-8-88877-157-0	Gachiakuta, Vol. 07 by Kei Urana	741.5	$9.09	1	$9.09
2460502	979-8-88877-283-6	Gachiakuta, Vol. 08 by Kei Urana	741.5	$9.09	1	$9.09
2349793	978-1-77262-087-0	Bad Medicine by Christopher Twin	741.5	$14.00	1	$14.00
2417140	978-1-9848-5772-9	Big Jim and the White Boy: An American Classic Reimagined by David F. Walker	741.5	$18.19	1	$18.19
2434507	978-1-77227-560-5	Haunted Blizzard by Aviaq Johnston	741.5	$12.57	1	$12.57

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2446210	978-1-5343-3207-2	Juvenile by Jesus Orellana	741.5			$11.19 | $11.19
2423442	978-1-60309-552-5	Low Orbit by Kazimir Lee	741.5			$17.49 | $17.49
2483241	978-1-60309-580-8	Luna Express by Campbell Whyte	741.5			$13.99 | $13.99
2446822	978-1-914224-34-8	My Dad Fights Demons! (Graphic Novel) by Bobby Joseph	741.5			$13.99 | $13.99
2443416	978-1-7995-0017-9	Nubia: Too Real by L. L. McKinney	741.5			$11.89 | $11.89
2446209	978-1-5343-2796-2	Pizza Witch by Sarah Graley	741.5			$11.89 | $11.89
2459612	978-1-5458-2101-5	Queen Kodiak by Christopher Greenslate	741.5			$10.49 | $10.49
2451114	978-1-77262-113-6	Quiet Crossings by Vivi Partridge	741.5			$14.00 | $14.00
2434392	978-1-952303-63-0	Sarah and Darah by David Pinckney	741.5			$10.49 | $10.49
2433203	979-8-88724-167-8	Sin Bin by Robbie Thompson	741.5			$13.29 | $13.29
2425679	979-8-8750-0058-4	Squeak Chatter Bark: An Eco-Mystery by Ali Fitzgerald	741.5			$17.49 | $17.49
2423181	978-1-83874-273-7	Thieves by Lucie Bryon	741.5			$14.69 | $14.69
2448611	978-1-5241-2624-7	Wizard of Oz (Graphic Novel) by Soo Lee	741.5			$12.59 | $12.59
2459719	978-1-962298-65-0	Wolfsbane: The Complete Edition by Ryan Cady	741.5			$17.49 | $17.49
2459608	978-1-5458-2100-8	Wrack and Rune by Chris Kappel	741.5			$10.49 | $10.49
2459838	979-8-8554-0994-9	About a Place in the Kinki Region by Michael Blaskowsky	741.5			$16.80 | $16.80
2461750	979-8-8554-1981-8	Hinatsugimura by Aki Shimizu	741.5			$14.00 | $14.00
2438195	979-8-89373-402-7	Lion Hearts (Manga) by Mita Ori	741.5			$12.59 | $12.59
2459924	979-8-8554-2285-6	Out of the Cocoon by Yuriko Hara	741.5			$11.20 | $11.20
2433697	978-1-9753-9346-5	Stardust Family (Manga) by Aki Poroyama	741.5			$21.00 | $21.00
2424711	979-8-8554-0177-6	Tamaki and Amane (Manga) by Fumi Yoshinaga	741.5			$11.20 | $11.20
2438210	979-8-89373-406-5	Two Guys at the Vet Clinic (Manga) by Sinonome	741.5			$10.49 | $10.49
2451893	979-8-8554-1067-9	Yankee and Carameliser (Manga) by Chiuko Umeshibu	741.5			$9.10 | $9.10
2429727	979-8-4009-0148-5	Itaewon Class, Vol. 05 by jin Kwang	741.5			$14.00 | $14.00
2438006	979-8-4009-0150-8	Itaewon Class, Vol. 06 by Kwang jin	741.5			$14.00 | $14.00
2451858	979-8-4009-0152-2	Itaewon Class, Vol. 07 by Kwang jin	741.5			$14.00 | $14.00
2461716	979-8-4009-0154-6	Itaewon Class, Vol. 08 by Kwang jin	741.5			$14.00 | $14.00
2438816	978-1-9747-5517-2	JoJo's Bizarre Adventure, Part 7: Steel Ball Run, Vol. 02 by Hirohiko Araki	741.5			$17.50 | $17.50
2457421	978-1-9747-5889-0	JoJo's Bizarre Adventure, Part 7: Steel Ball Run, Vol. 04 by Hirohiko Araki	741.5			$17.50 | $17.50
2462077	978-1-9747-6186-9	JoJo's Bizarre Adventure, Part 7: Steel Ball Run, Vol. 05 by Hirohiko Araki	741.5			$17.50 | $17.50
2422849	978-1-9747-5243-0	JoJo's Bizarre Adventure: Shining Diamond's Demonic Heartbreak, Vol. 03 by Kohei Kadono	741.5			$8.39 | $8.39
2443420	978-1-9747-5559-2	Jujutsu Kaisen, Vol. 27 by Gege Akutami	741.5			$8.39 | $8.39
2457424	978-1-9747-5890-6	Jujutsu Kaisen, Vol. 28 by Gege Akutami	741.5			$8.39 | $8.39
2486712	978-1-9747-6201-9	Jujutsu Kaisen, Vol. 29 by Gege Akutami	741.5			$8.39 | $8.39
2435019	979-8-89160-996-9	Kageki Shojo!! Vol. 14 by Kumiko Saiki	741.5			$9.79 | $9.79
2459731	979-8-89373-944-2	Kageki Shojo!!, Vol. 15 by Kumiko Saiki	741.5			$9.79 | $9.79
2457425	978-1-9747-5891-3	Kagurabachi, Vol. 05 by Takeru Hokazono	741.5			$8.39 | $8.39
2484954	978-1-9747-6287-3	Kagurabachi, Vol. 06 by Takeru Hokazono	741.5			$8.39 | $8.39
2451925	979-8-8554-1833-0	Kaiju Girl Caramelise, Vol. 08 by Lys Blakeslee	741.5			$9.10 | $9.10
2258762	978-1-9747-2598-4	Kaiju No. 8, Vol. 01 by Naoya Matsumoto	741.5			$8.39 | $8.39
2423084	978-1-9747-5285-0	Kaiju No. 8: B-Side, Vol. 01 by Naoya Matsumoto	741.5			$8.39 | $8.39
2462803	978-1-9747-5919-4	Kaiju No. 8: Relax, Vol. 01 by Kizuku Watanabe	741.5			$8.39 | $8.39
2462056	978-1-9747-6274-3	Kakuriyo: Bed and Breakfast for Spirits, Vol. 11 by Waco Ioka	741.5			$8.39 | $8.39
2462920	979-8-89561-522-5	Karate Survivor in Another World, Vol. 09 by Yazin	741.5			$9.79 | $9.79
2446745	979-8-89373-427-0	Karate Survivor in Another World, Vol. 08 by Yazin	741.5			$9.79 | $9.79
2433867	979-8-89373-153-8	Kase-San and Yamada, Vol. 04 by Hiromi Takashima	741.5			$9.79 | $9.79
2433901	979-8-89373-154-5	Kaya-Chan Isn't Scary, Vol. 01 by Yuritaro	741.5			$9.79 | $9.79
2438193	979-8-89373-155-2	Kaya-Chan Isn't Scary, Vol. 02 by YURITARO	741.5			$9.79 | $9.79
2449144	979-8-89373-537-6	Kaya-Chan Isn't Scary, Vol. 03 by YURITARO	741.5			$9.79 | $9.79
2461093	979-8-89373-538-3	Kaya-Chan Isn't Scary, Vol. 04 by YURITARO	741.5			$9.79 | $9.79
2415763	979-8-4009-0286-4	Kill the Villainess, Vol. 01 by Your April	741.5			$14.00 | $14.00
2433673	979-8-4009-0288-8	Kill the Villainess, Vol. 02 by Your April	741.5			$14.00 | $14.00
2439795	979-8-4009-0290-1	Kill the Villainess, Vol. 03 by Your April	741.5			$14.00 | $14.00
2455472	979-8-4009-0292-5	Kill the Villainess, Vol. 04 by Your April	741.5			$14.00 | $14.00
2462503	979-8-4009-0484-4	Kill the Villainess, Vol. 05 by Your April	741.5			$14.00 | $14.00
2439821	979-8-8554-1172-0	Killed Again, Mr. Detective?, Vol. 01 by teniwoha	741.5			$9.10 | $9.10
2434941	978-1-5458-1817-6	Morgana's Revenge by Joe Corallo	741.5			$10.49 | $10.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2161799	978-1-9747-1513-8	Kingdom of the Gods by In-Wan Youn	741.5			$10.49 | $10.49
2439815	979-8-8554-2108-8	Land Omnibus, Vol. 01 by Kazumi Yamashita	741.5			$28.00 | $28.00
2486634	979-8-88877-519-6	Last Samurai Standing, Vol. 04 by Shogo Imamura	741.5			$9.79 | $9.79
2434885	978-1-5458-1819-0	Last Session, Vol. 01: Roll for Initiative by Jasmine Walls	741.5			$10.49 | $10.49
2452023	978-1-5458-2060-5	Last Session, Vol. 2: Rerolled by Jasmine Walls	741.5			$10.49 | $10.49
2446652	979-8-89373-767-7	Legend of Dororo and Hyakkimaru, Vol. 10 by Osamu Tezuka	741.5			$9.79 | $9.79
2461699	979-8-8554-1915-3	Let This Grieving Soul Retire, Vol. 10 by Tsukikage	741.5			$9.10 | $9.10
2461698	979-8-8554-1387-8	Level Up with the Gods, Vol. 02 by Ohyeon	741.5			$15.40 | $15.40
2437769	979-8-8554-1385-4	Level up with the Gods, Vol. 01 by Ohyeon	741.5			$15.40 | $15.40
2435253	978-1-77294-385-6	Little Mega Man, Vol. 02 by Yuushi Kawata	741.5			$9.79 | $9.79
2442650	979-8-89373-666-3	Long Period, Vol. 01 by Nagisa Furuya	741.5			$10.49 | $10.49
2459721	979-8-89373-667-0	Long Period, Vol. 02 by Nagisa Furuya	741.5			$10.49 | $10.49
2433813	979-8-89373-174-3	Long Summer of August 31, Vol. 01 by Ikkado Ito	741.5			$9.79 | $9.79
2438204	979-8-89373-175-0	Long Summer of August 31, Vol. 02 by Ikkado Ito	741.5			$9.79 | $9.79
2449126	979-8-89373-540-6	Long Summer of August 31, Vol. 03 by Ikkado Ito	741.5			$9.79 | $9.79
2455485	979-8-8554-3030-1	Love Bullet, Vol. 01 by inee	741.5			$9.10 | $9.10
2435977	979-8-8554-0540-8	Lycoris Recoil, Vol. 03 by Spider Lily	741.5			$9.10 | $9.10
2451928	979-8-8554-1568-1	Lycoris Recoil, Vol. 04 by Adnazeer Macalangcom	741.5			$9.10 | $9.10
2437771	979-8-8554-1490-5	Lycoris Recoil Official Comic Anthology: React by Spider Lily	741.5			$9.10 | $9.10
2439885	979-8-8554-1498-1	Lycoris Recoil Official Comic Anthology: Reload, Vol. 01 by Spider Lily	741.5			$9.10 | $9.10
2447494	979-8-8554-1484-4	Lycoris Recoil Official Comic Anthology: Repeat, Vol. 01 by Spider Lily	741.5			$9.10 | $9.10
2437774	979-8-8554-0960-4	MONSTER TRIBE, Vol. 01 by Jyuu Masui	741.5			$9.10 | $9.10
2459922	979-8-8554-1911-5	MONSTER TRIBE, Vol. 02 by Greg Deng	741.5			$9.10 | $9.10
2462545	979-8-8554-1993-1	Mad Miniscape, Vol. 01 by Ayumu Hirose	741.5			$9.10 | $9.10
2423838	978-1-63715-636-0	Mae: the Definitive Edition by Gene Ha	741.5			$20.99 | $20.99
2446654	979-8-89373-980-0	Magic Maker: How to Create Magic in Another World, Vol. 01 by Kazuki Kaburagi	741.5			$9.79 | $9.79
2461429	979-8-89373-981-7	Magic Maker: How to Create Magic in Another World, Vol. 02 by Kazuki Kaburagi	741.5			$9.79 | $9.79
2434079	979-8-89160-757-6	Magical Buffs: The Support Caster Is Stronger Than He Realized! Vol. 03 by Haka Tokura	741.5			$10.49 | $10.49
2446680	979-8-89373-356-3	Magical Buffs: The Support Caster Is Stronger Than He Realized! Vol. 04 by Haka Tokura	741.5			$10.49 | $10.49
2461096	979-8-89373-674-8	Magical Buffs: The Support Caster Is Stronger Than He Realized!, Vol. 05 by Haka Tokura	741.5			$10.49 | $10.49
2462592	979-8-8554-2499-7	Magical Revolution Of The Reincarnated Princess And The Genius Young Lady, Vol. 07 by Piero Karasu	741.5			$9.10 | $9.10
2461697	979-8-8554-2407-2	Maiden of the Needle, Vol. 05 by Zeroki	741.5			$9.10 | $9.10
2433868	979-8-89160-919-8	Malevolent Spirits: Mononogatari, Vol. 10 by Onigunsou	741.5			$9.79 | $9.79
2438252	978-1-947808-30-0	Manga Classics: King Lear by William Shakespeare	741.5			$17.49 | $17.49
2461418	978-1-4278-8286-8	Margrave's Daughter and the Enemy Prince, Vol. 05 by An Ogura	741.5			$9.79 | $9.79
2422851	978-1-9747-5230-0	Marriage Toxin, Vol. 06 by Joumyaku	741.5			$8.39 | $8.39
2446681	979-8-89373-966-4	Masterful Cat Is Depressed Again Today, Vol. 10 by Hitsuzi Yamada	741.5			$9.79 | $9.79
2493095	979-8-8554-2610-6	Me and My Beast Boss, Vol. 04 by Elena Pizarro Lanzas	741.5			$9.10 | $9.10
2439890	979-8-8554-0785-3	Mechanical Marie, Vol. 01 by Aki Akimoto	741.5			$9.10 | $9.10
2462580	979-8-8554-0787-7	Mechanical Marie, Vol. 02 by Aki Akimoto	741.5			$9.10 | $9.10
2486637	979-8-88877-509-7	Medalist, Vol. 12 by Tsurumaikada	741.5			$9.79 | $9.79
2447497	979-8-8554-2076-0	Mieruko-Chan, Vol. 11 by Tomoki Izumi	741.5			$9.10 | $9.10
2428168	979-8-89215-174-0	Mighty Morphin Power Rangers: Across the Morphin Grid by Sam Humphries	741.5			$13.99 | $13.99
2448522	979-8-89215-366-9	Mighty Morphin Power Rangers: The Death Ranger I by Ryan Parrott	741.5			$13.99 | $13.99
2461696	979-8-8554-2440-9	Minato's Laundromat, Vol. 06 by Leighann Harvey	741.5			$10.50 | $10.50
2459907	979-8-8554-1242-0	Misanthrope Teaches a Class for Demi-Humans, Vol. 02 by Atsu Benino	741.5			$9.10 | $9.10
2459554	979-8-89215-598-4	Misfit City Complete Collection by Kiwi Smith	741.5			$13.99 | $13.99
2413725	979-8-89160-644-9	Miss Kobayashi's Dragon Maid: Elma's Office Lady Diary, Vol. 09 by Coolkyousinnjya	741.5			$9.09 | $9.09
2442652	979-8-89373-683-0	Miss Kobayashi's Dragon Maid: Kanna's Daily Life, Vol. 13 by Coolkyousinnjya	741.5			$9.79 | $9.79
2433717	978-1-9753-9886-6	Miss Savage Fang, Vol. 03 by Kakkaku Akashi	741.5			$9.10 | $9.10

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2456843	979-8-89561-324-5	Mocha the Cat and His Forever Family, Vol. 01 by nigotaro	741.5	$10.49	1	$10.49
2427018	979-8-8554-0944-4	Mono, Vol. 02 by Afro	741.5	$10.50	1	$10.50
2439919	979-8-8554-0946-8	Mono, Vol. 03 by Afro	741.5	$10.50	1	$10.50
2446708	979-8-89373-684-7	Monster Guild: the Dark Lord's (No-Good) Comeback!, Vol. 09 by Tourou	741.5	$9.79	1	$9.79
2433083	979-8-88724-259-0	New Scaremester, Vol. 01 by Jacque Aye	741.5	$12.59	1	$12.59
2443819	979-8-88724-300-9	New Scaremester, Vol. 02 by Jacque Aye	741.5	$13.29	1	$13.29
2437809	979-8-8554-1599-5	Monthly Girls' Nozaki-Kun, Vol. 16 by Izumi Tsubaki	741.5	$9.10	1	$9.10
2447501	979-8-8554-2031-9	Monthly in the Garden with My Landlord, Vol. 05 by Yodokawa	741.5	$10.50	1	$10.50
2444207	978-1-998341-45-0	Morgana and Oz, Vol. 03 by Miyuli	741.5	$13.29	1	$13.29
2459962	978-1-9753-4134-3	Mortal Instruments: The Graphic Novel, Vol. 09 by Cassandra Clare	741.5	$9.10	1	$9.10
2438205	979-8-89373-179-8	Most Notorious Talker Runs the World's Greatest Clan, Vol. 09 by Jaki	741.5	$9.79	1	$9.79
2459722	979-8-89561-339-9	Most Notorious Talker Runs the World's Greatest Clan, Vol. 10 by Jaki	741.5	$9.79	1	$9.79
2483390	978-1-64609-462-2	Mr. Villain's Day Off, Vol. 07 by Yuu Morikawa	741.5	$10.49	1	$10.49
2433659	979-8-4009-0342-7	Murderous Lewellyn's Candlelit Dinner, Vol. 01 by Sumnagi	741.5	$16.80	1	$16.80
2439798	979-8-4009-0343-4	Murderous Lewellyn's Candlelit Dinner, Vol. 02 by Sumnagi	741.5	$16.80	1	$16.80
2455473	979-8-4009-0344-1	Murderous Lewellyn's Candlelit Dinner, Vol. 03 by Sumnagi	741.5	$16.80	1	$16.80
2462514	979-8-4009-0345-8	Murderous Lewellyn's Candlelit Dinner, Vol. 04 by Sumnagi	741.5	$16.80	1	$16.80
2454261	979-8-88877-634-6	Mushishi Collector's Edition, Vol. 01 by Yuki Urushibara	741.5	$20.99	1	$20.99
2433872	979-8-88843-857-2	My Cat Is Such a Weirdo, Vol. 06 by Tamako Tamagoyama	741.5	$11.19	1	$11.19
2442656	979-8-89373-430-0	My Cat Is Such a Weirdo, Vol. 07 by Tamako Tamagoyama	741.5	$11.19	1	$11.19
2459724	979-8-89373-948-0	My Cat Is Such a Weirdo, Vol. 08 by Tamako Tamagoyama	741.5	$11.19	1	$11.19
2462921	979-8-89561-848-6	My Darling Devilish Daughter, Vol. 01 by Sankaku Sankaku Head	741.5	$9.79	1	$9.79
2435025	979-8-89160-755-2	My Dear Detective: Mitsuko's Case Files, Vol. 03 by Natsumi Ito	741.5	$9.79	1	$9.79
2449098	979-8-89160-758-3	My Dear Detective: Mitsuko's Case Files, Vol. 04 by Natsumi Ito	741.5	$9.79	1	$9.79
2462900	979-8-89373-685-4	My Dear Detective: Mitsuko's Case Files, Vol. 05 by Natsumi Ito	741.5	$9.79	1	$9.79
2442634	979-8-89373-687-8	My Deer Friend Nokotan, Vol. 06 by Oshioshio	741.5	$9.79	1	$9.79
2462873	979-8-89561-921-6	My Deer Friend Nokotan, Vol. 07 by Oshioshio	741.5	$9.79	1	$9.79
2433835	979-8-89160-969-3	My Girlfriend's Child, Vol. 07 by Mamoru Aoi	741.5	$9.79	1	$9.79
2442670	979-8-89373-357-0	My Girlfriend's Child, Vol. 08 by Mamoru Aoi	741.5	$9.79	1	$9.79
2459734	979-8-89373-814-8	My Girlfriend's Child, Vol. 09 by Mamoru Aoi	741.5	$9.79	1	$9.79
2426719	978-1-64609-389-2	My Happy Marriage, Vol. 05 by Akumi Agitogi	741.5	$9.09	1	$9.09
2434793	978-1-9747-5588-2	My Hero Academia, Vol. 41 by Kohei Horikoshi	741.5	$8.39	1	$8.39
2462813	978-1-9747-5814-2	My Hero Academia: Team-Up Missions, Vol. 07 by Kohei Horikoshi	741.5	$8.39	1	$8.39
2429739	979-8-8554-0557-6	My Instant Death Ability Is So Overpowered, No One in This Other World Stands a Chance Against Me! --AO--, Vol. 08 by Tsuyoshi Fujitaka	741.5	$9.10	1	$9.10
2456535	979-8-8554-2383-9	My Instant Death Ability Is So Overpowered, No One in This Other World Stands a Chance Against Me! --AO--, Vol. 09 by Chisato Naruse	741.5	$9.10	1	$9.10
2462901	979-8-89373-696-0	My Kitten Is A Picky Eater, Vol. 07 by Migiri Miki	741.5	$9.79	1	$9.79
2433832	979-8-89160-914-3	My Kitten Is a Picky Eater, Vol. 03 by Migiri Miki	741.5	$9.79	1	$9.79
2435010	979-8-89160-979-2	My Kitten Is a Picky Eater, Vol. 04 by Migiri Miki	741.5	$9.79	1	$9.79
2446668	979-8-89373-694-6	My Kitten Is a Picky Eater, Vol. 05 by Migiri Miki	741.5	$9.79	1	$9.79
2456835	979-8-89373-695-3	My Kitten Is a Picky Eater, Vol. 06 by Migiri Miki	741.5	$9.79	1	$9.79
2433907	979-8-89373-445-4	My New Boss Is Goofy, Vol. 01 by Dan Ichikawa	741.5	$10.49	1	$10.49
2442671	979-8-89373-698-4	My New Boss Is Goofy, Vol. 02 by Dan Ichikawa	741.5	$10.49	1	$10.49
2433878	979-8-89160-546-6	My New Life As a Cat, Vol. 09 by Konomi Wagata	741.5	$9.79	1	$9.79
2438198	979-8-89373-003-6	My New Life As a Cat, Vol. 10 by Konomi Wagata	741.5	$9.79	1	$9.79
2449129	979-8-89373-122-4	My New Life As a Cat, Vol. 11 by Konomi Wagata	741.5	$9.79	1	$9.79
2461480	979-8-89373-123-1	My New Life As a Cat, Vol. 12 by Konomi Wagata	741.5	$9.79	1	$9.79
2461406	978-1-4278-8289-9	My New Wife's Fake Smile, Vol. 01 by Kengo Matsumoto	741.5	$9.09	1	$9.09
2461404	978-1-4278-8290-5	My New Wife's Fake Smile, Vol. 02 by Kengo Matsumoto	741.5	$9.09	1	$9.09
2442680	979-8-89561-698-7	My Next Life As a Villainess: All Routes Lead to Doom! Vol. 11 by Satoru Yamaguchi	741.5	$9.79	1	$9.79
2427020	979-8-8554-0690-0	My Oh My, Atami-Kun, Vol. 02 by Asa Tanuma	741.5	$10.50	1	$10.50
2447504	979-8-8554-1921-4	My Oh My, Atami-Kun, Vol. 03 by Asa Tanuma	741.5	$10.50	1	$10.50
2462461	978-1-7183-2070-3	My Quiet Blacksmith Life in Another World, Vol. 01 by Tamamaru	741.5	$11.19	1	$11.19
2435923	979-8-4009-0279-6	My Secretly Hot Husband, Vol. 03 by Gabi Nam	741.5	$14.00	1	$14.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2447505	979-8-4009-0387-8	My Secretly Hot Husband, Vol. 04	741.5			$14.00 | $14.00
2456858	979-8-89561-699-4	My Senpai Is Annoying, Vol. 13 by Shiromanta	741.5			$10.49 | $10.49
2438199	979-8-89373-314-3	My Sister Took My Fiance and Now I'm Being Courted by a Beastly Prince, Vol. 04 by Yu Sakurai	741.5			$10.49 | $10.49
2456908	979-8-89373-308-2	My Status As an Assassin Obviously Exceeds the Hero's, Vol. 06 by Matsuri Akai	741.5			$9.79 | $9.79
2435029	979-8-89373-315-0	My Stepmother and Stepsisters Aren't Wicked, Vol. 06 by Otsuji	741.5			$10.49 | $10.49
2459751	979-8-89561-700-7	My Stepmother and Stepsisters Aren't Wicked, Vol. 07 by Otsuji	741.5			$10.49 | $10.49
2434163	979-8-89373-300-6	My Wife Has No Emotion, Vol. 08 by Jiro Sugiura	741.5			$9.79 | $9.79
2437777	979-8-8554-1331-1	Neighborhood Craftsmen: Stories from Kanda's Gokura-Chou, Vol. 01 by Akihito Sakaue	741.5			$14.00 | $14.00
2451946	978-1-64729-471-7	Nezumi's First Love, Vol. 01 by Riku Oseto	741.5			$9.77 | $9.77
2446752	979-8-89373-265-8	Night of the Living Cat, Vol. 06 by Hawkman	741.5			$9.79 | $9.79
2429701	979-8-8554-0518-7	Nights with a Cat, Vol. 05 by Kyuryu Z	741.5			$10.50 | $10.50
2447507	979-8-8554-1472-1	Nights with a Cat, Vol. 06 by Kyuryu Z	741.5			$10.50 | $10.50
2429702	978-1-9753-4664-5	No Longer Heroine, Vol. 09 by Momoko Koda	741.5			$9.10 | $9.10
2447508	978-1-9753-4666-9	No Longer Heroine, Vol. 10 by Momoko Koda	741.5			$9.10 | $9.10
2437812	979-8-8554-1601-5	No Matter How I Look at It, It's You Guys' Fault I'm Not Popular!, Vol. 25 by Nico Tanigawa	741.5			$9.10 | $9.10
2461666	979-8-8554-2465-2	No Matter How I Look at It, It's You Guys' Fault I'm Not Popular!, Vol. 26 by Niko Tanigawa	741.5			$9.10 | $9.10
2456852	979-8-89561-705-2	Noss and Zakuro, Vol. 02 by Rariatto	741.5			$11.19 | $11.19
2462497	979-8-4009-0496-7	Not Your Typical Reincarnation Story, Vol. 01 by Lemon Lemon Frog	741.5			$14.00 | $14.00
2435928	979-8-4009-0328-1	Not-Sew-Wicked Stepmom, Vol. 06 by Mo9Rang	741.5			$14.00 | $14.00
2451864	979-8-4009-0420-2	Not-Sew-Wicked Stepmom, Vol. 07 by Mo9Rang	741.5			$14.00 | $14.00
2461663	979-8-4009-0438-7	Not-Sew-Wicked Stepmom, Vol. 08 by Chana Conley	741.5			$14.00 | $14.00
2452796	978-1-960578-59-4	October Girl by Matthew Dow Smith	741.5			$10.49 | $10.49
2435930	979-8-4009-0284-0	Omniscient Reader's Viewpoint, Vol. 07 by singNsong	741.5			$14.00 | $14.00
2447509	979-8-4009-0285-7	Omniscient Reader's Viewpoint, Vol. 08 by singNsong	741.5			$14.00 | $14.00
2459843	979-8-4009-0440-0	Omniscient Reader's Viewpoint, Vol. 09 by Singsyong	741.5			$14.00 | $14.00
2462525	979-8-8554-3024-0	Once Upon A Witch's Death, Vol. 01 by Saka	741.5			$9.10 | $9.10
2438577	978-1-9747-5590-5	One Piece, Vol. 109 by Eiichiro Oda	741.5			$8.39 | $8.39
2457428	978-1-9747-5896-8	One Piece, Vol. 110 by Eiichiro Oda	741.5			$8.39 | $8.39
2438612	978-1-9747-5539-4	One-Punch Man, Vol. 31 by ONE	741.5			$8.39 | $8.39
2462824	978-1-9747-5816-6	One-Punch Man, Vol. 32 by ONE	741.5			$8.39 | $8.39
2434082	979-8-88843-487-1	Only I Know the World Is Ending and Getting Killed by Rampaging Beasts Only Makes Me Stronger, Vol. 02 by Shigeru Haijima	741.5			$9.79 | $9.79
2438200	979-8-89373-008-1	Otaku Elf, Vol. 09 by Akihiko Higuchi	741.5			$9.79 | $9.79
2459702	979-8-89373-949-7	Otaku Elf, Vol. 10 by Akihiko Higuchi	741.5			$9.79 | $9.79
2422910	978-1-9747-5233-1	Otaku Vampire's Love Bite, Vol. 03 by Julietta Suzuki	741.5			$8.39 | $8.39
2462046	978-1-9747-6152-4	Otaku Vampire's Love Bite, Vol. 06 by Julietta Suzuki	741.5			$8.39 | $8.39
2461643	979-8-8554-2097-5	Other World's Books Depend on the Bean Counter, Vol. 06 by Yatsuki Wakatsu	741.5			$9.10 | $9.10
2435023	979-8-89160-563-3	Otonari Complex, Vol. 04 by Saku Nonomura	741.5			$10.49 | $10.49
2446719	979-8-89160-564-0	Otonari Complex, Vol. 05 by Saku Nonomura	741.5			$11.89 | $11.89
2462885	979-8-89765-353-9	Our Dining Table: Seconds, Please! Vol. 02 by Mita Ori	741.5			$10.49 | $10.49
2449054	979-8-89561-184-5	Our Dining Table: Seconds, Please!, Vol. 01 by Mita Ori	741.5			$10.49 | $10.49
2429728	979-8-4009-0220-8	Overgeared, Vol. 07 by Saenal	741.5			$14.00 | $14.00
2451866	979-8-4009-0416-5	Overgeared, Vol. 08 by Adam Jankowski	741.5			$14.00 | $14.00
2461661	979-8-4009-0448-6	Overgeared, Vol. 09 by Monohumbug	741.5			$14.00 | $14.00
2459925	979-8-8554-1929-0	Overlord: The Undead King Oh!, Vol. 13 by so-bin	741.5			$9.10 | $9.10
2433719	979-8-8554-1013-6	Pandora Seven, Vol. 05 by Yuta Kayashima	741.5			$9.10 | $9.10
2459929	979-8-8554-1936-8	Pandora Seven, Vol. 06 by Ko Ransom	741.5			$9.10 | $9.10
2433678	979-8-4009-0325-0	Perks of Being an S-Class Heroine, Vol. 04 by Irinbi	741.5			$14.00 | $14.00
2439806	979-8-4009-0326-7	Perks of Being an S-Class Heroine, Vol. 05 by Irinbi	741.5			$14.00 | $14.00
2455474	979-8-4009-0327-4	Perks of Being an S-Class Heroine, Vol. 06 by Irinbi	741.5			$14.00 | $14.00
2462874	979-8-89373-434-8	Pet Shop Of Horrors: Collector's Edition, Vol. 05 by Matsuri Akino	741.5			$17.49 | $17.49
2433117	979-8-89160-868-9	Pet Shop of Horrors: Collector's Edition, Vol. 01 by Matsuri Akino	741.5			$17.49 | $17.49
2434013	979-8-89160-942-6	Pet Shop of Horrors: Collector's Edition, Vol. 02 by Matsuri Akino	741.5			$17.49 | $17.49
2442636	979-8-89373-432-4	Pet Shop of Horrors: Collector's Edition, Vol. 03 by Matsuri Akino	741.5			$17.49 | $17.49
2462048	978-1-9747-5783-1	Phantom Busters, Vol. 01	741.5			$8.39 | $8.39

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2462047	978-1-9747-6188-3	Phantom Busters, Vol. 02	741.5			$8.39 | $8.39
2433720	978-1-9753-9746-3	Pink and Habanero, Vol. 03 by Mika Satonaka	741.5			$9.10 | $9.10
2451930	978-1-9753-9748-7	Pink and Habanero, Vol. 04 by Alethea Nibley	741.5			$9.10 | $9.10
2461659	979-8-8554-2184-2	Please Look after the Dragon, Vol. 01 by Sarah Burch	741.5			$9.10 | $9.10
2463286	979-8-89215-578-6	Power Rangers Prime, Vol. 02 by Melissa Flores	741.5			$13.29 | $13.29
2446755	979-8-89373-320-4	Precarious Woman Executive Miss Black General, Vol. 12 by Jin	741.5			$9.79 | $9.79
2461420	978-1-4278-8281-3	Prince Is in the Villainess' Way!, Vol. 04 by Minami Shiina	741.5			$9.79 | $9.79
2461409	978-1-4278-8282-0	Prince Is in the Villainess' Way!, Vol. 05 by Minami Shiina	741.5			$9.79 | $9.79
2462908	979-8-89561-835-6	Prince Of A Friend, Vol. 01 by Sukeroku	741.5			$9.79 | $9.79
2438614	978-1-5458-1818-3	Quest for Avalon by Jordie Bellaire	741.5			$10.49 | $10.49
2462078	978-1-9747-5698-8	Princess Mononoke Film Comic: All-In-One Edition by Hayao Miyazaki	741.5			$24.50 | $24.50
2462827	978-1-9747-5818-0	Queen's Quality, Vol. 24 by Kyousuke Motomi	741.5			$8.39 | $8.39
2457429	978-1-9747-5898-2	Radiant, Vol. 19 by Tony Valente	741.5			$8.39 | $8.39
2435919	979-8-4009-0349-6	Radio Storm, Vol. 01	741.5			$16.80 | $16.80
2447510	979-8-4009-0348-9	Radio Storm, Vol. 02	741.5			$16.80 | $16.80
2423123	978-1-9747-5242-3	Rainbows After Storms, Vol. 03 by Luka Kobachi	741.5			$8.39 | $8.39
2484994	978-1-9747-6209-5	Rainbows After Storms, Vol. 08 by Luka Kobachi	741.5			$8.39 | $8.39
2462841	978-1-9747-5820-3	Rainbows after Storms, Vol. 07 by Luka Kobachi	741.5			$8.39 | $8.39
2461658	979-8-8554-2577-2	Rascal Does Not Dream of a Dreaming Girl by Keji Mizoguchi	741.5			$22.40 | $22.40
2456525	979-8-8554-2279-5	Rascal Does Not Dream of a Sister Home Alone, Vol. 04 by Andrew Cunningham	741.5			$16.80 | $16.80
2438201	979-8-89160-998-3	Re-Living My Life with a Boyfriend Who Doesn't Remember Me, Vol. 04 by Eiko Mutsuhana	741.5			$10.49 | $10.49
2456844	979-8-89373-957-2	Re-Living My Life with a Boyfriend Who Doesn't Remember Me, Vol. 05 by Eiko Mutsuhana	741.5			$10.49 | $10.49
2461098	979-8-89561-237-8	Re:Monster Vol. 12 by Kogitsune Kanekiru	741.5			$10.49 | $10.49
2411320	979-8-89160-268-7	Re:Monster, Vol. 10 by Kogitsune Kanekiru	741.5			$10.49 | $10.49
2435021	979-8-89373-165-1	Re:Monster, Vol. 11 by Kogitsune Kanekiru	741.5			$10.49 | $10.49
2429704	979-8-8554-1492-9	Re:ZERO -Starting Life in Another World-, Chapter 4: The Sanctuary and the Witch of Greed, Vol. 09 by Tappei Nagatsuki	741.5			$9.10 | $9.10
2449102	979-8-89373-309-9	Reborn As a Barrier Master, Vol. 08 by Kataoka Naotaro	741.5			$9.79 | $9.79
2433818	979-8-89160-090-4	Reborn Rich, Vol. 03 by JP	741.5			$15.39 | $15.39
2449103	979-8-89160-983-9	Reborn Rich, Vol. 04 by JP	741.5			$15.39 | $15.39
2429712	978-1-9753-7517-1	Reformation of the World As Overseen by a Realist Demon King, Vol. 06 by Ryosuke Hata	741.5			$9.10 | $9.10
2447519	978-1-9753-9322-9	Reformation of the World As Overseen by a Realist Demon King, Vol. 07 by Ryosuke Hata	741.5			$9.10 | $9.10
2446720	979-8-89561-708-3	Reincarnated As a Dragon Hatchling, Vol. 08 by Necoco	741.5			$9.79 | $9.79
2433889	979-8-89160-939-6	Reincarnated As a Sword, Vol. 14 by Yuu Tanaka	741.5			$9.09 | $9.09
2446669	979-8-89373-469-0	Reincarnated As a Sword, Vol. 15 by Yuu Tanaka	741.5			$9.79 | $9.79
2461481	979-8-89373-959-6	Reincarnated As a Sword, Vol. 16 by Yuu Tanaka	741.5			$9.79 | $9.79
2434170	979-8-89373-290-0	Reincarnated Into a Game As the Hero's Friend: Running the Kingdom Behind the Scenes, Vol. 04 by Yuki Suzuki	741.5			$9.79 | $9.79
2447490	979-8-8554-1532-2	Reincarnated Witch Spells Doom, Vol. 07 by Tail Yuzuhara	741.5			$9.10 | $9.10
2447492	979-8-8554-1987-0	Returner's Magic Should Be Special, Vol. 05 by Usonan	741.5			$14.00 | $14.00
2461656	979-8-4009-0453-0	Revenge of the Baskerville Bloodhound, Vol. 01 by Step on a LEGO	741.5			$14.00 | $14.00
2462886	979-8-89373-984-8	Ripples in The River, Vol. 02 by Zeniko Sumiya	741.5			$11.19 | $11.19
2449133	979-8-89373-983-1	Ripples in the River, Vol. 01 by Zeniko Sumiya	741.5			$11.19 | $11.19
2435980	979-8-8554-1333-5	Riviere and the Land of Prayer, Vol. 03 by Jougi Shiraishi	741.5			$10.50 | $10.50
2447511	979-8-8554-0797-6	Rock Is a Lady's Modesty, Vol. 01 by Hiroshi Fukuda	741.5			$10.50 | $10.50
2461437	979-8-89561-541-6	Romelia War Chronicle: The Count's Daughter Rallies an Army in the Wake of Mankind's Victory, Vol. 01 by Ryo Ariyama	741.5			$9.79 | $9.79
2435047	979-8-89373-321-1	Royal Tailor: Clothier to the Crown, Vol. 04 by Nakasane Nowaki	741.5			$9.79 | $9.79
2456910	979-8-89561-713-7	Royal Tailor: Clothier to the Crown, Vol. 05 by Nakasane Nowaki	741.5			$9.79 | $9.79
2435017	979-8-89160-915-0	Rozen Maiden: Collector's Edition, Vol. 02 by Peach-Pit	741.5			$18.19 | $18.19
2446657	979-8-89373-340-2	Rozen Maiden: Collector's Edition, Vol. 03 by Peach-Pit	741.5			$19.59 | $19.59
2456913	979-8-89373-360-0	Rozen Maiden: Collector's Edition, Vol. 04 by Peach-Pit	741.5			$19.59 | $19.59
2429733	979-8-4009-0241-3	SSS-Class Revival Hunter, Vol. 03 by Sinnoa	741.5			$14.00 | $14.00
2438008	979-8-4009-0371-7	SSS-Class Revival Hunter, Vol. 04 by Sinnoa	741.5			$14.00 | $14.00
2451872	979-8-4009-0399-1	SSS-Class Revival Hunter, Vol. 05 by Bill K	741.5			$14.00 | $14.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2439924	979-8-8554-0481-4	Sacrificial Princess and the King of Beasts Heir: White Rabbit and the Prince of Beasts, Vol. 02 by Yu Tomofuji	741.5			$9.10 | $9.10
2435987	978-1-9753-7677-2	Saga of Tanya the Evil, Vol. 26 by Carlo Zen	741.5			$9.10 | $9.10
2456526	979-8-8554-0077-9	Saga of Tanya the Evil, Vol. 27 by Shinobu Shinotsuki	741.5			$9.10 | $9.10
2412456	978-1-9747-5169-3	Sakamoto Days, Vol. 15 by Yuto Suzuki	741.5			$8.39 | $8.39
2457430	978-1-9747-5900-2	Sakamoto Days, Vol. 19 by Yuto Suzuki	741.5			$8.39 | $8.39
2462049	978-1-9747-6230-9	Sakamoto Days, Vol. 20 by Yuto Suzuki	741.5			$8.39 | $8.39
2459931	979-8-8554-1925-2	Sasaki and Peeps, Vol. 04 by Rachel J. Pierce	741.5			$9.10 | $9.10
2461655	978-1-4197-7837-7	Scars, Vol. 03 by Brandon Arias	741.5			$9.09 | $9.09
2461653	979-8-8554-2890-2	Scenes from Awajima, Vol. 01 by Andria McKnight	741.5			$10.50 | $10.50
2423835	978-1-5458-1625-7	Sc-Fi Witness by Richard Ashley Hamilton	741.5			$10.49 | $10.49
2437830	979-8-8554-1339-7	Secrets of the Silent Witch, Vol. 04 by Matsuri Isora	741.5			$9.10 | $9.10
2429731	979-8-4009-0124-9	See You in My 19th Life, Vol. 06 by Hye Yi	741.5			$14.00 | $14.00
2438007	979-8-4009-0125-6	See You in My 19th Life, Vol. 07 by Hye Yi	741.5			$14.00 | $14.00
2451870	979-8-4009-0398-4	See You in My 19th Life, Vol. 08 by Hye Yi	741.5			$14.00 | $14.00
2461652	979-8-4009-0474-5	See You in My 19th Life, Vol. 09 by Lee Hye	741.5			$14.00 | $14.00
2461617	978-1-7183-5354-1	Seirei Gensouki: Spirit Chronicles, Vol. 11 by Yuri Shibamura	741.5			$11.19 | $11.19
2446670	979-8-89373-960-2	Servamp, Vol. 22 by Strike Tanaka	741.5			$9.79 | $9.79
2433721	979-8-8554-0345-9	Shadows House, Vol. 09 by Somato	741.5			$9.10 | $9.10
2461650	979-8-8554-0347-3	Shadows House, Vol. 10 by Somato	741.5			$9.10 | $9.10
2449106	979-8-89373-322-8	She Professed Herself Pupil of the Wise Man, Vol. 13 by Ryusen Ryusen Hiratsugu	741.5			$9.79 | $9.79
2459737	979-8-89160-656-2	Sheeply Horned Witch Romi, Vol. 03 by Yoichi Abe	741.5			$9.79 | $9.79
2486010	978-1-5248-9642-3	SideQuested, Vol. 01 by K. B. Spangler	741.5			$13.29 | $13.29
2449559	978-1-4197-8077-6	Silence, Vol. 04 by Yoann Vorniere	741.5			$9.09 | $9.09
2437833	979-8-8554-0383-1	Sister and Giant: A Young Lady Is Reborn in Another World, Vol. 04 by Be-con	741.5			$10.50 | $10.50
2461649	979-8-8554-1671-8	Sister and Giant: A Young Lady Is Reborn in Another World, Vol. 05 by Be-con	741.5			$10.50 | $10.50
2446617	979-8-89373-291-7	Skip and Loafer, Vol. 11 by Misaki Takamatsu	741.5			$9.79 | $9.79
2422687	979-8-89160-665-4	Skull Dragon's Precious Daughter, Vol. 05 by Ichi Yukishiro	741.5			$9.79 | $9.79
2424926	979-8-89215-346-1	SLAM!: Complete Collection by Pamela Ribon	741.5			$13.99 | $13.99
2438820	978-1-9747-5592-9	Sleepy Princess in the Demon Castle, Vol. 28 by Kagiji Kumanomata	741.5			$8.39 | $8.39
2438001	978-1-9753-9928-3	Small-Animallike Lady Is Adored by the Ice Prince, Vol. 03 by Hisui	741.5			$9.10 | $9.10
2461642	979-8-8554-0399-2	Small-Animallike Lady Is Adored by the Ice Prince, Vol. 04 by Mugi Sawai	741.5			$9.10 | $9.10
2460737	979-8-89215-725-4	Smooth Criminals Complete Collection by Kiwi Smith	741.5			$13.99 | $13.99
2423129	978-1-9747-5247-8	Snowball Earth, Vol. 05 by Yuhiro Tsujitsugu	741.5			$10.49 | $10.49
2463282	978-1-9747-5904-0	Snowball Earth, Vol. 07 by Yuhiro Tsujitsugu	741.5			$10.49 | $10.49
2486719	978-1-9747-6141-8	Snowball Earth, Vol. 08 by Yuhiro Tsujitsugu	741.5			$10.49 | $10.49
2433726	979-8-8554-0363-3	So What's Wrong with Getting Reborn As a Goblin?, Vol. 08 by Nazuna Miki	741.5			$9.10 | $9.10
2456527	979-8-8554-0365-7	So What's Wrong with Getting Reborn As a Goblin?, Vol. 09 by Caleb Cook	741.5			$9.10 | $9.10
2442639	979-8-89561-716-8	Soara and the House of Monsters, Vol. 05 by Hidenori Yamaji	741.5			$11.19 | $11.19
2433674	979-8-4009-0257-4	Solo Leveling, Vol. 12 by Chugong	741.5			$14.00 | $14.00
2439803	979-8-4009-0259-8	Solo Leveling, Vol. 13 by Chugong	741.5			$14.00 | $14.00
2459942	979-8-4009-0464-6	Solo Leveling, Vol. 14 by Abigail Blackman	741.5			$14.00 | $14.00
2453558	978-1-4197-7827-8	Space Punch, Vol. 04 by ZD	741.5			$9.09 | $9.09
2437841	978-1-5067-4159-8	Royalty by Revel Guts	741.5			$13.99 | $13.99
2486629	979-8-88877-617-9	Spellbook Library, Vol. 04 by Uta Isaki	741.5			$9.79 | $9.79
2448528	978-1-302-95887-9	Unraveled by Stephanie Phillips	741.5			$11.19 | $11.19
2457433	978-1-9747-5846-3	Spider-Man: Octo-Girl, Vol. 03 by Hideyuki Furuhashi	741.5			$8.39 | $8.39
2433727	979-8-8554-0511-8	Spring Storm and Monster, Vol. 03 by Mitsubachi Miyuki	741.5			$9.10 | $9.10
2451933	979-8-8554-0513-2	Spring Storm and Monster, Vol. 04 by Emma Schumacker	741.5			$9.10 | $9.10
2462587	979-8-8554-2337-2	Spring Storm and Monster, Vol. 05 by Mitsubachi Miyuki	741.5			$9.10 | $9.10
2424719	979-8-8554-0292-6	Spy Classroom 2nd Period: Daughter Dearest, Vol. 01 by Takemachi	741.5			$9.10 | $9.10
2447512	979-8-8554-0294-0	Spy Classroom 2nd Period: Daughter Dearest, Vol. 02 by Takemachi	741.5			$9.10 | $9.10
2439899	979-8-8554-0291-9	Spy Classroom 3rd Period: Forgetter, Vol. 01 by Takemachi	741.5			$9.10 | $9.10

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2440163	978-1-9747-5600-1	Spy X Family, Vol. 14 by Tatsuya Endo	741.5	$8.39	1	$8.39
2462815	978-1-9747-5917-0	Spy X Family, Vol. 15 by Tatsuya Endo	741.5	$8.39	1	$8.39
2462833	978-1-9747-5788-6	Star Brighter Than the Sun, Vol. 04 by Kazune Kawahara	741.5	$8.39	1	$8.39
2457434	978-1-9747-5286-7	Star Wars: Path of the Lightsaber, Vol. 01 by Kenny Ruiz	741.5	$10.49	1	$10.49
2423182	978-1-9747-5267-6	Star Wars: The High Republic, Edge of Balance, Vol. 04 by Shima Shinya	741.5	$10.49	1	$10.49
2423094	978-1-9747-4998-0	Star Wars: The High Republic, Edge of Balance: Premonition, Vol. 01 by Daniel Jose Older	741.5	$10.49	1	$10.49
2449055	979-8-89373-459-1	Stay by My Side after the Rain, Vol. 04 by Shoko Rakuta	741.5	$10.49	1	$10.49
2453569	978-1-5067-4715-6	Stephen Mccranie's Space Boy, Vol. 22 by Stephen McCranie	741.5	$10.49	1	$10.49
2493826	978-1-5067-4716-3	Stephen Mccranie's Space Boy, Vol. 23 by Stephen McCranie	741.5	$10.49	1	$10.49
2433864	979-8-89373-180-4	Strange House, Vol. 03 by Uketsu	741.5	$10.49	1	$10.49
2461499	979-8-89373-967-1	Strange House, Vol. 04 by Uketsu	741.5	$10.49	1	$10.49
2461500	979-8-89561-724-3	Strange House, Vol. 05 by Uketsu	741.5	$10.49	1	$10.49
2433729	979-8-8554-1015-0	Studio Apartment, Good Lighting, Angel Included, Vol. 07 by matoba	741.5	$9.10	1	$9.10
2451942	979-8-8554-1975-7	Summer Hikaru Died, Vol. 06 by Abigail Blackman	741.5	$10.50	1	$10.50
2462050	978-1-9747-6180-7	Super Psychic Policeman Chojo, Vol. 01 by Shun Numa	741.5	$8.39	1	$8.39
2437759	979-8-8554-1102-7	Super String: Marco Polo's Travel to the Multiverse, Vol. 01 by IN-wan YOUN	741.5	$9.10	1	$9.10
2459943	979-8-8554-1143-0	Super String: Marco Polo's Travel to the Multiverse, Vol. 02 by Boichi	741.5	$9.10	1	$9.10
2459944	979-8-8554-1919-1	Suzuki-Kun's Mindful Life, Vol. 02 by Yuhki Fujimoto	741.5	$10.50	1	$10.50
2433730	979-8-8554-1178-2	Sword Art Online Ordinal Scale, Vol. 02 by Reki Kawahara	741.5	$9.10	1	$9.10
2456529	979-8-8554-1180-5	Sword Art Online Ordinal Scale, Vol. 03 by Viet Phuong Vu	741.5	$9.10	1	$9.10
2429708	979-8-8554-1470-7	Sword Art Online Re:Aincrad, Vol. 03 by Reki Kawahara	741.5	$9.10	1	$9.10
2461648	979-8-8554-2317-4	Sword Art Online Re:Aincrad, Vol. 04 by Stephen Paul	741.5	$9.10	1	$9.10
2435938	979-8-8554-0964-2	Sword Art Online Unital Ring, Vol. 01 by Reki Kawahara	741.5	$9.10	1	$9.10
2461102	979-8-89561-717-5	Sword of the Demon Hunter: Kijin Gentosho, Vol. 08 by Motoo Nakanishi	741.5	$9.79	1	$9.79
2446658	979-8-89373-329-7	Sword of the Demon Hunter: Kijin Gentosho, Vol. 7 by Motoo Nakanishi	741.5	$9.79	1	$9.79
2433731	979-8-8554-0447-0	Takahashi from the Bike Shop, Vol. 02 by Arare Matsumushi	741.5	$10.50	1	$10.50
2451934	979-8-8554-0449-4	Takahashi from the Bike Shop, Vol. 03 by Arare MATSUMUSHI	741.5	$10.50	1	$10.50
2438175	979-8-89373-000-5	Tale of the Secret Saint, Vol. 09 by Touya	741.5	$9.79	1	$9.79
2456916	979-8-89373-461-4	Tale of the Secret Saint, Vol. 10 by Touya	741.5	$9.79	1	$9.79
2456919	979-8-89561-336-8	Tales of the Hundred Monsters Next Door, Vol. 01 by Yoshiko Watanuki	741.5	$10.49	1	$10.49
2422913	978-1-9747-5236-2	Tamon's B-Side, Vol. 07 by Yuki Shiwasu	741.5	$8.39	1	$8.39
2462051	978-1-9747-6124-1	Tamon's B-Side, Vol. 10 by Yuki Shiwasu	741.5	$8.39	1	$8.39
2486630	979-8-88877-412-0	Tank Chair, Vol. 06 by Manabu Yashiro	741.5	$9.79	1	$9.79
2461619	978-1-7183-3863-0	Tearmoon Empire, Vol. 07 by Nozomu Mochitsuki	741.5	$11.19	1	$11.19
2429713	979-8-8554-0646-7	Teen Exorcist, Vol. 02 by Mitsuru Yuki	741.5	$9.10	1	$9.10
2447520	979-8-8554-1538-4	Teen Exorcist, Vol. 03 by Mitsuru Yuki	741.5	$9.10	1	$9.10
2483329	979-8-88724-309-2	Teenage Mutant Ninja Turtles: Mutant Nation, Vol. 02 by Tom Waltz	741.5	$15.39	1	$15.39
2448530	979-8-88724-312-2	Teenage Mutant Ninja Turtles: Saturday Morning Adventures, Vol. 05 by Erik Burnham	741.5	$11.89	1	$11.89
2463429	979-8-88724-363-4	Teenage Mutant Ninja Turtles: Saturday Morning Adventures, Vol. 06 by Erik Burnham	741.5	$11.89	1	$11.89
2461621	979-8-8554-1940-5	Terrified Teacher at Ghoul School!, Vol. 17 by Amanda Haley	741.5	$9.10	1	$9.10
2455487	979-8-8554-1847-7	Terrifying Students at Ghoul School!, Vol. 01 by Mai Tanaka	741.5	$9.10	1	$9.10
2439004	978-1-5458-1910-4	Theory of K. O., Vol. 01 by Mathieu Reynes	741.5	$7.69	1	$7.69
2462903	979-8-89373-787-5	This Is Screwed Up, But I Was Reincarnated As A GIRL In Another World!, Vol. 18 by Ashi	741.5	$9.79	1	$9.79
2433735	978-1-9753-9054-9	This Monster Wants to Eat Me, Vol. 04 by Sai Naekawa	741.5	$9.10	1	$9.10
2456530	978-1-9753-9056-3	This Monster Wants to Eat Me, Vol. 05 by Bianca Pistillo	741.5	$9.10	1	$9.10
2434092	979-8-89373-296-2	Though I Am an Inept Villainess: Tale of the Butterfly-Rat Body Swap in the Maiden Court, Vol. 07 by Satsuki Nakamura	741.5	$10.49	1	$10.49
2459725	979-8-89561-730-4	Though I Am an Inept Villainess: Tale of the Butterfly-Rat Body Swap in the Maiden Court, Vol. 08 by Satsuki Nakamura	741.5	$10.49	1	$10.49
2435991	979-8-8554-0134-9	Three-Body Problem, Vol. 03 by Cixin Liu	741.5	$15.40	1	$15.40
2456531	979-8-8554-0135-6	Three-Body Problem, Vol. 04 by Cixin Liu	741.5	$15.40	1	$15.40
2433891	979-8-89160-932-7	Tiger and Dragon, Vol. 03 by Mizuki Hoshino	741.5	$9.79	1	$9.79

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2442675	979-8-89373-104-0	Tiger and Dragon, Vol. 04 by Mizuki Hoshino	741.5	$9.79	1	$9.79
2438208	979-8-89373-009-8	Todai Revengers Omnibus, Vol. 03 by Shinpei Funatsu	741.5	$16.09	1	$16.09
2438003	979-8-8554-1607-7	Toilet-Bound Hanako-kun, Vol. 22 by Aidalro	741.5	$9.10	1	$9.10
2451944	979-8-8554-2473-7	Toilet-Bound Hanako-kun, Vol. 23 by Aidalro	741.5	$9.10	1	$9.10
2423168	978-1-9747-5248-5	Tokyo Alien Bros., Vol. 02 by Keigo Shinzo	741.5	$10.49	1	$10.49
2462877	979-8-89765-286-0	Tokyo Revengers: A Letter From Keisuke Baji, Vol. 06 by Ken Wakui	741.5	$10.49	1	$10.49
2435007	979-8-89160-976-1	Tokyo Revengers: A Letter from Keisuke Baji, Vol. 04 by Ken Wakui	741.5	$10.49	1	$10.49
2449056	979-8-89373-790-5	Tokyo Revengers: A Letter from Keisuke Baji, Vol. 05 by Ken Wakui	741.5	$10.49	1	$10.49
2438209	979-8-89373-181-1	Tokyo Revengers: Brilliant Full Color Edition Omnibus, Vol. 01-02 by Ken Wakui	741.5	$20.99	1	$20.99
2449107	979-8-89373-541-3	Tokyo Revengers: Brilliant Full Color Edition Omnibus, Vol. 03-04 by Ken Wakui	741.5	$20.99	1	$20.99
2435931	979-8-4009-0330-4	Tomb Raider King, Vol. 11 by SAN.G	741.5	$14.00	1	$14.00
2447521	979-8-4009-0332-8	Tomb Raider King, Vol. 12 by SAN.G	741.5	$14.00	1	$14.00
2459963	979-8-4009-0334-2	Tomb Raider King, Vol. 13 by 3B2S	741.5	$14.00	1	$14.00
2433869	979-8-89373-394-5	Tomo-Chan Is a Girl! (Omnibus Edition), Vol. 03 by Fumita Yanagida	741.5	$17.49	1	$17.49
2456847	979-8-89561-732-8	Too Many Losing Heroines!, Vol. 04 by Takibi Amamori	741.5	$9.79	1	$9.79
2462904	979-8-89373-776-9	Too-Perfect Saint: Tossed Aside By My Fiance And Sold To Another Kingdom, Vol. 05 by Fuyutsuki Koki	741.5	$9.79	1	$9.79
2434093	979-8-89160-953-2	Too-Perfect Saint: Tossed Aside by My Fiance and Sold to Another Kingdom, Vol. 02 by Fuyutsuki Koki	741.5	$9.79	1	$9.79
2442674	979-8-89373-366-2	Too-Perfect Saint: Tossed Aside by My Fiance and Sold to Another Kingdom, Vol. 03 by Fuyutsuki Koki	741.5	$9.79	1	$9.79
2456848	979-8-89373-367-9	Too-Perfect Saint: Tossed Aside by My Fiance and Sold to Another Kingdom, Vol. 04 by Fuyutsuki Koki	741.5	$9.79	1	$9.79
2433736	978-1-9753-9994-8	Tougen Anki: Legend of the Cursed Blood, Vol. 03 by Yura Urushibara	741.5	$9.10	1	$9.10
2451948	978-1-9753-9996-2	Tougen Anki: Legend of the Cursed Blood, Vol. 04 by Ivo Marques	741.5	$9.10	1	$9.10
2438004	979-8-8554-1665-7	Touring After the Apocalypse, Vol. 06 by Sakae Saito	741.5	$9.10	1	$9.10
2436225	978-1-990778-22-3	Tower of God, Vol. 05 by SIU	741.5	$13.29	1	$13.29
2424907	978-1-63715-644-5	Toxic Summer by Derek Charm	741.5	$13.99	1	$13.99
2458145	978-1-9747-5907-1	Trillion Game, Vol. 08 by Riichiro Inagaki	741.5	$10.49	1	$10.49
2462072	978-1-9747-6191-3	Trillion Game, Vol. 09 by Riichiro Inagaki	741.5	$10.49	1	$10.49
2433240	978-1-990778-12-4	True Beauty, Vol. 06 by Yaongyi	741.5	$13.29	1	$13.29
2453680	978-1-990778-14-8	True Beauty, Vol. 07 by Yaongyi	741.5	$13.29	1	$13.29
2433771	978-1-9753-4638-6	Tsubaki-Chou Lonely Planet, Vol. 10 by Mika Yamamori	741.5	$9.10	1	$9.10
2456532	978-1-9753-4640-9	Tsubaki-Chou Lonely Planet, Vol. 11 by Mika Yamamori	741.5	$9.10	1	$9.10
2438825	978-1-9747-5593-6	Twin Star Exorcists, Vol. 34 by Yoshiaki Sukeno	741.5	$8.39	1	$8.39
2453914	978-1-954366-13-8	Twokinds, Vol. 06 by Thomas Fischbach	741.5	$13.99	1	$13.99
2486731	978-1-9747-6160-9	Ultraman, Vol. 21 by Tomohiro Shimoguchi	741.5	$10.49	1	$10.49
2451949	979-8-8554-1837-8	Uncle from Another World, Vol. 12 by Christina Rose	741.5	$10.50	1	$10.50
2433683	979-8-4009-0114-0	Unholy Blood, Vol. 06 by Lina Lim	741.5	$14.00	1	$14.00
2439812	979-8-4009-0118-8	Unholy Blood, Vol. 07 by Lina Lim	741.5	$14.00	1	$14.00
2455479	979-8-4009-0119-5	Unholy Blood, Vol. 08 by Lina Lim	741.5	$14.00	1	$14.00
2461634	979-8-8554-2085-2	Unnamed Memory, Vol. 07 by Kuji Furumiya	741.5	$9.10	1	$9.10
2446710	979-8-89373-782-0	Valiant Must Fall, Vol. 05 by Yu Aida	741.5	$11.19	1	$11.19
2462905	979-8-89373-783-7	Valiant Must Fall, Vol. 06 by Yu Aida	741.5	$11.19	1	$11.19
2429714	979-8-8554-1288-8	Vampire and His Pleasant Companions, Vol. 06 by Narise Konohara	741.5	$9.10	1	$9.10
2435994	979-8-8554-1517-9	Victoria of Many Faces, Vol. 02 by Andria McKnight	741.5	$9.10	1	$9.10
2461627	979-8-8554-2095-1	Victoria of Many Faces, Vol. 03 by Syuu Syuu	741.5	$9.10	1	$9.10
2433665	979-8-4009-0294-9	Villainess Is a Marionette, Vol. 01 by hanirim	741.5	$14.00	1	$14.00
2439807	979-8-4009-0296-3	Villainess Is a Marionette, Vol. 02 by hanirim	741.5	$14.00	1	$14.00
2455483	979-8-4009-0298-7	Villainess Is a Marionette, Vol. 03 by hanirim	741.5	$14.00	1	$14.00
2461639	979-8-8554-2059-3	Villainess Stans the Heroes: Playing the Antagonist to Support Her Faves!, Vol. 05 by Yamori Mitikusa	741.5	$9.10	1	$9.10
2433680	979-8-4009-0338-0	Villainess Turns the Hourglass, Vol. 07 by SANSOBEE	741.5	$14.00	1	$14.00
2439810	979-8-4009-0340-3	Villainess Turns the Hourglass, Vol. 08 by SANSOBEE	741.5	$14.00	1	$14.00
2455484	979-8-4009-0418-9	Villains Are Destined to Die, Vol. 08 by Gwon Gyeoeul	741.5	$14.00	1	$14.00
2364823	978-1-64651-978-1	Vinland Saga Deluxe Edition, Vol. 01 by Makoto Yukimura	741.5	$38.49	1	$38.49
2435387	978-1-64651-984-2	Vinland Saga Deluxe Edition, Vol. 07 by Makoto Yukimura	741.5	$38.49	1	$38.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2433816	979-8-89373-279-5	Vs. Love, Vol. 01 by Chise Ogawa	741.5	$11.19	1	$11.19
2446671	979-8-89561-129-6	Vs. Love, Vol. 02 by Chise Ogawa	741.5	$11.19	1	$11.19
2429716	979-8-8554-0142-4	War of Greedy Witches, Vol. 02 by Homura Kawamoto	741.5	$10.50	1	$10.50
2439929	979-8-8554-0144-8	War of Greedy Witches, Vol. 03 by Homura Kawamoto	741.5	$10.50	1	$10.50
2446758	979-8-89373-269-6	Weakest Tamer Began a Journey to Pick up Trash, Vol. 07 by Honobonoru500	741.5	$9.79	1	$9.79
2448299	978-1-64729-467-0	Welcome to Demon School! Iruma-Kun: IruMafia Edition, Vol. 01 by Hiroja	741.5	$9.77	1	$9.77
2483352	978-1-64729-515-8	Welcome to Demon School! Iruma-Kun: IruMafia Edition, Vol. 03 by Osamu Nishi	741.5	$9.77	1	$9.77
2436280	978-1-5067-4491-9	Welcome to the Maynard by James Robinson	741.5	$13.99	1	$13.99
2438211	979-8-89373-390-7	What It Means to Be You, Vol. 01 by Leebora	741.5	$15.39	1	$15.39
2446715	979-8-89373-794-3	What It Means to Be You, Vol. 02 by Leebora	741.5	$15.39	1	$15.39
2461034	979-8-89373-795-0	What It Means to Be You, Vol. 03 by Leebora	741.5	$15.39	1	$15.39
2418852	978-1-9753-9480-6	When I Became a Commoner, They Broke off Our Engagement!, Vol. 05 by Kenzi Oiwa	741.5	$9.10	1	$9.10
2461626	979-8-8554-1907-8	When I Became a Commoner, They Broke off Our Engagement!, Vol. 06 by Leighann Harvey	741.5	$9.10	1	$9.10
2460913	979-8-89215-563-2	When I Lay My Vengeance Upon Thee by Gus Moreno	741.5	$13.99	1	$13.99
2463284	979-8-88877-425-0	Whisper Me a Love Song, Vol. 10 by Eku Takeshima	741.5	$9.09	1	$9.09
2435005	979-8-89373-256-6	White Rose in Bloom, Vol. 04 by Asumiko Nakamura	741.5	$9.79	1	$9.79
2451950	979-8-8554-1991-7	Why Raeliana Ended up at the Duke's Mansion, Vol. 09 by David Odell	741.5	$14.00	1	$14.00
2483340	978-1-64651-966-8	Wind Breaker, Vol. 19 by Satoru Nii	741.5	$9.09	1	$9.09
2486632	978-1-64651-965-1	Wind Breaker, Vol. 18 by Satoru Nii	741.5	$9.09	1	$9.09
2486647	979-8-88877-551-6	Wistoria: Wand and Sword, Vol. 11 by Toshi Aoi	741.5	$9.09	1	$9.09
2436005	978-1-9753-7430-3	Witch Life in a Micro Room, Vol. 05 by Abby Lehrke	741.5	$9.10	1	$9.10
2433692	979-8-8554-1421-9	Witch's Life in Mongol, Vol. 01 by Tomato Soup	741.5	$10.50	1	$10.50
2456533	979-8-8554-1423-3	Witch's Life in Mongol, Vol. 02 by Aila Nagamine	741.5	$10.50	1	$10.50
2462836	978-1-9747-5826-5	Wolf Girl and Black Prince, Vol. 16 by Ayuko Hatta	741.5	$8.39	1	$8.39
2435044	979-8-89373-440-9	Wolf's Daughter: A Werewolf's Tale, Vol. 01 by Yuki Kodama	741.5	$9.79	1	$9.79
2456839	979-8-89373-773-8	Wolf's Daughter: A Werewolf's Tale, Vol. 02 by Yuki Kodama	741.5	$9.79	1	$9.79
2459968	979-8-8554-2235-1	Wonder Boy, Vol. 01 by Giuseppe di Martino	741.5	$28.00	1	$28.00
2433682	979-8-4009-0320-5	World After the Fall, Vol. 10 by singNsong	741.5	$14.00	1	$14.00
2451877	979-8-4009-0413-4	World After the Fall, Vol. 11 by Shirley Chen	741.5	$14.00	1	$14.00
2461636	979-8-4009-0451-6	World After the Fall, Vol. 12	741.5	$14.00	1	$14.00
2459707	979-8-88843-775-9	World End Solte, Vol. 04 by Satoshi Mizukami	741.5	$10.49	1	$10.49
2446618	979-8-89373-968-8	World's Fastest Level Up, Vol. 06 by Nagato Yamata	741.5	$9.79	1	$9.79
2462906	979-8-89561-869-1	World's Fastest Level Up, Vol. 07 by Nagato Yamata	741.5	$9.79	1	$9.79
2433894	979-8-89160-931-0	World's Fastest Level up (Manga) Vol. 05 by Nagato Yamata	741.5	$9.79	1	$9.79
2429717	979-8-8554-1290-1	World's Strongest Rearguard: Labyrinth Country's Novice Seeker, Vol. 08 by Towa	741.5	$9.10	1	$9.10
2438213	979-8-89373-010-4	Yakuza Reincarnation, Vol. 13 by Takeshi Natsuhara	741.5	$9.79	1	$9.79
2456849	979-8-89373-569-7	Yakuza Reincarnation, Vol. 14 by Takeshi Natsuhara	741.5	$9.79	1	$9.79
2462059	978-1-9747-6194-4	Yashahime: Princess Half-Demon, Vol. 08 by Takashi Shiina	741.5	$8.39	1	$8.39
2462829	978-1-9747-5909-5	Yona of the Dawn, Vol. 45 by Mizuho Kusanagi	741.5	$8.39	1	$8.39
2451943	979-8-88877-584-4	You Can't Bluff the Sharp-Eyed Sister, Vol. 01 by Yo Asami	741.5	$9.79	1	$9.79
2483368	979-8-88877-586-8	You Can't Bluff the Sharp-Eyed Sister, Vol. 03 by Yo Asami	741.5	$9.79	1	$9.79
2484969	978-1-9747-6206-4	You and I Are Polar Opposites, Vol. 08 by Kocha Agasawa	741.5	$8.39	1	$8.39
2446761	979-8-89561-232-3	Young Ladies Don't Play Fighting Games, Vol. 08 by Eri Ejima	741.5	$9.79	1	$9.79
2433773	979-8-8554-0634-4	Your Forma, Vol. 03 by Mareho Kikuishi	741.5	$9.10	1	$9.10
2423265	978-1-990778-13-1	Your Throne, Vol. 02 by SAM	741.5	$13.29	1	$13.29
2456534	979-8-8554-0278-0	Yowamushi Pedal, Vol. 28 by Caleb Cook	741.5	$19.60	1	$19.60
2461439	979-8-89561-535-5	Yuri Love Story That Begins with Getting Dumped in a Dream, Vol. 01 by Hijiki	741.5	$9.79	1	$9.79

Total quantity	488 Titles(488 Books)
Subtotal	$5,552.17
Processing Options Total	$1,610.40
Shipping & Handling	$111.04
Shipping Discount	-$111.04
Tax	$734.16
Grand Total	$7,896.73

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: TEEN FICTION ODC
List#: 201420
Date: 2/17/2026 6:19:58 PM
Total quantity: 749 Titles(749 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	749	$2,471.70

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2363076	978-1-68263-576-6	Sky's End by Marc J. Gregson	Fic	$13.29	1	$13.29
2459607	978-1-958607-15-2	Cliffs of Wayward by Veronica King	Fic	$13.27	1	$13.27
2417779	978-1-5461-3661-3	All the Hidden Monsters by Amie Jordan	Fic	$13.99	1	$13.99
2453698	978-1-5461-3663-7	All the Lost Souls by Amie Jordan	Fic	$13.99	1	$13.99
2413538	978-1-5362-3009-3	Assassin's Guide to Babysitting by Natalie C. Parker	Fic	$13.99	1	$13.99
2437828	978-1-4197-7604-5	City of Echoes by Judy I. Lin	Fic	$15.39	1	$15.39
2436451	978-0-06-331195-4	Between These Broken Hearts by Lexi Ryan	Fic	$13.99	1	$13.99
2413739	978-0-593-53105-1	Lies on the Serpent's Tongue by Kate Pearsall	Fic	$13.99	1	$13.99
2004863	978-0-373-21231-6	Black Witch by Laurie Forest	Fic	$14.69	1	$14.69
2461009	979-8-212-37676-1	Ice Moon by Camila Victoire	Fic	$17.49	1	$17.49
2446693	978-0-374-38942-0	Steeping of Blood by Hafsah Faizal	Fic	$14.69	1	$14.69
2437032	978-0-593-71196-5	Bones at the Crossroads by LaDarrion Williams	Fic	$14.69	1	$14.69
2451732	978-0-593-30663-5	Rose Field by Philip Pullman	Fic	$20.99	1	$20.99
2402094	978-1-64428-437-7	Secret Star by Robert DeLaurentis	Fic	$19.60	1	$19.60
2432477	978-1-250-39114-8	Breath of the Dragon by Fonda Lee	Fic	$14.70	1	$14.70
2409003	978-1-368-08100-9	Sophomore Year by Brianna Peppins	Fic	$12.59	1	$12.59
2436373	978-1-4549-4995-4	Fiery Spirit by Kate Chenli	Fic	$13.29	1	$13.29
2415086	978-1-250-33168-7	Beasts We Bury by D.L. Taylor	Fic	$13.99	1	$13.99
2462696	978-1-250-33170-0	Beasts We Raise by D.L. Taylor	Fic	$14.69	1	$14.69
2418317	978-1-4197-6517-9	Single Brutal Fate by Lee Paige O'Brien	Fic	$13.99	1	$13.99
2459847	979-8-8554-1827-9	Brunhild the King's Sister by Aoaso Aoaso	Fic	$14.00	1	$14.00
2415832	979-8-8554-1082-2	Kriemhild and Brunhild by Yuiko Agarizaki	Fic	$14.00	1	$14.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2483317	978-0-593-89815-4	Call Of The Dragon by Natasha Bowen	Fic	$13.99	1	$13.99
2404712	978-1-250-89340-6	Spectacular by Stephanie Garber	Fic	$14.69	1	$14.69
2408074	978-1-63993-320-4	Casters and Crowns by Elizabeth Lowham	Fic	$14.69	1	$14.69
2451726	978-1-63993-435-5	Sonnets and Serpents by Elizabeth Lowham	Fic	$17.49	1	$17.49
2389630	979-8-88605-106-3	Chaos Grid by Lyndsey Lewellen	Fic	$17.49	1	$17.49
2462504	979-8-88605-210-7	Crier Stone by Lyndsey Lewellen	Fic	$17.49	1	$17.49
2462172	978-1-6659-8196-5	Fever by Lauren DeStefano	Fic	$14.69	1	$14.69
2462174	978-1-6659-8198-9	Sever by Lauren DeStefano	Fic	$14.69	1	$14.69
2462170	978-1-6659-8194-1	Wither by Lauren DeStefano	Fic	$14.69	1	$14.69
2494605	979-8-88605-234-3	Sons of Day and Night by Mariposa Aristeo	Fic	$17.49	1	$17.49
2459605	978-1-6659-5514-0	Rebel and the Rose by Catherine Doyle	Fic	$15.39	1	$15.39
2434957	978-1-368-04940-5	City of Magic and Monsters by Estelle Laure	Fic	$12.59	1	$12.59
2453677	978-1-6659-6013-7	Coldwire by Chloe Gong	Fic	$15.39	1	$15.39
2423564	978-1-5364-9167-8	Colliding Worlds of Mina Lee by Ellen Oh	Fic	$24.95	1	$24.95
2417183	978-1-335-01525-9	Shadow and Tide by Rachel Greenlaw	Fic	$13.99	1	$13.99
2415162	978-1-250-86692-9	Rebel Witch by Kristen Ciccarelli	Fic	$14.00	1	$14.00
2453635	978-1-998341-84-9	Most Unusual Princess by Michelle Knudsen	Fic	$10.49	1	$10.49
2412504	978-1-368-07861-0	Wishless Ones by Hafsah Faizal	Fic	$13.29	1	$13.29
2438543	978-1-958607-50-3	Crowns of Blood and Salt by Kay Adams	Fic	$13.27	1	$13.27
2368448	978-1-958607-09-1	Heirs of Bone and Sea by Kay Adams	Fic	$13.27	1	$13.27
2439889	978-1-250-29082-3	Scorched Earth by Danielle L. Jensen	Fic	$18.89	1	$18.89
2484442	978-0-06-328389-3	Brighter Than Nine by June CL Tan	Fic	$13.99	1	$13.99
2227059	978-0-06-288828-0	Darkness Outside Us by Eliot Schrefer	Fic	$13.99	1	$13.99
2446462	978-1-5461-2587-7	Dead of Summer by Ryan La Sala	Fic	$13.99	1	$13.99
2417270	978-1-250-85116-1	She Waits for You Beyond the Dark by Kristen Simmons	Fic	$13.99	1	$13.99
2437342	978-1-5364-9392-4	Destroy the Day by Brigid Kemmerer	Fic	$28.95	1	$28.95
2449248	978-0-593-64645-8	Zodiac Legacy by Katie Zhao	Fic	$13.99	1	$13.99
2462280	978-1-6659-7906-1	Light That Blinds Us by Andy Darcy Theo	Fic	$15.39	1	$15.39
2434685	978-1-5476-1519-3	Devils Like Us by L. T. Thompson	Fic	$14.69	1	$14.69
2436713	978-1-250-32972-1	Den of Liars by Jessica S. Olson	Fic	$13.99	1	$13.99
2422602	978-0-593-70506-3	Lady Knight by Amalie Howard	Fic	$13.99	1	$13.99
2443148	978-0-06-339990-7	Tiffany Aching's Guide to Being a Witch by Rhianna Pratchett	Fic	$15.39	1	$15.39
2437184	978-1-368-07674-6	Heartbroken by Serena Valentino	Fic	$13.29	1	$13.29
2449432	978-1-368-09620-1	Wayward Gods by Amanda M. Helander	Fic	$13.29	1	$13.29
2415273	978-0-316-53495-6	This Ends in Embers by Kamilah Cole	Fic	$13.99	1	$13.99
2389268	978-1-64937-307-6	Shadows Rule All by Abigail Owen	Fic	$14.69	1	$14.69
2415159	978-1-368-09877-9	Touch of Blood by Sajni Patel	Fic	$13.29	1	$13.29
2408265	978-1-6659-3930-0	Stranger Skies by Pascale Lacelle	Fic	$15.39	1	$15.39
2413919	979-8-8554-0698-6	Eminence in Shadow, Vol. 06 by Daisuke Aizawa	Fic	$14.00	1	$14.00
2411086	978-1-368-09790-1	Nightmares and Suenos by Alex Segura	Fic	$13.29	1	$13.29
2417393	978-0-593-53311-6	Encanto's Curse by Melissa de La Cruz	Fic	$13.99	1	$13.99
2368319	978-0-593-53308-6	Encanto's Daughter by Melissa de La Cruz	Fic	$13.99	1	$13.99
2443436	978-1-368-08977-7	Tinker Bell by Jen Calonita	Fic	$13.29	1	$13.29
2449247	978-1-5362-3934-8	Undisclosed by Aya De Leon	Fic	$13.99	1	$13.99
2443465	978-1-77488-875-9	Nettle by Bex Hogan	Fic	$13.99	1	$13.99
2403543	978-1-68119-688-6	Spell of the Sinister by Danielle Paige	Fic	$14.69	1	$14.69
2453865	978-1-250-87315-6	Fate So Cold by Amanda Foody	Fic	$16.09	1	$16.09
2436439	978-1-335-44880-4	Fateless by Julie Kagawa	Fic	$13.99	1	$13.99
2486729	978-1-5476-1652-7	Fathom Fall by Matteo L. Cerilli	Fic	$13.99	1	$13.99
2453636	978-0-593-61759-5	Wheel of Wrath by A. A. Vora	Fic	$15.39	1	$15.39
2446477	978-1-250-32853-3	Sisters in the Wind by Angeline Boulley	Fic	$13.99	1	$13.99
2431210	978-1-5364-9240-8	Escape the Pizzaplex by Scott Cawthon	Fic	$24.95	1	$24.95
2413303	978-1-5364-8968-2	Return to the Pit by Scott Cawthon	Fic	$24.95	1	$24.95
2451179	978-1-250-85311-0	Demon and the Light by Axie Oh	Fic	$13.99	1	$13.99
2431701	978-1-250-85308-0	Floating World by Axie Oh	Fic	$13.99	1	$13.99
2417430	978-1-250-87302-6	Deathly Grimm by Kathryn Purdie	Fic	$16.80	1	$16.80
2346797	978-1-250-87300-2	Forest Grimm by Kathryn Purdie	Fic	$14.00	1	$14.00
2425456	978-1-4197-5868-3	Iron Tongue of Midnight by Brittany N. Williams	Fic	$13.99	1	$13.99
2414047	978-1-5476-1010-5	Carving Shadows into Gold by Brigid Kemmerer	Fic	$14.69	1	$14.69
2460906	978-1-5476-1345-8	Sparking Fire Out of Fate by Brigid Kemmerer	Fic	$17.49	1	$17.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2442760	978-0-7443-1076-4	Queendom Come by Jordan H. Bartlett	Fic	$13.99	1	$13.99
2437748	978-1-7183-5082-3	Full Metal Panic! Short Stories, Vol. 03 by Shouji Shouji Gatou	Fic	$23.09	1	$23.09
2373849	978-1-958607-26-8	Diamond Bright and Broken by Holly Davis	Fic	$13.27	1	$13.27
2446316	978-0-316-59676-3	Hekate: The Witch by Nikita Gill	Fic	$13.99	1	$13.99
2437324	978-1-5364-9383-2	Grandest Game by Jennifer Lynn Barnes	Fic	$24.95	1	$24.95
2436665	978-0-316-48131-1	Glorious Rivals by Jennifer Lynn Barnes	Fic	$14.69	1	$14.69
2440109	978-1-250-19148-9	Yuli by S. Jae-Jones	Fic	$15.40	1	$15.40
2415216	978-0-593-81206-8	Dead Happy by Josh Silver	Fic	$13.99	1	$13.99
2406806	978-0-593-81202-0	HappyHead by Josh Silver	Fic	$13.99	1	$13.99
2437738	979-8-8554-1690-9	Theater of Haruhi Suzumiya by Nagaru Tanigawa	Fic	$14.00	1	$14.00
2462603	978-1-250-36540-8	Heart's Gambit by J.D. Myall	Fic	$14.70	1	$14.70
2451173	978-1-250-80939-1	Balancing Act by Paula Chase	Fic	$14.70	1	$14.70
2435085	978-0-316-56679-7	Heiress among Thieves by Emily Wibberley	Fic	$13.99	1	$13.99
2485051	979-8-217-04050-6	Her Hidden Fire by Cliodhna O'Sullivan	Fic	$16.09	1	$16.09
2394075	978-0-06-297723-6	Warrior of Legend by Kendare Blake	Fic	$13.99	1	$13.99
2408259	978-1-6659-1880-0	Wild and Ruined Song by Ashley Shuttleworth	Fic	$15.39	1	$15.39
2440229	978-1-5364-9454-9	Longest Night by Michelle Jabes Corpora	Fic	$24.95	1	$24.95
2449370	978-0-593-52776-4	Fortress of Ambrose by J. Elle	Fic	$14.69	1	$14.69
2443029	978-1-5362-4453-3	Daughter of the Underworld by Katharine Corr	Fic	$13.99	1	$13.99
2450781	978-1-5461-5954-4	Catching Fire (Illustrated Edition) by Suzanne Collins	Fic	$25.89	1	$25.89
2408801	978-1-250-90958-9	I Am the Dark That Answers When You Call by Jamison Shea	Fic	$13.99	1	$13.99
2453761	978-0-316-59364-9	Eternal Ruin by Tigest Girma	Fic	$13.99	1	$13.99
2414464	978-0-06-288887-7	(S)Kin by Ibi Zoboi	Fic	$13.99	1	$13.99
2434529	979-8-89414-120-6	13 Days of Summer by Stephanie Kate Strohm	Fic	$9.09	1	$9.09
2460513	978-0-06-333036-8	16 Forever by Lance Rubin	Fic	$13.99	1	$13.99
2462197	978-1-6659-3984-3	According to Plan by Christen Randall	Fic	$15.39	1	$15.39
2240460	978-0-06-303856-1	Act Cool by Tobly McSmith	Fic	$13.29	1	$13.29
2426820	978-1-59580-134-0	Acts of Resistance by Dominic Carrillo	Fic	$23.07	1	$23.07
2435615	978-1-5364-9324-5	Adventures of Mary Jane by Hope Jahren	Fic	$24.95	1	$24.95
2415051	978-1-7282-9120-8	After We Burned by Marieke Nijkamp	Fic	$13.29	1	$13.29
2412535	978-1-77488-224-5	Afterdark by E. Latimer	Fic	$13.99	1	$13.99
2413622	978-1-5344-3275-8	All Better Now by Neal Shusterman	Fic	$15.39	1	$15.39
2414134	978-1-5364-9028-2	All You Have to Do by Autumn Allen	Fic	$26.95	1	$26.95
2446634	978-1-5364-9528-7	All the Fighting Parts by Hannah V. Sawyerr	Fic	$28.95	1	$28.95
2413779	978-0-593-62527-9	All the Love under the Vast Sky by Alexandra Alessandri	Fic	$13.99	1	$13.99
2424964	978-1-6659-5265-1	All the Noise at Once by DeAndra Davis	Fic	$13.99	1	$13.99
2266853	978-1-5344-9903-4	All the Right Reasons by Bethany Mangle	Fic	$13.29	1	$13.29
2422059	978-1-250-89218-8	All the Stars Align by Gretchen Schreiber	Fic	$14.70	1	$14.70
2449420	978-1-6626-2098-0	All the Stars in the Daylight Sky by Maya MacGregor	Fic	$13.99	1	$13.99
2438907	978-1-6659-7255-0	All the Tomorrows After by Joanne Yi	Fic	$13.99	1	$13.99
2408760	978-1-6626-8088-5	All the Truth I Can Stand by Mason Stokes	Fic	$13.29	1	$13.29
2446001	978-0-06-308607-4	All the Way Around the Sun by Xixi Tian	Fic	$13.99	1	$13.99
2433573	978-0-06-328592-7	All-Nighter by Cecilia Vinesse	Fic	$13.99	1	$13.99
2435981	978-1-6659-0113-0	Always Be My Bibi by Priyanka Taslim	Fic	$13.99	1	$13.99
2435735	978-0-06-304592-7	Amelia, If Only by Becky Albertalli	Fic	$13.99	1	$13.99
2434735	979-8-89003-272-0	America's Not-So-Sweetheart by Blair Hanson	Fic	$13.29	1	$13.29
2434902	978-0-593-81372-0	Among Ghosts by Rachel Hartman	Fic	$14.69	1	$14.69
2404021	978-0-06-329643-5	Ancient's Game by Loni Crittenden	Fic	$13.99	1	$13.99
2433656	978-1-250-34765-7	And They Were Roommates by Page Powars	Fic	$13.99	1	$13.99
2449244	978-0-593-90487-9	And the River Drags Her Down by Jihyun Yun	Fic	$14.69	1	$14.69
2432559	978-0-8234-5912-4	And the Trees Stare Back by Gigi Griffis	Fic	$13.99	1	$13.99
2439054	978-1-5364-9415-0	Another First Chance by Robbie Couch	Fic	$24.95	1	$24.95
2409831	978-1-63993-325-9	Art of Us by Julie Wright	Fic	$13.99	1	$13.99
2417075	978-1-5364-9048-0	Artifice by Sharon Cameron	Fic	$26.95	1	$26.95
2389886	978-0-06-323788-9	Asking for a Friend by Kara H. L Chen	Fic	$13.99	1	$13.99
2436060	978-1-324-08293-4	Bad Creek by Peyton June	Fic	$13.29	1	$13.29
2423646	978-0-593-40316-7	Bad Influence by Claire Ahn	Fic	$13.99	1	$13.99
2439056	978-1-5364-9416-7	Bad Ones by Melissa Albert	Fic	$24.95	1	$24.95
2443466	978-1-77488-233-7	Bad in the Blood by Matteo L. Cerilli	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2417698	978-0-8234-5830-1	Banned Together: Our Fight for Readers' Rights by Ashley Hope Perez	808.8	$13.99	1	$13.99
2460854	978-1-250-38461-4	Barista's Guide to Love and Larceny by Caroline Bonin	Fic	$13.99	1	$13.99
2485393	978-1-6659-7957-3	Beast Becomes Her by Crystal Seitz	Fic	$15.39	1	$15.39
2419897	978-1-64614-513-3	Beasts by Ingvild Bjerkeland	Fic	$12.59	1	$12.59
2454118	978-1-250-86581-6	Beautiful Brutal Bodies by Linda Cheng	Fic	$14.69	1	$14.69
2435960	978-1-6659-0027-0	Beautiful Maddening by Shea Ernshaw	Fic	$13.99	1	$13.99
2017435	978-1-4926-3881-0	Behind the Song by K. M. Walton	Fic	$10.49	1	$10.49
2412508	978-1-368-09870-0	Bemused by Farrah Rochon	Fic	$13.29	1	$13.29
2435600	978-1-5461-5820-2	Best of All Worlds by Kenneth Oppel	Fic	$13.99	1	$13.99
2462099	978-1-6659-8869-8	Beth Is Dead by Katie Bernet	Fic	$13.99	1	$13.99
2460601	978-0-06-334114-2	Better Catch up, Krishna Kumar by Anahita Karthik	Fic	$13.99	1	$13.99
2414952	978-1-5461-1661-5	Better Nightmare by Megan Freeman	Fic	$14.69	1	$14.69
2459794	979-8-217-22570-5	Better in Black: Ten Stories of Shadowhunter Romance by Cassandra Clare	Fic	$17.49	1	$17.49
2460570	978-0-06-333832-6	Better the Devil by Erik J. Brown	Fic	$13.99	1	$13.99
2414053	978-1-250-33404-6	Biology Lessons by Melissa Kantor	Fic	$13.99	1	$13.99
2417943	978-0-593-48647-4	Bird in the Air Means We Can Still Breathe by Mahogany L. Browne	Fic	$13.99	1	$13.99
2446393	978-0-316-58843-0	Bitten by Jordan Stephanie Gray	Fic	$13.99	1	$13.99
2434746	978-1-250-87170-1	Black Girl Survives in This One: Horror Stories	Fic	$10.49	1	$10.49
2493677	978-0-7443-1240-9	Blinder by Erin Simpson	Fic	$13.99	1	$13.99
2446585	979-8-89003-229-4	Blood Moon by Britney S. Lewis	Fic	$13.29	1	$13.29
2408055	978-1-5364-8933-0	Blood Years by Elana K. Arnold	Fic	$29.95	1	$29.95
2450897	979-8-89003-300-0	Blood and Breath by Qurratulayn	Fic	$13.29	1	$13.29
2326262	978-1-335-42861-5	Boundless: Twenty Voices Celebrating Multicultural and Multiracial Identities	Fic	$14.69	1	$14.69
2422130	978-1-250-33459-6	Boys With Sharp Teeth by Jenni Howell	Fic	$13.99	1	$13.99
2454146	978-1-250-85449-0	Break Wide the Sea by Sara Holland	Fic	$14.70	1	$14.70
2446743	978-1-5364-9543-0	Brightwood Code by Monica Hesse	Fic	$24.95	1	$24.95
2439065	978-1-5364-9417-4	Bring Me Your Midnight by Rachel Griffin	Fic	$24.95	1	$24.95
2413408	978-1-6659-4251-5	Build a Girlfriend by Elba Luz	Fic	$13.99	1	$13.99
2485364	979-8-225-00674-7	Burn the Water by Billy Ray	Fic	$13.99	1	$13.99
2449223	978-1-64614-575-1	Butterfly Heart by Moa Backe Astot	Fic	$13.99	1	$13.99
2443847	978-1-6659-7243-7	By Invitation Only by Alexandra Brown Chang	Fic	$13.99	1	$13.99
2417413	979-8-89003-219-5	Camila Nunez's Year of Disasters by Miriam Zoila Perez	Fic	$13.29	1	$13.29
2414407	978-0-06-334561-4	Capitana by Cassandra James	Fic	$13.99	1	$13.99
2483263	979-8-217-02446-9	Carnival Fantastico by Angela Montoya	Fic	$13.99	1	$13.99
2417634	978-0-593-40551-2	Catalog of Burnt Objects by Shana Youngdahl	Fic	$13.99	1	$13.99
2434838	978-1-63893-126-3	Celestial Banquet by Roselle Lim	Fic	$13.99	1	$13.99
2485297	978-0-593-69374-2	Celestial Seas by T. A. Chan	Fic	$14.69	1	$14.69
2453091	978-1-5362-4786-2	Changeover by Margaret Mahy	Fic	$13.29	1	$13.29
2279906	978-1-250-31604-2	Chorus Rises by Bethany C. Morrow	Fic	$6.99	1	$6.99
2436351	978-1-68263-757-9	Climate of Chaos by Cassandra Newbould	Fic	$13.99	1	$13.99
2434717	978-1-250-77802-4	Coffeeshop in an Alternate Universe by C. B. Lee	Fic	$13.99	1	$13.99
2433648	978-1-250-87169-5	Come As You Are by Dahlia Adler	Fic	$14.00	1	$14.00
2433048	978-1-4549-5711-9	Come Home to My Heart by Riley Redgate	Fic	$13.99	1	$13.99
2402364	978-1-68263-612-1	Compound Fracture by Andrew Joseph White	Fic	$13.99	1	$13.99
2417303	978-0-06-328583-5	Corruption of Hollis Brown by K. Ancrum	Fic	$13.99	1	$13.99
2432506	978-1-5362-3371-1	Costumes for Time Travelers by A. R. Capetta	Fic	$13.29	1	$13.29
2423037	978-1-368-09919-6	Coven Tendency by Zoe Hana Mikuta	Fic	$13.29	1	$13.29
2438867	978-1-6659-7386-1	Creeping by Alexandra Sirowy	Fic	$15.39	1	$15.39
2413355	978-0-593-81072-9	Cruel Is the Light by Sophie Clark	Fic	$13.99	1	$13.99
2411148	978-0-593-64337-2	Cruel Thirst by Angela Montoya	Fic	$13.99	1	$13.99
2451177	978-1-250-35988-9	Curious Kind of Magic by Mara Rutherford	Fic	$14.70	1	$14.70
2438640	978-1-64614-565-2	D. J. Rosenblum Becomes the G. O. A. T. by Abby White	Fic	$13.99	1	$13.99
2452118	978-1-83402-008-2	Dark Cove Theatre Society by Sierra Marilyn Riley	Fic	$13.99	1	$13.99
2439103	978-1-6659-9099-8	Dark Dude by Oscar Hijuelos	Fic	$16.09	1	$16.09
2409009	978-0-593-70655-8	Darkly by Marisha Pessl	Fic	$13.99	1	$13.99
2446935	978-1-64614-503-4	Daughter of Doom by Jean-Claude van Rijckeghem	Fic	$13.99	1	$13.99
2408806	978-1-250-79140-5	Dead Girls Don't Dream by Nino Cipri	Fic	$13.99	1	$13.99
2408371	978-0-06-331044-5	Dead below Deck by Jan Gangsei	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2453555	978-0-593-85953-7	Deadly Ever After by Brittany Johnson	Fic	$13.99	1	$13.99
2459815	978-1-5364-9660-4	Death at Morning House by Maureen Johnson	Fic	$29.95	1	$29.95
2404728	978-1-250-88144-1	Debutantes by Olivia Worley	Fic	$16.80	1	$16.80
2443141	978-0-06-335913-0	Deep Well by Laura Creedle	Fic	$13.99	1	$13.99
2440269	979-8-89003-233-1	Devil's in the Dancers by Catherine Yu	Fic	$13.29	1	$13.29
2485456	978-1-6659-7893-4	Devious Prey by Scott Reintgen	Fic	$13.99	1	$13.99
2413532	979-8-89003-078-8	Devourer by Alison Ames	Fic	$13.29	1	$13.29
2436702	978-0-593-90398-8	Difficult Girls by Veronica Bane	Fic	$13.99	1	$13.99
2417184	978-0-06-325526-5	Divining the Leaves by Shveta Thakrar	Fic	$13.99	1	$13.99
2450716	978-1-335-01390-3	Don't Forget to Breathe by Sara Waxelbaum	Fic	$13.99	1	$13.99
2433509	978-0-06-306261-0	Don't Let Me Go by Kevin Christopher Snipes	Fic	$13.99	1	$13.99
2404730	978-1-250-89566-0	Don't Let the Forest In by C. G. Drews	Fic	$13.99	1	$13.99
2408726	978-0-8234-5663-5	Donut Prince of New York by Allen Zadoff	Fic	$13.29	1	$13.29
2436464	978-1-335-01289-0	Donut Summer by Anita Kelly	Fic	$13.99	1	$13.99
2426808	978-1-59580-135-7	Dressmaker's Daughter by Linda Boroff	Fic	$23.07	1	$23.07
2415441	978-0-316-58151-6	Dropping Beats by Nathanael Lessore	Fic	$13.99	1	$13.99
2433604	979-8-89003-231-7	Duke Steals Hearts and Other Body Parts by Elias Cold	Fic	$13.29	1	$13.29
2410449	978-1-250-87873-1	Dust by Alison Stine	Fic	$14.00	1	$14.00
2449511	979-8-217-03016-3	Dysfunctional Family's Guide to Murder by Kate Emery	Fic	$13.99	1	$13.99
2433144	978-0-593-80610-4	Education of Kia Greer by Alanna Bennett	Fic	$13.99	1	$13.99
2404508	978-1-6659-5258-3	Eleven Houses by Colleen Oakes	Fic	$13.99	1	$13.99
2435717	979-8-88605-186-5	Embergold by Rachelle Nelson	Fic	$17.49	1	$17.49
2435805	978-0-06-338613-6	Embrace the Serpent by Sunya Mara	Fic	$13.99	1	$13.99
2443494	978-0-593-90103-8	Embroidery of Souls by Ruby Martinez	Fic	$13.99	1	$13.99
2442192	978-1-4549-5162-9	Empty Heaven by Freddie Kolsch	Fic	$13.99	1	$13.99
2493814	979-8-217-02963-1	Erase Me by Josh Silver	Fic	$13.99	1	$13.99
2417942	978-0-593-71066-1	Every Borrowed Beat by Erin Stewart	Fic	$13.99	1	$13.99
2413782	978-0-593-85587-4	Everything Is Poison by Joy McCullough	Fic	$13.99	1	$13.99
2443281	978-1-335-00897-8	Everything about You by Robby Weber	Fic	$13.99	1	$13.99
2440134	978-1-250-33466-4	Executioners Three by Susan Dennard	Fic	$16.09	1	$16.09
2443550	978-0-06-333968-2	Exquisite Things by Abdi Nazemian	Fic	$13.99	1	$13.99
2443755	978-0-593-81401-7	Extraordinary Quests for Amateur Witches by Kayla Cottingham	Fic	$13.99	1	$13.99
2417181	978-0-06-321155-1	Fable for the End of the World by Ava Reid	Fic	$13.99	1	$13.99
2356954	978-1-6626-8025-0	Facing the Enemy: How a Nazi Youth Camp in America Tested a Friendship by Barbara Krasner	Fic	$13.99	1	$13.99
2453678	978-1-6659-6610-8	Fade into You by Amber Smith	Fic	$15.39	1	$15.39
2444186	978-1-6659-2126-8	Fake Skating by Lynn Painter	Fic	$15.39	1	$15.39
2462689	978-1-250-32381-1	Fall Of Iris Henley by Jennifer Graham	Fic	$16.80	1	$16.80
2443846	978-1-6659-7520-9	Falling Like Leaves by Misty Wilson	Fic	$14.69	1	$14.69
2423724	978-1-338-57320-6	Family I'm In by Sharon G. Flake	Fic	$13.29	1	$13.29
2443743	978-1-64421-470-1	Fawn's Blood by Hal Schrieve	Fic	$16.07	1	$16.07
2449215	978-1-68263-579-7	Feast for the Eyes by Alex Crespo	Fic	$13.99	1	$13.99
2462767	978-0-06-328791-4	Few Blue Skies by Carolina Ixta	Fic	$13.99	1	$13.99
2451639	978-1-250-39298-5	Final Cut by Olivia Worley	Fic	$14.70	1	$14.70
2434722	978-1-5476-1281-9	Finding Prince Charming by Jamar J. Perry	Fic	$13.99	1	$13.99
2443692	978-0-525-51405-3	Fireblooms by Alexandra Villasante	Fic	$13.99	1	$13.99
2413780	978-0-593-75096-4	First Love Language by Stefany Valentine	Fic	$13.99	1	$13.99
894436	978-0-8021-7037-8	Flight by Sherman Alexie	Fic	$11.20	1	$11.20
2408361	978-0-06-326008-5	Flopping in a Winter Wonderland by Jason June	Fic	$13.99	1	$13.99
2483330	978-1-62354-633-5	Footeprint: Eunice Newton Foote At The Dawn Of Climate Science And Women's Rights by Lindsay H. Metcalf	Fic	$13.29	1	$13.29
2449251	978-0-593-89847-5	For No Mortal Creature by Keshe Chow	Fic	$13.99	1	$13.99
2404726	978-1-250-87738-3	For She Is Wrath by Emily Varga	Fic	$14.00	1	$14.00
2443157	978-0-06-335178-3	For the Rest of Us: 13 Festive Holiday Stories to Celebrate All Seasons by Dahlia Adler	Fic	$13.99	1	$13.99
2434696	978-0-593-65061-5	Forgery of Fate by Elizabeth Lim	Fic	$14.69	1	$14.69
2409082	978-1-4549-5021-9	Fortune's Kiss by Amber Clement	Fic	$13.99	1	$13.99
2460902	978-1-250-37737-1	Freddie and Stella Got Hot by Maggie Horne	Fic	$13.99	1	$13.99
2484930	978-1-68263-840-8	Free Verse Society by Delali Adjoa	Fic	$13.99	1	$13.99
2461985	978-0-593-70571-1	Gaslit by Megan Davidhizar	Fic	$13.99	1	$13.99
2403943	978-0-06-323452-9	Gentlest Of Wild Things by Sarah Underwood	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2432552	978-0-8234-5237-8	Get Real, Chloe Torres by Crystal Maldonado	Fic	$13.99	1	$13.99
2453476	978-0-06-323962-3	Gilded in Vengeance by Lyssa Mia Smith	Fic	$13.99	1	$13.99
2435736	978-0-06-328484-5	Girl Walks into the Forest by Madeleine Roux	Fic	$13.99	1	$13.99
2415405	978-1-5476-1603-9	Girl You Know by Elle Gonzalez Rose	Fic	$13.99	1	$13.99
2453796	978-1-6659-7443-1	Girls Who Play Dead by Joelle Wellington	Fic	$15.39	1	$15.39
2438906	978-0-593-81210-5	Girls of Dark Divine by E. V. Woods	Fic	$13.99	1	$13.99
2443486	978-0-06-335840-9	Golden Boy's Guide to Bipolar by Sonora Reyes	Fic	$13.99	1	$13.99
2440139	978-1-250-32120-6	Good Vampire's Guide to Blood and Boyfriends by Jamie D'Amato	Fic	$14.70	1	$14.70
2462670	978-1-250-29309-1	Goodbye And Everything After by Mae Coyiuto	Fic	$13.99	1	$13.99
2436073	978-1-6659-7104-1	Goodbye, My Princess by Wo Si Cun Fei	Fic	$15.39	1	$15.39
2443023	978-1-68263-649-7	Grave Flowers by Autumn Krause	Fic	$13.99	1	$13.99
2460596	978-0-06-331248-7	Great Disillusionment of Nick and Jay by Ryan Douglass	Fic	$13.99	1	$13.99
2436428	978-1-335-00696-7	Great Misfortune of Stella Sedgwick by S. Isabelle	Fic	$13.99	1	$13.99
2446077	978-1-5461-3844-0	Guide to Falling off the Map by Zanni L. Arnot	Fic	$13.29	1	$13.29
2417360	978-1-250-86568-7	Hangry Hearts by Jennifer Chen	Fic	$16.80	1	$16.80
2451641	978-1-250-37629-9	Hazelthorn by C. G. Drews	Fic	$13.99	1	$13.99
2450925	978-0-316-57184-5	He's So Possessed with Me by Corey Liu	Fic	$13.99	1	$13.99
2453835	978-1-4549-6064-5	Hear Her Howl by Kim DeRose	Fic	$13.99	1	$13.99
2409011	978-0-593-48449-4	Heart-Shaped Lies by Elizabeth Agyemang	Fic	$13.99	1	$13.99
2485427	978-1-6659-7896-5	Heiress of Nowhere by Stacey Lee	Fic	$13.99	1	$13.99
2460915	978-1-250-41445-8	Her Name in the Sky by Kelly Quindlen	Fic	$17.49	1	$17.49
2405447	978-1-7284-8765-6	Here Goes Nothing by Emma K. Ohland	Fic	$10.49	1	$10.49
2436602	978-0-593-81462-8	Hex Girls: A Rogue Thorn (Scooby-Doo and Friends) by Lily Meade	Fic	$13.29	1	$13.29
2454476	978-1-76160-164-4	Hidden Girl by Louise Bassett	Fic	$13.99	1	$13.99
2443170	978-1-68263-777-7	Hollow by Taylor Grothe	Fic	$13.99	1	$13.99
2433490	978-0-06-320831-5	Home Has No Borders by Samira Ahmed	Fic	$13.99	1	$13.99
2412109	978-1-63893-102-7	Honeysuckle and Bone by Trisha Tobias	Fic	$13.99	1	$13.99
2417367	978-1-250-33719-1	House No One Sees by Adina King	Fic	$13.99	1	$13.99
2454117	978-1-250-32095-7	House Saphir by Marissa Meyer	Fic	$13.99	1	$13.99
2443205	978-0-593-69319-3	House of Hearts by Skyla Arndt	Fic	$13.99	1	$13.99
2443499	978-0-593-80657-9	House of Quiet by Kiersten White	Fic	$13.99	1	$13.99
2453521	978-0-06-337069-2	How Girls Are Made by Mindy McGinnis	Fic	$13.99	1	$13.99
2454214	978-1-5476-0505-7	How We Play the Game by Alexis Nedd	Fic	$14.69	1	$14.69
2446203	978-1-4549-6333-2	How to Survive a Horror Movie by Scarlett Dunmore	Fic	$13.99	1	$13.99
2417284	978-1-5476-1631-2	How to Survive a Slasher by Justine Pucella Winans	Fic	$13.99	1	$13.99
2423682	978-0-8234-5848-6	How to Tell a True Story by Tricia Springstubb	Fic	$12.59	1	$12.59
2426828	978-1-59580-137-1	Humphrey and Me by Stuart H. Brody	Fic	$25.17	1	$25.17
2423763	978-1-5461-5266-8	Hyo the Hellmaker by Mina Ikemoto Ghosh	Fic	$19.59	1	$19.59
2418097	978-1-5461-0448-3	I Am Made of Death by Kelly Andrew	Fic	$13.99	1	$13.99
2412399	978-1-335-52312-9	I Am Not Jessica Chen by Ann Liang	Fic	$13.99	1	$13.99
2386683	978-0-593-61691-8	I Am the Cage by Allison Sweet Grant	Fic	$13.99	1	$13.99
2417658	978-0-593-62386-2	I Am the Swarm by Hayley Chewins	Fic	$13.99	1	$13.99
2462022	978-0-593-81102-3	I Don't Wish You Well by Jumata Emill	Fic	$13.99	1	$13.99
2414017	978-1-5364-8986-6	I Hope This Doesn't Find You by Ann Liang	Fic	$24.95	1	$24.95
2443488	978-0-06-337961-9	I Killed the King by Rebecca Mix	Fic	$13.99	1	$13.99
2486739	979-8-89003-384-0	I Was A Teenage Death God by M. J. Beasi	Fic	$13.99	1	$13.99
2454235	978-1-250-38198-9	I'll Find You Where the Timeline Ends by Kylie Lee Baker	Fic	$13.99	1	$13.99
2435712	978-1-335-01392-7	I'll Pretend You're Mine by Tashie Bhuiyan	Fic	$13.99	1	$13.99
2451006	978-0-374-38890-4	I've Got My Love to Keep Me Warm by Mariama J. Lockington	Fic	$13.99	1	$13.99
2460888	979-8-89003-311-6	I, in the Shadows by Tori Bovalino	Fic	$13.99	1	$13.99
2460889	978-1-250-40646-0	If All the Stars Go Dark by S. G. Prince	Fic	$13.99	1	$13.99
2443894	978-1-5344-7081-1	If Looks Could Kill by Julie Berry	Fic	$15.39	1	$15.39
2486735	978-1-5476-2071-5	If We Never End by Laura Taylor Namey	Fic	$13.99	1	$13.99
2434751	978-1-250-35269-9	If We Survive This by Racquel Marie	Fic	$13.99	1	$13.99
2423054	978-0-06-335994-9	If We Were a Movie by Zakiya N. Jamal	Fic	$13.99	1	$13.99
2408386	978-0-06-334710-6	If You Can Hear This by Faith Gardner	Fic	$13.99	1	$13.99
2366337	978-1-4549-4777-6	Illusions of Fire by Nisha Sharma	Fic	$13.29	1	$13.29
2433202	978-1-62354-563-5	Imposter by Cait Levin	Fic	$13.29	1	$13.29
2433512	978-0-06-337377-8	In Case You Read This by Edward Underhill	Fic	$13.99	1	$13.99
2441382	978-1-339-03826-1	Influenced by Sarah Darer Littman	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2433160	978-0-7624-8706-6	Invisible Wild by Nikki Van De Car	Fic	$13.99	1	$13.99
2437179	978-1-6659-5995-7	Island Creatures by Margarita Engle	Fic	$13.99	1	$13.99
2412403	978-0-06-337086-9	It's a Love/Skate Relationship by Carli J. Corson	Fic	$13.99	1	$13.99
2404916	978-0-593-52585-2	Judgment of Yoyo Gold by Isaac Blum	Fic	$13.99	1	$13.99
2405049	978-0-8234-5619-2	Just Until by Joseph Moldover	Fic	$13.99	1	$13.99
2450715	978-0-06-335462-3	K-Jane by Lydia Kang	Fic	$13.99	1	$13.99
2071271	978-0-7352-6377-2	Kens by Raziel Reid	Fic	$12.59	1	$12.59
2434699	978-0-593-30231-6	Kill Creatures by Rory Power	Fic	$13.99	1	$13.99
2435732	978-1-5364-9328-3	Kill Her Twice by Stacey Lee	Fic	$26.95	1	$26.95
2434905	978-0-593-89927-4	Kill the Lax Bro by Charlotte Lillie Balogh	Fic	$13.99	1	$13.99
2486664	978-0-316-58857-7	King of Nothing by Nathanael Lessore	Fic	$13.99	1	$13.99
2450764	978-1-6659-7312-0	King of the Neuro Verse by Idris Goodwin	Fic	$13.99	1	$13.99
2406620	978-1-77488-525-3	Kiss of the Nightingale by Adi Denner	Fic	$13.29	1	$13.29
2439892	978-1-250-35982-7	L.O.V.E. Club by Lio Min	Fic	$14.69	1	$14.69
2441366	978-1-250-32590-7	Lady Dragon by AdriAnne Strickland	Fic	$13.99	1	$13.99
2435667	978-1-9848-1673-3	Lady or the Tiger by Heather M. Herrman	Fic	$13.99	1	$13.99
2435711	978-0-06-289339-0	Lady's Knight by Amie Kaufman	Fic	$13.99	1	$13.99
2412192	978-0-593-89948-9	Last Bookstore on Earth by Lily Braun-Arnold	Fic	$13.99	1	$13.99
2449311	978-0-593-62530-9	Last Chance Live! by Helena Haywoode Henry	Fic	$15.39	1	$15.39
2459534	978-1-250-86391-1	Last Vampire by Romina Garber	Fic	$14.70	1	$14.70
2453638	978-0-593-85839-4	Leave It on the Track by Margot Fisher	Fic	$13.99	1	$13.99
2450995	978-1-250-90808-7	Leaving Room by Amber McBride	Fic	$13.99	1	$13.99
2439867	978-0-06-307877-2	Leaving the Station by Jake Maia Arlow	Fic	$13.99	1	$13.99
2439910	978-0-06-331426-9	Legendary Frybread Drive-In: Intertribal Stories by Cynthia Leitich Smith	Fic	$13.99	1	$13.99
2412364	978-1-335-14726-4	Leo Martino Steals Back His Heart by Eric Geron	Fic	$13.99	1	$13.99
2431808	978-0-06-334624-6	Let Them Stare by Jonathan Van Ness	Fic	$16.09	1	$16.09
2413580	979-8-89003-967-5	Liar's Kingdom by Christine Calella	Fic	$13.29	1	$13.29
2449556	978-0-593-90047-5	Library of Lost Girls by Kristen Pipps	Fic	$13.99	1	$13.99
2485075	979-8-217-00451-5	Lies We Tell About The Stars by Susie Nadler	Fic	$13.99	1	$13.99
2462196	978-1-6659-9057-8	Lights Out by Jenni Fletcher	Fic	$14.69	1	$14.69
2473728	978-0-593-88924-4	Limelight by Andrew Keenan-Bolger	Fic	$13.99	1	$13.99
1702932	978-0-14-241472-9	Lock and Key by Sarah Dessen	Fic	$9.79	1	$9.79
2434086	978-1-5364-9274-3	Looking for Smoke by K. A. Cobell	Fic	$29.95	1	$29.95
2461992	978-0-593-90043-7	Lost Girls of Hollow Lake by Rebekah Faubion	Fic	$13.99	1	$13.99
2449037	978-1-5362-3011-6	Lou with the Band by Alexandra Leigh Young	Fic	$13.99	1	$13.99
2462115	978-1-6659-5062-6	Love Goes Viral by Camille Stochitch	Fic	$13.99	1	$13.99
2436882	978-1-5476-1296-3	Love Spells Trouble by Nia Davenport	Fic	$13.99	1	$13.99
2446321	978-0-7624-8903-9	Love and Video Games by Zachary Sergi	Fic	$13.99	1	$13.99
2425040	978-1-6659-5094-7	Love at Second Sight by F. T. Lukens	Fic	$13.99	1	$13.99
2422173	978-1-250-89938-5	Love in 280 Characters or Less by Ravynn K. Stringfield	Fic	$13.99	1	$13.99
2413357	978-0-593-56531-5	Love on Paper by Danielle Parker	Fic	$13.99	1	$13.99
2417442	978-1-250-88857-0	Lovely Dark and Deep by Elisa A. Bonnin	Fic	$14.69	1	$14.69
2434520	978-0-7595-5782-6	Lovesick Falls by Julia Drake	Fic	$13.99	1	$13.99
2415422	978-0-593-37840-3	Lucha of the Forgotten Spring by Tehlor Kay Mejia	Fic	$13.99	1	$13.99
2452900	978-0-7443-1179-2	Magic at the Grand Dragonfly Theatre by Brandie June	Fic	$13.99	1	$13.99
2446777	978-1-5476-1586-5	Make Me a Monster by Kalynn Bayron	Fic	$13.99	1	$13.99
2446195	978-1-4998-1795-9	Map That Led to You by Ella McLeod	Fic	$18.19	1	$18.19
2438988	978-0-593-90052-9	Marisol Acts the Part by Elle Gonzalez Rose	Fic	$13.99	1	$13.99
2437295	978-1-6659-5736-6	Mastery of Monsters by Liselle Sambury	Fic	$17.49	1	$17.49
2444191	978-1-6659-7745-6	Match Made in Hell by Charlotte Ingham	Fic	$15.39	1	$15.39
2426816	978-1-59580-138-8	Mattie and the Machine by Lynn Ng Quezon	Fic	$23.77	1	$23.77
2414785	978-0-593-69871-6	Meadowbrook Murders by Jessica Goodman	Fic	$13.99	1	$13.99
2582764	978-0-06-316042-2	Medicine Wheels by Byron Graves	Fic	$13.99	1	$13.99
2422628	978-0-06-325518-0	Meet Me at Blue Hour by Sarah Suk	Fic	$13.99	1	$13.99
2435983	978-1-6659-5757-1	Meet Me on Love Street by Farah Heron	Fic	$13.99	1	$13.99
2449503	978-0-06-323516-8	Mercy by Patricia Sarrafian Ward	Fic	$13.99	1	$13.99
2422631	978-0-06-335849-2	Messy Perfect by Tanya Boteju	Fic	$13.99	1	$13.99
2486713	978-1-250-38010-4	Midnight on the Celestial by Julia Alexandra	Fic	$14.70	1	$14.70
2408977	978-1-368-10193-6	Midnights with You by Clare Osongco	Fic	$13.29	1	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2453818	978-1-6659-9078-3	MindWorks: An Uncanny Compendium of Short Fiction by Neal Shusterman	Fic	$20.99	1	$20.99
2439891	978-1-250-88823-5	Mistress of Bones by Maria Z. Medina	Fic	$14.00	1	$14.00
2446691	978-1-250-35311-5	Moonsick by Tom O'Donnell	Fic	$16.80	1	$16.80
2444196	978-1-6659-8449-2	Moss by Lisa Lueddecke	Fic	$14.69	1	$14.69
2449402	978-0-593-85937-7	Moth Dark by Kika Hatzopoulou	Fic	$13.99	1	$13.99
2423405	978-0-593-30103-6	Murder Between Friends by Liz Lawson	Fic	$13.99	1	$13.99
2440128	979-8-89003-293-5	My Fair Monster by Adrienne Rivera	Fic	$13.29	1	$13.29
2410131	978-0-06-321284-8	My Fairy God Somebody by Charlene Allen	Fic	$13.99	1	$13.99
2453057	979-8-88798-087-4	My Keen Knife by Ana Davis	Fic	$23.79	1	$23.79
2443757	978-0-593-64300-6	My Mother, the Mermaid Chaser by Jamie Jo Hoang	Fic	$13.99	1	$13.99
2436372	978-0-8234-5486-0	My Perfect Family by Khadijah VanBrakle	Fic	$13.99	1	$13.99
2454148	978-1-250-88778-8	My Roommate from Hell by Cale Dietrich	Fic	$17.50	1	$17.50
2423700	978-0-8234-5835-6	Nahia by Emily Jones	Fic	$13.29	1	$13.29
2423059	978-1-335-01238-8	Nav's Foolproof Guide to Falling in Love by Jessica Lewis	Fic	$13.99	1	$13.99
2415085	978-1-250-33481-7	Needy Little Things by Channelle Desamours	Fic	$14.00	1	$14.00
2453694	978-1-5461-3164-9	Never Seen the Stars by Kate Korsh	Fic	$13.99	1	$13.99
2435599	978-1-5461-1067-5	Never Thought I'd End up Here by Ann Liang	Fic	$13.99	1	$13.99
2423347	978-0-525-55564-3	Night Swimming by Aaron Starmer	Fic	$13.29	1	$13.29
2449216	978-0-8234-6035-9	No Charm Done by Tori Anne Martin	Fic	$13.29	1	$13.29
2434702	978-1-250-35249-1	Nobody in Particular by Sophie Gonzales	Fic	$14.70	1	$14.70
2408852	978-1-250-84723-2	Not For the Faint of Heart by Lex Croucher	Fic	$14.00	1	$14.00
2449344	978-0-593-90394-0	Ocean Apart by Jill Tew	Fic	$13.99	1	$13.99
2433561	978-1-250-86332-4	Of Earthly Delights by Goldy Moldavsky	Fic	$13.99	1	$13.99
2436841	978-0-374-39342-7	Of Flame and Fury by Mikayla Bridge	Fic	$14.69	1	$14.69
2485069	979-8-217-00184-2	Oks Are Not OK by Grace K. Shim	Fic	$13.99	1	$13.99
2425180	978-1-4197-7563-5	On Again, Awkward Again by Erin Entrada Kelly	Fic	$13.99	1	$13.99
2413387	978-0-593-42617-3	On the Wings of la Noche by Vanessa L. Torres	Fic	$13.99	1	$13.99
2417203	978-0-06-333931-6	One Step Forward by Marcie Flinchum Atkins	Fic	$13.99	1	$13.99
2486761	978-1-250-40555-5	One Word, Six Letters by Adib Khorram	Fic	$13.99	1	$13.99
2426823	978-1-59580-139-5	One with the Waves by Vezna Andrews	Fic	$24.47	1	$24.47
2414928	978-0-593-40454-6	Otherwhere Post by Emily J. Taylor	Fic	$14.69	1	$14.69
2417239	978-1-250-33388-9	Our Infinite Fates by Laura Steven	Fic	$14.00	1	$14.00
2433558	978-1-250-36614-6	Out of Air by Rachel Reiss	Fic	$14.00	1	$14.00
2433618	978-0-374-38915-4	Out of Step, Into You by Ciera Burch	Fic	$13.99	1	$13.99
2460853	978-1-250-34230-0	Oxford Blood by Rachael Davis-Featherstone	Fic	$14.00	1	$14.00
2462281	978-1-6659-8353-2	Paradise Coast by Suzanne Young	Fic	$13.99	1	$13.99
2408849	978-1-250-90286-3	Perfect Girl by Tracy Banghart	Fic	$13.99	1	$13.99
2459536	978-1-250-34290-4	Persephone's Curse by Katrina Leno	Fic	$14.70	1	$14.70
2414178	978-1-5364-9022-0	Place for Vanishing by Ann Fraistat	Fic	$26.95	1	$26.95
2463397	978-0-593-61824-0	Postscript by Cory McCarthy	Fic	$13.99	1	$13.99
2436781	978-0-593-81431-4	Predatory Natures by Amy Goldsmith	Fic	$13.99	1	$13.99
2435720	978-0-7443-1126-6	Premonitions Club by Gwendolyn Womack	Fic	$13.99	1	$13.99
2436469	978-0-593-52564-7	Pretty Girl County by Lakita Wilson	Fic	$13.99	1	$13.99
2422157	978-1-250-34047-4	Pride or Die by C. L. Montblanc	Fic	$14.00	1	$14.00
2450813	978-1-6659-7155-3	Prince of Mourning by Jenn Bennett	Fic	$15.39	1	$15.39
2434772	978-0-593-89766-9	Protegee by Erica Ridley	Fic	$13.99	1	$13.99
2412306	978-0-06-334438-9	Queen's Spade by Sarah Raughley	Fic	$13.99	1	$13.99
2408808	978-1-250-84208-4	Rani Choudhury Must Die by Adiba Jaigirdar	Fic	$13.99	1	$13.99
2453890	978-1-5364-9617-8	Reappearance of Rachel Price by Holly Jackson	Fic	$28.95	1	$28.95
2453655	978-1-368-11374-8	Reasons We Break by Jesmeen Kaur Deo	Fic	$13.29	1	$13.29
2443027	978-1-5362-4035-1	Reasons to Hate Me by Susan Metallo	Fic	$13.29	1	$13.29
2436427	978-0-06-334029-9	Rebel Girls of Rome by Jordyn Taylor	Fic	$13.99	1	$13.99
2432756	978-0-593-70721-0	Rebel's Guide to Pride by Matthew Hubbard	Fic	$13.99	1	$13.99
2412111	978-1-63893-149-2	Recommended Reading by Paul Coccia	Fic	$13.99	1	$13.99
2419633	978-1-7284-9321-3	Red Car to Hollywood by Jennie Liu	Fic	$10.49	1	$10.49
2483315	979-8-217-02901-3	Red Star Rebels by Amie Kaufman	Fic	$13.99	1	$13.99
2404686	979-8-89003-070-2	Rest In Peaches by Alex Brown	Fic	$13.29	1	$13.29
2450885	978-1-250-34177-8	Resurrectionist by Kathleen S. Allen	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2426810	978-1-59580-141-8	Revenge of Joe Wild: An American Tale of Murder, Escape, and Adventure by Andrew Komarnyckyj	Fic	$24.47	1	$24.47
2434753	978-1-250-28972-8	Rewind to Us by Molly Morris	Fic	$15.40	1	$15.40
2412325	978-0-06-334387-0	Rhino's Run by Robert Lipsyte	Fic	$13.99	1	$13.99
2437358	978-0-7443-1105-1	Ricochet by Kellyn Carni	Fic	$13.99	1	$13.99
2449242	978-0-8234-6042-7	Riddle of Thorns by Sarena Nanua	Fic	$13.99	1	$13.99
2486741	978-0-374-39392-2	Right As Rain by Tashie Bhuiyan	Fic	$14.69	1	$14.69
2422716	978-1-250-32710-9	Right Beside You by Tucker Shaw	Fic	$13.99	1	$13.99
2449401	978-0-593-52833-4	Right Where We Belong by Farrah Penn	Fic	$14.69	1	$14.69
2413679	978-1-250-90402-7	Rival by Emma Lord	Fic	$16.80	1	$16.80
2493031	978-0-310-17839-2	Roach King of Raleigh by Shannon Stocker	Fic	$13.29	1	$13.29
2441440	978-1-250-38173-6	Roar of the Lambs by Jamison Shea	Fic	$14.69	1	$14.69
2423115	978-0-7624-8817-9	Roll for Love by M. K. England	Fic	$13.99	1	$13.99
2462168	978-1-6659-7307-6	Roommate Arrangement by Samantha Markum	Fic	$14.69	1	$14.69
2439947	978-0-593-52557-9	Rosa by Any Other Name by Hailey Alcaraz	Fic	$14.69	1	$14.69
2414489	978-0-06-337252-8	Rose Bargain by Sasha Peyton Smith	Fic	$13.99	1	$13.99
2408062	978-1-5364-8940-8	Rosewood Hunt by MacKenzie Reed	Fic	$29.95	1	$29.95
2446475	978-1-250-35634-5	Rules for Fake Girlfriends by Raegan Revord	Fic	$14.00	1	$14.00
2410472	978-1-250-88775-7	Rules of Royalty by Cale Dietrich	Fic	$17.50	1	$17.50
2433514	978-1-335-00993-7	Run Like a Girl by Amaka Egbe	Fic	$13.99	1	$13.99
2434395	978-1-6659-7390-8	Ruthless by Carolyn Lee Adams	Fic	$14.69	1	$14.69
2449285	978-1-368-09943-1	Sacred and the Divine by Kate Christensen	Fic	$13.29	1	$13.29
2433616	978-1-250-89508-0	Salvacion by Sandra Proudman	Fic	$14.70	1	$14.70
2456965	978-0-316-60026-2	Same Backward As Forward by Jennifer Lynn Barnes	Fic	$13.29	1	$13.29
2433507	978-1-335-00994-4	Sanskari Sweetheart by Ananya Devarajan	Fic	$13.99	1	$13.99
2449499	978-0-06-327127-2	Scammer by Tiffany D. Jackson	Fic	$13.99	1	$13.99
2413766	978-1-250-39235-0	Scorpion Queen by Mina Fears	Fic	$13.99	1	$13.99
2435137	978-1-4197-7392-1	Sea Change by Susan Fletcher	Fic	$13.99	1	$13.99
2446062	978-0-316-58163-9	Season of Fear by Emily Cooper	Fic	$13.99	1	$13.99
2453550	978-0-593-69267-7	Secret Astronomers by Jessica Walker	Fic	$13.99	1	$13.99
2459577	979-8-89003-363-5	Secrets, Spells, and Chocolate by Marisa Churchill	Fic	$13.29	1	$13.29
2453076	978-1-64614-577-5	Self Portrait by Ludwig Volbeda	Fic	$13.99	1	$13.99
2454135	978-1-5476-1910-8	Seven Deadly Thorns by Amber Hamilton	Fic	$14.69	1	$14.69
2443863	978-1-368-11460-8	Seven for a Secret by Mary E. Roach	Fic	$13.29	1	$13.29
2486715	978-1-250-87268-5	She Drinks the Light by Yasmin Angoe	Fic	$13.99	1	$13.99
2453578	978-0-593-90408-4	Shiny Happy People by Clay McLeod Chapman	Fic	$13.99	1	$13.99
2446747	978-1-250-37039-6	Showstopper by Lily Anderson	Fic	$13.99	1	$13.99
2443717	978-0-593-89851-2	Silenced by Diana Rodriguez Wallach	Fic	$13.99	1	$13.99
2433516	978-0-316-54868-7	Singular Life of Aria Patel by Samira Ahmed	Fic	$13.99	1	$13.99
2450815	978-1-6659-7217-8	Siren and the Star by Colby Cedar Smith	Fic	$15.39	1	$15.39
2486661	978-0-316-51037-0	Six Must Die by Victoria Wlosok	Fic	$13.99	1	$13.99
2404918	978-0-593-62005-2	Sixteen Minutes by K. J. Reilly	Fic	$13.99	1	$13.99
2436573	978-1-9848-1616-0	Sky on Fire by E. K. Johnston	Fic	$13.99	1	$13.99
2435989	978-1-6659-7388-5	Slice of Cherry by Dia Reeves	Fic	$16.09	1	$16.09
2484910	978-1-5362-4383-3	Slow Burn by Bethany Rutter	Fic	$13.99	1	$13.99
2365784	978-1-368-09771-0	Snow White: Fair & Sinister Heart by Lauren Blackwood	Fic	$13.29	1	$13.29
500649	978-0-7868-5172-0	Sold by Patricia McCormick	Fic	$9.09	1	$9.09
2435655	978-0-593-62478-4	Solo Stan by Talia Tucker	Fic	$13.29	1	$13.29
2418217	978-1-6659-1715-5	Solving for the Unknown by Loan Le	Fic	$13.99	1	$13.99
2422606	978-0-593-30907-0	Somadina by Akwaeke Emezi	Fic	$13.99	1	$13.99
2486774	978-0-374-39365-6	Someone To Daydream About by Sydney Langford	Fic	$14.69	1	$14.69
2419679	978-1-7284-9329-9	Sometimes the Girl by Jennifer Mason-Black	Fic	$13.99	1	$13.99
2162384	978-1-250-31532-8	Song Below Water by Bethany C. Morrow	Fic	$12.59	1	$12.59
2439108	978-1-4197-6853-8	Songs for Ghosts by Clara Kumagai	Fic	$13.99	1	$13.99
2398123	978-1-9785-9744-0	Songs for the Offseason by Ryan Wolf	Fic	$19.40	1	$19.40
2460900	979-8-89003-382-6	Soul of a Gentleman Witch by David Ferraro	Fic	$13.99	1	$13.99
2437294	978-1-6659-6370-1	Soulmatch by Rebecca Danzenbaker	Fic	$13.99	1	$13.99
2425625	978-1-5364-9235-4	Space Between Here and Now by Sarah Suk	Fic	$29.95	1	$29.95
2440088	978-0-593-85633-8	Spell to Wake the Dead by Nicole Lesperance	Fic	$13.99	1	$13.99
2473727	979-8-217-03894-7	Spiral Key by Kelsey Day	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2446201	978-0-316-58287-2	Split the Sky by Marie Arnold	Fic	$13.99	1	$13.99
2462605	978-1-64937-951-1	Stage Set for Villains by Shannon J. Spann	Fic	$16.09	1	$16.09
2449524	978-1-368-06561-0	Star Wars: The Last Order by Kwame Mbalia	Fic	$13.29	1	$13.29
2434159	978-1-5364-9287-3	Stay Dead by April Henry	Fic	$24.95	1	$24.95
2437255	978-1-6659-5975-9	Steel and Spellfire by Laura E. Weymouth	Fic	$13.99	1	$13.99
2443022	978-0-8234-6038-0	Steps by Wendelin Van Draanen	Fic	$13.99	1	$13.99
2443295	978-0-593-53187-7	Story of My Anger by Jasminne Mendez	Fic	$13.99	1	$13.99
2220538	978-0-7653-9943-4	Strange Exit by Parker Peevyhouse	Fic	$11.89	1	$11.89
2408672	978-0-593-61886-8	Streetlight People by Charlene Thomas	Fic	$13.99	1	$13.99
2406716	978-0-310-16235-3	Stronger At the Seams by Shannon Stocker	Fic	$13.29	1	$13.29
2422682	978-0-374-39053-2	Summer I Ate the Rich by Maika Moulite	Fic	$13.99	1	$13.99
2423457	978-0-593-71142-2	Summer I Remembered Everything by Catherine Con Morse	Fic	$13.99	1	$13.99
2463507	978-1-7282-5618-4	Sun And The Starmaker by Rachel Griffin	Fic	$13.99	1	$13.99
2461029	979-8-217-00494-2	Sundown Girls by L. S. Stratton	Fic	$13.99	1	$13.99
2423258	978-1-64129-648-9	Sunlight Playing Over a Mountain by Selina Li Bi	Fic	$13.99	1	$13.99
2460670	978-1-250-87310-1	Swan's Daughter: A Possibly Doomed Love Story by Roshani Chokshi	Fic	$15.40	1	$15.40
2293178	978-1-5362-1938-8	Tasting Light: Ten Science Fiction Stories to Rewire Your Perceptions by A. R. Capetta	Fic	$13.99	1	$13.99
2434762	978-1-5476-1495-0	Tell Me Every Lie by Ellen Hagan	Fic	$14.69	1	$14.69
2437191	978-1-6659-7384-7	Telling by Alexandra Sirowy	Fic	$15.39	1	$15.39
2435802	978-0-06-308103-1	Tempest by K. Ibura	Fic	$13.99	1	$13.99
2436714	978-1-250-34890-6	Tenderly, I Am Devoured by Lyndall Clipstone	Fic	$13.99	1	$13.99
2408420	978-0-06-331842-7	Thanks for Listening by Molly Horan	Fic	$13.99	1	$13.99
2435714	978-0-06-338861-1	That Devil, Ambition by Linsey Miller	Fic	$13.99	1	$13.99
2435784	978-0-593-40629-8	That Kind of Girl by Natalie C. Anderson	Fic	$13.99	1	$13.99
2459538	978-0-374-39169-0	There's Always Next Year by George M Johnson	Fic	$13.99	1	$13.99
2446698	979-8-89003-302-4	These Bodies Ain't Broken: A Horror Anthology by Madeline Dyer	Fic	$13.29	1	$13.29
2416516	978-1-63893-028-0	These Vengeful Wishes by Vanessa Montalban	Fic	$13.99	1	$13.99
2417256	978-1-5476-1111-9	They Bloom at Night by Trang Thanh Tran	Fic	$13.99	1	$13.99
2462667	978-1-250-33770-2	They Call Her Regret by Channelle Desamours	Fic	$14.70	1	$14.70
2404737	979-8-89003-080-1	They Watch From Below by Katya De Becerra	Fic	$13.29	1	$13.29
2462768	978-0-06-309333-1	This Ain't Our First Rodeo by Liara Tamani	Fic	$13.99	1	$13.99
2437161	978-1-6659-0401-8	This Book Might Be about Zinnia by Brittney Morris	Fic	$13.99	1	$13.99
2446632	979-8-89003-308-6	This Is How We Roll by Rosiee Thor	Fic	$13.29	1	$13.29
2412485	978-0-8234-5836-3	This Is the Year by Gloria Munoz	Fic	$13.29	1	$13.29
2443134	978-0-8234-5938-4	This Raging Sea by De Elizabeth	Fic	$13.99	1	$13.99
2436231	978-1-64129-517-8	This Side of Falling by Eunice Chan	Fic	$13.99	1	$13.99
2437731	979-8-88798-029-4	This Wretched Dawn by Melinda Gong	Fic	$23.79	1	$23.79
2433398	978-1-250-37717-3	Thrashers by Julie Soto	Fic	$14.00	1	$14.00
2403949	978-0-06-326675-9	Three Things About Emmy Crawford by Allison L. Bitz	Fic	$13.99	1	$13.99
2443500	978-0-06-321267-1	Through Our Teeth by Pamela N. Harris	Fic	$13.99	1	$13.99
2461903	979-8-217-02422-3	Tidespeaker by Sadie Turner	Fic	$13.99	1	$13.99
2418258	978-1-6659-4907-1	Till Death by Kellan McDaniel	Fic	$13.99	1	$13.99
2452964	978-0-8234-5829-5	Time Traveler's History of Tomorrow by Kendall Kulper	Fic	$13.99	1	$13.99
2463325	978-0-593-85821-9	To the Death by Andrea Tang	Fic	$13.99	1	$13.99
2434591	978-0-8234-5813-4	Top Heavy by Rhonda DeChambeau	Fic	$13.99	1	$13.99
2436084	978-1-6659-3230-1	Tournament by Rebecca Barrow	Fic	$15.39	1	$15.39
2413399	978-1-6659-6080-9	Traitorous Heart by Erin Cotter	Fic	$15.39	1	$15.39
2443858	978-0-593-81478-9	Transition by Logan-Ashley Kisner	Fic	$13.99	1	$13.99
2436091	978-1-6659-3650-7	Treachery of Swans by A. B. Poranek	Fic	$13.99	1	$13.99
2417951	978-0-593-70861-3	True Life in Uncanny Valley by Deb Caletti	Fic	$13.99	1	$13.99
2460154	979-8-88605-174-2	Truth Cursed by Angie Dickinson	Fic	$17.49	1	$17.49
2446742	978-1-4197-7683-0	Truth Is by Hannah V. Sawyerr	Fic	$15.39	1	$15.39
2412398	978-1-64375-282-2	Truth, Lies, and the Questions in Between by L. M. Elliott	Fic	$13.29	1	$13.29
2446702	978-1-5476-1393-9	Try Your Worst by Chatham Greenfield	Fic	$14.69	1	$14.69
2439063	978-1-5364-9421-1	Twelfth Knight by Alexene Farol Follmuth	Fic	$26.95	1	$26.95
2462846	978-0-06-333955-2	Twelve by Joey Graceffa	Fic	$13.99	1	$13.99
2459705	979-8-217-02393-6	Twin Tides by Hien Nguyen	Fic	$13.99	1	$13.99
2423042	978-0-06-326470-0	Two Truths and a Lionel by Brian Wasson	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2435636	978-0-593-66030-0	Uncertainty Principle by Joshua Davis	Fic	$13.99	1	$13.99
2454115	978-1-250-22554-2	Under a Fire-Red Sky by Geraldine McCaughrean	Fic	$17.49	1	$17.49
2424998	978-1-5344-8239-5	Under the Fading Sky by Cynthia Kadohata	Fic	$13.99	1	$13.99
2435623	978-0-593-85859-2	Under the Neon Lights by Arriel Vinson	Fic	$13.99	1	$13.99
2415088	978-0-374-38894-2	Under the Same Stars by Libba Bray	Fic	$17.49	1	$17.49
2414560	978-1-68263-599-5	Underwood Tapes by Amanda DeWitt	Fic	$13.99	1	$13.99
2451847	978-1-952397-25-7	Undrowned by G. M. DiDesidero	Fic	$24.47	1	$24.47
2434795	978-0-593-81151-1	Unexpected Consequence of Bleeding on a Tuesday by Kelsey B. Toney	Fic	$13.99	1	$13.99
2462229	978-1-6659-7409-7	Ungodly Chaos by Selma Soren	Fic	$13.99	1	$13.99
2415423	978-0-593-81098-9	Unhallowed Halls by Lili Wilkinson	Fic	$13.99	1	$13.99
2459753	978-0-593-90029-1	Uninvited by Nancy Banks	Fic	$13.99	1	$13.99
2414546	978-0-06-333503-5	Unlock the Dark by Sasa Hawk	Fic	$13.99	1	$13.99
2462610	978-1-250-37577-3	Until The Clock Strikes Midnight by Alechia Dow	Fic	$13.99	1	$13.99
2433399	978-1-250-35993-3	Up In Smoke by Nick Brooks	Fic	$13.99	1	$13.99
2426826	978-1-59580-143-2	Ventura and Winnetka by J. G. Bryan	Fic	$24.47	1	$24.47
2440016	979-8-89003-270-6	Verity Vox and the Curse of Foxfire by Don Martin	Fic	$13.29	1	$13.29
2436604	978-0-593-85789-2	Very Dangerous Things by Lauren Munoz	Fic	$13.99	1	$13.99
2434586	978-1-68263-732-6	Vesuvius by Cass Biehn	Fic	$13.99	1	$13.99
2447476	979-8-212-98090-6	Voice of the Ocean by Kelsey Impicciche	Fic	$13.99	1	$13.99
2439061	978-1-5364-9420-4	Wander in the Dark by Jumata Emill	Fic	$24.95	1	$24.95
2446943	979-8-8748-1172-3	Wandering Wild by Lynette Noni	Fic	$13.99	1	$13.99
2447464	979-8-88605-198-8	Warsafe by Lauren Smyth	Fic	$17.49	1	$17.49
2443581	978-1-335-01387-3	Watch Us Crack by Gabriella Lepore	Fic	$13.99	1	$13.99
2439979	978-0-593-62143-1	Water in Her Veins by Shannon Schuren	Fic	$13.99	1	$13.99
2418364	978-1-4197-5689-4	We Are Villains by Kacen Callender	Fic	$13.99	1	$13.99
2411122	978-0-593-70772-2	We Are the Beasts by Gigi Griffis	Fic	$13.99	1	$13.99
2434733	978-1-250-85365-3	We Can Never Leave by H. E. Edgmon	Fic	$14.70	1	$14.70
2443857	978-0-593-57241-2	Weaver Bride by Lydia Gregovic	Fic	$15.39	1	$15.39
1988869	978-1-941110-27-0	Weird Girl and What's His Name by Meagan Brothers	Fic	$11.87	1	$11.87
2438276	978-1-63993-387-7	Wendy's Ever After by Julie Wright	Fic	$13.99	1	$13.99
2423344	978-0-399-54528-3	What Comes After by Katie Bayerl	Fic	$15.39	1	$15.39
2417274	978-1-250-32280-7	What Wakes the Bells by Elle Tesch	Fic	$13.99	1	$13.99
2456803	978-1-63583-107-8	What We Did to Each Other by Josuee Hernandez	Fic	$10.77	1	$10.77
2410476	978-1-250-34067-2	What the Woods Took by Courtney Gould	Fic	$14.00	1	$14.00
2447460	978-1-250-35717-5	When Devils Sing by Xan Kaur	Fic	$15.39	1	$15.39
2485048	978-0-593-85947-6	When I Was Death by Alexis Henderson	Fic	$13.99	1	$13.99
2433583	978-1-5476-1527-8	When Love Gives You Lemons by Steven Salvatore	Fic	$14.69	1	$14.69
2409006	978-1-64129-536-9	When Mimi Went Missing by Suja Sukumar	Fic	$13.99	1	$13.99
2433503	978-0-316-47999-8	When We Go Missing by April Henry	Fic	$13.99	1	$13.99
2418638	978-1-324-05282-1	When We Ride by Rex Ogle	Fic	$13.29	1	$13.29
2443236	978-1-5247-1302-7	When We Were Monsters by Jennifer Niven	Fic	$14.69	1	$14.69
2414010	978-1-5364-8982-8	When You Wish Upon a Lantern by Gloria Chao	Fic	$24.95	1	$24.95
2417409	978-0-593-62548-4	When the Bones Sing by Ginny Myers Sain	Fic	$13.99	1	$13.99
2411006	978-1-5362-3566-1	When the Mapou Sings by Nadine Pinede	Fic	$13.99	1	$13.99
2484987	978-0-8234-5700-7	Where No Shadow Stays by Sara Hashem	Fic	$13.99	1	$13.99
2414526	978-0-06-335908-6	Where Shadows Bloom by Catherine Bakewell	Fic	$13.99	1	$13.99
2422048	978-1-250-81534-7	Where Shadows Meet by Patrice Caldwell	Fic	$14.00	1	$14.00
2453949	978-1-250-35631-4	Where There's Room for Us by Hayley Kiyoko	Fic	$15.40	1	$15.40
2417104	978-1-5364-9049-7	Where You See Yourself by Claire Forrest	Fic	$26.95	1	$26.95
2412314	978-0-06-338491-0	Where the Heart Should Be by Sarah Crossan	Fic	$15.39	1	$15.39
2438975	978-1-77488-101-9	Whisperings by Joel A. Sutherland	Fic	$13.99	1	$13.99
2389309	978-1-250-86126-9	White Guy Dies First: 13 Scary Stories of Fear and Power	Fic	$14.69	1	$14.69
2443442	978-1-368-10199-8	White Widow: Secret Sisters by Tess Sharpe	Fic	$13.29	1	$13.29
2443720	978-0-593-90057-4	Who's All Going (to Die)? by Lisa Springer	Fic	$13.99	1	$13.99
2415117	979-8-89003-161-7	Why on Earth: An Alien Invasion Anthology	Fic	$13.29	1	$13.29
2415255	978-0-593-70985-6	Wicked Darlings by Jordyn Taylor	Fic	$13.99	1	$13.99
2451037	978-1-5235-2994-0	Wicked Lies of Habren Faire by Anna Fiteni	Fic	$13.99	1	$13.99
2460800	978-1-68263-756-2	Wild Radiance by Maria Ingrande Mora	Fic	$13.99	1	$13.99
2454503	979-8-7656-6263-2	Wild Song by Candy Gourlay	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2412377	978-0-06-328764-8	Wilde Trials by MacKenzie Reed	Fic	$13.99	1	$13.99
2415412	978-1-250-88449-7	Wildest Things by Andrea Hannah	Fic	$14.70	1	$14.70
2461395	978-1-4549-6058-4	Winter White: A Modern Retelling of Shakespeare's the Winter's Tale by Annie Cardi	Fic	$13.29	1	$13.29
2440138	978-1-250-33556-2	Wish You Were Her by Elle McNicoll	Fic	$16.80	1	$16.80
2450779	978-1-5461-3768-9	Witchkiller by Ashlee Latimer	Fic	$13.99	1	$13.99
2450942	978-1-250-36949-9	Witchlore by Emma Hinds	Fic	$14.70	1	$14.70
2461640	978-1-4197-6499-8	Worst-Case Scenario by Ray Stoeve	Fic	$13.29	1	$13.29
2452892	978-0-8048-5934-9	Wounded Little Gods by Eliza Victoria	Fic	$4.89	1	$4.89
2440093	978-1-250-36546-0	Woven From Clay by Jennifer Birch	Fic	$14.70	1	$14.70
2442544	978-1-7282-9710-1	Write Me for You by Tillie Cole	Fic	$13.99	1	$13.99
2454505	979-8-7656-2771-6	Writing Room by Marcia Argueta Mickelson	Fic	$13.99	1	$13.99
2437145	978-1-64129-703-5	Yomigaeri Tunnel by Kelly Murashige	Fic	$13.99	1	$13.99
2423206	978-0-593-69838-9	You Belong to Me by Hayley Krischer	Fic	$13.99	1	$13.99
2453812	978-1-5344-8851-9	You Had Me at Hello World by Rona Wang	Fic	$13.99	1	$13.99
2433204	978-1-77488-475-1	You Started It by Jackie Khalilieh	Fic	$13.99	1	$13.99
2435777	978-0-06-329955-9	You've Awoken Her by Ann Davila Cardinal	Fic	$13.99	1	$13.99
2446194	978-0-316-57555-3	You've Goth My Heart by Lev AC Rosen	Fic	$13.99	1	$13.99
2454067	979-8-8554-1308-3	Bone Ash by Tow Ubukata	Fic	$16.80	1	$16.80
2409421	979-8-8554-0037-3	In a World of Lies, I Fell into an Unforgettable Love by Misaki Ichijo	Fic	$14.00	1	$14.00
2451792	979-8-8554-0283-4	Lila and the Winds of War by Sayuri Ueda	Fic	$16.80	1	$16.80
2418404	979-8-8554-0775-4	Maboroshi by Mari Okada	Fic	$14.00	1	$14.00
2415773	979-8-8554-0317-6	Whoever Steals This Book by Nowaki Fukamidori	Fic	$14.00	1	$14.00
2422156	978-1-250-89028-3	Chaos King by Kacen Callender	Fic	$13.99	1	$13.99
2438589	978-0-316-57535-5	Beautiful and Terrible Murder by Claire Andrews	Fic	$13.99	1	$13.99
2378379	978-0-7352-6998-9	Heavenly Tyrant by Xiran Jay Zhao	Fic	$14.69	1	$14.69
2448442	978-1-955307-10-9	Spartan Sacrifice by Andrew Varga	Fic	$14.69	1	$14.69
2412255	978-0-06-335384-8	Language of Dragons by S. F. Williamson	Fic	$13.99	1	$13.99
2460509	978-0-06-335386-2	War of Wyverns by S. F. Williamson	Fic	$13.99	1	$13.99
2417363	978-1-250-88154-0	His Mortal Demise by Vanessa Le	Fic	$13.99	1	$13.99
2277114	978-1-939053-40-4	Land Grab by Alfreda Beartrack-Algeo	Fic	$6.97	1	$6.97
2418213	978-1-6659-5190-6	Oathbound by Tracy Deonn	Fic	$15.39	1	$15.39
2460158	978-1-4197-8571-9	Crowntide by Alex Aster	Fic	$17.49	1	$17.49
2409027	978-1-4197-7378-5	Skyshade by Alex Aster	Fic	$16.09	1	$16.09
2422067	978-1-250-83117-0	Holy Terrors by Margaret Owen	Fic	$15.39	1	$15.39
2408360	978-0-06-327802-8	In Want of a Suspect by Tirzah Price	Fic	$13.99	1	$13.99
2408836	978-1-5476-1479-0	Love Interest by Helen Comerford	Fic	$13.99	1	$13.99
2462194	978-1-6659-7437-0	Love Me Tomorrow by Emiko Jean	Fic	$13.99	1	$13.99
2408845	978-1-250-33948-5	Whispering Night by Susan Dennard	Fic	$14.69	1	$14.69
2408737	978-1-64937-612-1	Onyx by Jennifer L. Armentrout	Fic	$17.49	1	$17.49
2436710	978-1-64937-613-8	Opal by Jennifer L. Armentrout	Fic	$17.49	1	$17.49
2449426	978-1-368-09478-8	Seeing Stars by Candice Jalili	Fic	$13.29	1	$13.29
2429657	979-8-9884215-3-5	Infinite Glade by James Dashner	Fic	$20.97	1	$20.97
2432494	978-1-4197-5776-1	Force of Chaos by Diana Ma	Fic	$13.99	1	$13.99
2438772	978-1-6659-7470-7	Legend of Sleepy Hollow and Other Stories by Washington Irving	Fic	$12.59	1	$12.59
2438771	978-1-6659-7467-7	Phantom of the Opera by Gaston Leroux	Fic	$12.59	1	$12.59
2438773	978-1-6659-7473-8	Raven and Other Writings by Edgar Allan Poe	Fic	$12.59	1	$12.59
2438990	978-0-593-48837-9	Starstrike by Yoon Ha Lee	Fic	$13.99	1	$13.99
2422051	978-1-250-86518-2	Give Up the Night by P. C. Cast	Fic	$14.00	1	$14.00
2462975	978-1-5461-3826-6	Bridge of Storms by Philip Reeve	Fic	$14.69	1	$14.69
2408310	978-1-5461-3823-5	Thunder City by Philip Reeve	Fic	$13.99	1	$13.99
2461924	978-1-368-07887-0	Ms. Marvel: Remnants of the Past by Saadia Faruqi	Fic	$13.29	1	$13.29
2493792	978-1-368-10479-1	Hunting the Strange by Kaitlyn Cavalancia	Fic	$13.99	1	$13.99
2412501	978-1-368-09908-0	Mystery Royale by Kaitlyn Cavalancia	Fic	$13.29	1	$13.29
2461074	978-0-316-60049-1	Naturals by Jennifer Lynn Barnes	Fic	$14.69	1	$14.69
2435086	978-0-316-58800-3	Naturals (Deluxe Edition) by Jennifer Lynn Barnes	Fic	$17.49	1	$17.49
2446376	978-0-316-57620-8	Never Ever After by Sue Lynn Tan	Fic	$13.99	1	$13.99
2436462	978-0-593-89736-2	Nightblood Prince by Molly X. Chang	Fic	$14.69	1	$14.69
2417732	978-0-316-58725-9	Nightweaver by R. M. Gray	Fic	$13.99	1	$13.99
2453762	978-0-316-59407-3	Starchaser by R. M. Gray	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2423116	978-0-451-47966-2	Notorious Virtues by Alwyn Hamilton	Fic	$16.09	1	$16.09
2435679	978-0-593-62278-0	Blood Phoenix by Amber Chen	Fic	$14.69	1	$14.69
2461562	979-8-8554-2447-8	Celebration Rings Over Crystal Waters by Chorefuji Chorefuji	Fic	$14.00	1	$14.00
2423165	978-1-368-10301-5	Wish Upon a K-Star by Kat Cho	Fic	$13.29	1	$13.29
2439876	978-0-06-302474-8	Once a Villain by Vanessa Len	Fic	$13.99	1	$13.99
2286532	978-1-4598-3355-5	Counting Scars by Melinda Di Lorenzo	Fic	$7.67	1	$7.67
2442832	978-0-310-17581-0	Secret Investigator of Astor Street by Stephanie Morrill	Fic	$13.29	1	$13.29
2451990	978-1-6659-7107-2	Fearful: A Powerless Story by Lauren Roberts	Fic	$11.89	1	$11.89
2424944	978-1-6659-5546-1	Fearless by Lauren Roberts	Fic	$15.39	1	$15.39
2406613	978-1-368-08548-9	Prince of Glass and Midnight by Linsey Miller	Fic	$13.29	1	$13.29
2412345	978-0-06-326497-7	Togetha by Keith F. Miller	Fic	$15.39	1	$15.39
2437156	978-1-368-08930-2	Hour of the Pumpkin Queen (Tim Burton's the Nightmare Before Christmas) by Megan Shepherd	Fic	$13.99	1	$13.99
2462607	978-1-250-36297-1	Queen of Faces by Petra Lord	Fic	$16.09	1	$16.09
2408973	978-0-593-71070-8	Queen's Game by Katharine McGee	Fic	$14.69	1	$14.69
2453522	978-0-593-71074-6	Queen's Match by Katharine McGee	Fic	$14.69	1	$14.69
2449430	978-1-7282-9790-3	Our Vicious Descent by Hayley Dennings	Fic	$13.29	1	$13.29
2462668	978-1-250-32978-3	This Wretched Beauty: A Dorian Gray Remix by Elle Grenier	Fic	$14.69	1	$14.69
2413389	978-1-6659-3444-2	Hallow Hunt by Margie Fuston	Fic	$15.39	1	$15.39
2412274	978-0-316-57869-1	Royal Heirs Academy by Lindsey Duga	Fic	$13.99	1	$13.99
2461065	978-0-316-58569-9	Royal Liars by Lindsey Duga	Fic	$13.99	1	$13.99
2449407	978-1-4642-5354-6	House of Dragons by K. A. Linde	Fic	$13.99	1	$13.99
2462377	978-1-4642-5355-3	House of Shadows by K. A. Linde	Fic	$13.99	1	$13.99
2437181	978-1-368-10887-4	Raging Heart by Kaylie Smith	Fic	$13.29	1	$13.29
2403997	978-0-06-301873-0	Bane of Asgard by Cinda Williams Chima	Fic	$13.99	1	$13.99
2404018	978-0-06-324170-1	Witch of Wol Sin Lake by Lena Jeong	Fic	$13.99	1	$13.99
2403999	978-1-335-09175-8	Blood Orchid by Kylie Lee Baker	Fic	$13.99	1	$13.99
2417302	978-0-06-325880-8	Shadow Bride by Shelby Mahurin	Fic	$15.39	1	$15.39
2451008	978-1-64379-699-4	Fall of the Fireflies by Guadalupe Garcia McCall	Fic	$16.77	1	$16.77
2403582	978-1-250-82299-4	Where the Library Hides by Isabel Ibanez	Fic	$14.00	1	$14.00
2438613	978-0-316-58815-7	Dream by the Shadows by Logan Karlie	Fic	$16.09	1	$16.09
2422584	978-0-06-341900-1	Watch Me by Tahereh Mafi	Fic	$15.39	1	$15.39
2444189	978-1-6659-6393-0	Joy to the Girls: A She Gets the Girl Novella by Rachael Lippincott	Fic	$11.89	1	$11.89
2463032	979-8-217-00261-0	Sibylline by Melissa de la Cruz	Fic	$14.69	1	$14.69
2453813	978-1-4814-9622-3	Reawakening by Orson Scott Card	Fic	$15.39	1	$15.39
2418264	978-1-6659-4991-0	Children of Useyi by Moses Ose Utomi	Fic	$13.99	1	$13.99
2434558	978-1-5362-2881-6	Skipshock by Caroline O'Donoghue	Fic	$13.99	1	$13.99
2446734	978-1-250-40925-6	Sleepless by Jen Williams	Fic	$14.70	1	$14.70
2423856	978-1-5364-9196-8	Snowglobe by Soyoung Park	Fic	$26.95	1	$26.95
2486740	978-1-250-34293-5	Heart of Mischief by Emma Noyes	Fic	$16.10	1	$16.10
2436978	978-1-250-34296-6	Soul of Shadow by Emma Noyes	Fic	$15.40	1	$15.40
2437029	978-0-593-89880-2	Immortal Consequences by I. V. Marie	Fic	$15.39	1	$15.39
2402752	978-0-593-12700-1	Serpent Sea by Maiya Ibrahim	Fic	$13.99	1	$13.99
2449389	978-1-4642-3613-6	Crimson Throne by Sara Raasch	Fic	$13.99	1	$13.99
2454063	978-1-9753-7911-7	STAR SEEKERS, Vol. 01 by HYBE	Fic	$24.50	1	$24.50
2437185	978-1-368-07012-6	Crystal Crown by Tessa Gratton	Fic	$13.29	1	$13.29
2423107	978-1-368-09518-1	Into the Light by Claudia Gray	Fic	$13.29	1	$13.29
2483259	979-8-217-11721-5	Stolen Midnights by Katherine Quinn	Fic	$15.39	1	$15.39
2434694	978-1-250-34815-9	Heir of Storms by Lauryn Hamilton Murray	Fic	$14.69	1	$14.69
2449560	979-8-217-03273-0	Starcourt Mall Escape by Jennifer Brody	Fic	$13.99	1	$13.99
2436461	978-0-06-342167-7	Theory of Dreaming by Ava Reid	Fic	$13.99	1	$13.99
2426026	978-1-4549-4808-7	King's Legacy by L. C. Rosen	Fic	$13.29	1	$13.29
2486689	978-0-316-57551-5	To Deal With Kings by M. K. Lobb	Fic	$13.99	1	$13.99
2418179	978-0-316-57548-5	To Steal from Thieves by M.K. Lobb	Fic	$13.99	1	$13.99
2463291	978-0-316-39602-8	Cursed Queen's Daughter by Elly Blake	Fic	$13.99	1	$13.99
2415451	978-0-316-39572-4	Forest King's Daughter by Elly Blake	Fic	$13.99	1	$13.99
2408803	978-1-250-81238-4	Our Deadly Designs by Kalyn Josephson	Fic	$14.69	1	$14.69
2446000	978-0-06-331534-1	Every Spiral of Fate by Tahereh Mafi	Fic	$13.99	1	$13.99
2443136	978-0-06-342779-2	Thorn Season by Kiera Azar	Fic	$13.99	1	$13.99
2449245	978-1-68263-769-2	Fate Unwoven by Rachael A. Edwards	Fic	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2493707	978-0-593-81388-1	Dragon and the Sun Lotus by Amelie Wen Zhao	Fic	$16.09	1	$16.09
2417905	978-0-593-81384-3	Scorpion and the Night Blossom by Amelie Wen Zhao	Fic	$16.09	1	$16.09
2442441	978-1-4642-2458-4	His Face Is the Sun by Michelle Jabes Corpora	Fic	$13.99	1	$13.99
2461022	979-8-212-22173-3	Tiger's Trek by Colleen Houck	Fic	$17.49	1	$17.49
2410450	978-1-64937-679-4	To Shatter the Night by Katherine Quinn	Fic	$13.99	1	$13.99
2443545	978-0-06-335826-3	Torchfire by Moira Buffini	Fic	$13.99	1	$13.99
2443433	978-1-368-10824-9	How Far I'll Go by Keala Kendall	Fic	$13.29	1	$13.29
2443497	978-0-06-328744-0	Others by Cheryl Isaacs	Fic	$13.99	1	$13.99
2443582	978-1-335-01004-9	Unending by Ivelisse Housman	Fic	$13.99	1	$13.99
2415646	978-1-64690-016-9	Silver Throat by Siri Pettersen	Fic	$14.00	1	$14.00
2453820	978-1-6659-7142-3	Heart Check by Emily Charlotte	Fic	$14.69	1	$14.69
2417228	978-1-335-01005-6	Igniting Fate by Jean Louise	Fic	$13.99	1	$13.99
2452966	978-1-68263-667-1	Lord of Blade and Bone by Erica Ivy Rodgers	Fic	$13.99	1	$13.99
2415209	978-1-6659-3049-9	Burning in the Bones by Scott Reintgen	Fic	$15.39	1	$15.39
2453519	978-0-593-89916-8	We Fell Apart by E. Lockhart	Fic	$16.09	1	$16.09
2486009	979-8-8816-0514-8	When The Rain Came by Matthew Eicheldinger	Fic	$16.09	1	$16.09
2415149	978-1-368-09845-8	Wings of Starlight by Allison Saft	Fic	$13.29	1	$13.29
2462691	978-1-250-87261-6	Daughter Of The Cursed Kingdom by Jasmine Skye	Fic	$16.09	1	$16.09
2366128	978-1-250-87245-6	Daughter of the Bone Forest by Jasmine Skye	Fic	$14.69	1	$14.69
2453861	978-1-250-19417-6	Witchlight by Susan Dennard	Fic	$15.39	1	$15.39
2443514	978-0-593-85847-9	You've Found Oliver by Dustin Thao	Fic	$13.99	1	$13.99

Total quantity	749 Titles(749 Books)
Subtotal	$11,141.74
Processing Options Total	$2,471.70
Shipping & Handling	$222.83
Shipping Discount	-$222.83
Tax	$1,395.38
Grand Total	**$15,008.82**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: JUVENILE SPANISH ODC 1
List#: 207798
Date: 2/17/2026 6:19:17 PM
Total quantity: 365 Titles(365 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	365	$1,204.50

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2437516	978-84-19975-54-6	Acertijo de Saurus (Saurus' Riddle) by Raquel Diaz Reguera	741.5	$13.97	1	$13.97
2422193	979-8-89098-326-8	Todo Sobre Cuidar el Planeta (Team Green!) by Andrea Beaty	551.6	$9.07	1	$9.07
2414000	979-8-89098-252-0	Todo Sobre Los Robots (Rockin' Robots!) by Andrea Beaty	629.8	$9.07	1	$9.07
2458706	978-0-8234-6178-3	Lucy Lopez: Programadora Estrella (Lucy Lopez: Coding Star) by Claudia Mills	Fic	$6.29	1	$6.29
2459569	978-958-8983-64-6	Una y Otra: Leyendas Latinoamericanas (Again and Again: Latin American Legends)	Fic	$6.97	1	$6.97
2435161	978-84-9145-787-9	Aggie pulga NO es una mentirosa! (Aggie Flea is Not a Liar) by Tania Ingram	Fic	$16.07	1	$16.07
2454969	979-8-89581-008-8	Bats / Los murcielagos by Kate Riggs	599.4	$24.95	1	$24.95
2454970	979-8-89581-009-5	Crocodiles / Los cocodrilos by Valerie Bodden	597.98	$24.95	1	$24.95
2454971	979-8-89581-010-1	Dolphins / Los delfines by Kate Riggs	599.53	$24.95	1	$24.95
2454972	979-8-89581-011-8	Giraffes / Las jirafas by Valerie Bodden	599.638	$24.95	1	$24.95
2454973	979-8-89581-012-5	Lions / Los leones by Valerie Bodden	599.757	$24.95	1	$24.95
2454974	979-8-89581-013-2	Polar Bears / Los osos polares by Valerie Bodden	599.786	$24.95	1	$24.95
2454975	979-8-89581-014-9	Sharks / Los tiburones by Valerie Bodden	597.3	$24.95	1	$24.95
2454976	979-8-89581-015-6	Wolves / Los lobos by Kate Riggs	599.77	$24.95	1	$24.95
2418668	978-0-7112-9776-0	Solo en California (Only in California) by Heather Alexander	979.4	$15.39	1	$15.39
2425745	979-8-89200-403-9	Adam sobresale y Max avanza! (Adam Rocks...and Max Rolls!) by Connie Colwell Miller	E	$7.69	1	$7.69
2425746	979-8-89200-404-6	Carlos y Rosie en el espacio (Carlos and Rosie in Space) by Connie Colwell Miller	E	$7.69	1	$7.69
2425747	979-8-89200-407-7	Demasiado ruido para Mia! (Too Much Noise for Mia!) by Connie Colwell Miller	E	$7.69	1	$7.69
2425748	979-8-89200-405-3	Emmy a tiempo (Emmy on the Dot) by Connie Colwell Miller	E	$7.69	1	$7.69

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2425749	979-8-89200-406-0	Kimberly y su talento con las palabras (Kimberly's Way with Words) by Connie Colwell Miller	E	$7.69		$7.69
2425750	979-8-89200-408-4	William esta en proceso (William Is Loading...) by Connie Colwell Miller	E	$7.69		$7.69
2424157	979-8-89200-431-2	Explorar la naturaleza (Navigating Through Nature) by Charis Mather	E	$25.95		$25.95
2424158	979-8-89200-429-9	Traza tu ruta a Marte (Chart Your Way to Mars) by Charis Mather	E	$25.95		$25.95
2424160	979-8-89200-379-7	Eres un anfibio? (Are You an Amphibian?) by Thomas Troupe	E	$25.95		$25.95
2424161	979-8-89200-380-3	Eres un ave? (Are You a Bird?) by Thomas Troupe	E	$25.95		$25.95
2424162	979-8-89200-382-7	Eres un insecto? (Are You an Insect?) by Thomas Troupe	E	$25.95		$25.95
2424163	979-8-89200-383-4	Eres un mamifero? (Are You a Mammal?) by Thomas Troupe	E	$25.95		$25.95
2424164	979-8-89200-381-0	Eres un pez? (Are You a Fish?) by Thomas Troupe	E	$25.95		$25.95
2455005	979-8-89200-659-0	Bella Durmiente: Cuento vs. realidad (Sleeping Beauty: Tale vs. Truth) by Gina Kammer	398.2	$25.95		$25.95
2455009	979-8-89200-658-3	Rapunzel: Cuento vs. realidad (Rapunzel: Tale vs. Truth) by Gillia M. Olson	398	$25.95		$25.95
2455010	979-8-89200-657-6	Sirenita: Cuento vs. realidad (Little Mermaid: Tale vs. Truth) by Gina Kammer	398.2	$25.95		$25.95
2455014	979-8-89200-646-0	Ballenas jorobadas: Una historia de migracion (Humpback Whales: A Migration Story) by Lisa J. Amstutz	599.5	$25.95		$25.95
2455019	979-8-89200-648-4	Tortugas laud: Una historia de migracion (Leatherback Sea Turtles: A Migration Story) by Lisa J. Amstutz	597.92	$25.95		$25.95
2424168	979-8-89200-369-8	De la papa a la papa frita (From Potato to Chip) by Mari Schuh	664	$25.95		$25.95
2424167	979-8-89200-367-4	Del maiz a los cereales (From Corn to Cereal) by Mari Schuh	664	$25.95		$25.95
2424169	979-8-89200-370-4	Del trigo a la pasta (From Wheat to Pasta) by Mari Schuh	664	$25.95		$25.95
2422854	978-0-593-96314-2	Mitos Egipcios (Egyptian Myths) by Jean Menzies	299.3113	$15.39		$15.39
2493213	979-13-87598-01-3	Profecia Equivocada (The Wrong Prophecy) by Victor Sabate	Fic	$12.57		$12.57
2493042	978-84-488-7194-9	Operacion Rescate (Rescue Operation) by Oscar Julve	Fic	$13.27		$13.27
2462456	978-84-488-7192-5	Plan Malefico (An Evil Plan) by Oscar Julve	Fic	$11.87		$11.87
2462457	978-84-488-7196-3	Secreto Del Profesor (The Professor's Secret) by Oscar Julve	Fic	$11.87		$11.87
2483449	979-8-2952-0036-6	Cumpleanos de Karen (Karen's Birthday) (Graphic Novel) by Ann M. Martin	741.5	$28.95		$28.95
2414073	978-1-5364-8995-8	Foto Escolar de Karen (Karen's School Picture) by Katy Farina	741.5	$22.95		$22.95
2451066	978-1-5364-9574-4	Tipos Malos en Cortar por Lo Sano (The Bad Guys in Cut to the Chase) by Aaron Blabey	Fic	$16.95		$16.95
2461544	978-1-5364-9684-0	Tipos Malos en los Tienes Detrazzz (The Bad Guys in They're Bee-Hind You!) by Aaron Blabey	Fic	$17.95		$17.95
2414070	978-1-5364-8993-4	Tipos malos en la Elegida?! (The Bad Guys in the One?!) by Aaron Blabey	Fic	$16.95		$16.95
2397666	978-607-38-4301-0	Audicion de Mimi (The Big Audition) by Swapna Reddy	Fic	$9.07		$9.07
2451191	978-84-272-4779-6	Tres Amigas y un Diario (Three Friends and a Diary) by Gisella Laterza	Fic	$12.57		$12.57
2452162	979-8-8752-3500-9	Betty la Yeti juega a las escondidas (Betty the Yeti Plays Hide-and-Seek) by Mandy R. Marx	Fic	$16.99		$16.99
2452163	979-8-8752-3492-7	Betty la Yeti odia el espagueti (Betty the Yeti Hates Spaghetti) by Mandy R. Marx	Fic	$16.99		$16.99
2452164	979-8-8752-3484-2	Betty la Yeti y el primer dia de clases (Betty the Yeti and the First Day of School) by Mandy R. Marx	Fic	$16.99		$16.99
2452165	979-8-8752-3476-7	Betty la Yeti y sus pies danzantes (Betty the Yeti and Her Dancing Feet) by Mandy R. Marx	Fic	$16.99		$16.99
2396903	978-1-6690-8079-4	Frase de la muerte (Death Sentence) by Michael Dahl	Fic	$18.99		$18.99
2396905	978-1-6690-8078-7	Paje perdido (The Lost Page) by Michael Dahl	Fic	$18.99		$18.99
2396906	978-1-6690-8077-0	Saqueador de tomos (Tome Raider) by Michael Dahl	Fic	$18.99		$18.99
2440194	978-1-5364-9434-1	Nueva Mascota de Eva (Eva's New Pet) by Rebecca Elliott	Fic	$16.95		$16.95
2414068	978-1-5364-8992-7	Caniche de la Perdicion (The Poodle of Doom) by Susan Tan	Fic	$14.95		$14.95
2446419	978-1-5364-9488-4	Magia Desaparecida (The Missing Magic) by Rebecca Elliott	Fic	$16.95		$16.95
2429124	978-1-7316-5862-3	Grandes mentes y hallazgos en la Antartida (Great Minds and Finds in Antarctica) by Robin Koontz	900	$6.48		$6.48
2429126	978-1-7316-5874-6	Invencion de los vuelos (Invention of Flight) by Mike Downs	900	$6.48		$6.48
2429128	978-1-7316-5914-9	Criaturas de los cielos antiguos (Creatures of Ancient Skies) by Anastasia Suen	567.918	$6.48		$6.48
2456541	978-607-39-3023-9	Bridget Vanderpuff y el Gran Robo aereo (Bridget Vanderpuff and the Great Airship Robbery) by Martin Stewart	Fic	$10.47		$10.47
2438083	978-607-39-2406-1	Bridget Vanderpuff y el Tren Fantasma (Bridget Vanderpuff and the Ghost Train) by Martin Stewart	Fic	$9.77		$9.77

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2422671	978-607-39-1855-8	Bridget Vanderpuff y la Evasion Pantastica (Bridget Vanderpuff and the Baked Escape) by Martin Stewart	Fic	$9.07	1	$9.07
2422228	978-84-10050-57-0	Yo de Verdad (Picture Day) by Sarah Sax	741.5	$13.27	1	$13.27
2396935	978-1-6690-8043-5	Cenicienta no se queda callada (Cinderella Speaks Up) by Mari Bolte	741.5	$18.99	1	$18.99
2445708	979-8-3849-2249-0	Pesca con mosca: escapando del rio rabioso (Fly Fishing: Escaping the Raging River) by Emily L. Hay Hinsdale	Fic	$27.95	1	$27.95
2493415	979-8-3849-2400-5	Carrera de conejitos de Pascua by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2493416	979-8-3849-2401-2	Concurso de Halloween by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2493417	979-8-3849-2405-0	Disputa de Accion de Gracias by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2493451	979-8-3849-2403-6	Posaditas by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2493452	979-8-3849-2402-9	Tarjetas de San Valentin (no) cubanas by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2493453	979-8-3849-2404-3	Tumulto trebol by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2396944	978-1-4846-9685-9	Camila la estrella de los videojuegos (Camila the Gaming Star) by Alicia Salazar	Fic	$16.99	1	$16.99
2396945	978-1-4846-9683-5	Camila la estrella del baile (Camila the Dancing Star) by Alicia Salazar	Fic	$16.99	1	$16.99
2396946	978-1-4846-9686-6	Camila la estrella del canto (Camila the Singing Star) by Alicia Salazar	Fic	$16.99	1	$16.99
2396947	978-1-4846-9684-2	Camila la estrella del concurso de talentos (Camila the Talent Show Star) by Alicia Salazar	Fic	$16.99	1	$16.99
2452307	979-8-8752-3569-6	Tu pasaporte a Egipto (Your Passport to Egypt) by Goliz Golkar	960	$23.49	1	$23.49
2452308	979-8-8752-3577-1	Tu pasaporte a Italia (Your Passport to Italy) by Nancy Dickmann	945	$23.49	1	$23.49
2452309	979-8-8752-3585-6	Tu pasaporte a Japon (Your Passport to Japan) by Cheryl Kim	950	$23.49	1	$23.49
2452310	979-8-8752-3593-1	Tu pasaporte a Mexico (Your Passport to Mexico) by Isela Xitlali Gomez	972	$23.49	1	$23.49
2494170	979-8-8752-9612-3	Copa Mundial Femenina en primer plano (Womens World Cup Close-Up) by Kurt Waldendorf	796.334	$23.49	1	$23.49
2494169	979-8-8752-9596-6	Copa Mundial en primer plano (World Cup Close-Up): Futbol masculino en el escenario mas grande by Kurt Waldendorf	796.334	$23.49	1	$23.49
2494171	979-8-8752-9614-7	Heroes de la Copa Mundial (World Cup Heroes) by Kurt Waldendorf	796.334	$23.49	1	$23.49
2494172	979-8-8752-9613-0	Momentos mas destacados de la Copa Mundial (The Greatest Moments of the World Cup) by Kurt Waldendorf	796	$23.49	1	$23.49
2415493	978-1-5458-1597-7	Casagrandes, Vol. 01 (Spanish Edition)	741.5	$10.49	1	$10.49
2446400	978-84-10190-80-1	Monstruo Del Lago Ness (The Loch Ness Monster) by Patricia Garcia-Rojo	Fic	$12.57	1	$12.57
2291403	978-84-19004-04-8	City Spies (Spanish Edition) by James Ponti	Fic	$13.27	1	$13.27
2438363	978-84-19834-41-6	Ciudad Prohibida (Forbidden City) by James Ponti	Fic	$13.97	1	$13.97
2493053	978-84-272-4292-0	Peor Primer dia de Clase (The Worst First Day of School) by Estibaliz Burgaleta	Fic	$11.87	1	$11.87
2437517	978-84-10190-72-6	Rimas y Leyendas (Rhymes and Legends) by Gustavo Adolfo Becquer	Fic	$15.37	1	$15.37
2416555	978-84-19688-37-8	Laberinto Magico (The Magic Labyrinth) by Cesar Mallorqui	Fic	$9.07	1	$9.07
2452975	978-607-39-2682-9	Compas y el Frijolito Magico (The Compas and the Little Magic Bean)	Fic	$11.17	1	$11.17
2416581	978-607-39-1441-3	Compas y la Mansion de Chocolate (Compas and the Chocolate Mansion) by Mikecrack	Fic	$11.17	1	$11.17
2393089	978-84-19688-39-2	Escuela de Acrobacias: Aventuras y Volteretas a la Luz de las Esdtrellas (Spanish Edition) by Alena Pons	Fic	$11.17	1	$11.17
2409447	978-84-19688-40-8	Fiesta Sorpresa: Aventuras y Volteretas a la Luz de las Estrellas (The Surprise Party: Adventures and Somersaults Under the Stars) by Alena Pons	Fic	$11.17	1	$11.17
2432714	978-84-19688-71-2	Troupe Secreta (The Secret Troupe) by Alena Pons	Fic	$11.17	1	$11.17
2429854	978-1-0398-1813-2	Silly Milly and the Picture Day Sillies / Silly Milly y las tonterias del dia de la foto by Laurie Friedman	E	$23.50	1	$23.50
2430194	978-1-0398-1817-0	Dad Surprise / Sorprendiendo a papa by Laurie Friedman	E	$21.95	1	$21.95
2430193	978-1-0398-1815-6	De Pesca en el Lago Encantado / Fishing in Magic Lake by Laurie Friedman	E	$21.95	1	$21.95
2430192	978-1-0398-1816-3	Olive and Charlotte / Olive y Charlotte by Laurie Friedman	E	$21.95	1	$21.95
2398745	979-8-88989-155-0	Historia de los New England Patriots (The Story of the New England Patriots) by Jim Whiting	796.332	$26.95	1	$26.95
2398746	979-8-88989-156-7	Historia de los Philadelphia Eagles (The Story of the Philadelphia Eagles) by Jim Whiting	796.332	$26.95	1	$26.95
2398747	979-8-88989-157-4	Historia de los San Francisco 49ers (The Story of the San Francisco 49ers) by Jim Whiting	796.332	$26.95	1	$26.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2419067	979-8-7656-6285-4	Activistas climaticos: Una guia grafica (Climate Activists: A Graphic Guide) by Stephanie Loureiro	333.72			$24.99 | $24.99
2419069	979-8-7656-6288-5	Combustibles fosiles: Una guia grafica (Fossil Fuels: A Graphic Guide) by Stephanie Loureiro	363.7			$24.99 | $24.99
2419071	979-8-7656-6286-1	Migrantes climaticos: Una guia grafica (Climate Migrants: A Graphic Guide) by Christina Hill	304.2			$24.99 | $24.99
2419072	979-8-7656-6289-2	Oceanos, glaciares y aumento del nivel del mar: Una guia grafica (Oceans, Glaciers, and Rising Sea Levels: A Graphic Guide) by Christina Hill	551.45			$24.99 | $24.99
2397933	978-0-06-337959-6	Rebote (Rebound) by Kwame Alexander	Fic			$7.69 | $7.69
2424295	979-8-89200-313-1	Curiosidad por el Area 51 (Curious about Area 51) by Gillia M. Olson	358.41			$24.95 | $24.95
2463004	978-84-9145-858-6	Libro Maldito: No Mires Esto! (The Cursed Book: Don't Look at This!) by Jens Schumacher	Fic			$11.87 | $11.87
2404512	978-0-593-84825-8	Oceano (Ocean) by Miranda MacQuitty	551.46			$11.89 | $11.89
2404789	978-0-593-84818-0	Mundo en Numeros (Our World in Numbers) by Clive Gifford	032.02			$13.99 | $13.99
2404794	978-0-593-84817-3	Mundo en Numeros: Animales (Our World in Numbers Animals) by Richard Mead	590			$13.99 | $13.99
2438521	978-0-593-96665-5	Erupcion! (Eruption!)	551.21			$10.49 | $10.49
2404781	978-0-7440-9501-2	Renacimiento de Harlem (Harlem Renaissance)	974.7			$10.49 | $10.49
2389467	978-0-7440-9498-5	Titanic (Spanish Edition) by Caryn Jenner	910.9163			$10.49 | $10.49
2454289	979-8-7656-6760-6	Jackie Robinson: Deportistas que marcaron una diferencia (Jackie Robinson: Athletes Who Made a Difference) by Blake Hoena	796.357092			$22.99 | $22.99
2454290	979-8-7656-6761-3	Jesse Owens: Deportistas que marcaron una diferencia (Jesse Owens: Athletes Who Made a Difference) by Blake Hoena	796.42092			$22.99 | $22.99
2454372	979-8-7656-6762-0	LeBron James: Deportistas que marcaron una diferencia (LeBron James: Athletes Who Made a Difference) by Josh Anderson	796.323092			$22.99 | $22.99
2454373	979-8-7656-6763-7	Muhammad Ali: Deportistas que marcaron una diferencia (Muhammad Ali: Athletes Who Made a Difference) by Josh Anderson	796.83092			$22.99 | $22.99
2454374	979-8-7656-6764-4	Serena Williams: Deportistas que marcaron una diferencia (Serena Williams: Athletes Who Made a Difference) by Blake Hoena	796.342092			$22.99 | $22.99
2454375	979-8-7656-6765-1	Simone Biles: Deportistas que marcaron una diferencia (Simone Biles: Athletes Who Made a Difference) by Josh Anderson	796.44092			$22.99 | $22.99
2417372	978-1-5364-9077-0	Diario Del Wimpy Kid: En Su Salsa (Diary of a Wimpy Kid: Hot Mess) by Jeff Kinney	Fic			$22.95 | $22.95
2402579	978-1-5364-8812-8	Escape Monstruoso (Monster Escape) by Ari Avatar	Fic			$16.95 | $16.95
2438324	978-1-4278-7841-0	Amigos Por Siempre! (Best Friends Forever!) by Miho Asada	741.5			$7.69 | $7.69
2418562	978-1-4278-7938-7	Stitch!, Vol. 01 (Spanish Edition) by Yumi Tsukurino	741.5			$7.69 | $7.69
2443461	978-1-4278-8150-2	Stitch!, Vol. 02 (Spanish Edition) by Yumi Tsukurino	741.5			$7.69 | $7.69
2418854	978-1-5364-9097-8	Despeluzado Escarlata (The Scarlet Shedder) by Dav Pilkey	741.5			$28.95 | $28.95
2446430	978-1-5364-9492-1	Juan el Grande, el Comienzo (Big Jim Begins) by Dav Pilkey	741.5			$28.95 | $28.95
2413341	978-1-5461-4802-9	Willa, el Dragon Plateado de Purpurina (Willa the Silver Glitter Dragon) by Maddy Mara	Fic			$4.19 | $4.19
2493059	979-8-89098-623-8	Izzy Esta en Las Nubes (Positively Izzy) by Terri Libenson	Fic			$10.47 | $10.47
2432630	978-607-39-2165-7	Hadas Sobrinas (Niece Fairies) by Sofia Rhei	E			$4.87 | $4.87
2424331	979-8-88989-538-1	Galaxias (Galaxies) by Matt Lilley	523.1			$24.95 | $24.95
2424333	979-8-88989-539-8	Naves espaciales (Space Vehicles) by Lori Dittmer	629.47			$24.95 | $24.95
2424334	979-8-88989-544-2	Sol (Sun) by Matt Lilley	523.7			$24.95 | $24.95
2424264	979-8-88989-540-4	Telescopios espaciales (Space Telescopes) by Lori Dittmer	522			$24.95 | $24.95
2424265	979-8-88989-541-1	Vehiculos espaciales (Space Rovers) by Lori Dittmer	629.1			$24.95 | $24.95
2415401	978-1-5364-9033-6	En Busca de la Isla Perdida (In Search of the Lost Island) by Teizo Osaki	741.5			$24.95 | $24.95
2415403	978-1-5364-9034-3	Misterio Del Dragon (The Mystery of the Dragon) by Teizo Osaki	741.5			$24.95 | $24.95
2421946	978-1-5364-9140-1	Perdidos en la Jungla (Lost in the Jungle) by Teizo Osaki	741.5			$24.95 | $24.95
2463000	978-84-10346-20-8	Encanto de la Oscuridad (The Dark Enchantment) by Elisabetta Gnone	Fic			$12.57 | $12.57
2401997	978-84-18538-98-8	Flox de los colores (Colorful Flox) by Elisabetta Gnone	Fic			$15.37 | $15.37
2463001	978-84-10346-21-5	Poderde la Luz (The Power of the Ligh) by Elisabetta Gnone	Fic			$12.57 | $12.57
2462999	978-84-10346-19-2	Secreto de las gemelas (The Twins' Secret) by Elisabetta Gnone	Fic			$12.57 | $12.57
2432716	978-84-19868-09-1	Don de Los Espiritus (The Graveyard Gift) by Piper CJ	Fic			$11.87 | $11.87
2456808	978-607-557-932-0	Primer Gato en el Espacio y el Caldito Maldito (First Cat in Space and the Soup of Doom) by Mac Barnett	741.5			$16.77 | $16.77
2417116	978-1-5364-9053-4	Cara de Pizza (Pizza Face) by Rex Ogle	741.5			$24.95 | $24.95
2416710	978-607-39-1546-5	Historia de Gigantosaurus (Story of Gigantosaurus)	E			$6.97 | $6.97
2403065	978-1-5364-8870-8	Libro Mas Aterrador (Scariest. Book. Ever.) by R. L. Stine	Fic			$17.95 | $17.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2426553	979-8-3849-2064-9	Bombardeo de Pearl Harbor (Bombing of Pearl Harbor) by Bobby Nash	741.5			$24.95 | $24.95
2426554	979-8-3849-2067-0	Erupcion del monte Santa Helena (Mount St. Helens Eruption) by Bobby Nash	741.5			$24.95 | $24.95
2426555	979-8-3849-2065-6	Gran incendio de Chicago (Great Chicago Fire) by Bobby Nash	741.5			$24.95 | $24.95
2426556	979-8-3849-2069-4	Hundimiento del Titanic (Sinking of the Titanic) by Bobby Nash	741.5			$24.95 | $24.95
2426557	979-8-3849-2066-3	Huracan Katrina (Hurricane Katrina) by Bobby Nash	741.5			$24.95 | $24.95
2461628	978-1-5364-9689-5	Harry Potter y el Caliz de Fuego (Harry Potter and the Goblet of Fire) by J. K. Rowling	Fic			$32.95 | $32.95
2421953	978-1-5364-9141-8	Harry Potter y el Prisionero de Azkaban (Harry Potter and the Prisoner of Azkaban) by J. K. Rowling	Fic			$32.95 | $32.95
2408059	978-1-5364-8937-8	Harry Potter y la Piedra Filosofal (Harry Potter and the Sorcerer's Stone) by J. K. Rowling	Fic			$31.95 | $31.95
2408060	978-1-5364-8938-5	Harry Potter y la camara secreta (Harry Potter and the Chamber of Secrets) by J. K. Rowling	Fic			$31.95 | $31.95
2437526	978-84-10269-45-3	Espejo Escondido (The Hidden Mirror) by Juan Gomez-Jurado	Fic			$11.87 | $11.87
2390900	978-84-19522-95-5	Legado de Los Heroes (Legacy of the Heroes) by Juan Gomez-Jurado	Fic			$11.87 | $11.87
2483452	979-8-2952-0037-3	Sobrevivi el Tornado de Joplin, 2011 (I Survived the Joplin Tornado, 2011) by Lauren Tarshis	Fic			$17.95 | $17.95
2414072	978-1-5364-8994-1	Sobrevivi la Erupcion Del Monte Santa Helena, 1980 (I Survived the Eruption of Mount St. Helens, 1980) by Lauren Tarshis	Fic			$14.95 | $14.95
2440221	978-1-5364-9446-4	Sobrevivi la Guerra de Independencia de Estados Unidos, 1776 (I Survived the American Revolution, 1776) (Graphic Novel) by Lauren Tarshis	741.5			$22.95 | $22.95
2393538	978-607-39-1405-5	Cocodrilo Comepesadillas / The Nightmare-Eating Crocodile by Antonio Ramos Revillas	E			$9.07 | $9.07
2460223	978-1-958629-84-0	Tiny Tern Takes Flight / Charrancito Se Lanza a Volar by Donna B. McKinney	590			$13.27 | $13.27
2393096	978-84-272-4087-2	Algo Mas Que El Bosque: Siempre Hay un Camino de Vuelta a Casa (More Than Just the Forest) by Miguel Gane	Fic			$12.57 | $12.57
2451650	978-1-5364-9611-6	Apenas a Flote (Barely Floating) by Lilliam Rivera	Fic			$24.95 | $24.95
2411769	978-958-5404-99-1	Bestiario en Mi Bota (Bestiary in My Boot) by Andrea Serna	E			$12.57 | $12.57
2411745	978-607-38-4554-0	Brujo, El Horrible y El Libro Rojo De Los Hechizos (The Wizard, The Ugly, and the Book of Shame) by Pablo Bernasconi	E			$11.17 | $11.17
2434822	978-607-39-2395-8	Calcetin Con Rombos Man: El Origen (Spanish Edition)	Fic			$6.97 | $6.97
2417278	979-8-89098-298-8	Celia Se Aburre (Celia Gets Bored) by Celia Rico Clavellino	E			$12.57 | $12.57
2486027	978-1-5458-2357-6	Clyde (Spanish Edition) by Jim Benton	741.5			$9.09 | $9.09
2446578	979-8-89098-328-2	Como Decir Adios en Cubano (How to Say Goodbye in Cuban) by Daniel Miyares	741.5			$13.27 | $13.27
2415775	978-1-958629-73-4	Como Ves el Mundo? (How Do You See the World?) by Noureddine Melikechi	616			$11.87 | $11.87
2453458	978-607-39-3025-3	Como entrenar a tu dragon (How to Train Your Dragon) by Cressida Cowell	Fic			$8.37 | $8.37
2411767	978-958-53425-8-3	Cuac Esta de Moda (Quacking Is In Fashion) by Omar Castro	E			$13.27 | $13.27
2440029	978-84-19514-55-4	Cuando Fuimos Tortugas (When We Were Turtles) by Mar Benegas	Fic			$11.17 | $11.17
2452085	978-607-39-2606-5	Cuentos Del Espacio para Hombres Del Manana (Stellar Stories for Boys of the Future) by Francesca Cavallo	Fic			$9.77 | $9.77
2435155	978-84-129011-5-3	Cuentos de dinosaurios, mamuts y otros seres prehistoricos (Tales of Dinosaurs, Mammoths and Other Prehistoric Creatures) by Isabella Salmoirago	Fic			$14.67 | $14.67
2414218	978-84-128046-7-6	Cuentos de las Mil y una Noches (Tales from the Thousand and One Nights) by Martina Forti	Fic			$16.77 | $16.77
2417418	978-1-5362-4392-5	Curiosity: La Historia de una Robot Exploradora de Marte (Curiosity: The Story of a Mars Rover) by Markus Motum	629.2			$6.99 | $6.99
2416573	979-8-89098-290-2	Curveball (Spanish Edition) by Pablo Cartaya	741.5			$13.27 | $13.27
2398025	978-1-9785-9756-3	Daylan y el rio de los secretos (Daylan and the River of Secrets) by Edd Tello	Fic			$19.40 | $19.40
2414229	978-84-127631-6-4	Dinosaurios Contra Alienigenas (Dinosaurs vs Aliens) by Andrea Castellani	Fic			$12.57 | $12.57
2433213	978-1-62354-559-8	Dormilones de Verano: Animales Aletargados (Summertime Sleepers: Animals That Estivate) by Melissa Stewart	571.7			$12.59 | $12.59
2493039	978-612-49663-1-6	Dos Claus (The Two Clauses) by Maria Fe Castro	Fic			$13.97 | $13.97
2434059	978-1-5364-9254-5	El Nino (Spanish Edition) by Pam Munoz Ryan	Fic			$19.95 | $19.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2409457	978-987-820-668-4	Enciclopedia Ilustrada de los Animales: Un Maravilloso Recorrido Por el Reino Animal (The Illustrated Encyclopedia of Animals: An Incredible Journey Through the Animal Kingdom) by Claudia Martin	590	$10.47	1	$10.47
2409456	978-987-820-667-7	Enciclopedia Ilustrada de los Dinosaurios: Un Recorrido Visual Por el Mundo Prehistorico (The Illustrated Encyclopedia of Dinosaurs: A Visual Tour) by Claudia Martin	567.9	$10.47	1	$10.47
2397674	978-607-38-4589-2	Escuela de los Ninos Invisibles (The School for Invisible Boys) by Shaun David Hutchinson	Fic	$11.17	1	$11.17
2414925	978-0-593-96308-1	Explora!: Descubre Un Mundo de Conocimiento Con Cientos de Mapas Y Diagramas (Explore: A Collection of Maps and Diagrams That Explain the World)	502	$17.49	1	$17.49
2446771	978-1-5364-9548-5	Fantasmas de Rancho Espanto (The Ghosts of Rancho Espanto) by Adrianna Cuevas	Fic	$20.95	1	$20.95
2493178	979-8-89098-480-7	Gracias a Mr. Terupt (Because of Mr. Terupt) by Rob Buyea	Fic	$10.47	1	$10.47
2437514	978-84-488-7042-3	Green Wood: La Hechicera Urania: El Gran Concurso de Pasteles (Green Wood: Urania the Sorceress: The Great Cake Contest) by Barbara Canepa	741.5	$14.67	1	$14.67
2411765	978-628-7687-03-5	Guia Secreta de Aves (Secret Bird Guide) by Javier Cajiao Nieto	598	$13.97	1	$13.97
2493209	978-84-264-3290-2	Hacia la Hierba Salvaje (Into the Uncut Grass) by Trevor Noah	Fic	$18.17	1	$18.17
2446524	978-1-250-33912-6	Heroes de la Esperanza (Hopeful Heroes) by Margarita Engle	972	$13.29	1	$13.29
2414236	978-84-127631-8-8	Heroinas de la Historia (Heroines of History) by Lorenza Cingoli	Fic	$16.77	1	$16.77
2414230	978-84-128046-6-9	Heroinas de la Mitologia Griega (Heroes of Greek Mythology) by Luisa Mattia	Fic	$16.77	1	$16.77
2435158	978-84-19834-67-6	Historias del bosque antiguo (Tales from the Ancient Forest) by Mauro Corona	Fic	$12.57	1	$12.57
2438928	978-84-19834-96-6	Joven Lorca y el Misterio de los Relojes Parados (Young Lorca and the Case of the Broken Watches) by Luna Bruna	Fic	$12.57	1	$12.57
2406862	978-1-64379-737-3	Julieta y el Enigma del Diamante (Julieta and the Diamond Enigma) by Luisana Duarte Armendariz	Fic	$12.57	1	$12.57
2440053	978-84-272-3972-2	Julio Verne: Las Grandes Novelas (Jules Verne: the Great Novels) by Julio Verne	Fic	$26.57	1	$26.57
2493277	979-8-2952-0074-8	Lola (Spanish Edition) by Karla Arenas Valenti	Fic	$28.95	1	$28.95
2434783	978-607-39-2357-6	Mago de Oz (Wonderful Wizard of Oz) by L. Frank Baum	Fic	$6.97	1	$6.97
2414238	978-84-9145-757-2	Mama, Cuando Vas a Volver? (Mom, When are you Coming Back?) by Lodovica Cima	E	$13.97	1	$13.97
2424905	978-1-5364-9223-1	Manos (Hands) by Torrey Maldonado	Fic	$24.95	1	$24.95
2402888	978-0-89239-495-1	Mercedes Sosa: La voz del Pueblo (Mercedes Sosa: Voice of the People) by Aixa Perez-Prado	781.62	$14.67	1	$14.67
2422194	978-84-10190-36-8	Misterio Del Capitan (The Captain's Secret) by Emilio Aragon	Fic	$11.87	1	$11.87
2433972	978-84-129011-6-0	Mitos y Leyendas de Corea (Myths and Legends of Korea) by Valentina Camerini	Fic	$16.77	1	$16.77
2453533	978-1-4197-6857-6	Nina Del Pueblo de Floricanto: Luz Jimenez, Hija de Los Nahuas (Child of the Flower-Song People) by Gloria Amescua	920	$13.99	1	$13.99
2452092	978-607-39-2554-9	Nina Peanut Es lo Maximo (Nina Peanut Is Amazing) by Sarah Bowie	741.5	$11.17	1	$11.17
2405478	979-8-7656-4402-7	Nina como yo (A Girl Like Me) by Angela Johnson	811	$6.99	1	$6.99
2414226	978-84-127631-5-7	Nuevas Fabulas de Animales (New Animal Fables)	Fic	$13.97	1	$13.97
2422688	978-607-07-3916-3	Paloma Palometa (Palometa the Dove) by Isabel Campos Adrados	Fic	$9.77	1	$9.77
2422981	978-607-39-1869-5	Paz Guerra Cruells Acusada de Bullying (Paz Guerra Cruells Accused of Bullying) by Daniela Viviani	Fic	$9.07	1	$9.07
2411782	978-607-39-1560-1	Pequenas Rebeldes (Little Rebel Girls)	920	$13.27	1	$13.27
2414219	978-84-128046-8-3	Pequeno Robin y la Navidad (Little Robin Red Vest) by Jan Fearnley	Fic	$13.97	1	$13.97
2411779	978-607-39-1559-5	Pequenos Rebeldes (Little Rebel Boys)	920	$13.27	1	$13.27
2405479	979-8-7656-4403-4	Pieza a pieza: El obsequio de Ernestine para el presidente Roosevelt (Piece by Piece: Ernestine's Gift for President Roosevelt) by Lupe Ruiz-Flores	976.4	$6.99	1	$6.99
2433215	978-1-62354-560-4	Plumas: No Son Solo para Volar (Feathers: Not Just for Flying) by Melissa Stewart	598.147	$12.59	1	$12.59
2433014	978-958-8983-53-0	Poeta y Los Murcielagos (Poet and the Bats) by Carmenza Botero	Fic	$10.47	1	$10.47
2414223	978-84-128046-0-7	Principe y el Mendigo (The Prince and the Pauper) by Mark Twain	Fic	$12.57	1	$12.57
2461546	978-1-5364-9686-4	Prisionero B-3087 (Prisoner B-3087) by Alan Gratz	Fic	$19.95	1	$19.95
2416561	978-607-39-1400-0	Profesor D Escapa de la Tarea by Dan Ariely	Fic	$9.77	1	$9.77
2419581	979-8-7656-6086-7	Roca en mi garganta (The Rock in My Throat) by Kao Kalia Yang	973	$9.09	1	$9.09

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2461735	978-84-10346-09-3	Rory Robins: Guardianes del bosque magico (Rory Robins: Guardians of the Magical Forest) by Isabel Alvarez	Fic			$9.77 | $9.77
2419746	979-8-7656-8504-4	Ruth y el libro verde (Ruth and the Green Book) by Calvin Alexander Ramsey	E			$19.99 | $19.99
2456542	978-607-39-3021-5	Se Busca a Los Compas (Wanted: The Compas)	Fic			$11.87 | $11.87
2451182	978-84-19975-85-0	Secreto de Silvana (Silvana's Secret) by Silvana Rebollo	Fic			$11.87 | $11.87
2434823	978-607-39-1393-5	Senor Papas (Mr. Chips) by Mauricio Montiel Figueiras	Fic			$8.37 | $8.37
2440064	978-84-488-7028-7	Soy una Buena Persona: 12 Valores para Ser Mejor Persona y Dejar Huella en Los Demas (I Am a Good Person) by Patricia Ramirez	Fic			$15.37 | $15.37
2493065	978-84-488-7296-0	Super Donuts: Conquistar el Mundo! (Donut Squad: Take Over the World!) by Neill Cameron	741.5			$11.87 | $11.87
2433613	978-1-958629-79-6	Super Volcan (The Super Volcano) by Suzanne Jacobs Lipshaw	551			$13.27 | $13.27
2436662	978-0-7624-8822-3	Vivir Bruja (Being Bruja) by Zayda Rivera	973			$12.59 | $12.59
2422923	978-607-07-7513-0	Vuelta Al Mundo en Cuatro Animales (Around the World in Four Animals) by Liliana Arias	Fic			$9.77 | $9.77
2454545	979-8-7656-8563-1	Y, tambien, el zorro (And, Too, the Fox) by Ada Limon	811			$7.69 | $7.69
2414224	978-84-128046-1-4	Zanahorio (Carrot Top) by Jules Renard	Fic			$12.57 | $12.57
2462380	978-607-38-6214-1	Isadora Moon Juega a Ser Doctora (Isadora Moon Helps Out) by Harriet Muncaster	Fic			$8.37 | $8.37
2437494	978-607-38-5537-2	Mirabella y la Casa Encantada (Mirabelle and the Haunted House) by Harriet Muncaster	Fic			$9.07 | $9.07
2414141	978-1-5364-9031-2	J. D. en la Expo de Estilistas (J. D. and the Hair Show Showdown) by J. Dillard	Fic			$17.95 | $17.95
2452285	979-8-8752-3508-5	Ajetreo hip-hop (Hip-Hop Hustle) by Jake Maddox	Fic			$19.49 | $19.49
2452286	979-8-8752-3515-3	Desaire de futbol (Soccer Snub) by Jake Maddox	Fic			$19.49 | $19.49
2415073	978-1-5362-3437-4	Juana y Lucas: Grandes Problemas (Juana and Lucas: Big Problemas) by Juana Medina	Fic			$11.19 | $11.19
2432453	978-1-5362-3941-6	Juana y Lucas: Muchos Cambios (Juana and Lucas: Muchos Changes) by Juana Medina	Fic			$11.19 | $11.19
2393086	978-84-19688-20-0	Primera Partida (First Round) by Bruno Puelles	Fic			$11.17 | $11.17
2493055	978-84-272-5087-1	Codigo Cosmico (Knutz and Boltz and the Cosmic Code) by Tim Collins	Fic			$11.87 | $11.87
2451187	978-84-272-5053-6	Doctor Caos (Knutz and Boltz and the Sorcerer of Science) by Tim Collins	Fic			$11.87 | $11.87
2446402	978-84-10269-65-1	Kora Sparks y el Dragon Perdido (Kora Sparks and the Last Dragon) by Marta Conejo Sanchez	Fic			$13.27 | $13.27
2493220	979-13-87695-12-5	Kora Sparks y el Laberinto Imposible (Kora Sparks and the Impossible Labyrinth) by Marta Conejo	Fic			$13.27 | $13.27
2393171	978-84-10050-41-9	Jugador Numero 12 (Player Number 12)	Fic			$12.57 | $12.57
2414032	978-84-10050-46-4	Torneo Demoniaco (The Demonic Tournament)	Fic			$12.57 | $12.57
2414016	978-607-38-4788-9	Torre de Los Campeones (The Tower of Champions)	Fic			$12.57 | $12.57
2402804	978-1-5364-8820-3	Alebrijes (Spanish Edition) by Donna Barba Higuera	Fic			$22.95 | $22.95
2393460	978-1-5364-8752-7	Ira de Tlaloc (Wrath of the Rain God) by Karla Arenas Valenti	Fic			$24.95 | $24.95
2417375	978-1-5364-9078-7	Origen de Todas Las Cosas (The Beginning of All Things) by Karla Arenas Valenti	Fic			$24.95 | $24.95
2493046	979-8-89098-625-2	Rey Enano de Uxmal (The Child King of Uxmal) by Karla Arenas Valenti	Fic			$9.07 | $9.07
2484833	978-0-358-33159-9	Buenas Noches, Camioncito Azul (Good Night, Little Blue Truck) by Alice Schertle	E			$7.69 | $7.69
2393465	978-1-5364-8753-4	Rooster y el Diablo Bailarin (Rooster and the Dancing Diablo) by Diana Lopez	Fic			$24.95 | $24.95
2416578	978-607-39-1440-6	Poder del Amuleto (Power of the Amulet) by Susanna Isern	Fic			$8.37 | $8.37
2462533	978-1-5364-9722-9	Barco de Los Muertos (The Ship of the Dead) by Rick Riordan	Fic			$29.95 | $29.95
2462527	978-1-5364-9720-5	Espada Del Tiempo (The Sword of Summer) by Rick Riordan	Fic			$29.95 | $29.95
2462524	978-1-5364-9719-9	Magnus Chase y Los Nueve Mundos (9 from the Nine Worlds) by Rick Riordan	Fic			$24.95 | $24.95
2462529	978-1-5364-9721-2	Martillo de Thor (The Hammer of Thor) by Rick Riordan	Fic			$29.95 | $29.95
2493048	978-84-272-4958-5	Cuadro Secreto Del Prado (The Secret Painting of the Prado) by Miriam Mosquera	Fic			$11.87 | $11.87
2436160	978-84-272-2598-5	Misterio de la Alhambra (The Mystery of the Alhambra) by Miriam Mosquera	Fic			$11.87 | $11.87
2446425	978-84-272-4094-0	Misterios Del Camino (Mysteries of the Road on the Way of St. James) by Miriam Mosquera	Fic			$11.87 | $11.87
2405590	979-8-7656-2402-9	G.O.A.T. en el atletismo: Usain Bolt, Jackie Joyner-Kersee y mas (Track and Field's G.O.A.T.: Usain Bolt, Jackie Joyner-Kersee, and More) by Joe Levit	796.42			$22.99 | $22.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2405587	979-8-7656-2397-8	G.O.A.T. en el boxeo: Muhammad Ali, Manny Pacquiao y mas (Boxing's G.O.A.T.: Muhammad Ali, Manny Pacquiao, and More) by Jon M. Fishman	796.83	$22.99	1	$22.99
2405558	979-8-7656-2398-5	G.O.A.T. en el golf: Jack Nicklaus, Tiger Woods y mas (Golf's G.O.A.T.: Jack Nicklaus, Tiger Woods, and More) by Jon M. Fishman	796.352	$22.99	1	$22.99
2405589	979-8-7656-2401-2	G.O.A.T. en el tenis: Serena Williams, Roger Federer y mas (Tennis's G.O.A.T.: Serena Williams, Roger Federer, and More) by Jon M. Fishman	796.342	$22.99	1	$22.99
2405559	979-8-7656-2399-2	G.O.A.T. en la gimnasia: Nadia Comaneci, Simone Biles y mas (Gymnastics's G.O.A.T.: Nadia Comaneci, Simone Biles, and More) by Joe Levit	796.44	$22.99	1	$22.99
2405588	979-8-7656-2400-5	G.O.A.T. en la lucha libre profesional: Hulk Hogan, Dwayne "La Roca" Johnson y mas (Pro Wrestling's G.O.A.T.: Hulk Hogan, Dwayne "The Rock" Johnson, and More) by Joe Levit	796.812	$22.99	1	$22.99
2409416	978-607-38-4686-8	Vecina Muy Magica (A Very Magical Neighbor) by Paule Battault	Fic	$8.37	1	$8.37
2413555	978-1-5362-3377-3	Merci Suarez Se Hace la Lista (Merci Suarez Plays It Cool) by Meg Medina	Fic	$13.29	1	$13.29
2438147	978-607-39-2702-4	Libro Prohibido de Exe (The Forbidden Book of Exe) by Mikecrack	Fic	$11.87	1	$11.87
2453470	978-607-39-2866-3	Secreto Del Laberinto (The Secret of the Labyrinth) by Mikecrack	Fic	$11.87	1	$11.87
2451070	978-1-5364-9576-8	Srta. Campista (Miss Camper) by Kat Fajardo	741.5	$28.95	1	$28.95
2462453	978-84-272-4878-6	Mi Primer Sherlock Holmes: El Signo de Los Cuatro (My First Sherlock Holmes: The Sign of the Four) by Sir Arthur Conan Doyle	Fic	$9.07	1	$9.07
2462450	978-84-272-4877-9	Mi Primer Sherlock Holmes: Estudio en Escarlata (My First Sherlock Holmes: A Study in Scarlet) by Sir Arthur Conan Doyle	Fic	$9.07	1	$9.07
2434892	978-1-5458-1961-6	Es Hora de Brillar (Time To Shine) by Amparo Ortiz	741.5	$10.49	1	$10.49
2437097	978-1-5458-1967-8	Mejores amigas para siempre (Besties 4ever)	741.5	$10.49	1	$10.49
2486005	978-1-5458-2177-0	Nuevas Aventuras de Turning Red: Poder Panda (The New Adventures of Turning Red: Panda Power)	741.5	$10.49	1	$10.49
2493052	978-84-272-4277-7	Curso Estelar (A Stellar Class) by Monica Cencerrado	Fic	$9.07	1	$9.07
2493041	978-84-18594-81-6	Corte de la Muerte (The Court of the Dead) by Rick Riordan	Fic	$13.27	1	$13.27
2437520	978-84-488-7010-2	Penalti y Gol Es Gol (Penalty and Goal Is a Goal) by Oscar Julve	741.5	$11.17	1	$11.17
2493051	978-84-10396-30-2	Este Hamster Huele a Roquefort (This Hamster Smells Like Blue Cheese) by Alberto Casamayor	741.5	$9.07	1	$9.07
2452305	979-8-8752-3561-0	Cancion de Paloma para Puerto Rico: un diario de 1898 (Paloma's Song for Puerto Rico: A Diary from 1898) by Adriana Erin Rivera	Fic	$21.99	1	$21.99
2494227	979-8-8752-6003-2	Deseo a una Estrella: Un diario de 2022 a 2023 (Wishing on a Star with Estrella) by Vanessa Ramos	Fic	$21.49	1	$21.49
2452306	979-8-8752-3554-2	En casa durante la guerra con Valentina: un diario de 1940 a 1943 (On the Home Front with Valentina: A Diary from 1940 to 1943) by Claudia Oviedo	Fic	$21.99	1	$21.99
2423421	978-84-10406-12-4	Olivia Wolf: La Asombrosa Maquina Del Tiempo (Olivia Wolf and the Trip Through Time) by Jose Fragoso	741.5	$10.49	1	$10.49
2439039	978-1-5364-9413-6	Comienzo (The Beginning) by Kate DiCamillo	Fic	$20.95	1	$20.95
2429173	978-1-7316-5955-2	Curva en el tiempo (Twist in Time) by J.L. Anderson	Fic	$6.27	1	$6.27
2429177	978-1-7316-5951-4	Este lugar es un zoologico (This Place is a Zoo) by Kyla Steinkraus	Fic	$6.27	1	$6.27
2397863	979-8-89098-172-1	Papel de Mi Vida (Penny Draws a School Play) by Sara Shepard	Fic	$11.87	1	$11.87
2429683	978-1-5364-9238-5	Diosa de Tres Cabezas (Wrath of the Triple Goddess) by Rick Riordan	Fic	$29.95	1	$29.95
2391621	978-1-5364-8679-7	Ultimo Heroe del Olimpo (The Last Olympian) by Rick Riordan	Fic	$28.95	1	$29.95
2460602	978-84-19868-44-2	Harry Potter (Spanish Edition) by J.k. Rowling	Fic	$13.97	1	$13.97
2460604	978-84-19868-45-9	Hermione Granger (Spanish Edition) by J.k. Rowling	Fic	$13.97	1	$13.97
2460605	978-84-19868-43-5	Ron Weasley (Spanish Edition) by J.k. Rowling	Fic	$13.97	1	$13.97
2439998	978-84-10190-87-0	Deseo de Cumpleanos a lo Bestia (A Birthday Wish Gone Wild) by Maria Frisa	Fic	$12.57	1	$12.57
2453474	978-607-39-2992-9	Gemelo Malvado (The Evil Twin)	741.5	$11.87	1	$11.87
2422670	978-607-39-1854-1	Isla de Los Dragones Magicos (The Island of Magic Dragons)	Fic	$11.17	1	$11.17
2438146	978-607-39-2431-3	Violeta, la Hermana Secreta (Violeta, the Secret Sister) by Las Ratitas	Fic	$11.87	1	$11.87
2405770	979-8-7656-2391-6	Bo y el juego de baloncesto (Bo and the Basketball Game) by Elliott Smith	Fic	$21.99	1	$21.99
2405774	979-8-7656-2395-4	Bo y el maton de la escuela (Bo and the School Bully) by Elliott Smith	Fic	$21.99	1	$21.99
2405775	979-8-7656-2396-1	Bo y la casa escalofriante (Bo and the Spooky House) by Elliott Smith	Fic	$21.99	1	$21.99
2419349	979-8-7656-4390-7	Imani encuentra las notas correctas (Imani Finds the Right Notes) by Cicely Lewis	Fic	$23.99	1	$23.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2419350	979-8-7656-4391-4	Imani hace una diferencia (Imani Makes a Difference) by Cicely Lewis	Fic			$23.99	$23.99
2419351	979-8-7656-4393-8	Imani la Superheroina (Imani the Superhero) by Cicely Lewis	Fic			$23.99	$23.99
2419352	979-8-7656-4392-1	Imani se sobrepone (Imani Picks Up the Pieces) by Cicely Lewis	Fic			$23.99	$23.99
2419353	979-8-7656-4389-1	Imani y su gran experimento para el pelo (Imani and the Great Hair Experiment) by Cicely Lewis	Fic			$23.99	$23.99
2419354	979-8-7656-4394-5	Receta de Imani para el trabajo en equipo (Imani's Recipe for Teamwork) by Cicely Lewis	Fic			$23.99	$23.99
2435703	978-0-593-95990-9	Cuentos de Buenas Noches para ninas Rebeldes: Mas de 100 Historias de mujeres extraordianarias (Good Night Stories for Rebel Girls: 100 Tales of Extraordinary Women) by Elena Favilli	920.72			$24.50	$24.50
2446453	978-1-5461-7655-8	Safi: la Gata de un Solo Ojo, Vol. 01 (Saphie the One-Eyed Cat, Vol. 01) by JOHO	741.5			$9.09	$9.09
2422734	978-607-07-6503-2	Llorona: La Guardiana (Llorona: The Guardian) by Olivia Vera	Fic			$9.07	$9.07
2422196	978-84-19746-66-5	Talentos Ocultos (Hidden Talents) by A. Quintas Garciandia	Fic			$13.27	$13.27
2404096	978-84-272-4149-7	Caso Del Manga Desaparecido (The Case of the Missing Manga) by Anais Baranda Barrios	Fic			$10.47	$10.47
2390888	978-84-272-4084-1	Caso de los Platanos Desararecidos (The Case of the Missing Bananas) by Anais Baranda Barrios	Fic			$10.47	$10.47
2416564	978-84-272-4153-4	Misterio de la Feria de Villarriba de Abajo (The Mystery of the Villarriba de Abajo Fair) by Anais Baranda	Fic			$10.47	$10.47
2423447	978-1-5364-9146-3	Sirena Esmeralda y la Fiesta del Oceano (Emerald and the Ocean Parade) by Harriet Muncaster	Fic			$24.95	$24.95
2452413	979-8-8752-3629-7	Vida secreta de Pie Grande (The Secret Life of Bigfoot) by Megan Cooley Peterson	001.944			$23.49	$23.49
2452415	979-8-8752-3637-2	Vida secreta del Hombre Polilla (The Secret Life of Mothman) by Megan Cooley Peterson	001.944			$23.49	$23.49
2452418	979-8-8752-3669-3	Vida secreta del Yeti (The Secret Life of the Yeti) by Benjamin Harper	001.944			$23.49	$23.49
2452414	979-8-8752-3645-7	Vida secreta del chupacabras (The Secret Life of the Chupacabra) by Megan Cooley Peterson	001.944			$23.49	$23.49
2452416	979-8-8752-3653-2	Vida secreta del kraken (The Secret Life of the Kraken) by Benjamin Harper	001.944			$23.49	$23.49
2452417	979-8-8752-3661-7	Vida secreta del monstruo del lago Ness (The Secret Life of the Loch Ness Monster) by Benjamin Harper	001.944			$23.49	$23.49
2483428	979-8-2952-0030-4	Alrededor Del Araniverso (Around the Spider Verse) by Pablo Leon	741.5			$28.95	$28.95
2393947	978-1-5364-8808-1	Escuela de Espias Malvados (Evil Spy School) by Stuart Gibbs	Fic			$19.95	$19.95
2419843	978-1-5364-9104-3	Escuela de Espias en Las Nieves (Spy Ski School) by Stuart Gibbs	Fic			$19.95	$19.95
2416557	978-84-19688-57-6	Supercastigados (Super-Punished) by Luis Ponce	Fic			$11.87	$11.87
2449594	978-84-18774-64-5	Solos (Alone) by Elias Vahlund	741.5			$10.49	$10.49
2416562	978-84-272-4077-3	Conjuros en Clase (Spells in Class) by Gracia Iglesias	Fic			$9.07	$9.07
2414826	978-1-6626-6559-2	Heroes Afroamericanos Del Salvaje Oeste (Black Heroes of the Wild West) by James Oits Smith	978.78			$8.39	$8.39
2424497	978-1-64466-748-4	Animales supercamuflados (Super-Camouflaged Animals) by Meg Greve	591.47			$24.95	$24.95
2424498	978-1-64466-755-2	Animales superfuertes (Super-Strong Animals) by Joanne Mattern	590			$24.95	$24.95
2424499	978-1-64466-751-4	Animales supergigantes (Super-Gigantic Animals) by Joanne Mattern	591.4			$24.95	$24.95
2424500	978-1-64466-754-5	Animales superinteligentes (Super-Smart Animals) by Joanne Mattern	591.5			$24.95	$24.95
2424501	978-1-64466-753-8	Animales supermortales (Super-Deadly Animals) by Joanne Mattern	591.6			$24.95	$24.95
2424502	978-1-64466-749-1	Animales superpeligrosos (Super-Dangerous Animals) by Meg Greve	591.6			$24.95	$24.95
2424503	978-1-64466-750-7	Animales superveloces (Super-Fast Animals) by Meg Greve	612			$24.95	$24.95
2424504	978-1-64466-752-1	Dinosaurios superincreibles (Super-Incredible Dinosaurs) by Meg Greve	567.9			$24.95	$24.95
2455430	978-1-64466-968-6	Anfibios (Amphibians) by Joanne Mattern	597.8			$24.95	$24.95
2455431	978-1-64466-973-0	Animales Marinos (Sea Animals) by Joanne Mattern	577.7			$24.95	$24.95
2455432	978-1-64466-969-3	Aves (Birds) by Joanne Mattern	598.168			$24.95	$24.95
2455433	978-1-64466-970-9	Insectos (Insects) by Joanne Mattern	595.7			$24.95	$24.95
2455434	978-1-64466-971-6	Mamiferos (Mammals) by Joanne Mattern	599.168			$24.95	$24.95
2455435	978-1-64466-972-3	Reptiles (Reptiles) by Joanne Mattern	333.95			$24.95	$24.95
2423537	978-1-5364-9159-3	Lu (Spanish Edition) by Jason Reynolds	Fic			$17.95	$17.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2414048	978-84-488-6896-3	Libelula Sin Volar y un Invento Genial: Aprender a Leer con MAYUSCULAS (A Dragonfly Without Flying and a Brilliant Invention) by Begona Oro	E	$6.27	1	$6.27
2414051	978-84-488-6898-7	Oso Trabajador y el Problema Del Ordenador: Aprender a Leer con MAYUSCULAS (A Hardworking Bear and the Computer Problem) by Begona Oro	E	$6.27	1	$6.27
2393443	978-1-4788-9047-8	Vampirita y la Turba Enfurecida (Vampirita and the Angry Mob) by Mariana Llanos	Fic	$12.57	1	$12.57
2393677	978-1-5364-8788-6	Que Sabemos Sobre el Chupacabras? (What Do We Know About the Chupacabra?) by Pam Pollack	001.944	$16.95	1	$16.95
2459812	978-1-5364-9657-4	Que Es el Canal de Panama? (What Is the Panama Canal?) by Janet B. Pascal	972.87	$16.95	1	$16.95
2411703	978-1-5364-8961-3	Que Fue el Holocausto? (What Was the Holocaust?) by Gail Herman	940.53	$16.95	1	$16.95
2423576	978-1-5364-9173-9	Que Fue el Titanic? (What Was the Titanic?) by Stephanie Sabol	910.9163	$16.95	1	$16.95
2440232	978-1-5364-9457-0	Que Fue la Era de Los Dinosaurios? (What Was the Age of the Dinosaurs?) by Megan Stine	567.9	$16.95	1	$16.95
2417229	978-1-5364-9067-1	Quien Es Lionel Messi? (Who Is Lionel Messi?) by James Buckley	796.334	$14.95	1	$14.95
2453923	978-1-5364-9631-4	Quien Es Zendaya? (Who Is Zendaya?) by Kirsten Anderson	790	$14.95	1	$14.95
2440233	978-1-5364-9458-7	Quien Es Lin-Manuel Miranda? (Who Is Lin-Manuel Miranda?) by Elijah Rey-David Matos	792.02	$16.95	1	$16.95
2409888	978-1-5364-8954-5	Quien Es Taylor Swift? (Who Is Taylor Swift?) by Kirsten Anderson	780.2	$16.95	1	$16.95
2402811	978-1-5364-8822-7	Quien Fue Cesar Chavez? (Who Was Cesar Chavez?) by Dana Meachen Rau	331.88	$16.95	1	$16.95
2437513	978-84-19982-05-6	Magia de la Luna (The Magic of the Moon) by Patricia Garcia-Rojo	Fic	$11.87	1	$11.87
2402077	978-84-19521-68-2	Golden Frog Games (Spanish Edition) by Claribel Ortega	Fic	$14.67	1	$14.67

Total quantity	365 Titles(365 Books)
Subtotal	$6,280.31
Processing Options Total	$1,204.50
Shipping & Handling	$125.61
Shipping Discount	-$125.61
Tax	$767.19
Grand Total	**$8,252.00**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: JUVENILE PICTURE BOOKS ODC 1
List#: 207796
Date: 2/17/2026 6:18:38 PM
Total quantity: 502 Titles(502 Books)

Order Information

Shipping Address

Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address

Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative

Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	502	$1,656.60

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2492893	978-1-77840-306-4	Aya Has Never Seen A Bear by Gerelchimeg Blackcrane	E				$14.67 1 $14.67
2486628	978-0-316-56134-1	Maya's Big Question by Meena Harris	E				$13.29 1 $13.29
2456820	978-1-83600-958-0	Fox and Owl's Winter Adventure by Jackie Lui	E				$10.49 1 $10.49
2495845	978-1-77450-874-9	Nuka Goes to Daycare by Tricia Jairam	E				$9.07 1 $9.07
2452920	978-1-4867-3180-0	Baby Loves Sports by Addie Vaughters	305				$6.29 1 $6.29
2493077	978-80-00-07606-5	Are You Bored, Minimoni? by Rocio Bonilla	E				$13.27 1 $13.27
2449570	979-8-88859-776-7	Big and Small by Britta Teckentrup	E				$6.99 1 $6.99
2474466	979-8-88859-897-9	Breathe Deep by Joanie Leeds	E				$11.89 1 $11.89
2446849	979-8-88859-659-3	Every Body Move! by Jenna Elyse Johnson	E				$11.89 1 $11.89
2493101	978-1-80570-101-9	Bear Worries by Natalia Shaloshvili	E				$13.29 1 $13.29
2449385	978-0-241-76702-3	Peter's Christmas Gifts by Beatrix Potter	E				$6.99 1 $6.99
2493102	978-0-7112-9638-1	Little Fairy Godmother by Abie Longstaff	E				$13.29 1 $13.29
2451637	978-1-5364-9609-3	Berenstain Bears Reach for the Stars! by Mike Berenstain	E				$14.95 1 $14.95
2493796	978-3-7913-7643-1	Birthday: A Big Hedgehog and Little Hedgehog Adventure by Britta Teckentrup	E				$10.49 1 $10.49
2493261	979-8-88983-406-9	Boy with Big, Big Energy by Britney Winn Lee	E				$13.29 1 $13.29
2484443	979-8-2952-0063-2	Bluey: Zoo	E				$14.95 1 $14.95
2458760	979-8-217-05164-9	I Love My Family by Bluey and Bingo	E				$6.99 1 $6.99
2485090	978-0-593-69683-5	Bookie And Cookie Turn The Page by Blanca Gomez	E				$13.29 1 $13.29
2449514	979-8-217-03130-6	Ms. Rachel and Bean and the Bedtime Routine: Encouraging a Calm and Comforting Good Night by Rachel Accurso	E				$13.99 1 $13.99
2460131	978-1-4642-6142-8	Meet February by April Martin	E				$11.89 1 $11.89
2460130	978-1-4642-6139-8	Meet January by April Martin	E				$11.89 1 $11.89

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2460132	978-1-4642-6145-9	Meet March by April Martin	E	$11.89	1	$11.89
2452070	978-1-6672-1056-8	Who's Jolly? (Lift-the-Flap) by Camilla Reid	E	$6.29	1	$6.29
2463323	978-0-316-57015-2	It's Spring! by Renee Kurilla	E	$13.29	1	$13.29
2493783	978-1-6659-9034-9	Juneteenth by Hannah Eliot	394.263	$6.29	1	$6.29
2459597	978-1-6659-8087-6	Chicka Chicka I Love You by John Archambault	E	$6.99	1	$6.99
2452925	978-1-4867-3157-2	Calm by Gail Hayes	E	$11.89	1	$11.89
2498725	978-1-4549-6716-3	Clive Penguin by Huw Lewis Jones	E	$6.29	1	$6.29
2461802	978-0-8028-5563-3	Consider the Lilies by Jennifer Grant	E	$13.29	1	$13.29
2492975	978-1-4197-8610-5	Danny Go's Volcano Adventure! by Danny Go!	E	$13.99	1	$13.99
2483416	978-0-7358-4596-1	Davy: A Garden for Everyone by Brigitte Weninger	E	$13.97	1	$13.97
2452913	978-1-960616-28-9	Day I Had a Spaceship by Ashley Wall	E	$12.57	1	$12.57
2492954	978-1-4197-8304-3	Alone and Together by Emilie Chazerand	E	$13.29	1	$13.29
2449419	978-1-7282-8984-7	Tiny Tooth by Max Amato	E	$13.29	1	$13.29
2449548	978-0-593-51805-2	Elmore and the Big Christmas Rescue by Dev Petty	E	$13.29	1	$13.29
2452919	978-84-10438-07-1	Mom by Margarita del Mazo	E	$13.97	1	$13.97
2446397	978-1-5235-3260-5	Shmoof by Heidi McKinnon	E	$11.19	1	$11.19
2485458	978-1-68555-201-5	Fly Who Flew Under the Sea by Lauren Sanchez Bezos	E	$13.97	1	$13.97
2450734	978-0-06-346973-0	Humble Pie by Jory John	E	$13.99	1	$13.99
2454421	978-1-4338-4742-4	S'More Is Enough by Brenda S. Miles	E	$13.29	1	$13.29
2493689	979-8-217-03317-1	Future Book by Mac Barnett	E	$13.99	1	$13.99
2493756	978-0-593-70940-5	Grumpy Monkey Father's Day Fuss by Suzanne Lang	E	$9.09	1	$9.09
2484868	978-1-5362-3797-9	Is This ... Spring? by Helen Yoon	E	$10.49	1	$10.49
2511438	978-0-593-51897-7	Soccer by Jill McDonald	796.334	$6.29	1	$6.29
2449299	978-1-77488-720-2	Newest Gnome by Lauren Soloy	E	$13.99	1	$13.99
2485305	978-1-63962-434-8	Daddy's Little Burrito by Jody Jensen Shaffer	E	$7.69	1	$7.69
2486595	979-8-89063-176-3	Hilariously Simple Math: The Combination Problem by Bill Wise	E	$14.67	1	$14.67
2443521	978-0-06-346033-1	Turkeys in Disguise by Cynthia Platt	E	$9.09	1	$9.09
2453131	978-1-4642-2619-9	How to Catch a Dream by Alice Walstead	E	$9.09	1	$9.09
2451126	978-0-374-39134-8	I Can Help on the Farm by David Hyde Costello	E	$10.49	1	$10.49
2462231	978-1-6659-1524-3	I'm Busy by Michael Ian Black	E	$13.99	1	$13.99
2443694	978-0-593-32498-1	If I Built a Town by Chris Van Dusen	E	$13.99	1	$13.99
2483472	978-1-78250-958-5	Abdullah's Bear Needs A Name! by Yasmin Hanif	E	$13.29	1	$13.29
2453594	978-0-593-75437-5	Abominable Snow Dancer by Steph Lau	E	$13.99	1	$13.99
2453626	978-1-6626-2004-1	Absolutely No Worries by Laurel Gale	E	$13.29	1	$13.29
2485089	978-0-593-61924-7	Action Jasmine by Kristen Mai Giang	E	$13.29	1	$13.29
2463356	978-0-316-58117-2	All That Glimmers by Laura Baker	E	$13.29	1	$13.29
2492965	978-1-4197-7284-9	All of Apolonia by Patty Cisneros Prevo	E	$13.29	1	$13.29
2451125	978-1-250-82198-0	And They Walk On by Kevin Noble Maillard	E	$13.29	1	$13.29
2453071	978-1-915748-38-6	Are You Sad, Little Bear?: A Book about Learning to Say Goodbye by Rachel Rivett	E	$11.19	1	$11.19
2461845	978-1-4556-2861-2	Are You a Rhinoceros? by Kevin Harris	E	$13.99	1	$13.99
2461553	978-1-68115-714-6	Aren't You a Strange Bird! by Rocio Bonilla	E	$13.97	1	$13.97
2461111	978-1-5235-2918-6	Baa Baa Shop: Sheep's First Haircut by Wendell Brooks	E	$11.89	1	$11.89
2449214	978-1-7972-1504-4	Balloon by Bruce Handy	E	$12.59	1	$12.59
2460014	978-1-68115-681-1	Banana Menorah by Lee Wind	E	$13.97	1	$13.97
2452115	978-1-77321-972-1	Baseball Bats for Christmas by Michael Arvaarluk Kusugak	E	$13.99	1	$13.99
2483375	978-1-77488-558-1	Bear Fairy by Paul Coccia	E	$13.29	1	$13.29
2449255	978-1-6643-0076-7	Bear Who Wanted to Dance by Stephanie Stansbie	E	$13.29	1	$13.29
2449434	978-1-68137-950-0	Bear by Himself by Geoffrey Hayes	E	$12.57	1	$12.57
2492929	978-1-77854-089-9	Bearheart and the Evergreen Tree by Alfreda Algeo Beartrack	E	$12.57	1	$12.57
2462210	978-1-6659-6391-6	Beatrix and the Unicorn by Lita Judge	E	$13.99	1	$13.99
2483296	978-0-593-51802-1	Because Of You, I'm A Sister by Jen Fier Jasinski	E	$13.29	1	$13.29
2486644	978-1-4547-1323-4	Beginning, Middle, and End by Jon Burgerman	E	$13.29	1	$13.29
2483445	978-1-83600-415-8	Being the Biggest by Molly Mead	E	$13.29	1	$13.29
2456537	978-1-6625-2309-0	Best Day Ever by Frank Tupta	E	$13.29	1	$13.29
2449178	978-1-5362-4507-3	Bestest Big Brother, Ever by Ben Mantle	E	$13.29	1	$13.29
2485087	979-8-217-04030-8	Better Than A Touchdown by Jalen Hurts	E	$13.99	1	$13.99
2484937	978-1-5362-4953-8	Big Green: A Story About The Great Green Wall Of Africa by Ken Wilson-Max	E	$13.29	1	$13.29
2486768	978-1-5266-7157-8	Big Journey by Michael Rosen	E	$13.29	1	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2450887	978-1-4547-1216-9	Big Rhinoceros, Little Rhinoceros by Jerrold Connors	E			$12.59 | $12.59
2464810	978-0-593-85894-3	Bob Is the Biggest, Strongest, and Smartest by Jean Reidy	E			$13.29 | $13.29
2462102	978-1-6659-8794-3	Book of Loves by Cynthia Rylant	E			$12.59 | $12.59
2460747	978-0-8234-6114-1	Bored by Felicita Sala	E			$13.29 | $13.29
2486646	978-1-4547-1292-3	Bothered by Bugs by Emily Gravett	E			$13.29 | $13.29
2449270	978-1-5362-4397-0	Boy, the Troll, and the Chalk by Anne Booth	E			$13.29 | $13.29
2453687	978-1-339-01538-5	Braided Roots: The Interweaving of History, Family, and a Father's Love by Pasha Westbrook	E			$13.99 | $13.99
2449481	978-1-4197-6815-6	Brain Train: An Off-The-Rails Journey from a to ZZZ by Charlie Mylie	E			$13.29 | $13.29
2443699	978-1-6626-2101-7	Bread Days by Hannah Chung	E			$13.29 | $13.29
2462619	978-1-250-90688-5	Bread Is Love by Pooja Makhijani	E			$13.29 | $13.29
2484865	978-0-8234-5961-2	Broccoli Is Trying to Kill Me by Katie Evans	E			$13.29 | $13.29
2449449	978-1-77488-200-9	Broken by X. Fang	E			$13.29 | $13.29
2453534	978-1-4197-7614-4	Bunny Ballet by Nora Ericson	E			$13.29 | $13.29
2450732	978-1-5253-1135-2	Call Me Gray by Andrew Larsen	E			$15.39 | $15.39
2462655	978-1-250-40874-7	Call Me Moby by Las Kenseth	E			$13.29 | $13.29
2451059	978-1-77227-566-7	Can I Come, Too?: An Adventure with the Grumpy Faces by Nadia Sammurtok	E			$12.57 | $12.57
2450745	978-1-6659-3563-0	Carla and the Tin Can Cake Party by Carla Hall	E			$13.99 | $13.99
2485431	978-1-6659-9076-9	Case of Old MacDonald and His Farm by Mark Teague	E			$13.99 | $13.99
2443751	978-0-06-267128-8	Cat Nap by Brian Lies	E			$13.99 | $13.99
2450728	978-1-5253-1353-0	Catnip Mouse by A. J. Smith	E			$13.99 | $13.99
2449390	978-0-593-69069-7	Cats on Cats on Cats by Maddie Frost	E			$13.29 | $13.29
2462673	978-1-250-34864-7	Celebrate Nowruz!: A Persian New Year Holiday To Honor Spring by Zohreh Ghahremani	E			$13.29 | $13.29
2486766	978-1-5476-0668-9	Celebration of You by Josh Funk	E			$13.29 | $13.29
2449359	978-1-62354-496-6	Charlotte's New Moccasins by Jenn Moudahi	E			$12.59 | $12.59
2493015	978-0-8028-5654-8	Children of the Sun: An Inca Legend by Micaela Chirif	E			$13.29 | $13.29
2454895	978-1-4788-8796-6	City Farm by Julie Koon	E			$13.27 | $13.27
2453482	978-0-06-314080-6	Come Catch a Dream by Brittany J. Thurman	E			$13.99 | $13.99
2485397	978-1-6659-8276-4	Come What May by Debi Gliori	E			$13.99 | $13.99
2451647	978-1-250-36529-3	Come on Out! by Alberto Lot	E			$11.19 | $11.19
2452912	978-0-571-39761-7	Coming of the Iron Giant by Ted Hughes	E			$13.97 | $13.97
2452863	978-1-77306-951-7	Community Snowman by Deborah Kerbel	E			$13.99 | $13.99
2453518	978-1-59270-437-8	Coziest Place on the Moon by Maria Popova	E			$13.99 | $13.99
2452935	979-8-9887499-7-4	Croco by Azul Lopez	E			$13.27 | $13.27
2449316	978-0-593-85914-8	Crocodiles Everywhere by Esteli Meza	E			$13.29 | $13.29
2453475	978-0-593-70900-9	Cure for the Hiccups by Jennifer E. Smith	E			$13.29 | $13.29
2451616	978-0-374-39128-7	Dance in the Desert by Madeleine L'Engle	E			$13.99 | $13.99
2453099	978-1-68115-694-1	Dancing on Memories by Freda Lewkowicz	E			$13.97 | $13.97
2453633	978-1-6626-2089-8	Dangerous Alphabet Book by D. K. Ryland	E			$13.29 | $13.29
2485384	978-1-6659-0677-7	Dark Is For by Jane Kohuth	E			$13.99 | $13.99
2450707	978-0-06-323805-3	Day Leap Soared by Blair Braverman	E			$13.99 | $13.99
2454212	978-1-5476-1935-1	Day with No Words by Tiffany Hammond	E			$13.29 | $13.29
2448840	978-1-4788-8189-6	Dear Moxie, Dear Rex by Cathy Petter	E			$13.27 | $13.27
2484432	978-0-06-346401-8	Dear Teacher,: A Celebration of People Who Inspire Us by Paris Rosenthal	E			$9.09 | $9.09
2449441	978-1-6659-5796-0	Dinky the Tinysaur by Maggie Edkins Willis	E			$13.99 | $13.99
2452083	978-1-4788-8784-3	Dinosaur Days by Courtney Pippin-Mathur	E			$13.27 | $13.27
2486044	979-8-89063-164-0	Don't Crawl! by Shideh Sekhavati	E			$14.67 | $14.67
2483325	978-1-6643-0079-8	Don't Do It, Doug! by Maudie Powell-Tuck	E			$13.29 | $13.29
2449606	978-0-06-332184-7	Don't Eat Eustace by Lian Cho	E			$13.99 | $13.99
2486047	978-1-6672-0997-5	Don't Go to Bed! by Adam Wallace	E			$9.09 | $9.09
2462806	978-0-06-335799-0	Dream by Gideon Sterer	E			$13.99 | $13.99
2483339	979-8-217-12244-8	Duck Delivers by Tom Tinn-Disbury	E			$13.29 | $13.29
2449358	978-0-593-35060-7	Dude. Be Nice by Sarah Scheerger	E			$13.29 | $13.29
2485026	978-0-593-88696-0	Eco: The Little Electric Taxi by Deb Adamson	E			$13.29 | $13.29
2444164	978-1-6659-0507-7	Elevator on 74th Street by Laura Gehl	E			$13.99 | $13.99
2483380	979-8-217-02405-6	Emily Saw A Door by Mel Rosenberg	E			$13.29 | $13.29
2446820	978-1-63655-139-5	Emmie Builds Something New by Marjorie Crosby-Fairall	E			$17.49 | $17.49
2492832	978-1-77306-710-0	Every Space Between by Naseem Hrab	E			$13.99 | $13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2462596	978-1-250-43391-6	Everybody by Jim Benton	E	$8.39		$8.39
2463382	978-0-593-69333-9	Exca-Gator! by Brooke Hartman	E	$13.29		$13.29
2486585	978-0-7358-4591-6	Fabulous Creatures: Legendary Animals from Around the World by Cornelia Funke	E	$15.37		$15.37
2444165	978-1-6659-4837-1	Family Tree by Liz Garton Scanlon	E	$13.99		$13.99
2449371	978-0-593-62515-6	Family of Friends by Varsha Bajaj	E	$13.29		$13.29
2484238	978-0-06-337357-0	Fanciest Flower by Summer Benton	E	$13.99		$13.99
2452891	978-1-962351-30-0	Fib: An Allegorical Picture Book about Honesty, Imagination and Facing the Truth by Pedro Iniguez	E	$13.97		$13.97
2433316	978-0-06-321672-3	Fireworks by Matthew Burgess	E	$13.99		$13.99
2458782	978-0-00-878959-6	Flow	E	$13.99		$13.99
2485283	978-0-593-69549-4	Flowers For Mama by Deborah Freedman	E	$13.29		$13.29
2493863	978-1-77488-092-0	Fly in the Chai by Zenia Wadhwani	E	$13.29		$13.29
2464799	978-0-593-69146-5	Forty the Fortune Teller by Drew Daywalt	E	$13.29		$13.29
2450746	978-1-6659-6427-2	Friend for Fox by Enrico Lorenzi	E	$13.99		$13.99
2445962	978-1-64614-569-0	Friend for Lucy by Jen-Ai Elena Molineaux	E	$13.99		$13.99
2454472	978-1-83630-020-5	Gallery of Cats by Ruth Brown	E	$13.29		$13.29
2453922	979-8-89565-214-5	Georgie and Her Great Horse Adventures by Tyrus	E	$13.99		$13.99
2450757	978-1-339-00034-3	Gift of Words by Peter H. Reynolds	E	$13.29		$13.29
2450778	978-1-6659-5990-2	Glitter Kittens by William Joyce	E	$13.99		$13.99
2485430	978-1-6659-5356-6	Go Bananas! by A. B. Peele	E	$13.99		$13.99
2486688	978-0-316-57096-1	God of Sleep by Lev Grossman	E	$13.29		$13.29
2493252	978-1-64060-996-9	God of Wonders by Dominique Okonkwo	E	$11.89		$11.89
2485020	978-0-593-69241-7	Goldfinches by Mary Oliver	E	$13.29		$13.29
2453553	978-0-593-69481-7	Goodnight, Crayons by Drew Daywalt	E	$6.99		$6.99
2493305	978-1-4598-3966-3	Gotcha Day by Deborah Kerbel	E	$15.37		$15.37
2492833	978-1-77306-751-3	Grandma, Cho Cho and Me by Morgan Christie	E	$13.99		$13.99
2446901	978-80-00-07607-2	Grandpas, Piranhas, and Other Stories by Rocio Bonilla	E	$13.27		$13.27
2449460	978-0-593-89748-5	Gray Squirrel Loses It! by Cassandra Federman	E	$13.29		$13.29
2463381	978-0-593-85795-3	Great Escape by Deborah Marcero	E	$13.99		$13.99
2460726	978-1-5362-4821-0	Green Hippo by Petr Horacek	E	$13.29		$13.29
2493008	978-1-6625-1005-2	Greta Green Builds A Submarine by Sue Fliess	E	$13.29		$13.29
2462837	978-0-06-323776-6	Growing Together by Ruth Spiro	E	$13.99		$13.99
2463600	978-1-77147-686-7	Gus Upstairs by Carey Sookocheff	E	$13.27		$13.27
2493870	978-1-368-11395-3	Habitat Heroes by Daniel Bernstrom	E	$13.29		$13.29
2452893	978-1-960616-25-8	Handy Pandas by Jamie McMahon	E	$12.57		$12.57
2453095	978-1-5362-4504-2	Hatful of Dreams by Bob Graham	E	$13.29		$13.29
2464805	978-1-9848-1324-4	Hazel and Herbert by Alexandra Thompson	E	$13.29		$13.29
2449013	978-1-957655-57-4	Hazel and Mabel: Two Hearts Apart by Melissa Stoller	E	$13.97		$13.97
2486778	978-1-250-32902-8	Hazel's Best Day: A Story of Community, Accessibility, and Pride in Being Yourself by Adiba Nelson	E	$13.29		$13.29
2486777	978-1-250-35736-6	Heart of Our Home by Janelle Washington	E	$13.99		$13.99
2461978	978-1-77488-636-6	Hello Baby, It's Me, Alfie by Maggie Hutchings	E	$13.29		$13.29
2451622	979-8-89003-310-9	Help Me Find My Hamster by Brooke Hartman	E	$13.29		$13.29
2485353	978-1-6626-4130-5	Her Muddy Majesty of Muck by Beatrice Alemagna	E	$13.99		$13.99
2462782	978-0-06-337469-0	Here Come the Aunties! by Cynthia Leitich Smith	E	$13.99		$13.99
2486578	979-8-89063-307-1	Higher! by Patricia Fitti	E	$14.67		$14.67
2450936	978-1-64963-287-6	Highly Sensitive Rabbit by Judith Orloff	E	$13.29		$13.29
2484964	978-1-5362-4403-8	Home Is A Nest by Emma Carlisle	E	$13.29		$13.29
2452862	978-1-77306-776-6	Home for Margaret by Denise Davy	E	$13.99		$13.99
2448292	978-0-500-65349-4	House with the Little Red Door by Grace Easton	E	$13.97		$13.97
2460735	978-1-83874-060-3	How Many Animals Can Fit in This Book? by Natalia Yaskina	E	$12.59		$12.59
2493088	978-80-00-07604-1	How Mr. Felix Entered A Bicycle Race by Peter Svetina	E	$11.87		$11.87
2492895	978-1-77147-658-4	How To Read A Very Serious Book by Mireille Messier	E	$13.27		$13.27
2485413	978-1-6659-5839-4	How To Say You're Sorry by Stephanie Calmenson	E	$13.99		$13.99
2492914	978-1-4598-4004-1	How to Comfort a Monster by Jesper Cederstrand	E	$15.37		$15.37
2453836	979-8-88777-212-7	How to Find a Yeti by Matt Hunt	E	$13.29		$13.29
2483295	978-0-593-90260-8	Hummingbird's Big Trip by G. Brian Karas	E	$13.29		$13.29
2484933	978-0-8234-5220-0	I Am A Bon Dancer by Brandi-Ann Uyemura	E	$13.29		$13.29
2450838	978-1-5461-4755-8	I Am Ingrid: The Adventures of the World's Greatest Guide Dog by Aria Mia Loberti	E	$13.29		$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2449442	978-1-6659-5335-1	I Am Not Happy! by Caroline L. Perry	E				$13.99	$13.99
2463366	978-0-316-36494-2	I Am a Good Friend by Charise Mericle Harper	E				$13.29	$13.29
2453756	978-0-316-45397-4	I Am a Highly Dangerous Warrior! by Raquel D'Apice	E				$13.29	$13.29
2349979	978-1-63819-133-9	I Am the Sun by Janessa Parker	E				$13.29	$13.29
2451670	978-1-77086-804-5	I Drove My Bed to Grandma's House by Carolyn Huizinga Mills	E				$16.07	$16.07
2492961	978-1-59270-483-5	I Forgot How To Sleep by Bruno Zocca	E				$12.59	$12.59
2449203	978-0-593-30817-2	I Hear the Snow, I Smell the Sea by Janice Milusich	E				$13.29	$13.29
2458772	978-0-06-344919-0	I Love You Alotl, I Love You So Much: An Axolotl Book by Giselle Angel	E				$6.99	$6.99
2493778	978-1-6643-0077-4	I Love You Rain or Shine by Danielle McLean	E				$13.29	$13.29
2486806	978-1-4642-4475-9	I Really Want To Be A Cat by Helen Hancocks	E				$10.49	$10.49
2453573	979-8-88859-780-4	I Took the Moon for a Walk by Carolyn Curtis	E				$13.29	$13.29
2446730	978-1-990252-37-2	I Will Not Be Scared by Jean-Francois Senechal	E				$13.29	$13.29
2453568	978-1-6643-0071-2	I'll Love You Forever by Owen Hart	E				$7.69	$7.69
2460214	978-1-83616-072-4	I'm Dreaming of a Pink Christmas by Frances Gilbert	E				$11.87	$11.87
2451815	978-0-7112-9574-2	I'm Going to Eat a Polar Bear by Karl Newson	E				$13.29	$13.29
2449289	978-0-593-62230-8	I'm Very Busy: A (Nearly Forgotten) Birthday Book by Oliver Jeffers	E				$12.59	$12.59
2462706	978-1-57102-495-4	If Mice Pulled the Sleigh by Bill Barnsley	E				$13.29	$13.29
2463433	978-0-8234-5719-9	If This Were the World by Stephen Barr	E				$13.29	$13.29
2443518	978-0-06-337522-2	If You Make a Call on a Banana Phone by Gideon Sterer	E				$13.99	$13.99
2493306	978-1-4598-4200-7	If You Make a Mosom Tea by Tonya Simpson	E				$15.37	$15.37
2493106	978-1-83600-894-1	Igor and the Mending Mice by Alexander Mostov	E				$13.99	$13.99
2486672	978-0-316-57467-9	Iguana Miss You! by Sandra Boynton	E				$13.29	$13.29
2492940	978-1-84976-961-7	Indigo Irvine by Rhiannon Archard	E				$12.59	$12.59
2486779	978-1-250-35308-5	Into the Wilderness by Haven Iverson	E				$13.29	$13.29
2492953	978-1-63655-144-9	Invisible River to Cross by Taraneh Matloob	E				$13.99	$13.99
2452885	978-84-10438-11-8	Is This Present for Me? by Jose Carlos Roman	E				$13.97	$13.97
2454459	978-1-4338-4750-9	Isabel's Birthday Surprise (Spanish / English) by Debbie Zapata	E				$13.29	$13.29
2452882	978-1-77147-703-1	It Began with a Buzz by Shiva Delsooz	E				$13.27	$13.27
2484832	978-0-06-328347-3	It Takes A Family to Serve: A Tribute To Military Families by Lisa Wheeler	E				$13.99	$13.99
2493823	978-1-62354-642-7	It's a Mom! by Abby Cooper	E				$12.59	$12.59
2486822	978-1-7282-9672-2	Judgy Bunny and the Terrible Beach by Scott Rothman	E				$13.29	$13.29
2449535	978-1-77488-252-8	Just Another Perfect Day by Jillian Harris	E				$13.29	$13.29
2448732	978-1-7282-9030-0	Just Keep Going by Lynn Smith	E				$13.29	$13.29
2453593	978-0-593-38583-8	Kat and Brandy by Katherine Schwarzenegger	E				$13.29	$13.29
2459732	978-1-64547-247-6	Kind Karl: A Little Crocodile with Big Feelings by Sharon Salzberg	E				$13.97	$13.97
2449294	978-1-78269-467-0	King Winter's Birthday by Jonathan Freedland	E				$13.97	$13.97
2462704	978-1-250-39289-3	Kitty Caterpillar by Annabeth Bondor-Stone	E				$13.29	$13.29
2448618	978-0-8028-5649-4	Late Today by Jungyoon Huh	E				$13.29	$13.29
2462703	978-1-250-41311-6	Leave Me Alone!: A Good Inside Story About Deeply Feeling Kids by Becky Kennedy	E				$13.99	$13.99
2462816	978-0-06-347229-7	Leave the Trees, Please by Benjamin Zephaniah	E				$13.99	$13.99
2449581	978-1-77488-013-5	Lena the Chicken (but Really a Dinosaur!) by Linda Bailey	E				$13.29	$13.29
2449392	978-0-593-85728-1	Lion in Bed by Darren Farrell	E				$13.29	$13.29
2446368	978-1-4547-1278-7	Lionel: The Big Friendly Rhinoceros by Lo Cole	E				$13.29	$13.29
2486579	979-8-89063-311-8	Lissy's Garden by Ellen DeLange	E				$14.67	$14.67
2463061	979-8-217-03873-2	Listen, Hippo! by Gabriel Evans	E				$13.29	$13.29
2453572	979-8-88859-782-8	Listen, Listen by Phillis Gershator	E				$13.29	$13.29
2492824	978-1-968127-08-4	Little Green Apple by Mary Emma Tisinger	E				$15.39	$15.39
2493329	978-1-998802-30-2	Little Halwa and a Big Family by Farid Bazger	E				$13.29	$13.29
2024768	978-1-328-74194-3	Little House (75th Anniversary Edition) by Virginia Lee Burton	E				$13.99	$13.99
2452875	978-1-77147-590-7	Little Moments in a Big Universe by Todd Stewart	E				$13.97	$13.97
2484935	978-1-5362-4294-2	Little Passenger by Deirdre Sullivan	E				$13.29	$13.29
2449456	978-0-06-346496-4	Little Penguin Gets the Hiccups by Tadgh Bentley	E				$9.09	$9.09
2453684	978-0-593-71181-1	Lolly on the Ice by Sarah S. Brannen	E				$13.29	$13.29
2446914	979-8-89338-028-6	Look Up by Azul Lopez	E				$13.97	$13.97
2485382	978-1-6659-7494-3	Loops by Jashar Awan	E				$13.99	$13.99
2449459	978-1-4197-6691-6	Lost Cause by Felicita Sala	E				$13.29	$13.29
2485021	978-1-83874-072-6	Lost Robot by Joe Todd-Stanton	E				$12.59	$12.59
2459582	978-1-250-33475-6	Love Finds a Way by Vern Kousky	E				$13.29	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2460159	978-1-917366-89-2	Love Grows Here by Amy Adele	E				$13.29	$13.29
2493786	978-1-62354-668-7	Love That Baby Hair! by Alliah L. Agostini	E				$12.59	$12.59
2493260	979-8-88983-647-6	Love That Made You by Grace Semler Baldridge	E				$13.29	$13.29
2492962	978-1-990252-42-6	Lucie and the Wind by Laforce Gregoire	E				$13.99	$13.99
2458653	978-1-77278-341-4	Lucky Dog Comes Home by John Spray	E				$13.27	$13.27
2493831	978-0-593-70908-5	Lulu Didn't Want a Dog by Laurel Molk	E				$13.29	$13.29
2453640	978-0-593-66015-7	Making Art by Diana Ejaita	E				$13.29	$13.29
2453757	978-0-316-57803-5	Mama Car by Lucy Catchpole	E				$13.29	$13.29
2493820	978-1-6643-0089-7	Marcie and Giraffe by Kim Gregory	E				$13.29	$13.29
2493250	979-8-88859-902-0	Mari and the Great Market Swap by Janelle Springer-Willms	E				$12.59	$12.59
2485992	978-1-62371-565-6	Marvelous Doctors for Magical Creatures by Jodie Lancet-Grant	E				$13.97	$13.97
2462342	978-1-962011-10-5	Maya's Journey: A Story of Two Great-Grandmothers by Marcella White Campbell	E				$13.99	$13.99
2483341	978-0-593-81499-4	Maya's World by Andrea Pippins	E				$13.29	$13.29
2451851	978-1-5064-9664-1	Memory Tree: A Holiday Grief Book by Joanna Rowland	E				$13.29	$13.29
2493255	978-0-7643-7073-1	Mermaid Candy: A Sea Glass Adventure by Ashley Regina Lucas	E				$13.99	$13.99
2453764	978-1-4549-5401-9	Mike the Magical Coughing Cat by Mag Takac	E				$13.29	$13.29
2452760	978-0-7358-4604-3	Millie and the Midnight Hedgehog by Bernadette Watts	E				$13.97	$13.97
2449364	978-0-593-53134-1	Moby Duck by Peter Raymundo	E				$13.29	$13.29
2443511	978-0-593-69230-1	Mom's Busy Work by Jacinda Ardern	E				$13.99	$13.99
2483471	979-8-9898588-5-9	Moon Sailors by Naomi Woodward	E				$13.27	$13.27
2450863	978-0-316-46163-4	Moon Song by Michaela Goade	E				$13.29	$13.29
2492826	978-1-64755-455-2	More Seeds, Please! by Lucas Alberg	E				$11.87	$11.87
2485124	978-0-593-69768-9	More Than A Tree by Sarah Kurpiel	E				$13.29	$13.29
2461629	978-1-63655-168-5	Most Wonderful Gift in the World by Mireia Olive Obradors	E				$13.29	$13.29
2493829	978-0-593-70568-1	Mother Tree by Sybil Rosen	E				$13.29	$13.29
2459761	978-1-62371-575-5	Mr. Kuroki's Garden by Anne Renaud	E				$13.27	$13.27
2451049	978-1-80066-059-5	Museum of Shapes by Sven Volker	E				$8.92	$8.92
2485132	978-0-593-62437-1	Music Of The Bells by Anitha Rao-Robinson	E				$13.29	$13.29
2448290	978-1-6689-5523-9	My Backyard Used to Be by Lynn Baldwin	E				$13.29	$13.29
2460830	978-0-593-86013-7	My Best Friend Is a Lion by Deb Pilutti	E				$13.29	$13.29
2453063	978-1-68115-685-9	My Body Can by Laura Gehl	E				$13.97	$13.97
2451813	978-0-7112-9601-5	My Friend, Billy Whiskers by David Litchfield	E				$13.29	$13.29
2486043	979-8-89063-112-1	My Lion Friend by Mao Yang	E				$14.67	$14.67
2459967	978-1-77160-761-2	My Little Santa Claus by Gabrielle Vincent	E				$14.00	$14.00
2485024	978-0-593-88727-1	My Someone: A Pet Adoption Story by Yuko Torii	E				$12.59	$12.59
2484241	978-0-06-324497-9	Name for Sister by Charlotte Cheng	E				$13.99	$13.99
2493026	978-0-310-16835-5	Nature of Change: Lessons of Determination, Resilience, and Hope from the Outside World by Rene Marsh	E				$13.99	$13.99
2493809	978-0-593-89769-0	Navigating Night by Julie Leung	E				$13.29	$13.29
2449521	978-1-4197-7471-3	Never Give a Baby a Library Card by Erin Sandberg	E				$13.29	$13.29
2453096	978-1-5362-4506-6	Night of the Hedgehog by Tanya Rosie	E				$13.29	$13.29
2449159	978-0-593-95925-1	Night the Garden Glowed by Brendan Kearney	E				$12.59	$12.59
2486040	978-1-962098-34-2	No, No, No by Noemi Vola	E				$13.29	$13.29
2449312	978-0-593-81272-3	Nunu and the Sea by Isabella Kung	E				$13.29	$13.29
2453129	978-1-7282-9098-0	Oh No! Dinosaurs in the Supermarket by Timothy Knapman	E				$10.49	$10.49
2454266	978-1-324-05412-2	Old Sleigh by Jarrett Pumphrey	E				$13.29	$13.29
2486651	979-8-88777-225-7	Once I Was a Tree by Eoin McLaughlin	E				$13.29	$13.29
2457395	978-1-63819-232-9	Once upon a You by Keyshawn Johnson	E				$13.29	$13.29
2449540	978-1-77488-266-5	One About the Blackbird by Melanie Florence	E				$13.29	$13.29
2485383	978-1-6659-4706-0	Other Side of the Garden by Sili Recio	E				$13.99	$13.99
2449395	978-0-593-62551-4	Our Air by G. Brian Karas	551.5				$13.29	$13.29
2494031	978-1-63217-666-0	Our Shed: A Father-Daughter Story About Building Memories Together by Robert Broder	E				$12.59	$12.59
2459311	979-8-225-01463-6	Paper Chase by Julia Donaldson	E				$13.99	$13.99
2462716	978-1-958514-14-6	Patrick Picklebottom and the Living Room of Lava by Jay	E				$13.97	$13.97
2463414	979-8-217-31913-8	Pet Show! by Ezra Jack Keats	E				$13.29	$13.29
2450788	978-1-6659-2530-3	Piggypine by Richard T. Morris	E				$13.99	$13.99
2486580	979-8-89063-317-0	Pippa and the Strange Egg by Sara Damme	E				$14.67	$14.67
2452057	978-1-62371-577-9	Pirate Moms by Jodie Lancet-Grant	E				$13.97	$13.97
2493320	978-0-593-51808-3	Pizzasaurus by Tammi Sauer	E				$13.29	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2452097	978-1-77840-238-8	Place Just for Me by Loredana Baldinucci	E			$13.97	$13.97
2484871	978-1-5362-3345-2	Planting Hope by Frederick Joseph	E			$13.29	$13.29
2462659	978-0-374-39225-3	Princess And The Grain Of Rice by Tina Cho	E			$13.29	$13.29
2454051	978-1-998129-46-1	Prism: A Chameleon Finds His Light by Brady Wells	E			$15.37	$15.37
2462714	978-1-250-33174-8	Promise Pets: The Adopt-A-Pup Plan by Stacia Deutsch	E			$13.29	$13.29
2452937	978-1-77278-355-1	Prudence by Veronique Alarie	E			$13.27	$13.27
2483260	978-0-593-53302-4	Put Your Records On by Corinne Bailey Rae	E			$13.29	$13.29
2453683	978-0-593-90598-2	Quick Trip to the Store by Sam Wedelich	E			$13.29	$13.29
2493104	978-1-83600-589-6	Quietly ... Quietly ... QUACK! by Jonty Howley	E			$13.29	$13.29
2452866	978-84-10438-03-3	Quilt of Our Memories by Desiree Acevedo	E			$13.97	$13.97
2448409	978-1-77321-990-5	Ra! Ta! Ma! Cue! by Howie Shia	E			$13.99	$13.99
2449448	978-0-06-325725-2	Rain and the Reading Horse by Maria Gianferrari	E			$13.99	$13.99
2462701	978-1-250-36439-5	Rare Bird by Elisha Cooper	E			$13.29	$13.29
2484235	978-0-06-335754-9	Read All About It! by Benjamin Hall	E			$15.39	$15.39
2449369	978-1-368-11643-5	Ready in a... Flash by Erin Falligant	E			$12.59	$12.59
2449425	978-1-7282-7999-2	Robot's First Snow by Billy Sharff	E			$12.59	$12.59
2461962	978-1-6643-0092-7	Rock and Roll by Ruby Amy Thompson	E			$13.29	$13.29
2493850	978-1-77488-565-9	Ruthie by Esme Shapiro	E			$13.29	$13.29
2463731	978-1-4930-9180-5	Santa and the Sled Dogs by Sarah van Rijsewijk	E			$13.97	$13.97
2460748	978-1-5362-4820-3	Sasha Feels Shy by Natalia Shaloshvili	E			$13.29	$13.29
2449372	978-0-593-61781-6	Searching for Mr. Johnson's Song by Ariel Vanece	E			$13.29	$13.29
2485126	978-0-593-69558-6	Seasons By The Lake: Adventures In Greenland by Naja Lund Aparico	E			$13.29	$13.29
2485129	978-1-6626-6575-2	Selfish Sister by David Sedaris	E			$13.29	$13.29
2486041	978-0-7358-4606-7	Selma: The Story Of A Stellar Spider by Tini Malina	E			$13.97	$13.97
2449387	978-1-63962-330-3	Silly Puppies: Baby's First Giggles by Heidi Bee Roemer	E			$6.29	$6.29
2492896	978-1-77147-732-1	Simon Turns Right by Nicole Van Brummelen	E			$13.27	$13.27
2451102	978-1-78250-927-1	Sleep Here, Wake There by Caio Zero	E			$13.29	$13.29
2453543	978-1-59270-460-6	Snow Theater by Ryoji Arai	E			$13.29	$13.29
2453463	978-0-06-332707-8	Snowball Fight by Beth Ferry	E			$13.99	$13.99
2492955	978-1-4197-4583-6	Songbird in the Light by Billy Porter	E			$13.99	$13.99
2493115	978-0-7112-9891-0	Sorry, Sammy by Scott Rothman	E			$13.29	$13.29
2449398	978-0-593-89060-8	Sound in the Night by Maria Coco	E			$13.99	$13.99
2458735	978-0-593-69462-6	Sparkles for Sunny: A Lunar New Year Story by Sylvia Chen	E			$13.29	$13.29
2484936	978-0-8234-5310-8	Spirit Shadow by Ginger Reno	E			$13.29	$13.29
2493307	978-1-4598-4010-2	Springtime in Kitkatla by Kim Spencer	E			$15.37	$15.37
2446084	979-8-9895904-2-1	Stars Align by Kristina Kaufman	E			$13.27	$13.27
2498797	978-1-5460-0394-6	Sticks vs. Stones by Rosanne L. Kurstedt	E			$6.29	$6.29
2449567	978-1-62354-579-6	Sticky Hermana by Ana Siqueira	E			$12.59	$12.59
2450848	978-1-5253-1380-6	Strange Creatures by Cristobal Leon	E			$15.39	$15.39
2498657	978-1-83729-207-3	Summer Pops Up! (Pop-Up) by Aurore Petit	E			$6.97	$6.97
2463445	978-0-8234-5940-7	Sun, Moon, and Star: A Folktale from Korea by Nancy So Miller	E			$13.29	$13.29
2463383	978-1-83874-086-3	Sunny and Stormy by Sarah Holliday	E			$12.59	$12.59
2462312	978-1-62371-566-3	Sunny and the Birds by Wendy Meddour	E			$13.27	$13.27
2450795	978-1-4002-5273-2	Sunshine Queens by Sherri Shepherd	E			$13.99	$13.99
2463059	978-0-593-52894-5	Sweater: A Story of Community by Larissa Theule	E			$13.29	$13.29
2485399	979-8-3471-0423-9	Take Heart, My Child: A Mother's Dream by Ainsley Earhardt	E			$6.99	$6.99
2492856	978-1-77840-324-8	Take Me Out To The Ball Game by Jack Norworth	E			$13.97	$13.97
2449403	978-0-593-61853-0	Tea Is Love by Adib Khorram	E			$13.29	$13.29
2459576	978-1-5476-1696-1	Ten Little Leprechauns by Molly Murphy	E			$10.49	$10.49
2463368	978-0-316-49999-6	Terry's Many Hats by Terry Crews	E			$13.29	$13.29
2486807	978-1-4642-3562-7	Thank You Letter to My Teacher by Deb Adamson	E			$9.09	$9.09
2484876	978-0-8234-5569-0	Thank You, School by Louise Borden	E			$13.29	$13.29
2485448	978-1-6659-6675-7	Thank You, Sun by Douglas Florian	E			$13.99	$13.99
2485284	978-0-593-61960-5	That Is NOT A Dog! by Bea Birdsong	E			$13.29	$13.29
2463469	979-8-3846-0212-5	There Was An Old Granny Who Got A Tattoo by Anne Sawan	E			$13.29	$13.29
2492894	978-1-77147-648-5	There's A Unicorn In Your Ear by Megan Pomper	E			$13.27	$13.27
2449009	978-1-77471-402-7	There's a Song in the Forest by Jennifer Britton	E			$12.57	$12.57
2448894	978-1-77203-550-6	Thing about Birds by Christy Obalek	E			$17.47	$17.47
2453840	978-0-316-56759-6	This Is Not a Sleepy Bear Book by Brian Gehrlein	E			$13.29	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2440319	978-1-68137-952-4	Three Ladies Beside the Sea by Rhoda Levine	E				$13.97	$13.97
2454897	978-1-4788-9057-7	Tic, Tac, and Toe by Sheri Dillard	E				$13.27	$13.27
2486596	979-8-89063-181-7	Tidy Ted Meets Jess the Mess by Joanna McIntyre	E				$14.67	$14.67
2453960	978-1-955904-10-0	Tiger Torn by Keith Lowell Jensen	E				$12.57	$12.57
2492859	978-1-77147-657-7	Time to Leave, Laverne! by Lana Button	E				$13.27	$13.27
2486019	978-0-7358-4612-8	Time to Split by Daniel Fehr	E				$13.97	$13.97
2453576	979-8-88859-781-1	Tiny Baker by Hayley Barrett	E				$13.29	$13.29
2492931	978-1-4197-7491-1	Tiny Garden by Deborah Underwood	E				$13.29	$13.29
2493308	978-1-4598-4290-8	Tiny Hiker by Natasha Zimmers	E				$15.37	$15.37
2449315	978-0-593-70541-4	Together We Are Sunshine by Jamilah Thompkins-Bigelow	E				$13.29	$13.29
2492880	978-1-962447-46-1	Too Many Unicorns by Trevor Crafts	E				$13.29	$13.29
2485446	978-1-6659-6056-4	Toy Plane by Cherise Harris	E				$13.99	$13.99
2486805	978-1-4642-5164-1	Truckosaurus by Karen Shapiro	E				$9.09	$9.09
2449545	978-0-593-70476-9	Tulip's Mess by Anden Wilder	E				$13.29	$13.29
2462287	978-1-4930-8924-6	Twelve Days of Spring by Sherri Maret	E				$11.87	$11.87
2493112	978-1-80570-106-4	Unexpected Guests by Mariajo Ilustrajo	E				$13.29	$13.29
2462212	978-1-6659-7060-0	Unluckiest Leprechaun by Alastair Heim	E				$9.09	$9.09
2446934	979-8-89338-026-2	Very Fine Clock by Muriel Spark	E				$13.97	$13.97
2449582	978-1-917194-14-3	Vote Wolf by Davide Cali	E				$13.27	$13.27
2452762	978-1-68555-280-0	Waiting for Max: A NICU Story by Emily Rosen	E				$13.27	$13.27
2484430	978-0-06-338266-4	Wake Up, Grouchy Bear! by David Ezra Stein	E				$13.99	$13.99
2453549	979-8-217-04009-4	War Is Over! by Sean Ono Lennon	E				$13.99	$13.99
2493859	978-1-62354-630-4	Ways Papi Says I Love You by Delia Ruiz	E				$12.59	$12.59
2485255	978-0-593-52883-9	We All Belong by Gianna Marino	E				$13.29	$13.29
2462835	978-0-06-343281-9	Weedy Garden: A Happy Habitat for Wild Friends by Margaret Renkl	577.554				$13.99	$13.99
2453867	979-8-88777-205-9	Welcome to the Nighttime Train by Louise Fitzgerald	E				$12.59	$12.59
2446013	978-1-7972-3644-5	Welcome to the Penguin Cruise by Haluka Nohana	E				$12.59	$12.59
2450766	979-8-225-01192-5	Welcome: a Book About Friendship by Alison Green	E				$13.99	$13.99
2492952	978-1-63655-171-5	What Do You Do When Your Dog Grows Old? by Jackie Short	E				$10.49	$10.49
2492939	978-1-917366-93-9	What If: Grow Your Imagination by Tom Schamp	E				$13.99	$13.99
2486599	979-8-89063-243-2	What's That in the Wall? by Conor Walton	E				$14.67	$14.67
2486018	978-0-7358-4614-2	What's for Dinner? by Larysa Maliush	E				$13.97	$13.97
2462627	978-1-77147-655-3	When Bryn's Ear Went Quiet by Nancy Hundal	E				$13.27	$13.27
2463289	978-0-316-28112-6	When Cherry Blossoms Fall by Katrina Goldsaito	E				$13.29	$13.29
2449292	978-3-7913-7619-6	When I Feel Lonely by Britta Teckentrup	E				$12.59	$12.59
2486643	978-1-4549-4555-0	When I Move by Carole Boston Weatherford	E				$6.29	$6.29
2493865	979-8-217-02828-3	When We Were Snails by Nan Cao	E				$13.29	$13.29
2485354	978-1-339-00035-0	When You Dream Big! by Peter H. Reynolds	E				$13.99	$13.99
2486670	978-1-5460-0755-5	When You Find A Question by Allie Millington	E				$13.29	$13.29
2456612	978-1-63163-987-6	When You're a Boy by Blake Nuto	E				$13.99	$13.99
2493309	978-1-4598-4168-0	When the Clouds Came by Sarah Yi-Mei Tsiang	E				$15.37	$15.37
2450718	978-0-06-341334-4	When the Dark Clouds Come by Danielle Ridolfi	E				$13.99	$13.99
2483354	979-10-276-1389-2	Where Are You, Baby? by Elena Selena	E				$10.49	$10.49
2486794	978-1-324-01661-8	Where I Grew by Jashar Awan	E				$13.29	$13.29
2462230	978-1-6659-5781-6	Where They Gather by Teresa Rodrigues	E				$13.99	$13.99
2486618	978-1-964686-43-1	Where's Big Dog?: A Story of Loss and Love by Jessica Collins	E				$13.29	$13.29
2450890	978-1-250-90123-1	While We Wait by Bee Johnson	E				$13.29	$13.29
2493853	979-8-217-02913-6	Who Are You? by Claire Keane	E				$13.29	$13.29
2459700	978-0-593-43354-6	Whooo Is Still Awake? by Brigette Barrager	E				$13.29	$13.29
2493779	978-1-6643-0087-3	Whose Nest Is Best?: A Book of Bird Homes by Lyndsay Wasko	E				$13.29	$13.29
2460724	978-1-5362-4455-7	Wiggling Words: Loving Language with Dyslexia by Kate Rolfe	E				$13.29	$13.29
2461857	979-8-217-02398-1	Wildest Thing by Emily Winfield Martin	E				$13.99	$13.99
2486597	979-8-89063-182-4	Will Little Tiger Tell the Truth? by Carol Roth	E				$14.67	$14.67
2443063	978-0-8234-5945-2	Winding Willow by Will Hillenbrand	E				$13.29	$13.29
2463670	978-1-4002-4951-0	Winnie's Pile of Pillows: Making Room For The Things You Love Most by Dana K. White	E				$12.59	$12.59
2449183	979-8-88988-016-5	Winter Is the Worst! by Dan Tavis	E				$13.29	$13.29
2453064	979-8-89509-038-1	Winter's Morning by Angelique Lecaye	E				$13.29	$13.29
2483381	978-0-593-80697-5	With You in Spirit: A Qing Ming Story by Jenny Liao	E				$13.29	$13.29
2485131	978-0-593-35442-1	Wonder In The Garden by Talia Aikens-Nunez	E				$13.29	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2449227	978-0-8234-5720-5	Year Round by Audrey Helen Weber	E			$13.29 | $13.29
2449457	978-1-4197-7680-9	Yellow Is a Banana by John Himmelman	E			$11.89 | $11.89
2453066	978-1-76121-400-4	You Are Not a Pup! by Annaleise Byrd	E			$10.49 | $10.49
2463408	979-8-217-00349-5	You Are the Land by Steph Littlebird	E			$13.29 | $13.29
2462177	978-1-6659-3119-9	Yulu's Linen by Cao Wenxuan	E			$13.99 | $13.99
2443145	978-0-8234-5871-4	Zip Zap Wickety Wack: A Story about Sharing by Matthew Diffee	E			$13.29 | $13.29
2449472	978-1-4197-8753-9	Let's Make Pancakes: See It, Say It, Cook It, Eat It! by Jamie Oliver	641.5			$6.99 | $6.99
2462828	978-0-06-346925-9	Is It Spring? by Kevin Henkes	E			$15.39 | $15.39
2460875	978-0-374-39474-5	Leonard Grows a Haunted Garden by Mike Ciccotello	E			$13.29 | $13.29
2451012	979-8-88777-209-7	Let's Go Home, Baby Penguin by Carolina Buzio	E			$7.69 | $7.69
2449551	978-0-375-82866-9	Blessing from Above: An Adoption Story by Patti Henderson	E			$4.19 | $4.19
2493230	979-8-217-23397-7	For the Fans! (K-Pop Demon Hunters) by Angela Song	E			$4.89 | $4.89
2461941	979-8-217-12136-6	I Am Raphael (Teenage Mutant Ninja Turtles) by Mei Nakamura	E			$4.19 | $4.19
2461943	979-8-217-12170-0	You Can Be a Fashion Designer (Barbie) by Elle Stephens	E			$4.19 | $4.19
2493078	978-80-00-07573-0	Welcome to the Anthill by Stepanka Sekaninova	E			$11.87 | $11.87
2485387	978-1-6659-7347-2	Lawn-Mowing Day! by Breanna Carzoo	E			$5.59 | $5.59
2082044	978-0-316-47509-9	Dream Big, Little Leader by Vashti Harrison	920			$6.29 | $6.29
2084160	978-0-316-47517-4	Little Dreamers: Visionary Women Around the World by Vashti Harrison	920.72			$12.59 | $12.59
2449353	978-0-593-35326-4	Llama Llama: A Gift for Mama by Anna Dewdney	E			$11.19 | $11.19
2492854	978-1-83555-484-5	Goodnight Panda by Katie Button	E			$7.69 | $7.69
2484431	979-8-2952-0048-9	Marty Moose: First Class Mischief by Claire Powell	E			$16.95 | $16.95
2453876	978-1-63715-891-3	Mika and the Chiller by Agata Loth-Ignaciuk	E			$10.49 | $10.49
2493788	978-1-368-10873-7	Goodnight, Bruce by Ryan T. Higgins	E			$13.99 | $13.99
2451017	979-8-88777-177-9	When Winter Comes by Ekaterina Trukhan	E			$9.09 | $9.09
2448657	978-1-3988-5994-4	My Angry Book by Honor Head	E			$6.99 | $6.99
2448659	978-1-3988-5635-6	My Brave Book by Honor Head	E			$6.99 | $6.99
2448655	978-1-3988-5998-2	My Happy Book by Honor Head	E			$6.99 | $6.99
2448661	978-1-3988-5638-7	My Jealous Book by Honor Head	E			$6.99 | $6.99
2448658	978-1-3988-5633-2	My Kind Book by Honor Head	E			$6.99 | $6.99
2448656	978-1-3988-5996-8	My Lonely Book by Honor Head	E			$6.99 | $6.99
2448660	978-1-3988-5641-7	My Sad Book by Honor Head	E			$6.99 | $6.99
2449455	978-1-4197-8403-3	Minnie Mouse!	E			$7.69 | $7.69
2493103	978-1-83600-199-7	No, I'm A... SHARK!	E			$13.29 | $13.29
2484831	978-0-06-335778-5	Littlest Elephant by Katherine Applegate	E			$13.99 | $13.99
2495894	978-80-00-07895-3	Grandma's Everything Bag (Lift-the-Flap) by Mariessa Shein	E			$6.29 | $6.29
2495895	978-80-00-07896-0	My Grandpa and Me: Exploring the Outdoors Together by Mariessa Shein	E			$6.29 | $6.29
2461937	979-8-217-12256-1	Rescue Collection	E			$6.99 | $6.99
2458747	978-0-241-72175-9	Hop into My Heart by Beatrix Potter	E			$6.99 | $6.99
2485398	978-1-6659-4265-2	Just Try It! Someplace New! by Phil Rosenthal	E			$13.99 | $13.99
2486698	978-1-4549-9962-1	It's My Bird-Day! by Mo Willems	E			$13.29 | $13.29
2451050	978-80-00-07620-1	White Winter by Milena Lukesova	E			$13.27 | $13.27
2449228	978-1-76121-601-5	Crocodiles Do Not Like the Bathroom by Ali Rutstein	E			$13.29 | $13.29
2486814	978-1-4642-3557-3	Ooh! Ooh! Ooh! I Love You! by Rose Rossner	E			$6.29 | $6.29
2493852	979-8-217-11634-8	Mama Loves It by Raffi	E			$13.29 | $13.29
2452001	978-0-7358-4590-9	Rainbow Fish and the Great Escape by Marcus Pfister	E			$13.97 | $13.97
2486048	978-1-5107-7713-2	It's OK to Be Quiet!: A Picture Book for Introverted Kids! by Dagmar Geisler	E			$12.59 | $12.59
2485287	978-0-593-69963-8	Serafina Makes Waves by Matthew Burgess	E			$13.29 | $13.29
2458679	978-1-5362-3658-3	Meet the Smushkins by Claudia Rueda	E			$12.59 | $12.59
2452880	978-1-77147-672-0	How to Be Brave Like a Snail by Naseem Hrab	E			$13.27 | $13.27
2446930	978-84-10406-35-3	Bennett's Roof by Anuska Allepuz	E			$12.59 | $12.59
2451116	978-84-10406-50-6	Come Back Out, Mole! by Alicia Acosta	E			$12.59 | $12.59
2453803	978-1-6659-3334-6	Stella and Roger Are on the Move by Clothilde Ewing	E			$13.99 | $13.99
2281774	978-1-77227-423-3	Tanna's Lemming by Rachel Qitsualik-Tinsley	E			$12.57 | $12.57
2486682	979-8-88777-241-7	Teeny Tiny Science: I See a Cloud by Saskia Gwinn	E			$10.49 | $10.49
2486683	979-8-88777-242-4	Teeny Tiny Science: I See a Star by Saskia Gwinn	E			$10.49 | $10.49
2451895	978-1-6625-1967-3	Party Monsters on the Block by Sue Ganz-Schmitt	E			$13.29 | $13.29
2498773	979-8-88777-247-9	This Little Kitten (Touch-and-Feel) by Ingela P. Arrhenius	E			$7.69 | $7.69
2449440	978-1-68369-512-7	Snuggle Season by Jaimie MacGibbon	E			$13.29 | $13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2459523	978-1-250-43349-7	Trouble with Children (According to Cat) by Katie Weaver	E			$13.99	1	$13.99
2459522	978-1-250-43350-3	Trouble with Children (According to Dog) by Katie Weaver	E			$13.99	1	$13.99
2493676	978-1-4867-3121-3	Laugh by Uncle Ian Aurora	E			$11.89	1	$11.89
2460135	978-1-4642-5962-3	Untold Story of the Easter Fairy by Diane Alber	E			$9.09	1	$9.09
2484236	978-0-06-343494-3	Hide-And-Seek by Corey R. Tabor	E			$9.09	1	$9.09
2463597	978-1-77840-327-9	We All Love by Julie Flett	E			$13.27	1	$13.27
2486684	979-8-88777-226-4	When I Became Your Brother by Susannah Shane	E			$12.59	1	$12.59
2486686	979-8-88777-227-1	When I Became Your Sister by Susannah Shane	E			$12.59	1	$12.59
2493851	978-0-593-89803-1	Where Do Race Cars Sleep at Night? by Brianna Caplan Sayres	E			$9.09	1	$9.09
2449184	978-1-5362-4150-1	Where's the Fire Truck? (Stroller Book) by Ingela P. Arrhenius	E			$6.29	1	$6.29
2483294	979-8-217-11941-7	There's A Bunny In Your Book by Tom Fletcher	E			$9.09	1	$9.09
2460825	978-0-593-69748-1	What Shall We Do, Winnie-The-Pooh? by Jeanne Willis	E			$13.29	1	$13.29
2460827	978-0-593-69745-0	Winnie-The-Pooh and the Party by Jeanne Willis	E			$13.29	1	$13.29
2484965	978-1-5362-3403-9	Our Home, Our Only Home by Marion Dane Bauer	E			$13.29	1	$13.29
2485256	979-8-217-14172-2	I Love Earth With The Very Hungry Caterpillar by Eric Carle	E			$6.99	1	$6.99
2486791	978-1-250-39739-3	Thank You, Mom!: From Baby Bear and Friends by Eric Carle	E			$10.49	1	$10.49
2460125	978-1-6659-6261-2	Valentines Are the Worst! by Alex Willan	E			$13.99	1	$13.99

Total quantity	502 Titles(502 Books)
Subtotal	$6,358.10
Processing Options Total	$1,656.60
Shipping & Handling	$127.16
Shipping Discount	-$127.16
Tax	$821.51
Grand Total	**$8,836.21**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: JUVENILE NONFICTION ODC 1
List#: 207800
Date: 2/17/2026 6:17:47 PM
Total quantity: 504 Titles(504 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions

Barcode Range Start

Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	504	$1,663.20

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2453938	978-1-83605-229-6	100 Things to Know about Food by Alice James	641			$10.49 | $10.49
2410099	978-1-83540-684-7	100 Things to Know about History by Laura Cowan	902			$10.49 | $10.49
2484622	978-1-6689-7275-5	Bottlenose Dolphins in the Wild by Virginia Loh-hagan	578			$22.45 | $22.45
2484804	978-1-6689-7333-2	Fungi as Medicine by Joyce Markovics	608			$23.45 | $23.45
2484805	978-1-6689-7334-9	Fungi as Recyclers by Joyce Markovics	413			$23.45 | $23.45
2484631	978-1-6689-7324-0	Deep Ocean Divers by Kelli Hicks	516			$22.45 | $22.45
2484661	978-1-6689-7325-7	Lion Trackers by Kelli Hicks	512			$22.45 | $22.45
2484813	978-1-6689-7326-4	Rainforest Rangers by Kelli Hicks	513			$22.45 | $22.45
2484681	978-1-6689-7327-1	Storm Chasers by Kelli Hicks	513			$22.45 | $22.45
2461079	978-1-4549-6170-3	Jane Goodall: 5-Minute Genius Stories by Heather Alexander	920			$11.89 | $11.89
2461080	978-1-4549-6169-7	Leonardo Da Vinci: 5-Minute Genius Stories by Wil Mara	709.2			$11.89 | $11.89
2461082	978-1-4549-6167-3	Women Who Won the Vote: 5-Minute Genius Stories by Emma Roberts	920			$11.89 | $11.89
2493338	978-1-0982-9779-4	Archaeological Digs by Anna Anderhagen	930.1			$24.95 | $24.95
2493340	978-1-0982-9781-7	Tombs and Treasures by Anna Anderhagen	393.1			$24.95 | $24.95
2493341	978-1-0982-9782-4	Tunnels and Passages by Anna Anderhagen	624.1			$24.95 | $24.95
2493343	978-1-0982-9784-8	Underground Cities by Anna Anderhagen	624.19			$24.95 | $24.95
2454267	978-0-7892-1524-6	Legends of Women's Figure Skating by Maura Sullivan Hill	796			$11.17 | $11.17
2493345	978-1-0982-9773-2	Entertainment Hobbies: Music, Magic, Theater and More by Ruby Daniels	790.13			$25.95 | $25.95
2493346	978-1-0982-9774-9	Nature Hobbies: Bird-Watching, Camping, Hiking and More by Ruby Daniels	790.13			$25.95 | $25.95
2453121	979-8-217-12681-1	Robotics: Meet the Robots and Find Out the Amazing Ways They're Changing Our World by Kate Peridot	629			$13.99 | $13.99
2495954	979-8-89577-618-6	Giant's Causeway of Northern Ireland by James Buckley	909			$21.67 | $21.67
2495990	979-8-89577-619-3	Perito Moreno Glacier of Argentina by James Buckley	909			$21.67 | $21.67

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2495994	979-8-89577-620-9	Salt Flats of Bolivia by James Buckley	909			$21.67 | $21.67
2495998	979-8-89577-621-6	Simpson Desert of Australia by James Buckley	909			$21.67 | $21.67
2495586	979-8-7656-8880-9	Writing Fiction by Leslie Holleran	808.3			$23.99 | $23.99
2495578	979-8-7656-8876-2	Writing a Personal Narrative by Brianna Kaiser	808.06			$23.99 | $23.99
2495580	979-8-7656-8879-3	Writing a Report by Heather E. Schwartz	371.30281			$23.99 | $23.99
2495582	979-8-7656-8878-6	Writing an Opinion Piece by Heather E. Schwartz	808			$23.99 | $23.99
2495021	979-8-7656-4734-9	Artificial Intelligence: A Graphic History by Emma Carlson-Berne	006.309			$23.99 | $23.99
2495164	979-8-7656-4736-3	Drones: A Graphic History by Emma Carlson-Berne	629.133			$23.99 | $23.99
2495488	979-8-7656-4737-0	Skateboards: A Graphic History by Blake Hoena	796.22028			$23.99 | $23.99
2495122	979-8-7656-8885-4	Connected: America's Role in Building the Internet by Margaret J. Goldstein	004.67			$23.99 | $23.99
2495124	979-8-7656-8889-2	Conquering Polio: America's Fight to End Polio Epidemics by Margaret J. Goldstein	616.8			$23.99 | $23.99
2495271	979-8-7656-8883-0	Great American Experiment: From Revolution to Constitution by Lisa Idzikowski	973.3			$23.99 | $23.99
2495286	979-8-7656-8888-5	Hits that Changed History: How Motown Revolutionized Music and Culture in America by Monica B. Morall-Baker	781.64409774			$23.99 | $23.99
2495424	979-8-7656-8882-3	One Giant Leap: America's Mission to the Moon by Lisa Idzikowski	629.45			$23.99 | $23.99
2495048	979-8-7656-8887-8	Ringing in Innovation: American Inventions that Transformed Communication by Margaret J. Goldstein	621.38509			$23.99 | $23.99
2496138	979-8-89662-364-9	Ruby Bridges: School Integration Hero by Becca Becker	379.2			$20.99 | $20.99
2496170	979-8-89662-370-0	Zitkala-Sa: Native Writer and Activist by Becca Becker	978.004			$20.99 | $20.99
2496015	979-8-89577-596-7	Visit to Mount Rushmore by J. Press	973			$21.67 | $21.67
2496016	979-8-89577-592-9	Visit to the Alamo by Rebecca Pettiford	976.4			$21.67 | $21.67
2496017	979-8-89577-593-6	Visit to the Gateway Arch by Rebecca Pettiford	973			$21.67 | $21.67
2496018	979-8-89577-594-3	Visit to the Lincoln Memorial by Rebecca Pettiford	917.5304			$21.67 | $21.67
2496019	979-8-89577-595-0	Visit to the Martin Luther King Jr. Memorial by Rebecca Pettiford	973			$21.67 | $21.67
2496020	979-8-89577-597-4	Visit to the Washington Monument by Rebecca Pettiford	973			$21.67 | $21.67
2494089	979-8-8752-3925-0	My Axolotl Life by Fb Smit	597			$20.49 | $20.49
2494090	979-8-8752-3933-5	My Dolphin Life by Shoshana Stopek	578			$20.49 | $20.49
2494092	979-8-8752-3949-6	My Tiger Life by Shoshana Stopek	599			$20.49 | $20.49
2451060	978-1-77227-585-8	Arctic Land Mammals	030			$16.07 | $16.07
2496765	978-1-4994-5587-8	Under the Ground by Eliza Nodes	591.568			$18.95 | $18.95
2485928	978-1-5038-7561-6	Biggest and Smallest Fish by Emma Carlson Berne	597			$22.95 | $22.95
2485930	978-1-5038-7562-3	Biggest and Smallest Mammals by Kelley Barth	599			$22.95 | $22.95
2460978	978-0-7534-8107-3	Algebra and Geometry: Anything But Square by Dan Green	512			$13.99 | $13.99
2460918	978-0-7534-8074-8	Engineering: the Riveting World of Buildings and Machines by Tom Jackson	624			$13.99 | $13.99
2495996	979-8-89577-610-0	Science in Your Life by Charis Mather	500			$21.67 | $21.67
2449541	978-1-4197-7996-1	Keep It Clean! by Don Brown	628.3			$11.19 | $11.19
2454312	978-1-83569-140-3	Are Glaciers the Key to Climate Change?: Discover the Science behind Glaciology by Olivia Watson	551.31			$10.49 | $10.49
2454320	978-1-83569-143-4	Did Life Come from the Sun?: Discover the Science behind Heliophysics by Eliza Jeffery	523.7			$10.49 | $10.49
2454323	978-1-83569-142-7	What Can Frogs Tell Us about Our Planet?: Discover the Science behind Herpetology by Eliza Jeffery	597.9			$10.49 | $10.49
2449269	978-1-5362-2528-0	Spark: Jim West's Electrifying Adventures in Creating the Microphone by Ainissa Ramirez	509			$13.29 | $13.29
2495640	979-8-89304-844-5	Fred Rogers by Betsy Rathburn	920			$20.97 | $20.97
2432527	978-0-8234-5564-5	Detective Dogs: How Working Dogs Sniff Out Invasive Species by Alison Pearce Stevens	636.73			$14.69 | $14.69
2494113	979-8-8752-5464-2	Animal Fact Frenzy! by Cari Meister	590			$22.49 | $22.49
2494115	979-8-8752-5480-2	Reptile Fact Frenzy! by Arnold Ringstad	597			$22.49 | $22.49
2494116	979-8-8752-5488-8	Weather Fact Frenzy! by Jaclyn Jaycox	551			$22.49 | $22.49
2494135	979-8-8752-5718-6	Would You Rather Smash a Home Run or Pitch a Perfect Game?: Questions About Pro Baseball by Matt Chandler	793			$18.99 | $18.99
2494136	979-8-8752-5726-1	Would You Rather Snag the Most Steals or Block the Most Shots?: Questions About Pro Basketball by Matt Chandler	793			$18.99 | $18.99
2494141	979-8-8752-5496-3	Featuring Cristiano Ronaldo: Facts, Quizzes, Activities, and More! by Erin Falligant	796			$20.99 | $20.99
2494142	979-8-8752-5504-5	Featuring Dua Lipa: Facts, Quizzes, Activities, and More! by Erin Falligant	782.42164092			$20.99 | $20.99
2494143	979-8-8752-5512-0	Featuring Jungkook: Facts, Quizzes, Activities, and More! by Erin Falligant	782.4216			$20.99 | $20.99
2494144	979-8-8752-5520-5	Featuring Selena Gomez: Facts, Quizzes, Activities, and More! by Erin Falligant	791.4302			$20.99 | $20.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2449001	978-1-64741-140-4	Wacky Contraptions: Gadgets That Whiz, Whoosh, Whirl, and Twist with Hands-On Engineering Activities by Laura Perdew	530	$17.47	1	$17.47
2494155	979-8-8752-5400-0	Everyday AI: Interacting with Artificial Intelligence by Tammy Enz	006.3	$23.49	1	$23.49
2494161	979-8-8752-5432-1	American Patriots vs. British Redcoats: Seeing History from All Sides by Emma Carlson Berne	973.3	$23.49	1	$23.49
2494164	979-8-8752-5440-6	Home Life During the American Revolution: Seeing History from All Sides by Emma Carlson Berne	973.3	$23.49	1	$23.49
2494177	979-8-8752-5745-2	Baseball's Most Controversial Plays: You Make the Call by Matt Chandler	796	$23.49	1	$23.49
2494178	979-8-8752-5737-7	Basketball's Most Controversial Plays: You Make the Call by Heather E. Schwartz	796	$23.49	1	$23.49
2494199	979-8-8752-6981-3	Greatest Moments of the World Cup by Kurt Waldendorf	796	$23.49	1	$23.49
2495927	979-8-89577-646-9	Destructive Nature by Nathan Sommer	500	$22.37	1	$22.37
2495945	979-8-89577-647-6	Eco-Disasters by Nathan Sommer	577	$22.37	1	$22.37
2495909	979-8-89577-648-3	Extraordinary Survivors by Nathan Sommer	363	$22.37	1	$22.37
2495965	979-8-89577-649-0	Industrial Disasters by Nathan Sommer	363	$22.37	1	$22.37
2495991	979-8-89577-650-6	Plagues and Diseases by Nathan Sommer	363	$22.37	1	$22.37
2495995	979-8-89577-651-3	Saving Animals from Disaster by Nathan Sommer	590	$22.37	1	$22.37
2443197	978-0-06-337238-2	Cook with Clydeo: A Cookbook for Kids: 35 Totally Awesome Recipes by Jennifer Aniston	641.5	$17.49	1	$17.49
2485939	978-1-5038-7583-8	Constellation Ursa Major by Lisa Owings	523	$24.95	1	$24.95
2493490	978-1-0982-9848-7	Weird Inventions by Emma Kaiser	600	$25.95	1	$25.95
2493491	978-1-0982-9849-4	Weird Moments in History by Emma Kaiser	909	$25.95	1	$25.95
2493493	978-1-0982-9851-7	Weird Structures by Yvette Lapierre	720	$25.95	1	$25.95
2496012	979-8-89577-607-0	Ten Hair-Raising Haunts by E. Andrews	133	$21.67	1	$21.67
2496508	978-1-5345-5246-3	Jane Austen by Kristen Rajczak Nelson	820.92	$18.95	1	$18.95
2449146	978-0-593-97214-4	Ancient Rome: From Everyday Life to an Emperor's Life	937	$20.99	1	$20.99
2443121	978-0-593-97175-8	Anthology of Remarkable Bugs by Jess French	595	$17.49	1	$17.49
2449169	978-0-593-97191-8	Science: A Visual Journey Through Our World	509	$19.59	1	$19.59
2453110	978-0-593-97206-9	Planet Earth: Discover Our Place in Space by Shoshana Weider	550	$13.99	1	$13.99
2443146	979-8-217-12554-8	Boston Tea Party	973.3	$9.09	1	$9.09
2443149	979-8-217-12556-2	California Gold Rush	973	$9.09	1	$9.09
2443153	979-8-217-12558-6	George Washington and the American Revolution	973.3	$9.09	1	$9.09
2443135	979-8-217-12560-9	Lewis and Clark Expedition	917.804	$9.09	1	$9.09
2443139	978-0-593-96994-6	Salem Witch Trials	973	$9.09	1	$9.09
2494214	979-8-8752-5674-5	Ultimate Guide to Drawing Adorable Animals! by Kathryn Clay	743.6	$25.49	1	$25.49
2494215	979-8-8752-5680-6	Ultimate Guide to Drawing Amazing Cars! by Aaron Sautter	743	$25.49	1	$25.49
2449222	978-1-5362-1341-6	Danger Files: Real-Life Disasters by Anna Crowley Redding	363.34	$12.59	1	$12.59
2496424	978-1-9785-7750-3	African Wild Dogs by Kim Thompson	599.77096	$18.95	1	$18.95
2496547	978-1-9785-7747-3	Elephants by Kim Thompson	599.674	$18.95	1	$18.95
2493495	979-8-3849-4002-9	Ants and the Grasshopper by Tyler Gieseke	398.2	$22.95	1	$22.95
2493418	979-8-3849-4003-6	Crow and the Pitcher by Tyler Gieseke	398.2	$22.95	1	$22.95
2493496	979-8-3849-4006-7	Raven the Trickster by Tyler Gieseke	398.24	$22.95	1	$22.95
2451860	978-1-324-05379-8	Deadliest: Insect by Eleanor Spicer Rice	577	$12.59	1	$12.59
2451862	978-1-324-05381-1	Deadliest: Sea Creature by Eleanor Spicer Rice	591.6	$12.59	1	$12.59
2460858	978-1-83874-916-3	Tummy Trouble by Ben Elcomb	570	$12.59	1	$12.59
2446070	978-1-5235-3004-5	Did You Hear What Happened in Salem?: The Witch Trials Of 1692 by Katie Kennedy	345.7445	$12.59	1	$12.59
2495932	979-8-89577-601-8	Digging Up a Stegosaurus by Sloane Hughes	567.915	$21.67	1	$21.67
2495934	979-8-89577-603-2	Digging Up a Velociraptor by Sloane Hughes	567.912	$21.67	1	$21.67
2497036	978-1-9785-4729-2	Who Ate the Dinosaurs? by Dave Hone	567.9	$20.20	1	$20.20
2497038	978-1-9785-4732-2	Whose Bum Did T. Rex Bite? by Dave Hone	567.9	$20.20	1	$20.20
2495030	978-1-83569-663-7	Battle-Ready Dinosaurs by Eliza Jeffery	560	$23.99	1	$23.99
2495146	978-1-83569-662-0	Deadly Dinosaurs by Eliza Jeffery	560	$23.99	1	$23.99
2496706	978-1-4994-5710-0	Representation Matters by Jill Keppeler	362.4	$18.95	1	$18.95
2496784	978-1-64190-560-2	What Is Chemical Energy? by Virginia Elliott	541.394	$22.15	1	$22.15
2496796	978-1-64190-566-4	What Is Heat Energy? by Virginia Elliott	536	$22.15	1	$22.15
2496539	978-1-64190-575-6	What Is Sound Energy? by Virginia Elliott	534	$22.15	1	$22.15
2496558	978-1-64190-527-5	Exploring the Milky Way by Elizabeth Pruet	523	$22.15	1	$22.15
2496560	978-1-64190-536-7	Exploring the Sun by Elizabeth Pruet	523.1	$22.15	1	$22.15
2496576	978-1-64190-557-2	Focus on Trains by Doug Bradley	629	$22.15	1	$22.15
2493499	978-1-0982-4869-7	Fearless Era by Grace Hansen	782.42164094	$23.95	1	$23.95
2493503	978-1-0982-4873-4	Red Era by Elizabeth Andrews	782.42164098	$23.95	1	$23.95
2493505	978-1-0982-4875-8	Speak Now Era by Elizabeth Andrews	782.421641	$23.95	1	$23.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2493507	978-1-0982-4877-2	Tortured Poets Department Era by Elizabeth Andrews	782.42164102				$23.95 | $23.95
2461879	979-8-217-22474-6	Explore the National Parks with Dr. Seuss's Lorax by Bonnie Worth	333.783				$7.69 | $7.69
2496475	978-1-9785-7711-4	Coral Reef by Francie Dolan	508				$18.95 | $18.95
2496489	978-1-9785-7714-5	Deciduous Forest by Francie Dolan	508				$18.95 | $18.95
2496578	978-1-9785-7720-6	Fresh Water by Francie Dolan	508				$18.95 | $18.95
2460729	979-8-217-12683-5	Desert: Journey Through the Hot Sands and Frosty Lands by Anita Ganeri	910				$17.49 | $17.49
2415446	978-1-5107-7711-8	How Can I Be Safe Online?: Learning How to Behave and Protect Myself on the Internet by Dagmar Geisler	004.67				$13.99 | $13.99
2493523	978-1-0982-9888-3	Crystal and Gemstone Encyclopedia by Samantha S. Bell	553.8				$36.95 | $36.95
2495630	979-8-89304-824-7	Echolocation by Monika Davies	590				$20.97 | $20.97
2495639	979-8-89304-825-4	Flexibility by Monika Davies	598				$20.97 | $20.97
2495651	979-8-89304-826-1	Invulnerability by Monika Davies	597				$20.97 | $20.97
2495688	979-8-89304-827-8	Super Healing by Monika Davies	599				$20.97 | $20.97
2495697	979-8-89304-819-3	Woolly Rhinoceros by Elizabeth Neuenfeldt	599				$20.97 | $20.97
2495627	979-8-89304-856-8	Dog Family by Alex Monroe	599.77				$22.37 | $22.37
2495678	979-8-89304-858-2	Snake Family by Golriz Golkar	590				$22.37 | $22.37
2495695	979-8-89304-859-9	Whale Family by Alex Monroe	590				$22.37 | $22.37
2445208	979-8-89304-552-9	Famous Activists by Elsie Olson	305				$22.37 | $22.37
2445209	979-8-89304-553-6	Famous Athletes by Melissa Ross	796				$22.37 | $22.37
2445076	979-8-89304-555-0	Famous Inventors by Melissa Ross	609.2				$22.37 | $22.37
2445210	979-8-89304-557-4	Famous Scientists by Elsie Olson	305				$22.37 | $22.37
2445080	979-8-89304-542-0	1920s by Sara Green	390				$22.37 | $22.37
2445219	979-8-89304-543-7	1930s by Sara Green	390				$22.37 | $22.37
2445220	979-8-89304-544-4	1940s by Sara Green	390				$22.37 | $22.37
2446372	979-8-88777-194-6	Everything You Know about the Human Body Is Wrong! by Emma Young	571				$13.99 | $13.99
2496667	978-1-4994-5722-3	Marine Biologist by Dwayne Hicks	578.77023				$18.95 | $18.95
2496775	978-1-4994-5728-5	Volcanologist by Dwayne Hicks	551.21				$18.95 | $18.95
2495116	978-1-83569-103-8	Comets and Asteroids by Rosie Rowntree	500				$22.99 | $22.99
2495165	978-1-83569-684-2	Dwarf Planet Pluto by Rosie Rowntree	500				$22.99 | $22.99
2495433	978-1-83569-680-4	Planet Jupiter by Emily Kington	523.45				$22.99 | $22.99
2495434	978-1-83569-679-8	Planet Mars by Emily Kington	523.43				$22.99 | $22.99
2496564	978-1-9785-7675-9	Floods by Jack Williams	363.3493				$18.95 | $18.95
2496513	978-1-9785-7681-0	Wildfires by Jack Williams	363.379				$18.95 | $18.95
2497089	978-1-4824-7534-0	Mythical Unicorns by Benjamin Proudfit	398.469				$21.20 | $21.20
2493542	978-1-0982-9897-5	Wildflowers by Carla Mooney	582.1				$32.95 | $32.95
2458720	978-0-8234-6097-7	Navajos by Virginia Driving Sneve	973				$13.99 | $13.99
2493550	979-8-3849-4019-7	Houston Astros by Kenny Abdo	796.357				$23.95 | $23.95
2493552	979-8-3849-4021-0	Los Angeles Angels by Kenny Abdo	796.357				$23.95 | $23.95
2493553	979-8-3849-4022-7	Los Angeles Dodgers by Kenny Abdo	796.357				$23.95 | $23.95
2493558	979-8-3849-4027-2	New York Yankees by Kenny Abdo	796.357				$23.95 | $23.95
2493563	979-8-3849-4032-6	Seattle Mariners by Kenny Abdo	796.357				$23.95 | $23.95
2493565	979-8-3849-4034-0	Tampa Bay Rays by Kenny Abdo	796.357				$23.95 | $23.95
2493566	979-8-3849-4035-7	Texas Rangers by Kenny Abdo	796.357				$23.95 | $23.95
2495120	979-8-7656-8957-8	Concussion Crisis: The Rise of Head Injuries in Youth Sports by Marie-Therese Miller	617.4				$24.99 | $24.99
2495167	979-8-7656-8955-4	Earth on Fire: The Science, History, and Fight Against Wildfires by Ben Hubbard	634.9				$24.99 | $24.99
2495339	979-8-7656-8956-1	K-Pop's Big Wave: A Global Phenomenon by Sarah Raggio	781.63095195				$24.99 | $24.99
2446036	978-0-7358-4582-4	Genius Eyes: A Curious Animal Compendium by Lena Anlauf	590				$17.47 | $17.47
2446823	978-0-500-65323-4	Do Gorillas Eat Bananas? by Huw Lewis-Jones	599				$13.27 | $13.27
2494254	979-8-8752-4013-3	Carpathia Rescues Titanic Survivors by Ashley Storm	900				$27.49 | $27.49
2494259	979-8-8752-3977-9	D-Day Training Turned Deadly: The Exercise Tiger Disaster by Nel Yomtov	900				$27.49 | $27.49
2494260	979-8-8752-3985-4	Japan's Attack at Dawn: The Pearl Harbor Disaster by Aaron Sautter	900				$27.49 | $27.49
2494261	979-8-8752-4001-0	Stalked at Sea: The USS Indianapolis Disaster by Aaron Sautter	900				$27.49 | $27.49
2496136	979-8-89662-181-2	Nellie Bly Races Around the World by Janie Havemeyer	70.92				$20.99 | $20.99
2496148	979-8-89662-184-3	Tenzing Norgay Climbs Mount Everest by Janie Havemeyer	796.522				$20.99 | $20.99
2452795	978-1-78708-175-8	Gandhi by Button Books	954.03				$10.49 | $10.49
2449283	978-1-4263-7812-6	Greeking Out Tales from the Underworld: Ghostly Myths from Around the Globe by Kenny Curtis	398				$13.99 | $13.99
2496732	978-1-4994-5656-1	Speech Therapist by Ursula Pang	618.92855				$18.95 | $18.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2449263	978-1-944530-43-3	Vikings by Harriet Evans	948			$13.99 | $13.99
2451172	978-1-250-81028-1	Great Depression: From Hard Times to the New Deal by Tim Stout	973.91			$15.39 | $15.39
2449591	978-0-593-90234-9	Ancient Egypt by Kate Messner	932			$12.34 | $12.34
2448288	978-0-500-65336-4	History of Fashion for Children by Celia Joicey	746			$16.07 | $16.07
2448851	979-8-9894034-8-6	How Living Things Communicate: Talking Plants by Joyce Markovics	580			$12.59 | $12.59
2456243	978-1-5105-8693-2	Gallbladder by Priyanka Das	612			$26.99 | $26.99
2456173	978-1-5105-8685-7	Pancreas by Priyanka Das	612			$26.99 | $26.99
2456244	978-1-5105-8697-0	Spleen by Priyanka Das	612			$26.99 | $26.99
2456245	978-1-5105-8701-4	Stomach by Priyanka Das	612.3			$26.99 | $26.99
2494269	979-8-8752-3793-5	Chip French Fry's Icky, Sticky Digestive System Journey by Jamee-marie Edwards	571			$20.49 | $20.49
2494270	979-8-8752-3801-7	Hannah Banana's Icky, Sticky Composting Journey by Jamee-marie Edwards	577			$20.49 | $20.49
2453123	978-1-83725-117-9	Amazing Book of World Mythology: A Unique Celebration of Culture, Created by Artists from Across the Globe by Stella Caldwell	398.2			$16.09 | $16.09
2404753	978-0-593-84380-2	1,000 Curious Questions: And 1,000 Amazing Answers	031.02			$20.99 | $20.99
2423846	978-1-78708-156-7	100 Ways to Save the Planet: Everything You Need to Know to Become a Green Super Hero! by Tom Jordan	333.72			$13.99 | $13.99
2451131	979-8-88674-318-0	100 Year Time Travelers: Travel Through Time Using Magic Stones by Philip Steele	900			$13.99 | $13.99
2402535	978-0-7112-8637-5	12 Ways to Get a Ticket to Space by Kate Peridot	629.45			$13.99 | $13.99
2449365	978-1-62354-316-7	3 Weeks in the Rainforest: A Rapid Inventory in the Amazon by Jennifer Swanson	333.95			$15.39 | $15.39
2449217	978-1-7972-2469-5	All about Antarctica: A Fact Book about the Southernmost Continent by Marc Martin	919.89			$13.29 | $13.29
2453103	978-0-593-96695-2	All the World's Your Stage Shakespeare for Today: Discover the World of Shakespeare Through 8 of His Most Famous Plays by Farah Karim-Cooper	792			$13.99 | $13.99
2459546	979-8-217-11190-9	Amazing Generation: Your Guide to Fun and Freedom in a Screen-Filled World by Jonathan Haidt	616.85			$17.49 | $17.49
2454511	979-8-7656-6822-1	Are We Alone?: Searching for Life Beyond Earth with The Planetary Society by Bruce Betts	576.8			$23.99 | $23.99
2449246	978-1-5102-3142-9	Art School (in a Book): A Future Artist's Guide to Contemporary Art by Russell Tovey	707			$13.99 | $13.99
2452039	978-1-64036-542-1	Barbie: Cooking with Besties: 35+ Recipes Kids Can Make!	641.5			$13.99 | $13.99
2449187	979-8-89509-035-0	Big, Little: A Book of Opposites by Didier Cornille	428			$7.69 | $7.69
2438238	978-0-7112-9436-3	Bold, Brilliant, and Latine by Alyssa Reynoso-Morris	920			$17.49 | $17.49
2461511	978-1-4788-8410-1	Books on Horseback by Candice Ferris Ransom	027			$13.27 | $13.27
2425169	978-1-59270-413-2	Boy Who Became a Parrot: A Foolish Biography of Edward Lear Who Invented Nonsense by Barry Wolverton	821.8			$16.09 | $16.09
2459969	978-1-77147-712-3	Burst Your Bubble!: Outsmart the Algorithms and See What You're Missing by Joyce Grant	025.5			$13.97 | $13.97
2452876	978-1-77147-617-1	Buzz on Wild Bees: The Little-Known Pollinators That Keep Our Planet Humming by Kira Vermond	595.79			$13.97 | $13.97
2458778	978-1-6626-6540-0	Calamity Before Jane by Noah Van Sciver	978.02092			$12.59 | $12.59
2445987	979-8-89509-022-0	Call of the Birds: How We Can Help Birds Everywhere by Seraphine Menu	590			$13.99 | $13.99
2449265	978-0-8234-5969-8	Chemistry Between Art and Science by Jen White	700.23			$13.29 | $13.29
2453693	978-1-4003-4760-5	Cities: Travel Through the World's Amazing Places by Manon Bucciarelli	307			$13.99 | $13.99
2448485	978-0-7112-8836-2	Comeback Creatures: Discover the Wild Things Once Thought Extinct? by Leisa Stewart-Sharpe	591			$21.00 | $21.00
2446782	978-1-68449-453-8	Compendium of Curious Contraptions: A Guessing Game about History's Most Unusual Artifacts by Anna Goldfield	930.1			$13.99 | $13.99
2461801	978-0-8028-5515-2	Curious Life of Cecilia Payne: Discovering the Stuff of Stars by Laura Alary	920			$13.99 | $13.99
2451658	978-0-7534-7996-4	Day and Night: Come on an Incredible Journey by Tracey Turner	525			$13.99 | $13.99
2449027	978-1-83725-106-3	Day in the Life of Fossils, Fire and Other Fantastic Finds: Amazing Discoveries That Changed the World by Mike Barfield	500			$13.99 | $13.99
2449157	978-0-593-97213-7	Day in the Life of Your Body: Find Out What's Going on Under Your Skin	571			$20.99 | $20.99
2451129	978-1-5476-1502-5	Dead Ends!: Flukes, Flops and Failures That Sparked Medical Marvels by Lindsey Fitzharris	610			$13.99 | $13.99
2446927	979-8-9912234-3-0	Did You Kiss a Cat Today??? by Geri Lipschultz	808			$13.99 | $13.99
2453646	978-0-593-88965-7	Dirt!: Wild Life under the Soil's Surface by Lindsey Leigh	591.75			$12.59 | $12.59

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2460846	978-1-6626-8031-1	Dream Builder's Blueprint: Dr. King's Message to Young People by Alice Faye Duncan	808			$13.99 | $13.99
2494492	979-8-8752-4695-1	Dynamic DC Origin Story: The Evolution of Batman, Superman, Wonder Woman, and the DC Universe by Benjamin Harper	900			$23.49 | $23.49
2449462	978-1-84976-915-0	Electric Birds of Pothakudi by Karthika Nair	598			$15.39 | $15.39
2454225	978-1-250-86840-4	Electric Life: The Hidden Radiance of Everything by Sander Funneman	500			$20.99 | $20.99
2451846	978-1-83729-063-5	Exploring the Universe: A Complete Guide to the Cosmos by Isabel Thomas	520			$17.47 | $17.47
2450847	978-1-338-88548-4	Facing Feelings: Inside the World of Raina Telgemeier by Raina Telgemeier	740.9			$18.89 | $18.89
2450845	978-1-5253-1127-7	Feeling Your Feelings: The Head-To-Toe Science of Emotions by Tanya Lloyd Kyi	571			$13.29 | $13.29
2454305	978-1-954354-33-3	Fight for the Right to Read: Samuel Wilbert Tucker and the 1939 Sit-Down Strike for Library Reading Equality by Jeff Gottesfeld	323			$13.99 | $13.99
2452099	978-1-77840-098-8	Gland Factory: A Tour of Your Body's Goops, Juices, and Hormones by Rachel Poliquin	612.4			$15.37 | $15.37
2449488	978-1-63655-152-4	Great Big Book of Museums by Eva Bensard	069			$18.89 | $18.89
2454517	978-1-954354-34-0	Happy Birthday to You!: The Sisters Who Wrote the Most Famous Song in the World by Rachelle Burk	782			$13.99 | $13.99
2448803	978-1-80466-144-4	Harriet Tubman, Force of Nature: A Biography in Poems by Caroline Brewer	303			$13.29 | $13.29
2460088	979-8-89509-056-5	Heart: History, Science and Lots of Love by Noemi Fabra	571			$13.99 | $13.99
2451837	978-0-7112-9477-6	Hidden Wisdom of Animals: Surprising Things We Can Learn from Nature by Kate Siber	590			$17.49 | $17.49
2446489	978-1-250-31394-2	Hopeful Heroes by Margarita Engle	972			$13.29 | $13.29
2462925	979-8-225-05614-8	How Big Is That?: A Life-Size Guide to the Animal Kingdom by Tom Jackson	590			$11.89 | $11.89
2453854	978-1-4549-5644-0	How Rude!: Animals That Burp, Toot, Spit, and Screech to Survive by Chana Stiefel	590			$12.59 | $12.59
2443138	978-1-68263-758-6	How the Ghost Army Hoodwinked Hitler: The Story of American Artistry and Deception in World War II by Rebecca Siegel	940.54			$13.99 | $13.99
2461100	978-1-4451-9780-7	Hungry History of Sharks by Clive Gifford	578			$13.99 | $13.99
2449319	978-0-593-64876-6	I Am My Name: A Girl's Journey to Finding Her Cree Family by Na'kuset	920			$13.99 | $13.99
2454518	979-8-7656-2080-9	Jason Belongs: The Story of Jason Schachter McKinney by Audrey Ades	782.3			$14.99 | $14.99
2460025	978-3-96704-790-5	Keep on Moving: The Great Animal Migrations Large and Small by Sara Forster	590			$20.97 | $20.97
2462625	978-1-77147-620-1	Left-Handed: Getting a Grip on Handedness by Maria Birmingham	152.33			$13.97 | $13.97
2495350	978-1-78856-639-1	Let's Talk Climate Change: Take Action, Be Positive, Love Our Planet by Ruth Owen	363.738			$23.99 | $23.99
2454524	979-8-7656-4347-1	Liftoff!: How the Apollo Moon Missions Made Alma Thomas's Art Soar by Nina Crews	759.13			$14.99 | $14.99
2460954	978-1-62979-456-3	Louisa Learns to Write: Louisa May Alcott Creates Little Women by Kate Hannigan	813			$13.99 | $13.99
2463173	978-1-4205-2847-3	Malcolm Lives!: The Official Biography Of Malcolm X For Young Readers by Ibram X. Kendi	320.5			$23.74 | $23.74
2443202	978-0-593-97209-0	Maptastic!: A Mind-Blowing Map Adventure on Every Page by Rebecca Fry	912			$20.99 | $20.99
2449388	978-1-6626-8082-3	Mary Oliver, Holding on to Wonder by Erin Frankel	920			$13.29 | $13.29
2453837	979-8-88777-200-4	Mega: The Most Enormous Animals Ever by Jules Howard	591.68			$20.99 | $20.99
2446512	978-1-5364-9509-6	Mona Lisa Vanishes: A Legendary Painter, a Shocking Heist, and the Birth of a Global Celebrity by Nicholas Day	364.16			$20.95 | $20.95
2448694	978-1-78708-158-1	Moving to Mars by Eduard Altarriba	629			$13.99 | $13.99
2451841	978-1-83729-091-8	Mysteries of Marine Mammals: An Illustrated Guide to Whales, Dolphins, and Porpoises by Amandine Delaunay	599.5			$17.47 | $17.47
2450850	978-1-5461-2236-4	Nazi Conspiracy: The Secret Plot to Kill Roosevelt, Stalin, and Churchill (Young Reader's Edition) by Brad Meltzer	940.54			$13.99 | $13.99
2495841	978-1-960803-50-4	Oh Give Me A Home by Jane Kurtz	920			$15.37 | $15.37
2453763	978-0-7624-8976-3	Persian Mythology: Epic Stories of Gods, Heroes, and Monsters by Ryan Bani Tahmaseb	398			$13.99 | $13.99
2449226	978-1-5102-3063-7	Pierre the Maze Detective: The Hunt for the Maze Pyramid by Hiro Kamigaki	793			$13.99 | $13.99
2460019	978-1-68115-654-5	Place Called Galveston by Andrea Shapiro	970			$13.97 | $13.97
2451873	978-0-500-65355-5	Race to the South Pole: A Two-Sided Story by Alexandra Stewart	920			$13.97 | $13.97
2461097	978-1-5263-3187-8	Real-Life Sea Monsters and Their Stories of Survival by Anita Ganeri	551			$13.99 | $13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2446011	979-8-89509-032-9	Reptiles and Amphibians of the Americas by Marty Crump	590			$13.29 | $13.29
2454530	979-8-7656-1153-1	Returning the Sword: How a Japanese Sword of War Became a Symbol of Friendship and Peace by Caren Stelson	940.53			$14.24 | $14.24
2454531	979-8-7656-1152-4	Revolutions Are Made of Love: The Story of James Boggs and Grace Lee Boggs by Melina Mangal	811			$14.24 | $14.24
2454532	979-8-7656-4727-1	Rewriting the Rules: How Dr. Kathleen Friel Created New Possibilities for Brain Research and Disability by Danna Zeiger	610.92			$14.99 | $14.99
2453520	978-1-63655-165-4	Salmon Run: An Epic Journey to the Ocean and Back Again by Annie Chen	597			$13.99 | $13.99
2446021	978-1-5102-3134-4	Secret Lives of Stones: Fascinating Stories of Gemstones, Rocks and Minerals by Hettie Judah	552			$15.39 | $15.39
2419635	978-1-951365-29-5	Shabbat on Mars by Jeff Ward	296			$10.49 | $10.49
2454535	979-8-7656-6821-4	Size of Space: Measuring Our Solar System with The Planetary Society by Bruce Betts	523.2			$23.99 | $23.99
2454537	979-8-7656-7104-7	So Rude!: Animals Behaving Badly by Jessica Fries-Gaither	591.5			$23.99 | $23.99
2451643	978-0-374-39261-1	Sole Survivor by Norman Ollestad	979.4			$13.99 | $13.99
2443909	978-1-5344-6617-3	Spy in the Museum: How Rose Valland Saved Art from the Nazis by Erin McGuire	940.53			$13.99 | $13.99
2452861	978-1-77306-731-5	Story and Science of Hope by Andrea Curtis	152			$13.99 | $13.99
2454268	978-0-500-65385-2	Story of Gold	930			$15.37 | $15.37
2446818	978-1-917366-06-9	Stuff That Stuff Is Made Of: The Things We Make with Plants by Jonathan Drori	600			$16.09 | $16.09
2446012	978-1-5253-0668-6	Sustainable School: A Journey Through Time and Energy by Erica Fyvie	500			$12.59 | $12.59
2451032	979-8-88777-196-0	There Are No Silly Questions: More Than 200 Weird and Wacky Questions, Expertly Answered! by Mike Rampton	032			$17.49 | $17.49
2453126	978-0-593-96536-8	Things Scientists Don't Know Yet: The Unsolved Mysteries of Science by Peter Gallivan	509			$13.99 | $13.99
2449221	978-1-5362-3052-9	This Is Orange: A Field Trip Through Color by Rachel Poliquin	535.5			$13.29 | $13.29
2460137	978-1-7282-6784-5	This Skirt Won't Work!: How Women Athletes Changed Their Clothes and Changed the Game by Jennifer Cooper	305			$13.29 | $13.29
2451836	978-1-83729-057-4	Tomorrow Tree: How Nature Creates New Life from Old by Maciej Michno	634			$13.97 | $13.97
2446028	978-1-5102-3164-1	Tree Is a Time Machine by Rob Sears	900			$17.49 | $17.49
2452116	978-1-83402-013-6	Unreal: Can You Tell Fact from Fake? by Kate Simpson	508			$17.49 | $17.49
2443482	978-0-593-71255-9	Vanished: Seven Women Magicians Who Simply Disappeared by Anna Hays	793.8092			$13.29 | $13.29
2451823	978-0-7112-9348-9	Voyage That Changed the World: The Epic Story of the First Crew to Sail Around the Globe by Thekla Priebst	910.92			$17.49 | $17.49
2454541	979-8-7656-2746-4	Watch Them Grow: The Fascinating Science of Animal Beginnings by Carrie A. Pearson	612.6			$25.99 | $25.99
2446383	978-1-63586-850-0	What Goes on Inside a Wolf Pack: Follow the Adventures of a Wolf Family in Yellowstone National Park by Kathleen Yale	599.773			$13.99 | $13.99
2449168	978-0-593-97211-3	What's It Made Of?: The Materials That Shape Our World	540			$20.99 | $20.99
2451839	978-1-83729-032-1	What's That Building?: An Architectural Guessing Game by Rebecca Donnelly	720			$13.97 | $13.97
2443253	978-1-83874-907-1	Wish upon a Star: The Science, Magic and Meaning of Stars by Catherine Ard	629			$13.99 | $13.99
2485037	978-1-4197-8675-4	Wizard's Guide to Magical Experiments: 40 Science Experiments to Try at Home by A. J. Wood	500			$17.49 | $17.49
2449578	978-1-62354-395-2	Women on a Mission: The Remarkable Heroes Who Put Men on the Moon by Suzanne Slade	305			$13.29 | $13.29
2446854	978-1-83605-178-7	Woodland Book by Alice James	590			$9.09 | $9.09
2446104	978-1-338-88236-0	World War II Close up: They Battled in Blizzards by Deborah Hopkinson	940.54219348			$18.19 | $18.19
2443484	978-0-593-64387-7	World Without Summer: A Volcano Erupts, a Creature Awakens, and the Sun Goes Out by Nicholas Day	303.48			$13.99 | $13.99
2461026	978-1-6626-8089-2	Writing Toward Justice: The Life and Reporting of Alice A. Dunnigan by Peggy Thomas	920			$13.99 | $13.99
2495213	979-8-7656-6270-0	Exploring Fashion Design Careers by Kelley Barth	746.9			$26.99 | $26.99
2495215	979-8-7656-6268-7	Exploring Health-Care Careers by Kelley Barth	610.69			$26.99 | $26.99
2495217	979-8-7656-6269-4	Exploring Service Trades Careers by Kelley Barth	331.702			$26.99 | $26.99
2495219	979-8-7656-6271-7	Exploring Sports and Fitness Careers by Stephanie Loureiro	796.023			$26.99 | $26.99
2453134	978-1-4642-2854-4	For Growing Up by Hannah Barnaby	158			$9.09 | $9.09
2443429	978-1-4263-7709-9	Hockey: The Math Behind the Perfect Slap Shot, the Split-Second Save, and So Much More! by Eric Zweig	796.962			$10.49 | $10.49
2497153	978-1-5345-5165-7	Families by Eliza Nodes	306.85			$20.98 | $20.98

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2497156	978-1-5345-5171-8	Games by Eliza Nodes	796.14			$20.98	$20.98
2453588	978-1-68369-393-2	Kid Olympians Winter: True Tales of Childhood from Champions and Game Changers by Robin Stevenson	796			$10.49	$10.49
2453138	979-8-217-12610-1	Kids Book About Being an Introvert by Amy Taylor	302			$13.99	$13.99
2458734	979-8-217-12612-5	Kids Book About Kindness by Jackson Cooper	302			$13.99	$13.99
2453135	979-8-217-13777-0	Kids Book About Pets and Love by Taylor Hill	302			$13.99	$13.99
2493589	978-1-0982-9862-3	Animal Migration by Samantha S. Bell	591.56			$24.95	$24.95
2493590	978-1-0982-9863-0	Earth's Seasons by Samantha S. Bell	508.2			$24.95	$24.95
2493591	978-1-0982-9864-7	Metamorphosis by Samantha S. Bell	571.8			$24.95	$24.95
2493592	978-1-0982-9865-4	Moon Phases by Golriz Golkar	523.3			$24.95	$24.95
2493596	978-1-0982-9870-8	Spotting Birds by Laura Perdew	598.072			$24.95	$24.95
2493599	978-1-0982-9873-9	Spotting Rocks by Emily Heck	552.0			$24.95	$24.95
2493600	978-1-0982-9874-6	Spotting Trees by Angela Lim	582.16			$24.95	$24.95
2459989	978-88-544-2159-2	Many Ways to be a Family: Learning from Animals	590			$10.49	$10.49
2495342	979-8-7656-8945-5	Lamar Jackson vs. Cam Newton: Who Would Win? by Kelley Barth	796.332092			$22.99	$22.99
2495485	979-8-7656-8948-6	Shohei Ohtani vs. David Ortiz: Who Would Win? by Peter Douglas	796.357092			$22.99	$22.99
2495528	979-8-7656-8944-8	Travis Kelce vs. Rob Gronkowski: Who Would Win? by Kelley Barth	796.332092			$22.99	$22.99
2495532	979-8-7656-8946-2	Trinity Rodman vs. Carli Lloyd: Who Would Win? by Kelley Barth	796.334092			$22.99	$22.99
2495088	979-8-7656-8949-3	Boston Celtics vs. Los Angeles Lakers: Rival Rumble by Josh Anderson	796.323			$22.99	$22.99
2495268	979-8-7656-8951-6	Golden State Warriors vs. San Antonio Spurs: Rival Rumble by Josh Anderson	796.323			$22.99	$22.99
2495344	979-8-7656-8953-0	Las Vegas Aces vs. New York Liberty: Rival Rumble by Josh Anderson	796.323			$22.99	$22.99
2496562	978-1-9785-7729-9	Figure Skating by Kim Thompson	796.912			$18.95	$18.95
2484610	978-1-6689-7311-0	Age of the Dinosaurs by Christian Lopetz	567			$22.45	$22.45
2484611	978-1-6689-7310-3	Ancient Oceans by Julie K. Lundgren	551			$22.45	$22.45
2484660	978-1-6689-7312-7	Landscapes Long Ago by Alexandria Berry	910			$22.45	$22.45
2484674	978-1-6689-7314-1	Rise of The Giant Mammals by Christian Lopetz	567			$22.45	$22.45
2484675	978-1-6689-7315-8	Sea Monsters by Julie K. Lundgren	567			$22.45	$22.45
2495193	979-8-7656-8924-0	Explore Ancient Egypt by Zelda Wagner	932			$22.99	$22.99
2495201	979-8-7656-8923-3	Explore Mesopotamia by Zelda Wagner	935			$22.99	$22.99
2495203	979-8-7656-8930-1	Explore the Aztec Empire by Candice Ransom	972			$22.99	$22.99
2495207	979-8-7656-8925-7	Explore the Maya Civilization by Zelda Wagner	972.81			$22.99	$22.99
2495209	979-8-7656-8929-5	Explore the Viking Age by Candice Ransom	948.022			$22.99	$22.99
2495273	978-1-78856-624-7	Green Tree Ant's New Nest by Ruth Owen	500			$22.99	$22.99
2495281	978-1-78856-627-8	Hermit Crab's New Shell by Ruth Owen	500			$22.99	$22.99
2453537	978-1-4197-7969-5	Little Book of Love: 100 Ways to Say I Love You Around the World by Vita Murrow	394			$13.99	$13.99
2446056	978-1-83758-670-7	Atlas of Horses and Ponies by Frances Evans	636.1			$15.39	$15.39
2446055	978-1-83758-625-7	World from Above by Ben Hubbard	910.222			$15.39	$15.39
2446857	978-1-83605-180-0	Lots of Things to Know about Robots by James Maclaine	629.892			$9.09	$9.09
2443226	978-0-593-70589-6	Space by Mary Pope Osborne	520			$12.59	$12.59
2451132	979-8-88674-331-9	Magnificent Book of Horses by Tom Jackson	636.1			$13.99	$13.99
2495454	978-1-83569-668-2	Rovers and Landers by John Allan	600			$22.99	$22.99
2495456	978-1-83569-669-9	Satellites and Probes by John Allan	629.46			$22.99	$22.99
2495364	978-1-83569-672-9	Machines Busy Harvesting by John Allan	600			$22.99	$22.99
2495365	978-1-83569-671-2	Machines Busy Planting by John Allan	600			$22.99	$22.99
2495366	978-1-83569-673-6	Machines on the Go by John Allan	600			$22.99	$22.99
2495072	978-1-917509-48-0	Saving the Rhino by Sarah Eason	590			$23.99	$23.99
2495460	978-1-917509-52-7	Saving the Shark by Sarah Eason	590			$23.99	$23.99
2495462	978-1-917509-56-5	Saving the Whale by Katherine Eason	590			$23.99	$23.99
2453055	979-8-88770-384-8	My Life Beyond Hemophilia: A Mayo Clinic Patient Story by Hey Gee	179			$10.49	$10.49
2496001	979-8-89577-840-1	Story of Area 51 by Noah Leatherland	900			$23.07	$23.07
2496002	979-8-89577-842-5	Story of Roanoke by Noah Leatherland	900			$23.07	$23.07
2496003	979-8-89577-841-8	Story of the Bermuda Triangle by Noah Leatherland	900			$23.07	$23.07
2496004	979-8-89577-843-2	Story of the Mary Celeste by Noah Leatherland	900			$23.07	$23.07
2446644	978-1-68449-452-1	Dragons: Meet the Legendary Monsters of Mythology by Cait Stevenson	398.24			$13.29	$13.29
2449583	978-1-4263-7738-9	Weather and Natural Disasters by Michael Burgan	551			$23.74	$23.74
2448603	978-1-4598-3975-5	Not Just Dirt!: How Soil Supports Our Planet by Sheryl Normandeau	577.5			$15.37	$15.37
2451687	978-1-4598-4153-6	Smart Machines: How AI Is Changing Our World by Helaine Becker	006.3			$18.87	$18.87
2448605	978-1-4598-3959-5	Cracking the Code: The Human Quest to Uncover Secrets by Rachel Kehoe	652			$20.97	$20.97

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2448606	978-1-4598-4062-1	Just a Minute: Why Humans Tell Time by Kirstie Hudson	529	$20.97	1	$20.97
2443756	978-1-6659-7288-8	Our Frozen Planet by Leisa Stewart-Sharpe	363.700911	$15.39	1	$15.39
2494302	979-8-8752-5650-9	Cutest Cats of All Time by Mari Bolte	636	$22.49	1	$22.49
2494303	979-8-8752-5658-5	Cutest Dogs of All Time by Mari Bolte	636	$22.49	1	$22.49
2494326	979-8-8752-5615-8	Basketball Is the Best! by Joe Tischler	796	$23.49	1	$23.49
2494327	979-8-8752-5623-3	Football Is the Best! by Joe Tischler	796.332	$23.49	1	$23.49
2494338	979-8-8752-4658-6	Make Your Own Easter Eggs by Mandy R. Marx	745.594	$22.49	1	$22.49
2494362	979-8-8752-7155-7	Green by April R. Hugh	535	$23.49	1	$23.49
2494363	979-8-8752-7163-2	Orange by April R. Hugh	535	$23.49	1	$23.49
2494364	979-8-8752-7171-7	Pink by April R. Hugh	535	$23.49	1	$23.49
2494347	979-8-8752-4845-0	Whose Furry Butt Is That? by Christianne Jones	590	$23.49	1	$23.49
2494349	979-8-8752-4861-0	Whose Tricky Tracks Are Those? by Christianne Jones	590	$23.49	1	$23.49
2484617	978-1-6689-7336-3	Battle of Bunker Hill: Battles of the American Revolution by Marcia Amidon Lusted	355	$23.45	1	$23.45
2484618	978-1-6689-7339-4	Battle of Gettysburg: Battles of the Civil War by Roberta Baxter	355	$23.45	1	$23.45
2484673	978-1-6689-7341-7	Remembering the Battle of the Alamo by Peggy Caravantes	355	$23.45	1	$23.45
2484575	978-1-6689-7340-0	Underground Railroad: The Brave and the Free by Sheila Griffin Llanas	323	$23.45	1	$23.45
2496521	978-1-9785-7896-8	Chess Set / Mushroom Power / Bonkers Beach Huts by Stephen Rickard	372.465	$22.00	1	$22.00
2496468	978-1-9785-7818-0	Can You Trick a Polygraph? / Space Invaders by Daisy Hawkins	372.4	$22.00	1	$22.00
2496648	978-1-9785-7836-4	It Makes No Sense! / Nomad Life by Stephen Rickard	372.4	$22.00	1	$22.00
2460028	978-1-5131-4197-8	Children's Songs for Guitar: A Superfast Way to Learn Awesome Songs on Your Guitar by Jennifer Kemmeter	787.87	$23.09	1	$23.09
2495922	979-8-89577-624-7	Bats: Friends of Flowers by Bryan Langdo	599.4	$21.67	1	$21.67
2495923	979-8-89577-625-4	Bees: Friends of Flowers by Bryan Langdo	595.79	$21.67	1	$21.67
2495924	979-8-89577-626-1	Butterflies and Moths: Friends of Flowers by Bryan Langdo	595.78	$21.67	1	$21.67
2495964	979-8-89577-627-8	Hummingbirds: Friends of Flowers by Bryan Langdo	598.7	$21.67	1	$21.67
2495914	979-8-89577-740-4	Age of Mammals: The Cenozoic Era by Dougal Dixon	930	$22.37	1	$22.37
2495935	979-8-89577-741-1	Dinosaurs Rule: The Cretaceous Period by Dougal Dixon	930	$22.37	1	$22.37
2495943	979-8-89577-742-8	Early Life: The Cambrian Period Through the Triassic Period by Dougal Dixon	930	$22.37	1	$22.37
2495912	979-8-89577-743-5	Warm, Wet World: The Jurassic Period by Dougal Dixon	930	$22.37	1	$22.37
2448475	978-0-7112-9424-0	Once in a Blue Moon: Nature's Rarest Events and Best-Kept Secrets by Emily Hawkins	520	$21.00	1	$21.00
2485965	978-1-5038-7795-5	Secrets of the Deep Ocean by Eamonn Corrigan	577	$24.95	1	$24.95
2485967	978-1-5038-7789-4	Superstorms by Kathleen Corrigan	551	$24.95	1	$24.95
2495950	979-8-89577-747-3	Exploring Rock Types by Claudia Martin	552	$22.37	1	$22.37
2495908	979-8-89577-746-6	Exploring the Rock Cycle by Claudia Martin	552	$22.37	1	$22.37
2454773	979-8-7656-7199-3	Dinosaur Secrets Revealed!: How High-Tech Tools Spark Discoveries by Sandra Markle	567.9	$24.99	1	$24.99
2461397	978-1-5364-9677-2	Scholastic Book of World Records 2026	030	$28.95	1	$28.95
2451170	978-1-62672-765-6	Computers: How Digital Hardware Works by Jerel Dye	004.1	$15.39	1	$15.39
2461794	978-1-3988-5735-3	Questions and Answers about Space: The Universe As You've Never Seen It Before by Giles Sparrow	523.1	$11.89	1	$11.89
2496434	978-1-5383-1340-4	Ankylosaurus by P. J. Freedman	567.915	$19.70	1	$19.70
2496694	978-1-5383-1358-9	Pteranodon by Mary Griffin	567.918	$19.70	1	$19.70
2496736	978-1-5383-1361-9	Stegosaurus by Mary Griffin	567.9153	$19.70	1	$19.70
2496737	978-1-5383-1364-0	T. Rex by Mary Griffin	567.9129	$19.70	1	$19.70
2495134	979-8-7656-8898-4	Could We Bring Dinosaurs Back to Life? by Cynthia O'Brien	567.9	$23.99	1	$23.99
2495136	979-8-7656-8896-0	Could We Harness the Power of Black Holes? by Cynthia O'Brien	523.8	$23.99	1	$23.99
2495138	979-8-7656-8895-3	Could We Tame a Tornado? by Cynthia O'Brien	551.68	$23.99	1	$23.99
2495937	979-8-89577-811-1	Discovering Jellyfish and Sea Slugs	500	$21.67	1	$21.67
2495938	979-8-89577-812-8	Discovering Kelp Forests	500	$21.67	1	$21.67
2495940	979-8-89577-814-2	Discovering Octopuses and Squid	500	$21.67	1	$21.67
2497183	978-1-5345-5189-3	Life Cycles by Eliza Nodes	571.8	$20.98	1	$20.98
2497179	978-1-5345-5195-4	Water Cycle by Eliza Nodes	551.48	$20.98	1	$20.98
2495911	979-8-89577-641-4	Gas Giants by Ashley Kuehl	500	$23.07	1	$23.07
2495955	979-8-89577-642-1	Gravity in Space by Ashley Kuehl	500	$23.07	1	$23.07
2495966	979-8-89577-643-8	Inner Planets by Ashley Kuehl	500	$23.07	1	$23.07
2495985	979-8-89577-644-5	Meteors, Asteroids, and Comets by Ashley Kuehl	500	$23.07	1	$23.07
2495986	979-8-89577-645-2	Missions to Space by Ashley Kuehl	520	$23.07	1	$23.07
2494372	979-8-8752-4032-4	Legendary Knights of Medieval Europe by Benjamin Harper	900	$28.49	1	$28.49
2494375	979-8-8752-4056-0	Legendary Vikings of Early Scandinavia by Benjamin Harper	900	$28.49	1	$28.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2494404	979-8-8752-5556-4	Cyclops vs. Ogre by A. J. Sautter	398			$23.49 | $23.49
2494407	979-8-8752-5564-9	Pegasus vs. Unicorn by A. J. Sautter	398.24			$23.49 | $23.49
2494417	979-8-8752-4481-0	Worst of the Worst Airplane Crashes! by Aaron Sautter	363.12			$23.49 | $23.49
2494419	979-8-8752-4497-1	Worst of the Worst Shipwrecks! by Aaron Sautter	910.4			$23.49 | $23.49
2494420	979-8-8752-4505-3	Worst of the Worst Volcanic Eruptions! by Aaron Sautter	363			$23.49 | $23.49
2448617	978-0-8028-5643-2	Journey of the Humpbacks by Juliana Munoz Toro	599.5			$13.29 | $13.29
2493613	978-1-0982-9824-1	Broadcast Rights: The Future of TV and Streaming by Luke Hanlon	070.449796			$24.95 | $24.95
2493615	978-1-0982-9826-5	Managing the Money: Athlete Contracts and Salary Caps by Tom Schad	338.43796			$24.95 | $24.95
2493616	978-1-0982-9827-2	Running the Show: The Evolving Roles of Sports Owners by Luke Hanlon	796.023			$24.95 | $24.95
2493617	978-1-0982-9828-9	Sports Brands: The Companies at the Center of the Action by Charlie Beattie	659.144			$24.95 | $24.95
2453501	978-1-9848-5202-1	Muzoon: From Refugee to Leader by Muzoon Almellehan	920			$16.14 | $16.14
2493626	978-1-0982-9793-0	Tiny Mighty Animal Art by Layne Halvorsen	745.5			$24.95 | $24.95
2493628	978-1-0982-9795-4	Tiny Mighty Food Fun by Layne Halvorsen	745.5			$24.95 | $24.95
2493630	978-1-0982-9797-8	Tiny Mighty Nature Crafts by Layne Halvorsen	745.5			$24.95 | $24.95
2493631	978-1-0982-9798-5	Tiny Mighty Vehicle Toys by Layne Halvorsen	745.5			$24.95 | $24.95
2446642	978-1-68449-450-7	Tales of Pirates: Adventures on the Seven Seas by Katie Nelson	904			$15.39 | $15.39
2497107	978-1-4824-7552-4	Stone Age by Ben Hubbard	930.12			$21.20 | $21.20
2497113	978-1-4824-7555-5	Victorians by Tim Cooke	941.081			$21.20 | $21.20
2494998	978-1-83569-490-9	Animal Intelligence Unleashed: What Animals Reveal about Our Changing World by Jill Russo	590			$29.99 | $29.99
2495296	978-1-83569-481-7	How to Build a Human: The Incredible Design of the Human Body by Scott Goldie	500			$29.99 | $29.99
2495534	978-1-83569-482-4	Ultimate Space Quest: Humanity's Next Mission by Darren Ruddell	600			$29.99 | $29.99
2422476	979-8-89232-637-7	10 Coolest Animals by Rachel Rose	590			$21.67 | $21.67
2422478	979-8-89232-639-1	10 Deadliest Animals by Rachel Rose	591.6			$21.67 | $21.67
2422480	979-8-89232-641-4	10 Smartest Animals by Rachel Rose	591.5			$21.67 | $21.67
2424486	978-1-64582-396-4	12 iconic American Myths and Legends by Marne Ventura	398.2			$30.95 | $30.95
2399165	978-1-64582-290-5	12 Authors Who Changed the World by Elaine Kule	809			$29.95 | $29.95
2399208	978-1-64582-302-5	12 Biggest Breakthroughs in Transportation Technology by M. M. Eboch	629.0409			$29.95 | $29.95
2495614	979-8-89304-832-2	Bison vs. Elk by Nathan Sommer	590			$20.97 | $20.97
2495618	979-8-89304-833-9	Canada Goose vs. Gray Fox by Nathan Sommer	590			$20.97 | $20.97
2495629	979-8-89304-834-6	Dolphin vs. Mako Shark by Nathan Sommer	590			$20.97 | $20.97
2495660	979-8-89304-835-3	Maned Wolf vs. Giant Anteater by Nathan Sommer	590			$20.97 | $20.97
2413621	978-1-4788-8780-5	Flick! The Truth About Lizards by Annette Whipple	597.95			$12.57 | $12.57
2446017	979-10-276-1364-9	Ultimate Book of the Human Body by Anne-Sophie Baumann	571			$17.49 | $17.49
2451031	978-1-83605-213-5	Understanding Physics by Darran Stobbart	509			$10.49 | $10.49
2495918	979-8-89577-628-5	Anglerfish and Other Strange Deep-Sea Creatures by Rachel Rose	591.77			$21.67 | $21.67
2495910	979-8-89577-630-8	Flower Hat and Other Strange Jellies and Jellyfish by Rachel Rose	590			$21.67 | $21.67
2495993	979-8-89577-632-2	Sailor's Eyeball and Other Strange Plants, Plankton, and Algae by Rachel Rose	580			$21.67 | $21.67
2495997	979-8-89577-633-9	Sea Bunny and Other Strange Sea Slugs and Sea Cucumbers by Rachel Rose	594			$21.67 | $21.67
2496008	979-8-89577-631-5	Strawberry Anemone and Other Strange Corals and Anemones by Rachel Rose	593.6			$21.67 | $21.67
2455605	978-1-5461-7856-9	Escape From Alcatraz by Dinah Williams	979.4			$31.00 | $31.00
2455607	978-1-5461-7863-7	Ghost Ship by Dinah Williams	363.12			$31.00 | $31.00
2495000	979-8-7656-8971-4	34 Amazing Facts about Aliens by Tracy Sue Walker	500			$22.99 | $22.99
2495002	979-8-7656-8972-1	34 Amazing Facts about Dinosaurs by Hannah Gramson	567.9			$22.99 | $22.99
2495004	979-8-7656-8973-8	34 Amazing Facts about Ghosts by Tracy Sue Walker	133.1			$22.99 | $22.99
2484455	978-1-6689-7353-0	Growing Bones by Virginia Loh-hagan	571			$22.45 | $22.45
2484461	978-1-6689-7358-5	Organs from Time Long Ago by Virginia Loh-hagan	571			$22.45 | $22.45
2484462	978-1-6689-7357-8	Regeneration by Virginia Loh-hagan	571			$22.45 | $22.45
2484466	978-1-6689-7356-1	Yawning by Virginia Loh-hagan	571			$22.45 | $22.45
2446312	979-8-88777-157-1	Welcome to Our Playground: A Celebration of Games Children Play Everywhere by Moira Butterfield	793			$16.09 | $16.09
2443229	979-8-217-04921-9	What Do We Know about Spontaneous Human Combustion? by Steve Korte	612			$15.19 | $15.19
2452946	978-0-593-97205-2	What If... Every Volcano Erupted at Once?: And Other Amazing Earth Questions by Emma Young	551			$12.59 | $12.59
2497085	978-1-4824-7567-8	Materials by Paul Mason	620.11			$21.20 | $21.20
2497111	978-1-4824-7573-9	Sun by Paul Mason	523.2			$21.20 | $21.20

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2459809	978-1-5364-9654-3	What Is Lunar New Year? by Vivian Jun Kirklin	950	$17.95	1	$17.95
2459810	978-1-5364-9655-0	What Was the Industrial Revolution? by Jim E. Gigliotti	973	$17.95	1	$17.95
2497063	978-1-4824-7579-1	Farts, Fumes, and Other Gases by Helen Greathead	533	$21.20	1	$21.20
2497079	978-1-4824-7582-1	Lightning, Solar, and Other Energies by Helen Greathead	531.113	$21.20	1	$21.20
2497091	978-1-4824-7585-2	Pee, Rain, and Other Liquids by Helen Greathead	530.42	$21.20	1	$21.20
2497101	978-1-4824-7588-3	Poop, Plastic, and Other Solids by Helen Greathead	530.41	$21.20	1	$21.20
2453612	978-0-593-38565-4	Who Discovered How to Breathe Underwater?: Jacques Cousteau by Ned Wolfe	920	$9.79	1	$9.79
2462956	979-8-2952-0023-6	Who Is Jenna Ortega? by Kirsten Anderson	790	$14.95	1	$14.95
2459811	978-1-5364-9656-7	Who Was Cleopatra? by Kathryn Waterfield	920	$16.95	1	$16.95
2449397	978-0-593-75217-3	Who Was Katherine Johnson? by Shelia P. Moses	510	$15.19	1	$15.19
2449396	979-8-217-14091-6	Who Was Vincent Van Gogh? by Paula K. Manzanero	759.9492	$15.19	1	$15.19
2446440	978-1-5364-9497-6	Porcupine vs. Pangolin by Jerry Pallotta	599.35	$14.95	1	$14.95
2496987	978-1-9785-4690-5	Coco Gauff vs. Serena Williams: Tennis's Greatest by Kathleen Connors	796.342092	$20.20	1	$20.20
2496989	978-1-9785-4693-6	Connor McDavid vs. Wayne Gretzky: Hockey's Greatest by Kathleen Connors	796.96	$20.20	1	$20.20
2460149	979-8-88608-456-6	Why We Celebrate Groundhog Day: Everything to Know about Your Favorite Holiday by Karen Bush Gibson	394	$11.19	1	$11.19
2497185	978-1-5345-5156-5	Mushrooms and Other Fungi by Charis Mather	579.6	$20.98	1	$20.98
2397816	978-1-5026-7158-5	100 Art Words Explained by Jon Richards	709	$23.15	1	$23.15
2397819	978-1-5026-7167-7	100 Science Words Explained by Jon Richards	570	$23.15	1	$23.15
2496144	979-8-89662-382-3	Sue Hendrickson: Dinosaur Discoverer by Clara MacCarald	560	$20.99	1	$20.99
2496504	978-1-5345-5294-4	Golden Gate Bridge by Sloane Gould	624.230979461	$20.95	1	$20.95
2496665	978-1-5345-5300-2	Machu Picchu by Sloane Gould	985.37	$20.95	1	$20.95
2495916	979-8-89577-852-4	Ancient Greek Gods by Eliza Nodes	930	$23.07	1	$23.07
2495917	979-8-89577-855-5	Ancient Roman Gods by Eliza Nodes	930	$23.07	1	$23.07
2495988	979-8-89577-854-8	Norse Gods by Eliza Nodes	930	$23.07	1	$23.07
2497047	978-1-4824-7504-3	... Dive into the Mariana Trench or Climb Mount Everest? by Rosie Banks	910.9164	$21.20	1	$21.20
2497049	978-1-4824-7507-4	... Eat a Fried Tarantula or Drink Yak Milk? by Rosie Banks	306.4	$21.20	1	$21.20
2495277	978-1-57715-674-1	He Can HEAL: Health and Education: Inspiring Stories of Men Who Changed the World by Richard V. Reeves	920	$25.99	1	$25.99
2495480	978-1-57715-673-4	She Can STEM: Chemistry and Physics: Inspiring Stories of Women Who Changed the World by Liz Lee Heinecke	920	$25.99	1	$25.99
2494477	979-8-8752-4068-3	Can You Survive a Roaring Tornado?: An Interactive Survival Adventure by Thomas Kingsley Troupe	363	$25.99	1	$25.99
2494478	979-8-8752-4064-5	Can You Survive a Surging Tsunami?: An Interactive Survival Adventure by Matt Doeden	363	$25.99	1	$25.99

Total quantity	504 Titles(504 Books)
Subtotal	$10,031.85
Processing Options Total	$1,663.20
Shipping & Handling	$200.64
Shipping Discount	-$200.64
Tax	$1,198.74
Grand Total	**$12,893.79**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: JUVENILE GRAPHIC ODC 1
List#: 207794
Date: 2/17/2026 6:17:08 PM
Total quantity: 499 Titles(499 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	499	$1,646.70

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2441404	978-1-83605-123-7	24 Hours in the Wilderness by Ashe de Sousa	741.5	$6.99	1	$6.99
2453874	978-1-5364-9612-3	Sword Thief (Graphic Novel) by Peter Lerangis	741.5	$24.95	1	$24.95
2461868	978-1-5458-2455-9	Action Cat and Adventure Bug: Let's Do This by Art Baltazar	741.5	$12.59	1	$12.59
2462357	978-1-6672-1167-1	Action Dude and the Massive Shark by Andy Riley	741.5	$6.99	1	$6.99
2434894	978-1-6672-1020-9	Vacation On the Moon by Andy Riley	741.5	$6.99	1	$6.99
2433019	978-1-64607-172-2	Elsewhere in Odyssey by Evan David	741.5	$10.49	1	$10.49
2433170	978-0-316-58253-7	Adventures of Tintin, Vol. 01 by Herge	741.5	$20.29	1	$20.29
2433173	978-0-316-58266-7	Adventures of Tintin, Vol. 02 by Herge	741.5	$20.29	1	$20.29
2433175	978-0-316-58271-1	Adventures of Tintin, Vol. 03 by Herge	741.5	$20.29	1	$20.29
2433176	978-0-316-58272-8	Adventures of Tintin, Vol. 04 by Herge	741.5	$20.29	1	$20.29
2433178	978-0-316-58273-5	Adventures of Tintin, Vol. 05 by Herge	741.5	$20.29	1	$20.29
2433180	978-0-316-58274-2	Adventures of Tintin, Vol. 06 by Herge	741.5	$20.29	1	$20.29
2433183	978-0-316-58275-9	Adventures of Tintin, Vol. 07 by Herge	741.5	$20.29	1	$20.29
2433184	978-0-316-58276-6	Adventures of Tintin, Vol. 08 by Herge	741.5	$20.29	1	$20.29
2464824	978-0-593-75431-3	Escape from Nuggetville, Vol. 01 by Jenine Pastores	741.5	$9.09	1	$9.09
2432441	978-1-5362-3931-7	Snakehead by Anthony Horowitz	741.5	$11.19	1	$11.19
2449196	978-1-64614-578-2	Ami Moon and the Galactic Peacekeepers, Vol. 01 by Frances Lee	741.5	$17.49	1	$17.49
2439886	978-1-250-85028-7	Area 51 by Steve Foxe	741.5	$15.39	1	$15.39
2439888	978-1-250-85026-3	Unwanted Guests by Steve Foxe	741.5	$15.39	1	$15.39
2450940	978-1-250-76080-7	Loki by George O'Connor	741.5	$15.39	1	$15.39
2452832	978-1-5458-2180-0	Asterix in Lusitania by Jean-Yves Ferri	741.5	$6.99	1	$6.99
2461871	978-1-5458-2302-6	Asterix and the Banquet by Rene Goscinny	741.5	$13.99	1	$13.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2423839	978-1-5458-1622-6	Asterix and the Golden Sickle by Rene Goscinny	741.5	$13.99	1	$13.99
2436667	978-1-5458-1827-5	Asterix and the Goths by Rene Goscinny	741.5	$13.99	1	$13.99
2452025	978-1-5458-2048-3	Asterix the Gladiator by Rene Goscinny	741.5	$13.99	1	$13.99
2461602	978-1-4197-7457-7	Blast from the Past! by Sabrina Moyle	741.5	$9.79	1	$9.79
2433464	978-0-06-307595-5	Atana and the Jade Mermaid by Vivian Zhou	741.5	$17.49	1	$17.49
2423180	978-1-83874-198-3	Avery and the Fairy Circle by Rowan Kingsbury	741.5	$9.09	1	$9.09
2451064	978-1-5364-9573-7	Jessi Ramsey, Pet-Sitter (Graphic Novel) by Ann M. Martin	741.5	$24.95	1	$24.95
2435596	978-1-5364-9319-1	Karen's Ghost (Graphic Novel) by DK Yingst	741.5	$24.95	1	$24.95
2423459	978-1-5364-9147-0	Karen's Prize (Graphic Novel) by Shauna J Grant	741.5	$24.95	1	$24.95
2459765	979-8-217-11598-3	LOVE by Jennifer L. Holm	741.5	$20.89	1	$20.89
2423808	978-1-5248-9230-2	Cheesey Brie-Ginning by Guy Kopsombut	741.5	$8.39	1	$8.39
2462326	978-1-5364-9692-5	Big Audition by Brian Smitty Smith	741.5	$19.95	1	$19.95
2423536	978-1-5364-9158-6	In the Spotlight by Brian Smitty Smith	741.5	$19.95	1	$19.95
2434290	978-1-6659-1446-8	Barb and the Battle for Bailiwick by Dan Abdo	741.5	$9.09	1	$9.09
2453675	978-1-6659-5353-5	Barb vs. the Leech Queen by Dan Abdo	741.5	$10.49	1	$10.49
2452060	978-1-5458-2050-6	Monsters among Us by Trevor Mueller	741.5	$10.49	1	$10.49
2425455	978-1-4197-7622-9	Cooking Contest! by Meggie Ramm	741.5	$10.49	1	$10.49
2437770	978-1-917044-94-3	Ivy and Bearlock Holmes: The Case of the Missing Flower by Kristyna Litten	741.5	$10.49	1	$10.49
2434927	978-0-316-59293-2	Frog Daddy by Andrew Weiner	741.5	$9.09	1	$9.09
2425016	978-1-6659-0748-4	Beetle and the Chimera Carnival by Aliza Layne	741.5	$18.19	1	$18.19
2437013	979-8-88724-258-3	Pinkie Pie by Jeremy Whitley	741.5	$6.29	1	$6.29
2422915	978-1-9747-5280-5	Beyblade X, Vol. 02 by Homura Kawamoto	741.5	$8.39	1	$8.39
2438626	978-1-9747-5518-9	Beyblade X, Vol. 03 by Homura Kawamoto	741.5	$8.39	1	$8.39
2462054	978-1-9747-6127-2	Beyblade X, Vol. 05 by Homura Kawamoto	741.5	$8.39	1	$8.39
2494822	979-8-2952-0094-6	Big Nate: Code Red! by Lincoln Peirce	741.5	$24.95	1	$24.95
2462519	978-1-5364-9717-5	Down a Dark Path by Daniel Nayeri	741.5	$24.95	1	$24.95
2437345	978-1-5364-9395-5	Mirror Town by Daniel Nayeri	741.5	$24.95	1	$24.95
2462014	978-0-593-81325-6	Move It or Bruise It by V. P. Anderson	741.5	$15.39	1	$15.39
2450876	978-1-250-90141-5	Sew Totally Nala by Misako Rokkusu	741.5	$16.09	1	$16.09
2446622	978-1-250-34193-8	Grow, Strawberries, Grow! by James Burks	741.5	$9.09	1	$9.09
2434973	978-1-5067-3848-2	Nix by R. J. Jost	741.5	$13.99	1	$13.99
2452819	979-8-8816-0272-7	It's Showtime, Sophie by Georgia Dunn	741.5	$9.09	1	$9.09
2438654	978-1-6626-4124-4	Dragon Awakens by Jerome Pelissier	741.5	$9.09	1	$9.09
2452089	978-1-4788-9069-0	Frabbit: Birth of a Superhero! by Steve Metzger	741.5	$12.57	1	$12.57
2443888	978-1-77488-505-5	Cabin Head and Tree Head by Scott Campbell	741.5	$9.79	1	$9.79
2511396	979-8-2952-0211-7	Captain Underpants: The First Epic Manga by Dav Pilkey	741.5	$28.95	1	$28.95
2434911	978-1-5458-1901-2	Casagrandes, Vol. 07	741.5	$9.09	1	$9.09
2446247	978-1-5458-2040-7	Freezing and Frio!	741.5	$9.09	1	$9.09
2453882	978-1-5458-2078-0	Selfie Espectacular	741.5	$9.09	1	$9.09
2443160	978-0-8234-5651-2	Everything Is Terrible by Kay Healy	741.5	$11.89	1	$11.89
2442624	979-8-89373-346-4	Cat Companions Maruru and Hachi, Vol. 04 by Yuri Sonoda	741.5	$10.49	1	$10.49
2462840	978-0-06-338145-2	Lair of the Owl King by Susie Yi	741.5	$13.29	1	$13.29
2439862	978-0-06-338142-1	Magic at the Mansion by Susie Yi	741.5	$13.29	1	$13.29
2438590	978-0-316-51047-9	Cosmic Clutter by Drew Brockington	741.5	$13.29	1	$13.29
2460623	978-1-5461-8656-4	Blurmp in Time by Jim Benton	741.5	$18.19	1	$18.19
2453851	978-1-5458-2068-1	Chase Speedington: And the Last Dragon's Breath by Franco Aureliani	741.5	$10.49	1	$10.49
2436279	978-1-5067-4741-5	Chibi Usagi: Attack of the Heebie Chibis by Julie Sakai	741.5	$10.49	1	$10.49
2286824	978-1-956694-08-6	Fire in the Hole by Chris Grine	741.5	$9.09	1	$9.09
2440237	978-1-339-03301-3	Quest for the True Dragon by Jaimal Yogis	741.5	$17.49	1	$17.49
2485138	978-0-593-85672-7	Milkshake The Disappearing Milk Snake by Akeem S. Roberts	741.5	$13.99	1	$13.99
2436513	978-0-593-85666-6	What Happened to the Naked Mole Rat? by Akeem S. Roberts	741.5	$13.99	1	$13.99
2434083	978-1-5364-9272-9	Stuck by Kayla Miller	741.5	$29.95	1	$29.95
2434617	979-8-9898841-0-0	Cosmic Girls, Vol. 01 by Manuel P. Godoy	741.5	$13.99	1	$13.99
2436673	978-1-5248-9045-2	World Is Lava by Tauhid Bondia	741.5	$9.09	1	$9.09
2484221	979-8-2952-0041-0	Cranky-Verse by Katherine Battersby	741.5	$17.95	1	$17.95
2440081	978-1-250-89939-2	Moby Duck by Sara Goetter	741.5	$16.09	1	$16.09
2439084	978-1-6659-7149-2	Alexis Cool As a Cupcake (Graphic Novel) by Coco Simon	741.5	$16.09	1	$16.09
2451594	978-1-5364-9599-7	Back in Business by Sharee Miller	741.5	$24.95	1	$24.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2378554	978-1-962298-27-8	Cyko KO!, Vol. 01 by Rob Feldman	741.5	$11.89	1	$11.89
2440283	978-1-7995-0197-8	Supergirl: Cosmic Adventures in the 8th Grade by Landry Walker	741.5	$9.09	1	$9.09
2453511	978-1-4197-7686-1	Danny Phantom: Fair Game by Gabriela Epstein	741.5	$17.49	1	$17.49
2462164	979-8-3471-0081-1	Haunted House Next Door the Graphic Novel by Andres Miedoso	741.5	$15.39	1	$15.39
2446706	978-1-5364-9536-2	Detective Beans: Adventures in Cat Town by Li Chen	741.5	$24.95	1	$24.95
2484438	979-8-2952-0061-8	Detective Stanley and the Green Thumbed Thief by Hannah Tunniclife	741.5	$24.95	1	$24.95
2443736	978-1-368-09693-5	Dex Dingo: World's Best Greatest Ever Archaeologist by Greg Foley	741.5	$17.49	1	$17.49
2446234	979-8-8816-0282-6	Finding the Witch by Cube Kid	741.5	$15.39	1	$15.39
2436676	978-1-5458-1830-5	Fat Cat Rogers by Gabriel Valentin	741.5	$9.09	1	$9.09
2462353	978-1-5458-2335-4	Shakey Spears by Gabriel Valentin	741.5	$9.09	1	$9.09
2492968	978-1-4197-7282-5	Pen Pals, Vol. 02 by Tom Angleberger	741.5	$10.49	1	$10.49
2485984	978-1-5458-2465-8	Disney Frozen: Anna's Adventure Journal	741.5	$12.59	1	$12.59
2486583	978-1-5458-2467-2	Disney Princess and the Frog: Tiana's Adventure Journal	741.5	$12.59	1	$12.59
2434944	978-1-5458-1963-0	Disney Fairies, Vol. 04	741.5	$10.49	1	$10.49
2459624	978-1-5458-2091-9	Disney Fairies, Vol. 05 (4-in-1)	741.5	$10.49	1	$10.49
2453878	978-1-5458-2184-8	Encanto (Graphic Novel)	741.5	$10.49	1	$10.49
2462334	978-1-5458-2461-0	Mulan's Adventure Journal (Disney)	741.5	$12.59	1	$12.59
2462354	978-1-5458-2463-4	Disney the Little Mermaid: Ariel's Adventure Journal	741.5	$12.59	1	$12.59
2446215	978-1-5458-1692-9	Lucky's Guard by Arianna Irwin	741.5	$6.99	1	$6.99
2486029	978-1-5458-2079-7	Penny's Big Splash by Arianna Irwin	741.5	$10.49	1	$10.49
2440315	978-1-4278-8052-9	Toy Story: 30th Anniversary Edition by Tetsuhiro Koshita	741.5	$13.99	1	$13.99
2440300	978-1-4278-8125-0	Evie's Wicked Runway: The Complete Manga Collection by Jason Muell	741.5	$13.99	1	$13.99
2440299	978-1-4278-8149-6	Disney Tim Burton's The Nightmare Before Christmas by Dan Conner	741.5	$17.49	1	$17.49
2453872	978-1-5458-2182-4	Turning Red	741.5	$10.49	1	$10.49
2462683	978-1-250-83437-9	Spells Like Trouble by Scout Underhill	741.5	$16.09	1	$16.09
2449620	978-0-358-39406-8	Friendship Goals by Rodrigo Vargas	741.5	$17.49	1	$17.49
2453961	978-1-5364-9644-4	Big Jim Believes by Dav Pilkey	741.5	$29.95	1	$29.95
2486046	978-1-5458-2348-4	Dogmatix and the Druid by Matthieu Choquet	741.5	$10.49	1	$10.49
2446089	978-1-5458-2035-3	Indomitables Ruff Things Up by Yves Coulon	741.5	$9.09	1	$9.09
2434890	978-1-5458-1960-9	Ruffin and Rollin in Lutetia by Olivier Serrano	741.5	$9.09	1	$9.09
2438685	978-1-5458-1794-0	Double Booking: When and Where Wolf? by Chas! Pangburn	741.5	$12.59	1	$12.59
2461605	978-1-917366-03-8	Little Dinosaurs, Big Questions: 10 Thoughtful Stories by Swapna Haddow	741.5	$13.99	1	$13.99
2443841	978-0-593-70312-0	Thing One and Thing Two Have Homework to Do: A Cat in the Hat Story by Art Baltazar	741.5	$7.69	1	$7.69
2437291	978-1-6659-6618-4	Restless Ruins by Jordan Quinn	741.5	$15.39	1	$15.39
2440246	978-1-5364-9465-5	Dream On by Shannon Hale	741.5	$28.95	1	$28.95
2451980	978-1-223-18712-9	New World by Jesse Byrd	741.5	$22.79	1	$22.79
2443426	978-1-368-11586-5	Moose's Bad Hair Day! by Kirk Reedstrom	741.5	$9.09	1	$9.09
2445997	978-0-06-303928-5	Final Face-Off by Molly Knox Ostertag	741.5	$17.49	1	$17.49
2433252	978-0-06-326845-6	Time to Party by Molly Knox Ostertag	741.5	$11.19	1	$11.19
2440249	978-1-5364-9467-9	Mabel Makes (^Up) a Friend by Cyndi Marko	741.5	$19.95	1	$19.95
2418539	978-1-4278-8066-6	Emma & Capucine, Vol. 01 by Jerome Hamon	741.5	$10.49	1	$10.49
2423411	978-1-4278-8094-9	Emma & Capucine, Vol. 02 by Jerome Hamon	741.5	$10.49	1	$10.49
2483289	978-1-4278-8097-0	Emma & Capucine, Vol. 04 by Jerome Hamon	741.5	$10.49	1	$10.49
2429698	978-1-4278-8182-3	Emma and Capucine, Vol. 01 by Jerome Hamon	741.5	$13.99	1	$13.99
2462643	978-1-250-33594-4	Creature Connection by Mike Cavallaro	741.5	$17.49	1	$17.49
2461918	978-1-5458-2307-1	Extraordinary Voyages, Vol. 01 by Denis-Pierre Filippi	741.5	$13.99	1	$13.99
2484254	978-0-06-334953-7	Big Shrink! by FGTeeV	741.5	$16.79	1	$16.79
2462764	978-0-06-326052-8	Blasts Off! by FGTeeV	741.5	$10.49	1	$10.49
2433251	978-0-06-309301-0	Switcheroo Rescue! by FGTeeV	741.5	$10.49	1	$10.49
2439838	978-0-06-324242-5	Fairy Tale Fixers: Cinderella by Deborah Underwood	741.5	$9.09	1	$9.09
2463388	978-1-77488-597-0	Fantastic Frog and the Amazing Tad Lad by Brandon Reese	741.5	$15.39	1	$15.39
2423315	978-0-593-43430-7	Fart Boy and Reeky Dog by Joan Holub	741.5	$10.49	1	$10.49
2453472	978-0-06-341550-8	First Cat in Space and the Baby Pirate's Revenge by Mac Barnett	741.5	$11.89	1	$11.89
2453855	978-1-5458-2070-4	Flash Gordon Adventures!, Vol. 02 by Art Baltazar	741.5	$10.49	1	$10.49
2443062	978-0-06-309510-6	Flat Stanley: His Original Adventure! by Jeff Brown	741.5	$11.19	1	$11.19
2425535	978-0-7112-9835-4	Floofs Reach for the Stars by Penelope O'Neill	741.5	$11.19	1	$11.19

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2446220	979-8-8816-0404-2	Folk Remedy by Jem Yoshioka	741.5			$15.39] $15.39
2486003	979-8-89488-028-0	Frankie and the Curious Cocoon Quest by Caitlin Rose Boyle	741.5			$9.09] $9.09
2446686	978-1-250-79811-4	Rise of the G. E. M. S. by Marian Dealy	741.5			$16.09] $16.09
2459533	978-1-250-90138-5	Gabby Torres Is the Best Winner Ever by Angela Dominguez	741.5			$13.99] $13.99
2433285	978-0-06-293559-5	One Crazy Summer (Graphic Novel) by Rita Williams-Garcia	741.5			$17.49] $17.49
2434424	979-8-89215-348-5	Family Style by Ryan Estrada	741.5			$10.49] $10.49
2434943	979-8-89215-364-5	Garfield: Full Course, Vol. 06 by Scott Nickel	741.5			$13.29] $13.29
2423791	978-1-5458-1621-9	Attack of the Killer Whale by Geronimo Stilton	741.5			$6.99] $6.99
2459621	978-1-5458-2094-0	Starring Geronimo by Geronimo Stilton	741.5			$6.99] $6.99
2463063	979-8-217-00595-6	Gingerbread Man and the Leprechaun Loose at School by Laura Murray	E			$6.29] $6.29
2435825	978-1-5364-9339-9	New Friend on the Loose by Laura Murray	741.5			$17.95] $17.95
2434791	978-0-593-48781-5	Gnome and Rat by Lauren Stohler	741.5			$5.59] $5.59
2493832	978-0-593-48785-3	Time to Party! by Lauren Stohler	741.5			$5.59] $5.59
2442190	978-1-4549-5503-0	Champion of Earth by Hamish Steele	741.5			$17.49] $17.49
2446437	978-1-5364-9495-2	Monster Blood (Graphic Novel) by R. L. Stine	741.5			$24.95] $24.95
2286825	978-0-9895744-5-7	Breaking Gossamyr by David A. Rodriguez	741.5			$9.09] $9.09
2440218	978-1-5364-9443-3	Search for Lapras by Simcha Whitehill	741.5			$22.95] $22.95
2485424	978-1-6659-3830-3	Big Mousetake by Alina Tysoe	741.5			$9.79] $9.79
2485425	978-1-6659-3828-0	Purranormal Activity by Alina Tysoe	741.5			$6.29] $6.29
2486701	978-1-250-81576-7	Greenies by Emma Mills	741.5			$16.09] $16.09
2436682	978-1-5248-9839-7	Groucho the Grouchy Groundhog by Lydia Lukidis	741.5			$8.39] $8.39
2434790	978-0-593-70934-4	Grumpy Monkey School Stinks! by Suzanne Lang	741.5			$7.69] $7.69
2446640	978-1-5364-9531-7	Wasted Wilderness by Roan Black	741.5			$23.95] $23.95
2434917	978-1-5248-8642-4	Gyro and the Argonauts! aka the Best Book Ever Written by Joshua Pruett	Fic			$16.09] $16.09
2461969	978-1-63217-623-3	Where's Halmoni? by Julie Kim	741.5			$13.29] $13.29
2461970	978-1-63217-620-2	Where's Joon? by Julie Kim	741.5			$13.29] $13.29
2493697	978-0-593-30305-4	Harper Sharp: Kid Detective by Jarrett Williams	741.5			$15.39] $15.39
2452810	978-1-5248-9767-3	Fall by Joe Latham	741.5			$16.09] $16.09
2486017	978-1-5458-2346-0	Herobear and the Kid, Part 1, Vol. 02 by Mike Kunkel	741.5			$20.99] $20.99
2434437	979-8-89215-357-7	Night Tunnels by Sam Davies	741.5			$7.69] $7.69
2453963	978-1-5364-9645-1	Hikaru in the Light!, Vol. 02 by Mai Matsuda	741.5			$23.95] $23.95
2494514	979-8-2952-0089-2	Hikaru in the Light!, Vol. 03 by Mai Matsuda	741.5			$23.95] $23.95
2453621	978-1-83874-292-8	Wake the Ice Man by Luke Pearson	741.5			$12.59] $12.59
2483247	978-0-593-30530-0	Mighty by Judd Winick	741.5			$10.49] $10.49
2443543	978-0-06-344825-4	Hooves of Death, Vol. 01 by Sam Bragg	741.5			$16.79] $16.79
2433689	979-8-8554-1198-0	Horror Collector, Vol. 01 by Niko Yuki	741.5			$9.10] $9.10
2434467	978-1-5364-9302-3	Cleanup Challenge by Steve Behling	741.5			$14.95] $14.95
2434469	978-1-5364-9303-0	Racers to the Rescue by Steve Behling	741.5			$14.95] $14.95
2463361	978-1-4549-5768-3	Litterbox Time Machine by Rich Moyer	741.5			$17.49] $17.49
2440195	978-1-5364-9435-8	Hulk Teach by Jeffrey Brown	741.5			$24.95] $24.95
2440197	978-1-5364-9436-5	I Survived the Japanese Tsunami, 2011 (Graphic Novel) by Lauren Tarshis	741.5			$24.95] $24.95
2484837	978-0-06-324725-3	Great Train Robbery Of 1963 by Andrea Debbink	741.5			$17.49] $17.49
2451025	978-1-83605-238-8	Illustrated Norse Myths by Alex Frith	741.5			$13.99] $13.99
2443443	978-1-368-08966-1	Daybreaker by Tori Tadiar	741.5			$17.49] $17.49
2440277	978-1-338-32510-2	Adorable Empire by Laura Terry	741.5			$17.49] $17.49
2453937	978-1-5364-9636-9	Agent Cupcake by Mel Hilario	741.5			$28.95] $28.95
2453525	978-1-990252-47-1	Alyte (Graphic Novel) by Jeremie Moreau	741.5			$18.89] $18.89
2435769	978-0-06-328808-9	Aphmau: Searching for Home by Aphmau	741.5			$16.79] $16.79
2443414	978-1-7995-0402-3	Aquamanatee by Ben Clanton	741.5			$9.09] $9.09
2434303	978-0-439-89530-9	Arrival by Shaun Tan	741.5			$11.89] $11.89
2462825	978-0-00-864957-9	Astrochimp by David Walliams	741.5			$9.09] $9.09
2432813	978-1-77321-941-7	Astronautical! by Brooklin Stormie	741.5			$18.19] $18.19
2437092	978-1-5458-1969-2	Aw, Nuts! by Max Beaudry	741.5			$10.49] $10.49
2422592	978-0-358-44786-3	Band Nerd by Sarah Clawson Willis	741.5			$17.49] $17.49
2483370	978-1-62354-570-3	Baseball for Breakfast: A (Mostly) True Story by Judy Campbell-Smith	E			$12.59] $12.59
2462629	978-1-5476-0941-3	Camp Monster by Kate Messner	741.5			$10.49] $10.49
2422660	978-0-06-305769-2	Carousel Summer by Kathleen Gros	741.5			$17.49] $17.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2486026	978-1-5458-2355-2	Clyde by Jim Benton	741.5	$12.59	1	$12.59
2446839	978-1-83605-184-8	Complete Greek Myths: An Illustrated Book of Greek Myths by Henry Brook	741.5	$20.99	1	$20.99
2434877	978-1-83874-130-3	Cosmo Park by Madeleine Finlay	741.5	$11.19	1	$11.19
2422563	978-0-06-297969-8	Coven by Soman Chainani	741.5	$18.89	1	$18.89
2434031	978-0-7352-3061-3	Creaky Acres by Calista Brill	741.5	$17.49	1	$17.49
2433552	978-1-250-84759-1	Creature Clinic by Gavin Aung Than	741.5	$16.09	1	$16.09
2433241	978-1-7995-0126-8	DC's Misfits of Magic by Matthew Dow Smith	741.5	$9.09	1	$9.09
2443889	978-1-5344-9658-3	Dear Jackie by Jessixa Bagley	741.5	$17.49	1	$17.49
2434721	978-1-250-33103-8	Deeply Dave by Michael Grover	741.5	$10.49	1	$10.49
2440247	978-1-5364-9466-2	Deepwater Creek by Michael Regina	741.5	$26.95	1	$26.95
2440225	978-1-5364-9450-1	Diary of a Nature Nerd by Tiffany Everett	741.5	$24.95	1	$24.95
2422617	978-1-250-88729-0	Don't Cause Trouble by Arree Chung	741.5	$16.09	1	$16.09
2450840	978-1-5253-1083-6	Dragon vs. Unicorn: Friends or Frenemies? by P. J. Hoover	741.5	$11.89	1	$11.89
2443712	978-1-7972-3041-2	Faraway Forest: Wally's Route by Debbie Fong	741.5	$9.09	1	$9.09
2443012	978-0-8234-5702-1	First Kiss with Fangs by Marker Snyder	741.5	$16.09	1	$16.09
2451019	978-1-250-17062-0	Five Wolves by Peter McCarty	741.5	$20.99	1	$20.99
2437333	978-1-5364-9385-6	Free Piano (Not Haunted) by Whitney Gardner	741.5	$26.95	1	$26.95
2459814	978-1-5364-9659-8	Ghost Boys: The Graphic Novel by Jewell Parker Rhodes	741.5	$26.95	1	$26.95
2437749	978-1-4549-4828-5	Ghost Circus by Adrienne Kress	741.5	$17.49	1	$17.49
2446211	978-1-5458-2124-4	Ghost of Wreckers Cove by Angelica Del Campo	741.5	$16.09	1	$16.09
2433609	978-1-250-29196-7	Good Boy by Andy Hirsch	741.5	$16.09	1	$16.09
2432677	978-1-962447-27-0	Greta Whiteshark Meets the Mermaids by Patrick Baggatta	741.5	$8.39	1	$8.39
2460543	978-0-06-333528-8	Gumshoe by Brenna Thummler	741.5	$17.49	1	$17.49
2437025	978-1-5458-2026-1	Heebie Jeebies by Matthew Erman	741.5	$13.99	1	$13.99
2445966	978-1-5458-2130-5	Herobear and the Kid: The Inheritance by Mike Kunkel	741.5	$20.99	1	$20.99
2423259	978-1-77488-312-9	How to Talk to Your Succulent by Zoe Persico	741.5	$15.39	1	$15.39
2433239	978-1-302-96096-4	Human Torch: Burn by Karl Kesel	741.5	$12.59	1	$12.59
2438024	978-1-4549-5331-9	I Am Not Okay by David DeGrand	741.5	$9.09	1	$9.09
2486786	978-1-250-83875-9	Inbetweens by Faith Erin Hicks	741.5	$16.09	1	$16.09
2436425	978-0-06-324612-6	Into the Bewilderness by Gus Gordon	741.5	$17.49	1	$17.49
2437089	978-1-302-96169-5	It's Jeff: Jeff-Verse by Kelly Thompson	741.5	$11.19	1	$11.19
2423266	978-1-7995-0093-3	Jimmy Olsen's SuperCyclopedia by Gabe Soria	741.5	$9.09	1	$9.09
2449268	978-1-7995-0229-6	Kid Flash: Going Rogue by Steve Foxe	741.5	$9.09	1	$9.09
2462766	978-0-06-335411-1	Kid Like Me by Norm Feuti	741.5	$17.49	1	$17.49
2438960	978-1-60309-555-6	Land of Unfinished Dreams by Marco Ventura	741.5	$13.99	1	$13.99
2486012	979-8-8816-0249-9	Legends in the Heights by Marguerite Dabaie	741.5	$15.39	1	$15.39
2449579	978-1-62354-142-2	Limelight: Curtain up on Poetry Comics! by Renee Latulippe	741.5	$13.29	1	$13.29
2437349	978-1-5364-9399-3	Little Batman: Month One by Morgan Evans	741.5	$24.95	1	$24.95
2434942	978-1-63715-775-6	Lost Sunday by Ileana Surducan	741.5	$10.49	1	$10.49
2433572	978-0-06-320789-9	Lu and Ren's Guide to Geozoology by Angela Hsieh	741.5	$17.49	1	$17.49
2444182	978-1-6659-4333-8	Many Misfortunes of Eugenia Wang by Stan Yan	741.5	$17.49	1	$17.49
2437087	978-1-5248-8646-2	Masks by Margaret Rae	741.5	$16.09	1	$16.09
2443132	978-0-06-328249-0	Millie of the Manor by Karina Evans	741.5	$17.49	1	$17.49
2450880	978-1-250-89669-8	My Sister the Werebeast by Alina Tysoe	741.5	$16.79	1	$16.79
2451057	978-3-03964-107-9	My Trip with Drip by Josephine Mark	741.5	$17.47	1	$17.47
2449553	978-0-593-30315-3	Night Chef: An Epic Tale of Friendship with a Side of Deliciousness! by Mika Song	741.5	$14.69	1	$14.69
2462335	978-1-5458-2333-0	Ninja Kaiju by Franco	741.5	$12.59	1	$12.59
2446469	978-1-250-83823-0	North for the Winter by Bobby Podesta	741.5	$16.79	1	$16.79
2449400	978-1-6626-4002-5	On the Air with Dr. Doodlebug by Susan E. Goodman	741.5	$13.29	1	$13.29
2434920	978-1-5248-9222-7	Pacheco and the Witch of the Mountain by Juan E. Zambrano	741.5	$15.39	1	$15.39
2437017	978-1-955905-36-7	PawnShop by LindoYes Jones	741.5	$10.49	1	$10.49
2442924	978-1-5364-9486-0	Poetry Comics by Grant Snider	811	$24.95	1	$24.95
2436450	978-0-358-57200-8	Punycorn and the Princess of Thieves by Andi Watson	741.5	$11.19	1	$11.19
2433548	978-1-5235-2736-6	Puzzling Fate of Millicent Graves (Graphic Novel) by Dora M. Mitchell	741.5	$17.49	1	$17.49
2434297	978-1-338-85392-6	Reel Life by Kane Lynch	741.5	$17.49	1	$17.49
2451067	978-1-5364-9575-1	Refugee (Graphic Novel) by Alan Gratz	741.5	$28.95	1	$28.95
2438636	978-1-4998-1527-6	Say Something, Poupeh Babaee! by Haleh Massey	741.5	$17.49	1	$17.49
2451998	979-8-8816-0175-1	Scarlet Ship: An Original Graphic Novel by Claire Grimond	741.5	$16.09	1	$16.09

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2449025	978-1-962447-40-9	Secret Order of Librarians by Blake Harris	741.5	$10.49	1	$10.49
2434871	978-1-5248-9894-6	Seeker Society by Jana Tropper	741.5	$15.39	1	$15.39
2460811	978-0-8234-5789-2	Serendipity by Gabbie Benda	741.5	$17.49	1	$17.49
2486784	978-1-954689-36-7	Sloomoo: Making Friends by Melissa de la Cruz	741.5	$9.09	1	$9.09
2417064	978-1-5067-3778-2	Small Town Spirits (Graphic Novel) by Zack Keller	741.5	$13.99	1	$13.99
2434647	978-1-77321-958-5	Soul Machine by Jordana Globerman	741.5	$17.49	1	$17.49
2440076	978-1-250-81747-1	Space Cat by Nnedi Okorafor	741.5	$16.09	1	$16.09
2437104	978-1-7995-0406-1	Superman's Good Guy Gang by Rob Justus	741.5	$9.09	1	$9.09
2451995	979-8-8816-0291-8	T. S. Hullabaloo: A Graphic Novel Based on a (Mostly) True Story by Zack Rosenberg	741.5	$16.09	1	$16.09
2452028	978-1-5458-2047-6	Ten-Ton Titan Terrier by David Pepose	741.5	$12.59	1	$12.59
2461054	978-1-60309-579-2	Token City Wondercade by D. Bradford Gambles	741.5	$10.49	1	$10.49
2461916	978-1-5458-2305-7	Tommy the Coward by Marco Sonseri	741.5	$10.49	1	$10.49
2446753	978-1-5364-9545-4	Tuck Everlasting: The Graphic Novel by Natalie Babbitt	741.5	$28.95	1	$28.95
2460943	978-0-593-11714-9	Wallflower by Iasmin Omar Ata	741.5	$17.49	1	$17.49
2451081	978-1-5364-9580-5	Winging It by Megan Wagner Lloyd	741.5	$28.95	1	$28.95
2493028	978-1-4003-4664-6	Wit and Wisdom of Spider-Man: Quotes and Life Lessons from Your Favorite Superhero by Robb Pearlman	741.5	$13.99	1	$13.99
2462666	978-1-250-35946-9	Sew Much Trouble by John Patrick Green	741.5	$9.09	1	$9.09
2434903	978-1-5458-1897-8	Jackson's Wilder Adventures, Vol. 02 by Sarah Davidson	741.5	$10.49	1	$10.49
2437245	978-1-6659-2232-6	Jazzy the Witch in Broom Doom by Jessixa Bagley	741.5	$10.49	1	$10.49
2446521	978-1-5364-9518-8	Junie B. Jones and a Little Monkey Business (Graphic Novel) by Colleen A. F. Venable	741.5	$24.95	1	$24.95
2437202	978-1-83874-961-3	Knight of Tykotech City by Sarah Soh	741.5	$21.84	1	$21.84
2437203	978-1-83874-962-0	Secrets of the Guardian Knights by Sarah Soh	741.5	$21.84	1	$21.84
2423141	978-0-316-46874-9	K Is in Trouble AGAIN by Gary Clement	741.5	$17.49	1	$17.49
2436227	978-1-7995-0162-6	KANGA-U: Tests and Tournaments by Sholly Fisch	741.5	$9.09	1	$9.09
2493787	978-1-7995-0599-0	Kanga-U: Lost in a Labyrinth by Sholly Fisch	741.5	$9.09	1	$9.09
2436622	978-1-60309-554-9	Land of Cars by Nick Bertozzi	741.5	$10.49	1	$10.49
2459602	978-1-5344-6340-0	Keeper of the Lost Cities, Vol. 02 by Shannon Messenger	741.5	$19.59	1	$19.59
2449474	978-1-4197-7116-3	Kindred Dragons, Vol. 01 by Sarah Mensinga	741.5	$17.49	1	$17.49
2438819	978-1-9747-5530-1	Kirby Manga Mania, Vol. 08 by Hirokazu Hikawa	741.5	$8.39	1	$8.39
2463448	978-0-8234-5913-1	Case Of The Missing Kolo by Alaba Onajin	741.5	$17.49	1	$17.49
2408244	978-1-5343-5372-5	Shatterspin by Tri Vuong	741.5	$9.09	1	$9.09
2423843	978-1-5248-9548-8	Spidermania by Doug Savage	741.5	$8.39	1	$8.39
2462325	978-1-5343-3335-2	Strike of the Serpentine by Cameron Chittock	741.5	$11.89	1	$11.89
2422598	978-0-06-331040-7	Lemonade War (Graphic Novel) by Jacqueline Davies	741.5	$17.49	1	$17.49
2446232	978-1-5248-9887-8	Quest for Iron Mountain by Shidan Youssefian	741.5	$17.49	1	$17.49
2432593	978-1-5241-2742-8	Lilo and Stitch: 'OHana, Vol. 02 by Greg Pak	741.5	$13.99	1	$13.99
2492935	978-1-4197-5996-3	Lionharts, Vol. 01 by Mike Lawrence	741.5	$17.49	1	$17.49
2425026	978-1-77840-102-2	Barnacle Bay by Jana Curll	741.5	$10.47	1	$10.47
2422137	978-1-5362-1647-9	Most Perfect Summer Ever by Jonathan Hill	741.5	$17.49	1	$17.49
2461953	978-1-5458-2312-5	Save The Planet by Damian	741.5	$9.09	1	$9.09
2434386	978-1-5458-1836-7	Trapped! by Damian	741.5	$9.09	1	$9.09
2452067	978-1-5458-2053-7	Loud House, Vol. 25	741.5	$9.09	1	$9.09
2434318	978-1-5458-1899-2	Loudest and Proudest	741.5	$9.09	1	$9.09
2437082	978-1-5458-1623-3	Movin' to the Music	741.5	$9.09	1	$9.09
2461873	978-1-5458-2303-3	On With The Snow!	741.5	$10.49	1	$10.49
2423295	978-1-6626-4087-2	Love Report, Vol. 03 by Beka	741.5	$13.99	1	$13.99
2459562	979-8-89215-541-0	Lumberjanes Omnibus, Book 01 by Shannon Watters	741.5	$20.99	1	$20.99
2463020	979-8-89215-729-2	Lumberjanes Omnibus, Vol. 03 by Shannon Watters	741.5	$20.99	1	$20.99
2423371	978-1-962770-04-0	Mafalda: Book One by Quino	741.5	$12.60	1	$12.60
2446504	978-1-5364-9506-5	Midnight on the Moon (Graphic Novel) by Jenny Laird	741.5	$20.95	1	$20.95
2438431	978-1-5362-2764-2	Maker Girl and Professor Smarts by Jasmine Florentine	741.5	$13.99	1	$13.99
2432744	978-1-78708-166-6	Adventures of Sherlock Holmes by Yi-Jeong Noh	741.5	$13.29	1	$13.29
2432747	978-1-78708-167-3	Alice's Adventures In Wonderland by Suk-Il Eo	741.5	$13.29	1	$13.29
2432742	978-1-78708-165-9	Romeo and Juliet by Kyung-shin Lee	741.5	$13.29	1	$13.29
2461554	979-8-88770-328-2	Hair Tie / The Swimmer's Clip: Two Loneliness Stories by Emma Carlson Berne	741.5	$7.69	1	$7.69
2461556	979-8-88770-343-5	Satchel / The Dice: Two Anxiety Stories by Kelley Barth	741.5	$7.69	1	$7.69
2434769	978-0-593-64998-5	On Guard! by Cassidy Wasserman	741.5	$15.39	1	$15.39

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2425124	978-1-4197-7468-3	Spider-Man Swings Through by Sabrina Moyle	741.5	$10.49	1	$10.49
2440296	978-1-302-96000-1	Marvel Zombies: Dawn of Decay by Thomas Krajewski	741.5	$11.19	1	$11.19
2440201	978-0-593-96553-5	Great Cupcake Mystery by Jamie Smart	741.5	$13.29	1	$13.29
2460942	979-8-217-13382-6	Hunt for the Pirate's Gold by Jamie Smart	741.5	$13.29	1	$13.29
2453105	978-0-593-97203-8	Search for the Ice Chaffy by Jamie Smart	741.5	$13.29	1	$13.29
2436205	978-0-593-96530-6	Welcome to Animal Island	741.5	$13.29	1	$13.29
2446436	978-1-5364-9494-5	Max, a Little Axolotl by Joey Spiotto	741.5	$24.95	1	$24.95
2423579	978-1-5364-9174-6	Nightmare Hunter by Brady Smith	741.5	$26.95	1	$26.95
2485278	978-1-223-18932-1	Invasion of the Mutant Plications by Bridgett McGill	741.5	$21.84	1	$21.84
2431211	978-1-5364-9241-5	Mecha-Ude: Mechanical Arms, Vol. 01 by Yoshino Koyoka	741.5	$23.95	1	$23.95
2453929	978-1-5364-9634-5	Mecha-Ude: Mechanical Arms, Vol. 02 by Yoshino Koyoka	741.5	$23.95	1	$23.95
2452754	979-8-8816-0013-6	Council of Ferrets by Liza N. Cooper	741.5	$16.09	1	$16.09
2435143	978-1-4197-7985-5	Hog-Rocket Ruckus by Nathan Hale	741.5	$11.19	1	$11.19
2435153	978-1-4197-7459-1	Iron Man: Something Strange! by Dean Hale	741.5	$9.09	1	$9.09
2425172	978-1-4197-6481-3	Spider-Man: Animals Assemble! by Mike Maihack	741.5	$6.29	1	$6.29
2492947	978-1-4197-7052-4	Spider-Man: Cosmic Chaos! by Mike Maihack	741.5	$6.99	1	$6.99
2438841	978-1-4197-7050-0	Spider-Man: Quantum Quest! by Mike Maihack	741.5	$6.29	1	$6.29
2492981	978-1-5067-4318-9	Minecraft: Heart of Cobblestone, Vol. 02 by Andrew Clemson	741.5	$7.69	1	$7.69
2462283	978-1-5458-2112-1	Miraculous Chibi Red Carpet Runaround and Other Tales by Carrie Harris	741.5	$9.09	1	$9.09
2450906	978-1-5458-2111-4	Showdowns and Other Sweet Surprises by Carrie Harris	741.5	$9.09	1	$9.09
2459714	978-1-5458-2110-7	Skate Date and other Lucky Charms by Josh Trujillo	741.5	$9.09	1	$9.09
2436857	978-1-338-53560-0	Miss Camper by Kat Fajardo	741.5	$17.49	1	$17.49
2438755	978-1-6659-4314-7	Campers Beware by Bob Scott	741.5	$10.49	1	$10.49
2440025	978-0-593-52468-8	Battle of the Beasts by Maple Lam	741.5	$17.49	1	$17.49
2486014	979-8-8816-0268-0	Curious Case of the Bloodless Hound by Danielle McKechnie	741.5	$16.09	1	$16.09
2438316	978-1-77046-778-1	Moomin by Tove Jansson	741.5	$16.07	1	$16.07
2438917	978-1-6659-3480-0	Space Case (Graphic Novel) by Stuart Gibbs	741.5	$17.49	1	$17.49
2461008	979-8-89215-724-7	Dawn of the Black Axe by David Petersen	741.5	$17.49	1	$17.49
2451104	978-1-5364-9584-3	Mr. Lemoncello's Library Olympics (Graphic Novel) by Chris Grabenstein	741.5	$26.95	1	$26.95
2434764	979-8-88724-346-7	My Little Pony: Back to School by Ted Anderson	741.5	$6.29	1	$6.29
2438996	979-8-88724-347-4	My Little Pony: Friendship Is Spooky by Thom Zahler	741.5	$6.29	1	$6.29
2438959	979-8-88724-338-2	My Little Pony: Lost Stories of Equestria by Christina Rice	741.5	$15.39	1	$15.39
2433164	979-8-88724-261-3	Storm of Zephyr Heights by Jeremy Whitley	741.5	$12.59	1	$12.59
2437034	979-8-88724-337-5	My Little Pony: The Mane 5 Omnibus by Celeste Bronfman	741.5	$17.49	1	$17.49
2440207	978-1-5364-9441-9	My Name Is Benny, Vol. 01 by Sokomin	741.5	$24.95	1	$24.95
2432484	978-1-5253-1004-1	Way off Track by Carl Brundtland	741.5	$11.89	1	$11.89
2434068	978-1-5364-9262-0	Narwhal's Sweet Tooth by Ben Clanton	741.5	$17.95	1	$17.95
2459759	978-1-77488-453-9	Waffle Lot of Love! by Ben Clanton	741.5	$9.09	1	$9.09
2437030	978-1-5458-1966-1	Born to Voyage by Sloane Leong	741.5	$10.49	1	$10.49
2424913	978-1-5458-1695-0	Dust-Off Dreams by Franck Thilliez	741.5	$10.49	1	$10.49
2433075	978-1-4549-5328-9	Nina Peanut and the Mystery of the Ghost Shoe by Sarah Bowie	741.5	$17.49	1	$17.49
2438813	978-1-6659-1584-7	Oddity Woods by Kay Davault	741.5	$18.19	1	$18.19
2446728	978-1-4197-6406-6	Evolution Changes Everything! by Jorge Cham	Fic	$11.19	1	$11.19
2423417	978-84-10406-13-1	Olivia Wolf and the Trip Through Time by Jose Fragoso	741.5	$10.49	1	$10.49
2462345	978-1-5248-9024-7	Operation: Make a Splash by Tate Godwin	741.5	$16.09	1	$16.09
2424053	978-1-77147-611-9	Find a Way by Naseem Hrab	741.5	$13.27	1	$13.27
2492861	978-1-77147-778-9	Otis and Peanut by Naseem Hrab	741.5	$6.97	1	$6.97
2485055	978-0-593-69583-8	Trouble With Leo by Nathan Fairbairn	741.5	$16.09	1	$16.09
2454129	978-1-5476-1762-3	Roman Holiday by Sheena Dempsey	741.5	$10.49	1	$10.49
2436099	978-1-5344-5170-4	Strange Sky by Amy Marie Stadelmann	741.5	$15.39	1	$15.39
2423471	978-1-5364-9153-1	Outsider Kids by Betty C. Tang	741.5	$28.95	1	$28.95
2438548	978-1-5343-3249-2	Patchwork Girl of Oz, Vol. 01 by Otis Frampton	741.5	$9.09	1	$9.09
2452834	978-1-5458-2105-3	Case of the Sleeping Artist by Jason Platt	741.5	$10.49	1	$10.49
2434217	978-1-5248-9047-6	Snoopy: Doghouse Tales by Charles M. Schulz	741.5	$9.09	1	$9.09
2438896	978-0-593-12550-2	Sugar Shack by Lucy Knisley	741.5	$15.39	1	$15.39
2434017	978-0-593-69981-2	Lost and Frown! by Jenny Alvarado	741.5	$9.09	1	$9.09
2460863	978-0-593-69989-8	New Friends Rule! by Jenny Alvarado	741.5	$9.09	1	$9.09
2493871	978-1-368-09729-1	Pet Placement Society by Primo Gallanosa	741.5	$17.49	1	$17.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2449378	978-1-368-09944-8	Fast and the Furriest by C. S. Jennings	741.5				$7.69 | $7.69
2449373	978-1-368-09929-5	Pet Shop Racers by C. S. Jennings	741.5				$7.69 | $7.69
2451054	978-1-5364-9571-3	Friendship Upgrade! by Steve Foxe	741.5				$24.95 | $24.95
2459648	978-1-5458-2087-2	Phineas and Ferb Classic Comics Collection, Vol. 05 by Scott Peterson	741.5				$10.49 | $10.49
2434423	978-1-5458-1842-8	Phineas and Ferb Collection 3 in 1, Vol. 01 by Scott Peterson	741.5				$13.99 | $13.99
2434908	978-1-5458-1962-3	Phineas and Ferb Collection, Vol. 04 by Scott Peterson	741.5				$10.49 | $10.49
2438628	978-1-5458-1322-5	A-MAZE-ing Creature Double Feature by Scott Peterson	741.5				$10.49 | $10.49
2462306	979-8-8816-0245-1	Unicorn Secrets: Another Phoebe and Her Unicorn Adventure by Dana Simpson	741.5				$9.09 | $9.09
2449060	979-8-217-12591-3	Sun Cats Graphic Novel: Sounds of the Alphabet by Clair Wilson	741.5				$16.09 | $16.09
2461949	978-1-5458-2314-9	Set Sail for Treasure! by Alexis Vivallo	741.5				$12.59 | $12.59
2450749	978-1-5461-3792-4	Jungle Pursuit by Vannotes	741.5				$17.49 | $17.49
2461892	978-0-593-81454-3	Go Viral! by Stephen Shaskan	741.5				$7.69 | $7.69
2451731	978-1-5067-5328-7	Plants vs. Zombies Zomnibus, Vol. 03 by Paul Tobin	741.5				$13.99 | $13.99
2493842	978-1-5067-5329-4	Plants vs. Zombies Zomnibus, Vol. 04 by Paul Tobin	741.5				$13.99 | $13.99
2443011	978-1-5067-2849-0	Big Spitball by Paul Tobin	741.5				$9.09 | $9.09
2492980	978-1-5067-4292-2	It's a Dogz Life by Paul Tobin	741.5				$9.09 | $9.09
2451115	978-1-5364-9587-4	Over the Moon by Paul Gilligan	741.5				$20.95 | $20.95
2452749	978-1-5248-9615-7	Game On by Dora Wang	741.5				$8.39 | $8.39
2484992	978-1-9747-6211-8	Pokemon: Scarlet and Violet, Vol. 04 by Hidenori Kusaka	741.5				$4.19 | $4.19
2423089	978-1-9747-4713-9	Pokemon: Sword and Shield, Vol. 12 by Hidenori Kusaka	741.5				$4.19 | $4.19
2443826	978-1-9747-5458-8	Pokemon: Sword and Shield, Vol. 13 by Hidenori Kusaka	741.5				$4.19 | $4.19
2438821	978-1-9747-5461-8	Ponyo Film Comic All-In-One Edition (Manga) by Hayao Miyazaki	741.5				$21.00 | $21.00
2462084	978-1-5458-2286-9	New Friends by Adam Wallenta	741.5				$12.59 | $12.59
2450941	978-1-4549-4695-3	Quest for the Golden Bones by Michael Sweater	741.5				$17.49 | $17.49
2446245	978-1-5458-2038-4	Charm of Magpies by Benjamin Dickson	741.5				$10.49 | $10.49
2437072	978-1-63715-787-9	Quinnelope and the Unicorn Utopia by H. F. Brownfield	741.5				$10.49 | $10.49
2440273	978-1-338-11518-5	Kingdom of Water by Amy Kim Kibuishi	741.5				$17.49 | $17.49
2449204	978-0-8234-4512-7	Rodeo Hawkins and the Daughters of Mayhem by John Claude Bemis	741.5				$16.09 | $16.09
2459669	978-1-60309-569-3	Out of the Blue by Natalie Warner	741.5				$10.49 | $10.49
2453623	978-1-83874-940-8	Tale of the Obsidian Maze by Carlos Sanchez	741.5				$24.69 | $24.69
2432983	978-1-5131-4183-1	Space Intruders by David Mansch	741.5				$20.99 | $20.99
2453887	978-1-5364-9614-7	Saphie the One-Eyed Cat, Vol. 02 by JOHO	741.5				$24.95 | $24.95
2436572	978-0-593-69941-6	Schoolbot 9000 by Sam Hepburn	741.5				$17.49 | $17.49
2462320	978-1-5458-2331-6	Secret S.T.E.A.M. Society: Horses by Trevor Mueller	741.5				$13.99 | $13.99
2446229	978-1-63715-842-5	Sesame Street: The Amazing Mumford's Magic Trick by Joey Esposito	741.5				$5.59 | $5.59
2461867	979-8-89488-000-6	Sunny Stories by Joey Esposito	741.5				$10.49 | $10.49
2423773	978-1-63715-640-7	Lights (Collector's Edition) by Brenna Thummler	741.5				$17.49 | $17.49
2493276	978-1-77260-445-0	Shy Cat and the Stuff-The-Bus Challenge by Dian Day	741.5				$12.57 | $12.57
2446298	978-1-5460-0623-7	Flying High! by Steve Breen	741.5				$13.29 | $13.29
2423098	978-1-5460-0622-0	Sib Squad by Steve Breen	741.5				$13.29 | $13.29
2461538	978-1-5364-9678-9	Thick As Thieves by Dan Santat	741.5				$28.95 | $28.95
2443882	978-1-77488-007-4	Super Business! by Cale Atkinson	741.5				$9.79 | $9.79
2423691	978-1-64595-217-6	Dinomite! by Steve Breen	741.5				$10.49 | $10.49
2423809	978-1-5248-8084-2	Second Slice by Adam Foreman	741.5				$8.39 | $8.39
2434292	978-1-5458-1858-9	Smurfs Archives, Vol. 02 by Peyo	741.5				$27.99 | $27.99
2452805	978-1-5458-2057-5	Smurfs Archives, Vol. 03 by Peyo	741.5				$27.99 | $27.99
2462358	978-1-5458-2438-2	Smurfs Archives, Vol. 04 by Peyo	741.5				$27.99 | $27.99
2453859	978-1-5458-2072-8	Smurfs Holiday Special by Peyo	741.5				$9.09 | $9.09
2486609	978-1-5458-2352-1	Smurfs Tales, Vol. 15 by Peyo	741.5				$16.09 | $16.09
2424925	978-1-5458-1696-7	Smurfs and the Dragon of the Lake by Peyo	741.5				$16.09 | $16.09
2438555	978-1-5458-1971-5	Smurfs and the Dream Machine and Other Stories by Peyo	741.5				$16.09 | $16.09
2459635	978-1-5458-2097-1	Smurfs and the Flight of the Storks and other Stories by Peyo	741.5				$16.09 | $16.09
2436677	978-1-5458-1965-4	New Beginning by Peyo	741.5				$9.09 | $9.09
2461393	978-0-316-52895-5	Enter the Wigmaster! by Raul the Third	741.5				$10.49 | $10.49
2462978	978-1-5461-7174-4	Blood Moon by Morr Meroz	741.5				$18.19 | $18.19
2483240	979-8-88724-377-1	Sonic the Hedgehog: On the Go, Vol. 02 by Ian Flynn	741.5				$9.79 | $9.79
2428129	979-8-88724-281-1	Sonic the Hedgehog: Sonic Prime, Vol. 01 by Hayden Robel	741.5				$6.99 | $6.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2423415	979-8-88724-173-9	Extreme Competition by Evan Stanley	741.5			$11.89 1 $11.89
2462598	978-1-250-78278-6	Space Chasers: To The Moon by Leland Melvin	741.5			$16.09 1 $16.09
2434264	978-1-5343-2892-1	Adventures of Spawn: Complete Collection by Jonathan David Goff	741.5			$6.99 1 $6.99
2494761	979-8-2952-0092-2	Speed Reader by Matthew Cody	741.5			$24.95 1 $24.95
2446459	978-1-5364-9499-0	Shadow Warrior by Shogo Aoki	741.5			$24.95 1 $24.95
2423461	978-1-5364-9148-7	Around the Spider-Verse: Original Graphic Novel Anthology by Pablo Leon	741.5			$24.95 1 $24.95
2444184	978-1-6659-6312-1	Howl at the Moon by Liv Livingston	741.5			$15.39 1 $15.39
2462166	978-1-6659-7425-7	It Came from the Deep by Liv Livingston	741.5			$15.39 1 $15.39
2306366	978-1-952126-69-7	Spirits: The Soul Collector, Vol. 01 by Colin Lawler	741.5			$11.89 1 $11.89
2423092	978-1-9747-5264-5	Splatoon 3: Splatlands, Vol. 04 by Sankichi Hinodeya	741.5			$8.39 1 $8.39
2425164	978-1-4197-5773-0	Find a Missing Star by David Lewman	741.5			$6.29 1 $6.29
2493696	978-0-593-89782-9	Pet Rock Mystery by Ashley Belote	741.5			$7.69 1 $7.69
2493810	979-8-217-02642-5	StEvEn and Parker: Dinos Are Forever! by Parker James	741.5			$15.39 1 $15.39
2459799	978-1-5067-4782-8	Training Sessions by Dave Scheidt	741.5			$6.29 1 $6.29
2463018	978-0-593-62164-6	Startup Squad: One for the Dogs by Brian Weisfeld	741.5			$16.09 1 $16.09
2445998	978-1-5253-1301-1	Steve, Born to Run by Kelly Collier	741.5			$11.89 1 $11.89
2434545	978-1-5253-1300-4	Steve, a Rare Egg by Kelly Collier	741.5			$11.89 1 $11.89
2437001	979-8-217-02616-6	Stitch Head by Guy Bass	741.5			$10.49 1 $10.49
2436864	978-1-338-79248-5	Sunny Figures It Out by Jennifer L. Holm	741.5			$17.49 1 $17.49
2434923	979-8-88777-133-5	Supa Nova by Chante Timothy	741.5			$6.99 1 $6.99
2446736	978-1-4197-5958-1	Home Sea Home by Nidhi Chanani	741.5			$17.49 1 $17.49
2459752	978-0-593-42784-2	I Am a Slime Monster by Jarod Rosello	741.5			$7.69 1 $7.69
2453892	978-1-5364-9619-2	Super Pancake and the Terrible Toast by Megan Wagner Lloyd	741.5			$22.95 1 $22.95
2483239	978-1-7995-0601-0	Krypto's Big Break by Rob Justus	741.5			$9.09 1 $9.09
2432745	978-0-593-80725-5	New Girl by Francine Pascal	741.5			$15.39 1 $15.39
2461893	978-0-593-80729-3	Three's a Crowd by Francine Pascal	741.5			$15.39 1 $15.39
2436679	978-1-5458-1298-3	Arthur's Magical Kingdom by Michael Snow	741.5			$10.49 1 $10.49
2494898	979-8-2952-0119-6	Sneak Attack by Scott Kurtz	741.5			$28.95 1 $28.95
2462293	978-1-5458-2324-8	Tamia and the Memories of the Dragon by David Brana	741.5			$12.59 1 $12.59
2423476	978-1-5364-9156-2	King of the World! by Ben Clanton	741.5			$17.95 1 $17.95
2450804	978-1-6659-6430-2	Sneakiest in the World! by Ben Clanton	741.5			$9.09 1 $9.09
2437257	978-1-5364-9371-9	Dawn of the Dino Tooth Fairies by Alexis Frederick-Frost	741.5			$17.95 1 $17.95
2483279	978-1-7995-0591-4	Teen Titans Go! Go Big or Go Home! by Sholly Fisch	741.5			$9.09 1 $9.09
2423394	979-8-88724-191-3	Teenage Mutant Ninja Turtles: Turtle Power Pack, Vol. 02 by Caleb Goellner	741.5			$6.29 1 $6.29
2483242	979-8-88724-378-8	Teenage Mutant Ninja Turtles: Turtle Power Pack, Vol. 03 by Erik Burnham	741.5			$6.29 1 $6.29
2452837	978-1-5458-2059-9	Captive Prince by Scott Chantler	741.5			$13.99 1 $13.99
2462294	978-1-5458-2329-3	King's Dragon by Scott Chantler	741.5			$13.99 1 $13.99
2435895	978-1-5458-1935-7	Sign of the Black Rock by Scott Chantler	741.5			$13.99 1 $13.99
2423553	978-1-5364-9162-3	Time Buddies: Past, Present, Hooture by Marcie Colleen	741.5			$24.95 1 $24.95
2437070	978-1-5343-2799-3	Worst Bot Ever: Meet Ballpoint by Brian Smith	741.5			$9.09 1 $9.09
2446697	978-1-5364-9535-5	Tuck and Tina and the Lost Fortune by Jess Brallier	Fic			$22.95 1 $22.95
2494909	978-1-76121-547-6	Twig Friends Branch Out by Andrew McDonald	741.5			$8.39 1 $8.39
2443689	978-1-76121-546-9	Twig Friends Go Wild by Andrew McDonald	741.5			$8.39 1 $8.39
2434807	978-1-76121-499-8	Twig Friends Stick Together by Andrew McDonald	741.5			$8.39 1 $8.39
2443133	978-1-5362-3705-4	Chaos in the Cosmic Library by Tom Angleberger	741.5			$10.49 1 $10.49
2432447	978-1-5362-2903-5	Two-Headed Chicken by Tom Anglberger	741.5			$6.29 1 $6.29
2462961	979-8-2952-0026-7	Unfairies, Vol. 01 by Huw Aaron	741.5			$26.95 1 $26.95
2435602	978-1-5364-9321-4	Unico: Hunted by Samuel Sattin	741.5			$24.95 1 $24.95
2437562	978-1-956694-17-8	Counsel of Crows by Keith Ward	741.5			$7.69 1 $7.69
2436953	978-1-250-83531-4	New Dog in the Den by Bethanie Murguia	741.5			$15.39 1 $15.39
2423873	978-1-5364-9194-4	Prophecies Begin, Vol. 02 by Erin Hunter	741.5			$29.95 1 $29.95
2448566	978-1-5364-9567-6	Prophecies Begin, Vol. 03 by Erin Hunter	741.5			$29.95 1 $29.95
2436420	978-0-06-335176-9	Tigerstar and Sasha by Erin Hunter	741.5			$11.19 1 $11.19
2449278	978-1-368-11081-5	Escape of the Apes by Kon Tan	741.5			$12.59 1 $12.59
2451107	978-1-5364-9585-0	Not-So-Sweetie Pie by Maureen Fergus	741.5			$20.95 1 $20.95
2438542	978-1-5248-9428-3	Harvest Party by Katie Risor	741.5			$8.39 1 $8.39
2453715	978-1-5461-0959-4	If the Shoe Fits (Graphic Novel) by Sarah Mlynowski	741.5			$17.49 1 $17.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2450737	978-1-5253-0843-7	Museum of Willa and Wade by Judith Henderson	741.5	$10.49	1	$10.49
2460716	978-1-5364-9667-3	Talons of Power by Tui T. Sutherland	741.5	$28.95	1	$28.95
2453886	978-1-5364-9613-0	Darkstalker (Graphic Novel) by Tui T. Sutherland	741.5	$28.95	1	$28.95
2459656	978-1-5458-2178-7	Alone Against Everybody	741.5	$16.09	1	$16.09
2459723	978-1-5458-2119-0	Friends, Monsters, and Witches!	741.5	$16.09	1	$16.09
2459733	978-1-5458-2120-6	Heart of a Fairy	741.5	$16.09	1	$16.09
2459735	978-1-5458-2121-3	Magic Battle	741.5	$16.09	1	$16.09
2485347	978-1-5458-2118-3	Welcome to Magix	741.5	$16.09	1	$16.09
2443472	978-0-593-81344-7	Curse and Reverse by Sophie Escabasse	741.5	$15.39	1	$15.39
2452802	978-1-5458-2056-8	Witches of Pepperwood Bay by Lisa Manuzak Wiley	741.5	$10.49	1	$10.49
2438866	978-1-6659-0086-7	Wizkit 2: A Tail of Disruption by Tanya J. Scott	741.5	$16.09	1	$16.09
2484243	978-0-06-339628-9	Tough Times by Raul the Third	741.5	$9.09	1	$9.09
2453484	978-0-06-334409-9	Besties: Set Sail by Kayla Miller	741.5	$17.49	1	$17.49
2486007	978-1-5458-2439-9	Crisis on Cray World! by Art Baltazar	741.5	$13.99	1	$13.99
2438602	978-1-5458-1934-0	Mystic Orb by Art Baltazar	741.5	$10.49	1	$10.49
2434765	978-1-60309-553-2	Wishborn by Jeff Victor	741.5	$10.49	1	$10.49
2436567	978-0-593-20642-3	Glitch by Michael Rex	741.5	$17.49	1	$17.49
2460593	978-0-06-335430-2	Case of Bird Problems by Rachel Elliott	741.5	$17.49	1	$17.49
2453676	978-1-6659-1490-1	EXpets: The Skunk Who Challenged the World! by Mark Tatulli	741.5	$10.49	1	$10.49

Total quantity	499 Titles(499 Books)
Subtotal	$7,265.63
Processing Options Total	$1,646.70
Shipping & Handling	$145.31
Shipping Discount	-$145.31
Tax	$913.51
Grand Total	$9,825.84

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: JUVENILE FICTION ODC 1
List#: 207792
Date: 2/17/2026 6:16:15 PM
Total quantity: 471 Titles(471 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	471	$1,554.30

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2403167	978-1-4549-5015-8	Grimthorpe Grave by K. H. Saxton	Fic	$11.89	1	$11.89
2448685	978-1-4642-6709-3	Academy by T. Z. Layton	Fic	$10.49	1	$10.49
2400677	978-1-250-20837-8	Kelcie Murphy and the Race for the Reaper's Key by Erika Lewis	Fic	$13.99	1	$13.99
2397907	978-1-335-00697-4	Accidental Demons by Clare Edge	Fic	$13.99	1	$13.99
2453483	978-1-335-01386-6	Mixing Magics by Clare Edge	Fic	$13.99	1	$13.99
2400384	978-1-5248-7942-6	Don't Climb This Mountain by Dustin Brady	Fic	$15.39	1	$15.39
2402696	978-0-593-56433-2	Alex Wise vs. The Cosmic Shift by Terry J. Benton-Walker	Fic	$12.59	1	$12.59
2446373	979-8-88777-189-2	Spoonful of Spying by Sarah Todd Taylor	Fic	$12.59	1	$12.59
2439840	978-0-06-324588-4	Into the Shadows by Angela Cervantes	Fic	$13.29	1	$13.29
2433569	978-0-06-338224-4	Bashir Boutros and the Jewel of the Nile by George Jreije	Fic	$13.99	1	$13.99
2437273	978-1-6659-6717-4	House of Found Objects by Jo Beckett-King	Fic	$12.59	1	$12.59
2454311	978-1-64371-479-0	Case of the Nasty Notes: A Ben and Blue Mystery by Ellen Melissa Cohen	Fic	$12.59	1	$12.59
2408307	978-1-5461-0269-4	Like a Boss by Sarah Mlynowski	Fic	$11.89	1	$11.89
2397874	978-0-06-306417-1	Birchbark House by Louise Erdrich	Fic	$13.29	1	$13.29
2408929	978-1-368-09862-5	Tinker Bell and the Lost City by Zack Loran Clark	Fic	$10.49	1	$10.49
2413687	978-1-250-90376-1	Just Kitten Around by Hilda Eunice Burgos	Fic	$11.89	1	$11.89
2436964	978-1-250-90379-2	Pawsome Pals by Hilda Eunice Burgos	Fic	$11.89	1	$11.89
2409117	979-8-212-53839-8	Escape from the Dungeons of Snerbville by Patrick Carman	Fic	$11.89	1	$11.89
2404549	978-1-64375-381-2	Boy 2.0 by Tracey Baptiste	Fic	$12.59	1	$12.59
2408035	978-1-5364-8908-8	Breakers of the Code by Erin Hunter	Fic	$20.95	1	$20.95
2433129	978-0-593-80623-4	Camp Frenemies by Liz Montague	741.5	$15.39	1	$15.39
2421944	978-1-5364-9138-8	Cut Loose! by Ali Stroker	Fic	$19.95	1	$19.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2412292	978-1-963511-04-8	Chip and Chatti Save the Farm by Heidi Paul	Fic	$12.57	1	$12.57
2443479	978-0-06-334199-9	Chloe Vega and the Agents of Magic by Leslie Adame	Fic	$13.99	1	$13.99
2434829	978-0-06-343517-9	Silver Chair by C. S. Lewis	Fic	$13.99	1	$13.99
2449492	978-0-06-324577-8	What Lurks in the Shadows by Z. Brewer	Fic	$13.29	1	$13.29
2429652	978-0-593-69190-8	Age of Enchantment by Anna James	Fic	$13.29	1	$13.29
2434161	978-1-5364-9288-0	Chronicles of a Lizard Nobody by Patrick Ness	Fic	$19.95	1	$19.95
2434553	978-1-5362-4126-6	Hat of Great Importance by Patrick Ness	Fic	$13.29	1	$13.29
2448709	978-1-5364-9568-3	ChupaCarter and the Curse of la Llorona by George Lopez	Fic	$20.95	1	$20.95
2435840	978-1-5364-9350-4	ChupaCarter and the Screaming Sombrero by George Lopez	Fic	$20.95	1	$20.95
2454344	979-8-7656-4865-0	Escape from Bigfoot by Penny Warner	Fic	$17.99	1	$17.99
2454345	979-8-7656-4867-4	Search for the Missing Mascot by Penny Warner	Fic	$17.99	1	$17.99
2439818	978-0-593-70468-4	Ben Yokoyama and the Cookie of Destiny by Matthew Swanson	Fic	$9.79	1	$9.79
2386946	978-0-06-325458-9	Cookie Crumbles by Tracy Badua	Fic	$13.99	1	$13.99
2409067	978-0-593-89700-3	Screech School by Jennifer Killick	Fic	$19.94	1	$19.94
2435954	978-1-6659-6974-1	Immortal Fire by Anne Ursu	Fic	$13.99	1	$13.99
2448664	978-1-7282-2031-4	Time Machine Trouble by Chris Ferrie	Fic	$10.49	1	$10.49
2396966	978-1-6690-7522-6	Sasquatch Suspect by Thomas Kingsley Troupe	Fic	$19.49	1	$19.49
2425005	978-1-6659-5112-8	Night We Got Stuck in a Story by Ben Miller	Fic	$12.59	1	$12.59
2436449	978-0-06-332984-3	Ghost Rescue by Jenny McLachlan	Fic	$13.99	1	$13.99
2397829	978-0-06-328321-3	Scrimshaw by Ethan M. Aldridge	Fic	$13.29	1	$13.29
2425623	978-1-5364-9233-0	Mystery of Locked Rooms by Lindsay Currie	Fic	$19.95	1	$19.95
2448730	978-1-4642-3494-1	House with No Keys by Lindsay Currie	Fic	$11.89	1	$11.89
2437214	978-1-5364-9358-0	Haunted House by Ari Avatar	Fic	$16.95	1	$16.95
2440135	978-1-250-81562-0	Stella: Ranch Patrol by W. Bruce Cameron	Fic	$12.59	1	$12.59
2446767	978-1-5364-9547-8	Mouse and His Dog by Katherine Applegate	Fic	$19.95	1	$19.95
2439090	978-1-6659-7513-1	Lost on Doll Island by Cassandra Ramos-Gomez	Fic	$13.29	1	$13.29
2402250	978-1-63893-032-7	Heart-Stealer Mask by Zack Loran Clark	Fic	$12.59	1	$12.59
2435973	978-1-6659-6254-4	Devourer's Attack by Katie Tsang	Fic	$13.29	1	$13.29
2418270	978-1-6659-6251-3	Infinity's Secret by Katie Tsang	Fic	$13.29	1	$13.29
2423235	978-0-593-81317-1	Dragon's Apprentice by James Riley	Fic	$13.29	1	$13.29
2448396	978-1-68464-857-3	Einstein the Penguin by Iona Rangeley	Fic	$11.89	1	$11.89
2443440	978-0-06-332746-7	Rise of Nicholas the Noble by Chanda A. Bell	Fic	$13.99	1	$13.99
2414158	978-1-5364-9024-4	Ellie Engle Saves Herself by Leah Johnson	Fic	$19.95	1	$19.95
2417846	978-1-368-09010-0	Bree Boyd Is a Legend by Leah Johnson	Fic	$13.29	1	$13.29
2400417	978-1-5248-8463-5	In a Pickle by Lisa Greenwald	Fic	$13.99	1	$13.99
2409440	978-1-4549-4713-4	Everything Interesting Keeps Happening To Ethan Fairmont by Nick Brooks	Fic	$11.89	1	$11.89
2406067	978-0-593-42966-2	Never Thirteen by Stacy McAnulty	Fic	$12.59	1	$12.59
2435000	978-1-4263-7745-7	Unbreakable Bond by Trudi Trueit	Fic	$19.94	1	$19.94
2423565	978-1-5364-9168-5	Eyes and the Impossible by Dave Eggers	Fic	$28.95	1	$28.95
2417160	978-0-06-334943-8	Cursed Campground by FGTeeV	Fic	$13.29	1	$13.29
2445979	978-0-06-334947-6	Werehouse by FGTeeV	Fic	$13.29	1	$13.29
2404435	978-1-5362-2217-3	Fairy Tale Fan Club: Legendary Letters Collected by C. C. Cecily by Richard Ayoade	Fic	$12.59	1	$12.59
2443074	978-1-64595-269-5	Famous Anonymous by Morgan Baden	Fic	$11.89	1	$11.89
2417207	978-1-5364-9062-6	Finally Heard by Kelly Yang	Fic	$19.95	1	$19.95
2449043	978-0-525-55632-9	Flora la Fresca and the Plot to Make Millions by Veronica Chambers	Fic	$12.59	1	$12.59
2404909	978-0-593-69874-7	Operation Chaos by Lisa McMann	Fic	$13.29	1	$13.29
2433169	978-0-06-325590-6	Summer of the Fortune Tellers by Lisa Greenwald	Fic	$13.99	1	$13.99
2453136	978-1-68263-412-7	Special Teams by Fred Bowen	Fic	$12.59	1	$12.59
2425483	978-1-4236-6593-9	Creepy Campfire Stories by Anastasia Garcia	Fic	$17.49	1	$17.49
2435598	978-1-5461-3866-2	Chef's Secret by Kelly Yang	Fic	$13.29	1	$13.29
2440193	978-1-5364-9433-4	Battle for Sky Kingdom by Remi Blackwood	Fic	$16.95	1	$16.95
2432522	978-1-64595-268-8	Attempting Connection by E. C. Myers	Fic	$12.59	1	$12.59
2412369	978-1-335-42708-3	How to Free a Leviathan by Meg Cannistra	Fic	$13.29	1	$13.29
2417155	978-1-5364-9056-5	Gigi Shin Is Not a Nerd by Lyla Lee	Fic	$17.95	1	$17.95
2425027	978-1-6659-3920-1	Gigi Shin, Live from Manhattan by Lyla Lee	Fic	$12.59	1	$12.59
2387129	978-0-06-322941-9	Girl Who Kept the Castle by Ryan Graudin	Fic	$13.99	1	$13.99
2427480	978-1-6690-8627-7	Faye and the Dangerous Journey by Kim Sigafus	Fic	$20.99	1	$20.99
2427481	978-1-6690-8634-5	Penny and the Tragic Voyage by Julie Gilbert	Fic	$20.99	1	$20.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2400514	978-1-6659-1783-4	Time Travelers by Joan Holub	Fic	$13.29	1	$13.29
2408014	978-1-5364-8892-0	Egg Monsters from Mars by R. L. Stine	Fic	$17.95	1	$17.95
2408015	978-1-5364-8893-7	Ghost Next Door by R. L. Stine	Fic	$19.95	1	$19.95
2408016	978-1-5364-8894-4	Girl Who Cried Monster by R. L. Stine	Fic	$19.95	1	$19.95
2408018	978-1-5364-8896-8	Invasion of the Body Squeezers: Part 1 by R. L. Stine	Fic	$19.95	1	$19.95
2408017	978-1-5364-8895-1	Invasion of the Body Squeezers: Part 2 by R. L. Stine	Fic	$19.95	1	$19.95
2440198	978-1-5364-9437-2	Last Sleepover by R. L. Stine	Fic	$17.95	1	$17.95
2403169	978-1-4549-4458-4	Season's Eatings by Lisi Harrison	Fic	$11.89	1	$11.89
2417161	978-1-5364-9057-2	Great Catnapping by Emily Ecton	Fic	$19.95	1	$19.95
2453806	978-1-6659-6646-7	Great Puppypalooza by Emily Ecton	Fic	$12.59	1	$12.59
2417558	978-0-593-95930-5	Green Kingdom by Cornelia Funke	Fic	$11.89	1	$11.89
2418349	978-1-63993-380-8	Big Bad Wolf by Michaelbrent Collings	Fic	$13.99	1	$13.99
2446240	978-1-59188-282-4	Case of the Poetic Bird Dog by John R. Erickson	Fic	$9.79	1	$9.79
2400390	978-1-944020-91-0	Secrets of Riverway by Ashley Hards	Fic	$11.89	1	$11.89
2403795	978-1-5248-9404-7	Pop-Up Shop Predicament by Kathryn Holmes	Fic	$17.49	1	$17.49
2452752	978-1-5248-9889-2	Spotlight on Zari	Fic	$17.49	1	$17.49
2444166	978-1-6659-7193-5	Bookshop at the Back of Beyond by Amy Sparkes	Fic	$13.29	1	$13.29
2418253	978-1-6659-7187-4	House at the Edge of Magic by Amy Sparkes	Fic	$13.29	1	$13.29
2436049	978-1-6659-7190-4	Tower at the End of Time by Amy Sparkes	Fic	$13.29	1	$13.29
2408301	978-1-5364-8941-5	I Survived the Black Death, 1348 by Lauren Tarshis	Fic	$16.95	1	$16.95
2415181	978-1-6659-6872-0	Ice Apprentices by Jacob North	Fic	$12.59	1	$12.59
2453468	978-0-06-327567-6	Valley of Lies by Ali Standish	Fic	$13.99	1	$13.99
2424892	978-1-5364-9207-1	102 Days of Lying About Lauren by Maura Jortner	Fic	$19.95	1	$19.95
2417259	978-0-06-325698-9	13 Ways to Say Goodbye by Kate Fussner	Fic	$13.99	1	$13.99
2413775	978-1-64614-508-9	AI Incident by J. E. Thomas	Fic	$13.29	1	$13.29
2436290	978-1-5362-3362-9	Accidental Stowaway by Judith Eagle	Fic	$13.29	1	$13.29
2402581	978-1-5364-8814-2	Adrift by Tanya Guerrero	Fic	$22.95	1	$22.95
2446763	978-1-59270-416-3	Adventures of Cipollino by Gianni Rodari	Fic	$20.99	1	$20.99
2402091	978-1-77278-322-3	After the Wallpaper Music by Jean Mills	Fic	$13.27	1	$13.27
2404944	978-0-593-65943-4	Ain't It Funny by Margaret Gurevich	Fic	$12.59	1	$12.59
2404437	978-1-5362-3488-6	Answers to Dog by Pete Hautman	Fic	$13.29	1	$13.29
2414467	978-0-06-337842-1	At Home in a Faraway Place by Lynne Rae Perkins	Fic	$13.99	1	$13.99
2459312	978-1-5461-5833-2	At the Speed of Gus by Richard Scrimger	Fic	$13.29	1	$13.29
2414184	978-1-4549-5345-6	Bad Badger by Maryrose Wood	Fic	$13.29	1	$13.29
2400746	978-1-250-90151-4	Banned Books, Crop Tops, and Other Bad Influences by Brigit Young	Fic	$12.59	1	$12.59
2434465	978-1-5364-9299-6	Basil and Dahlia: A Tragical Tale of Sinister Sweetness by Joy McCullough	Fic	$19.95	1	$19.95
2423051	978-0-06-328538-5	Beasties by Peter Lerangis	Fic	$13.29	1	$13.29
2434075	978-1-5364-9268-2	Benny Ramirez and the Nearly Departed by Jose Pablo Iriarte	Fic	$19.95	1	$19.95
2424982	978-1-6659-3769-6	Benny on the Case by Wesley King	Fic	$12.59	1	$12.59
2403969	978-0-06-332616-3	Best Friend Bracelet by Nicole D. Collier	Fic	$13.29	1	$13.29
2435595	978-1-5461-1538-0	Best Worst Summer of Esme Sun by Wendy Wan-Long Shang	Fic	$13.99	1	$13.99
2402634	978-1-338-78359-9	Beware the Heartman by Shakirah Bourne	Fic	$13.29	1	$13.29
2414062	978-1-956393-09-5	Beyond Mulberry Glen by Millie Florence	Fic	$13.29	1	$13.29
2433225	978-1-368-11041-9	Billions to Burn by Taylor Banks	Fic	$11.89	1	$11.89
2449394	978-0-593-11137-6	Bionic Boy by Lynn Plourde	Fic	$12.59	1	$12.59
2405039	978-0-8234-5656-7	Bird Nerd by Jennifer Ann Richter	Fic	$13.29	1	$13.29
2433162	978-1-5460-0794-4	Bonnie Bailey and the Faire of Worlds by Ellie Kirk	Fic	$12.59	1	$12.59
2461780	978-1-952397-79-0	Brave Little Anoli by Gabriel Cannon	Fic	$13.97	1	$13.97
2451471	978-1-5364-9598-0	Bridge to Bat City by Ernest Cline	Fic	$19.95	1	$19.95
2462676	979-8-9898299-3-4	Brightwing Tales: Mole's Misadventure by Ben Palpant	Fic	$17.49	1	$17.49
2445985	978-0-06-335519-4	Broken Dolls by Ally Malinenko	Fic	$13.29	1	$13.29
2408170	978-1-68369-320-8	Brush with Magic by Flora Ahn	Fic	$11.89	1	$11.89
2404007	978-0-00-869948-2	Butterfly Lion by Michael Morpurgo	Fic	$18.19	1	$18.19
2400531	978-1-6659-3057-4	Camp Twisted Pine by Ciera Burch	Fic	$12.59	1	$12.59
2403990	978-0-06-327577-5	Chai Jinxed by Emi Pinto	Fic	$13.99	1	$13.99
2434683	978-1-250-32858-8	Chess Club: The Winning Move by Rebecca Donnelly	Fic	$13.99	1	$13.99
2453692	978-1-5461-3817-4	Chris Makes a Friend by Alex Gino	Fic	$13.29	1	$13.29
2448543	978-1-5364-9558-4	Creepening of Dogwood House by Eden Royce	Fic	$22.95	1	$22.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2453953	978-1-5364-9642-0	Daggers of Ire by J. C. Cervantes	Fic	$20.95	1	$20.95
2412308	978-0-06-315966-2	Danilo Was Here by Tamika Burgess	Fic	$13.99	1	$13.99
2438474	978-0-8234-5655-0	Days of Awe by Eric A. Kimmel	Fic	$13.29	1	$13.29
2446696	978-1-250-87400-9	Defanged by H. E. Edgmon	Fic	$12.59	1	$12.59
2439864	978-0-06-327936-0	Dive by John David Anderson	Fic	$13.99	1	$13.99
2436642	978-0-593-81470-3	Dog Who Made It Better by Katherin Nolte	Fic	$12.59	1	$12.59
2433165	979-8-88777-153-3	Doughnut Club by Kristina Rahim	Fic	$12.59	1	$12.59
2459804	978-1-5364-9649-9	Down Came the Spiders by Ally Russell	Fic	$19.95	1	$19.95
2441435	978-0-374-39294-9	Dream by Barbara O'Connor	Fic	$12.59	1	$12.59
2408037	978-1-5364-8910-1	Elf Dog and Owl Head by M. T. Anderson	Fic	$20.95	1	$20.95
2436438	978-0-06-334857-8	Elvira Vance and the Monster Mystery by Kacy Ritter	Fic	$13.99	1	$13.99
2408807	978-0-316-44942-7	Empty Place by Olivia A. Cole	Fic	$11.89	1	$11.89
2436412	978-1-335-01288-3	Encantadora's Guide to Monstros and Magic by Sarah J. Mendonca	Fic	$13.99	1	$13.99
2446628	978-1-250-37476-9	Experiment by Rebecca Stead	Fic	$12.59	1	$12.59
2404448	978-1-6659-4420-5	Eyes On the Sky by J. Kasper Kramer	Fic	$12.59	1	$12.59
2417265	978-0-00-870830-6	Fairytale for Everyone by Boldizsar M. Nagy	Fic	$13.99	1	$13.99
2433472	978-1-5476-1306-9	Field Guide to Broken Promises by Leah Stecher	Fic	$13.29	1	$13.29
2454185	978-1-5476-1516-2	Firefly Crown by Yxavel Magno Dino	Fic	$13.29	1	$13.29
2400811	978-1-250-87397-2	Flicker by H. E. Edgmon	Fic	$13.99	1	$13.99
2451035	978-0-316-58126-4	Fooled by Susan Haas	Fic	$12.59	1	$12.59
2459518	978-1-5364-9646-8	Fowl Play by Kristin O'Donnell Tubb	Fic	$20.95	1	$20.95
2450841	978-1-5461-6608-5	Free State of Jax by Jennifer A. Nielsen	Fic	$13.29	1	$13.29
2440257	978-1-339-01242-1	Freedom Seeker by Ruchira Gupta	Fic	$13.29	1	$13.29
2403199	978-1-4788-7619-9	Freedom's Game by Rosanne Tolin	Fic	$12.57	1	$12.57
2405096	978-1-68115-641-5	Friends to the Rescue by Ellen Schwartz	Fic	$12.57	1	$12.57
2494718	979-8-2952-0098-4	Galaxy of Whales by Heather Fawcett	Fic	$19.95	1	$19.95
2414787	978-0-593-62493-7	Ghosts of Bitterfly Bay by Mary Averling	Fic	$12.59	1	$12.59
2418105	978-1-64690-046-6	Ghosts of Pandora Pickwick by Christina Wolff	Fic	$11.20	1	$11.20
2403967	978-0-06-325410-7	Ghostwing's Lie by Rebecca Mix	Fic	$13.99	1	$13.99
2443104	978-0-06-334705-2	Ghoul Summer by Tracy Badua	Fic	$13.29	1	$13.29
2413851	978-1-5364-8979-8	Girl Who Built a Spider by George Brewington	Fic	$19.95	1	$19.95
2403938	978-0-06-331159-6	Girls of Skylark Lane by Robin Benway	Fic	$13.99	1	$13.99
2449338	978-0-593-90246-2	Glimmer of Change by Elle McNicoll	Fic	$12.59	1	$12.59
2439973	978-0-593-69383-4	Gloam by Jack Mackay	Fic	$12.59	1	$12.59
2449614	978-0-06-342832-4	Goalkeeper by Edward Bloor	Fic	$13.99	1	$13.99
2433663	978-1-250-34725-1	Going Overboard by Caroline Huntoon	Fic	$12.59	1	$12.59
2449267	978-1-62354-373-0	Golden Necklace: A Darjeeling Tea Mystery by Mitali Perkins	Fic	$11.19	1	$11.19
2408755	978-1-64614-269-9	Golemcrafters by Emi Watanabe Cohen	Fic	$13.29	1	$13.29
2394067	978-0-06-334629-1	Gracie Under the Waves by Linda Sue Park	Fic	$13.29	1	$13.29
2449532	978-1-4197-8327-2	Great American Mousical by Julie Andrews	Fic	$13.29	1	$13.29
2413449	978-1-6659-7306-9	Great Good Thing by Roderick Townley	Fic	$13.29	1	$13.29
2408276	978-1-6659-2778-9	Greatest Heist in Joviala by Adi Alsaid	Fic	$13.29	1	$13.29
2438608	978-0-316-56883-8	Greta Ever After by Melissa Dassori	Fic	$12.59	1	$12.59
2417719	978-1-68263-766-1	Griffin's Boy by Sarah L. Thomson	Fic	$12.59	1	$12.59
2439843	978-0-593-81488-8	Grin by D. W. Gillespie	Fic	$12.59	1	$12.59
2434429	978-1-6659-4248-5	Growing Home by Beth Ferry	Fic	$12.59	1	$12.59
2433626	978-1-250-34936-1	Gus and Glory by Sarah Guillory	Fic	$13.29	1	$13.29
2436054	978-1-5364-9352-8	Hannah Sharpe, Cartoon Detective by Janet Tashjian	Fic	$20.95	1	$20.95
2403989	978-0-06-325336-0	Happy Town by Greg Van Eekhout	Fic	$13.29	1	$13.29
2436458	978-0-06-324959-2	Haunting of Bellington Cottage by Laura Parnum	Fic	$13.99	1	$13.99
2434028	978-0-451-47975-4	Hero's Guide to Summer Vacation by Pablo Cartaya	Fic	$13.29	1	$13.29
2434761	978-1-5476-1471-4	Hidden Treasure by Jessie Burton	Fic	$13.29	1	$13.29
2450913	978-1-5476-1606-0	Holding on for Dear Life by Dusti Bowling	Fic	$12.59	1	$12.59
2413857	978-1-5364-8980-4	Home Away from Home by Cynthia Lord	Fic	$19.95	1	$19.95
2445983	978-0-06-287582-2	House Next Door by Ellen Oh	Fic	$13.29	1	$13.29
2494719	979-8-2952-0099-1	House With a Dragon in It by Nick Lake	Fic	$19.95	1	$19.95
2458652	978-1-77278-352-0	How to Save a Library by Colleen Nelson	Fic	$13.97	1	$13.97
2406850	978-1-338-83258-7	Hungry Bones by Louise Hung	Fic	$13.99	1	$13.99
2415032	978-1-5461-2500-6	I. R. L. by Jenny Goebel	Fic	$10.49	1	$10.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2446317	978-0-316-58594-1	Ink Witch by Steph Cherrywell	Fic	$12.59	1	$12.59
2414401	978-0-06-328533-0	Inside the Park by Andrea Williams	Fic	$13.29	1	$13.29
2404557	978-0-316-56602-5	Instafamous by Erika J. Kendrick	Fic	$11.89	1	$11.89
2451725	978-1-63993-433-1	Invincible List of Lani Li by Veeda Bybee	Fic	$13.29	1	$13.29
2449375	978-0-593-88662-5	Invisible: The (Sort of) True Story of Me and My Hidden Disease by David Soren	Fic	$12.59	1	$12.59
2440213	978-1-7282-3055-9	Island of Forgotten Gods by Victor Pineiro	Fic	$11.89	1	$11.89
2449237	978-0-8234-5986-5	Ivy and Forest Rewrite the World by Hannah West	Fic	$13.29	1	$13.29
2404565	978-1-250-33729-0	Jasmine Is Haunted by Mark Oshiro	Fic	$13.29	1	$13.29
2402174	978-0-593-69926-3	Kareem Between by Shifa Saltagi Safadi	Fic	$13.29	1	$13.29
2432557	978-0-8234-5791-5	Keepers of the Marsh by Maura Jortner	Fic	$12.59	1	$12.59
2434792	978-0-593-70781-4	Kickturn by Brie Spangler	Fic	$12.59	1	$12.59
2431810	978-0-06-343860-6	Leaping Beauty: And Other Animal Fairy Tales by Gregory Maguire	Fic	$13.29	1	$13.29
2393862	978-1-6625-1751-8	Lenny Among Ghosts by Frank Maria Reifenberg	Fic	$11.89	1	$11.89
2402368	978-0-8234-5567-6	Library Girl by Polly Horvath	Fic	$13.29	1	$13.29
2436363	978-0-8234-5854-7	Library of Curiosities by Jenny Lundquist	Fic	$12.59	1	$12.59
2404446	978-1-6659-4324-6	Lifeboat 5 by Susan Hood	Fic	$12.59	1	$12.59
2446776	978-1-5476-1634-3	Little Too Haunted by Justine Pucella Winans	Fic	$13.29	1	$13.29
2394074	978-0-06-327681-9	Lola Reyes Is So Not Worried by Cindy L. Rodriguez	Fic	$13.99	1	$13.99
2400736	978-1-5362-3472-5	Long Way Around by Anne Nesbet	Fic	$13.29	1	$13.29
2419678	978-1-76160-038-8	Losing the Plot by Annaleise Byrd	Fic	$9.44	1	$9.44
2400533	978-1-6659-3882-2	Madsi the True by S. J. Taylor	Fic	$12.59	1	$12.59
2440307	978-1-368-11414-1	Maggie and the Story Shadows by Annabelle Oh	Fic	$12.59	1	$12.59
2436042	978-1-5364-9351-1	Magnolia Wu Unfolds It All by Chanel Miller	Fic	$17.95	1	$17.95
2408367	978-0-06-325553-1	Mallory in Full Color by Elisa Stone Leahy	Fic	$13.99	1	$13.99
2402294	978-0-593-61586-7	May the Best Player Win by Kyla Zhao	Fic	$12.59	1	$12.59
2434835	978-1-962447-26-3	Mermaid Elle Saving the Seas by Elle Jimenez	Fic	$11.89	1	$11.89
2446583	978-1-250-90028-9	Method for Magic and Misfortune by Craig Kofi Farmer	Fic	$13.29	1	$13.29
2422006	978-1-5364-9129-6	Midnight Children by Dan Gemeinhart	Fic	$20.95	1	$20.95
2434314	979-8-217-00240-5	Midwatch Institute for Wayward Girls by Judith Rossell	Fic	$13.29	1	$13.29
2445980	978-0-06-327342-9	Mr. Grieves and the Grievous Deeds by Matt Lieberman	Fic	$13.29	1	$13.29
2408810	978-0-374-39205-5	My So-Called Family by Gia Gordon	Fic	$12.59	1	$12.59
2404501	978-1-6659-5666-6	Mystery of Mystic Mountain by Janet Fox	Fic	$12.59	1	$12.59
2443448	978-0-06-328443-2	Nine Moons of Han Yu and Luli by Karina Yan Glaser	Fic	$13.99	1	$13.99
2397932	978-0-06-328554-5	No Brainer's Guide to Decomposition by Adrianna Cuevas	Fic	$13.29	1	$13.29
2449014	979-8-9887499-6-7	No One Slept by Rafael Sica	Fic	$13.27	1	$13.27
2405088	978-1-962447-17-1	Norbu's Secret by Dana Klisanin	Fic	$13.99	1	$13.99
2408309	978-1-339-01117-2	Off the Map by Meika Hashimoto	Fic	$12.59	1	$12.59
2417445	978-1-250-32698-0	Once for Yes by Allie Millington	Fic	$12.59	1	$12.59
2417772	978-1-338-27586-5	One Wrong Step by Jennifer A. Nielsen	Fic	$13.29	1	$13.29
2404575	978-1-250-90878-0	Onyx and Beyond by Amber McBride	Fic	$12.59	1	$12.59
2439094	978-1-6659-8042-5	Open Wide by I. M. Eerie	Fic	$12.59	1	$12.59
2436459	978-0-06-328878-2	Other Side of Imani by Lisa Springer	Fic	$13.29	1	$13.29
2425624	978-1-5364-9234-7	Otherwoods by Justine Pucella Winans	Fic	$20.95	1	$20.95
2442997	978-0-8234-5385-6	Picasso Curse by Dan Gutman	Fic	$13.29	1	$13.29
2450866	978-0-316-58040-3	Planet, the Portal, and a Pizza by Wendy Mass	Fic	$12.59	1	$12.59
2443874	978-1-6659-7477-6	Press 1 for Invasion by J. A. Dauber	Fic	$12.59	1	$12.59
2422581	978-0-06-332695-8	Queen Bees of Tybee County by Kyle Casey Chu	Fic	$13.99	1	$13.99
2422655	978-0-06-333952-1	Rainbow Fair by Diana Ma	Fic	$13.99	1	$13.99
2435796	978-0-06-308130-7	Rayleigh Mann and the Quest of Misfits by Ciannon Smart	Fic	$13.99	1	$13.99
2417596	978-1-64379-643-7	Reel Wish by Yamile Saied Mendez	Fic	$16.07	1	$16.07
2433438	978-1-250-29218-6	Return to Sender by Vera Brosgol	Fic	$13.29	1	$13.29
2454494	979-8-9911237-0-9	Rewilding by Lisa Gerlits	Fic	$13.99	1	$13.99
2414536	978-0-06-323081-1	Rick Kotani's 400 Million Dollar Summer by Waka T. Brown	Fic	$13.99	1	$13.99
2449453	978-1-77488-728-8	Robot Island by Cary Fagan	Fic	$12.59	1	$12.59
2443531	978-0-06-279689-9	Rocket Arm by Tim Green	Fic	$13.29	1	$13.29
2392355	978-1-6659-5810-3	Rosa by Starlight by Hilary McKay	Fic	$11.89	1	$11.89
2394088	978-0-06-332538-8	Rougarou Magic by Rachel M. Marsh	Fic	$13.29	1	$13.29
2443876	978-1-6659-7018-1	Running Back to You by Sarah Henning	Fic	$13.99	1	$13.99
2436410	978-0-06-309871-8	Sabrena Swept Away by Karuna Riazi	Fic	$13.29	1	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2433944	978-1-5364-9251-4	Salsa Magic by Letisha Marrero	Fic	$22.95	1	$22.95
2405399	978-1-76065-940-0	Saltwater Boy by Bradley Christmas	Fic	$13.99	1	$13.99
2443528	978-0-06-321034-9	Scarlet Morning by N. D. Stevenson	Fic	$13.99	1	$13.99
2392647	978-0-06-328474-6	Science of Friendship by Tanita S. Davis	Fic	$13.99	1	$13.99
2419686	978-1-76160-049-4	Scout and the Rescue Dogs by Dianne Wolfer	Fic	$9.97	1	$9.97
2446625	978-1-250-34261-4	Sea of Lemon Trees: The Corrido of Roberto Alvarez by Maria Dolores Aguila	Fic	$12.59	1	$12.59
2448849	978-1-77278-349-0	Seabird by Michelle Kadarusman	Fic	$13.97	1	$13.97
2440245	978-1-5364-9464-8	Secret Dead Club by Karen Strong	Fic	$19.95	1	$19.95
2434162	978-1-5364-9289-7	Secret Library by Kekla Magoon	Fic	$22.95	1	$22.95
2400909	978-1-78269-418-2	Secret of Helmersbruck Manor by Eva Frantz	Fic	$17.50	1	$17.50
2424991	978-1-6659-5021-3	Secrets of Lovelace Academy by Marie Benedict	Fic	$12.59	1	$12.59
2450904	979-8-88777-193-9	Secrets of the Snakestone by Piu DasGupta	Fic	$12.59	1	$12.59
2435829	978-1-5364-9343-6	Selkie's Daughter by Linda Crotta Brennan	Fic	$22.95	1	$22.95
2400690	978-1-5476-1513-1	Serpent Rider by Yxavel Magno Dino	Fic	$12.59	1	$12.59
2433379	978-0-06-320778-3	Severe and Unusual Weather by Jessie Ann Foley	Fic	$13.99	1	$13.99
2404490	978-1-5362-2896-0	Shadow Fox by Carlie Sorosiak	Fic	$12.59	1	$12.59
2409167	979-8-8747-1234-1	Shark Night by R. L. Stine	Fic	$11.89	1	$11.89
2402843	978-1-5364-8839-5	Simon Sort of Says by Erin Bow	Fic	$20.95	1	$20.95
2415026	978-1-5362-4112-9	Skylar and the K-Pop Principal by Luan Goldie	Fic	$13.29	1	$13.29
2435147	978-1-4197-7013-5	Smoke and Mirrors by Rosalyn Ransaw	Fic	$13.29	1	$13.29
2436822	978-1-5461-2608-9	Snoop by Gordon Korman	Fic	$13.29	1	$13.29
2413546	978-1-5362-1925-8	Snow by Meera Trehan	Fic	$13.29	1	$13.29
2432504	978-1-5362-3127-4	Someone's Gonna End up Crying by Johanna Knowles	Fic	$13.99	1	$13.99
2413682	978-1-250-90604-5	Song of Orphan's Garden by Nicole M. Hewitt	Fic	$12.59	1	$12.59
2404699	978-0-316-52383-7	Spellbound Solstice by Alexandria Rogers	Fic	$11.89	1	$11.89
2434373	978-1-6659-3011-6	Spelling It Out by Margaret Finnegan	Fic	$12.59	1	$12.59
2404356	978-1-368-09598-3	Spider-Man: Stories from the Spider-Verse by David Betancourt	Fic	$12.59	1	$12.59
2403939	978-0-06-321236-7	Split Second by Janae Marks	Fic	$13.99	1	$13.99
2419882	978-1-5364-9118-0	Spoonful of Time by Flora Ahn	Fic	$19.95	1	$19.95
2409069	979-8-217-02412-4	Stage Fright by Wendy Parris	Fic	$12.34	1	$12.34
2282521	978-0-8234-5040-4	Star That Always Stays by Anna Rose Johnson	Fic	$12.59	1	$12.59
2417730	978-0-8234-5644-4	Starry, Starry Heist by Karen Briner	Fic	$12.59	1	$12.59
2432483	978-1-5362-3639-2	Starstuff: Ten Science Fiction Stories to Celebrate New Possibilities	Fic	$13.99	1	$13.99
2436301	978-1-5362-4198-3	Stitch: Reimagining Frankenstein by Padraig Kenny	Fic	$12.59	1	$12.59
2417177	978-0-06-311585-9	Strongest Heart by Saadia Faruqi	Fic	$13.99	1	$13.99
2410436	978-1-339-01246-9	Swimming with Spies by Chrystyna Lucyk-Berger	Fic	$13.29	1	$13.29
2406742	978-1-368-00758-0	Sylvia Doe and the 100-Year Flood by Robert Beatty	Fic	$12.59	1	$12.59
2408368	978-0-06-332173-1	Take It from the Top by Claire Swinarski	Fic	$13.29	1	$13.29
2404650	978-0-316-53948-7	Tale of the Flying Forest by R. M. Romero	Fic	$12.59	1	$12.59
2438643	978-1-64614-566-9	Teacher of Nomad Land by Daniel Nayeri	Fic	$13.29	1	$13.29
2402729	978-1-77488-343-3	Team Park by Angela Ahn	Fic	$12.59	1	$12.59
2394061	978-0-06-285827-6	That Curious Thing by Chris Raschka	Fic	$15.39	1	$15.39
2403970	978-0-06-334699-4	Thea and the Mischief Makers by Tracy Badua	Fic	$13.29	1	$13.29
2390943	978-1-368-07640-1	Thor Quest: Fires of the Forgekeep (Marvel) by Jackson Lanzing	Fic	$10.49	1	$10.49
2436649	978-0-316-57716-8	Thrash Force by Raj Sidhu	Fic	$12.59	1	$12.59
2424848	978-1-9825-3774-6	Thrump-O-Moto by James Clavell	Fic	$13.99	1	$13.99
2449211	978-1-5362-3050-5	Tinkerers by Caroline Carlson	Fic	$13.29	1	$13.29
2423702	978-0-8234-5810-3	Tontine Caper by Dianne K. Salerni	Fic	$13.29	1	$13.29
2439074	978-1-6659-7763-0	Traitors in Space: A Pick-Your-Own-Path Adventure by Tim Collins	Fic	$13.29	1	$13.29
2453577	978-0-593-80982-2	Treasure of Ocean Parkway by Sarvenaz Tash	Fic	$12.59	1	$12.59
2450762	978-0-8028-5650-0	Tree That Was a World by Yorick Goldewijk	Fic	$13.29	1	$13.29
2422657	978-0-06-331164-0	Trouble with Secrets by Naomi Milliner	Fic	$13.99	1	$13.99
2408493	978-0-593-69262-2	Twits Next Door by Roald Dahl	Fic	$13.29	1	$13.29
2402894	978-1-64379-642-0	Two-Placed Heart by Doan Phuong Nguyen	Fic	$17.47	1	$17.47
2423100	978-0-316-57709-0	Unboxing Libby by Steph Cherrywell	Fic	$12.59	1	$12.59
2418256	978-1-6659-5970-4	Unfortunate Wishes of Nelly Young by Beth Garrod	Fic	$13.29	1	$13.29
2422121	978-1-5362-3904-1	Unlikely Heroes Club by Kate Foster	Fic	$12.59	1	$12.59
2448853	979-8-89013-031-0	Vale by Abigail Hing Wen	Fic	$13.97	1	$13.97
2402635	978-1-338-88503-3	Valor Wings by Sam Subity	Fic	$13.29	1	$13.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2417275	978-1-250-89983-5	Vanya and the Wild Hunt by Sangu Mandanna	Fic	$12.59	1	$12.59
2432815	978-1-63206-392-2	Village Beyond the Mist by Sachiko Kashiwaba	Fic	$12.60	1	$12.60
2407802	978-1-339-01220-9	We Do Not Welcome Our Ten-Year-Old Overlord by Garth Nix	Fic	$13.29	1	$13.29
2403991	978-0-06-332496-1	Weirdly Walter by Julia Walton	Fic	$13.29	1	$13.29
2439905	978-0-06-332475-6	Welcome to the Ghost Show by J. W. Ocker	Fic	$13.29	1	$13.29
2415119	978-0-374-39045-7	What Fell from the Sky by Adrianna Cuevas	Fic	$12.59	1	$12.59
2446044	978-1-5461-2498-6	What Happened Then by Erin Soderberg Downing	Fic	$13.29	1	$13.29
2402636	978-1-338-85694-1	When We Flew Away: A Novel of Anne Frank Before the Diary by Alice Hoffman	Fic	$13.99	1	$13.99
2440117	978-0-374-39278-9	Where Only Storms Grow: A Novel About the Dust Bowl by Alyssa Colman	Fic	$12.59	1	$12.59
2403940	978-0-06-308206-9	Wish Monster by J. A. White	Fic	$13.99	1	$13.99
2433510	978-0-316-57858-5	Wish Switch by Lynn Painter	Fic	$13.29	1	$13.29
2400787	978-1-5476-1257-4	Wishbone by Justine Pucella Winans	Fic	$13.29	1	$13.29
2410437	978-1-5461-0998-3	Wolves at the Door by Steve Watkins	Fic	$13.29	1	$13.29
2443536	978-0-358-65958-7	Words Apart by Aimee Lucido	Fic	$13.29	1	$13.29
2453073	978-1-64614-702-1	Xolo by Donna Barba Higuera	Fic	$13.99	1	$13.99
2433505	978-0-06-328499-9	Zarina Divided by Reem Faruqi	Fic	$13.99	1	$13.99
2439907	978-0-06-339665-4	Zed Moonstein Makes a Friend by Lance Rubin	Fic	$13.99	1	$13.99
2433826	978-1-4788-9055-3	Infinity Blast and the Labyrinth of Time by Brad Wright	Fic	$12.57	1	$12.57
2412395	978-0-06-337651-9	Meticulous Jones and the Skull Tattoo by Philippa Leathley	Fic	$13.99	1	$13.99
2419684	978-1-83629-001-8	Soni and the Life Drinkers by Shiko Nguru	Fic	$9.97	1	$9.97
2419670	978-1-83630-000-7	Ivy Newt and the Storm Witch by Derek Keilty	Fic	$9.44	1	$9.44
2454570	978-1-83630-025-0	Ivy Newt and the Time Thief by Derek Keilty	Fic	$12.59	1	$12.59
2452289	979-8-8752-2102-6	Gymnastics Courage by Jake Maddox	Fic	$19.49	1	$19.49
2452290	979-8-8752-2109-5	Pickleball Problems by Jake Maddox	Fic	$19.49	1	$19.49
2447493	978-1-63993-430-0	War of the Wasteland by Tyler Whitesides	Fic	$13.99	1	$13.99
2454153	978-1-250-37264-2	Firefox Moon by Eoin Colfer	Fic	$13.99	1	$13.99
2415254	978-0-593-64633-5	Home for Unusual Monsters by Shaun David Hutchinson	Fic	$12.59	1	$12.59
2414827	978-0-593-69911-9	Labyrinth of Souls by Leslie Vedder	Fic	$13.29	1	$13.29
2418223	978-1-6659-5047-3	Study in Secrets by Debbi Michiko Florence	Fic	$12.59	1	$12.59
2446057	978-1-5461-3243-1	Last Resort by Erin Entrada Kelly	Fic	$12.59	1	$12.59
2415846	978-1-5364-9041-1	Plum to the Rescue! by Matt Phelan	Fic	$20.95	1	$20.95
2418640	978-1-5364-9085-5	City of Wishes by Christina Soontornvat	Fic	$17.95	1	$17.95
2419197	979-8-7656-1969-8	Balancing Act by Max Marino	Fic	$22.99	1	$22.99
2419199	979-8-7656-1968-1	Quarterback Blues by Max Marino	Fic	$22.99	1	$22.99
2419200	979-8-7656-1970-4	Rookie Squad by Max Marino	Fic	$22.99	1	$22.99
2406802	978-0-593-64952-7	Like a Curse by Elle McNicoll	Fic	$12.59	1	$12.59
2438916	978-1-5344-9429-9	Little Vampire and the Family Chronicles by Angela Sommer-Bodenburg	Fic	$12.59	1	$12.59
2404152	978-1-5344-9423-7	Little Vampire in Danger by Angela Sommer-Bodenburg	Fic	$12.59	1	$12.59
2418279	978-1-5344-9426-8	Little Vampire in Misery Valley by Angela Sommer-Bodenburg	Fic	$12.59	1	$12.59
2424723	979-8-9888393-9-2	Deep-Sea Giants by Kevin Lovegreen	Fic	$13.97	1	$13.97
2424728	979-8-9916607-0-9	Shark On! by Kevin Lovegreen	Fic	$13.97	1	$13.97
2449494	978-0-06-325541-8	Lulu Sinagtala and the Battle for the Realms by Gail D. Villanueva	Fic	$13.99	1	$13.99
2423101	978-0-316-41253-7	Double Trouble Puzzle by James Patterson	Fic	$12.59	1	$12.59
2418846	978-1-5364-9091-6	Join the Club, Maggie Diaz by Nina Moreno	Fic	$19.95	1	$19.95
2437024	978-0-593-17997-0	Guardian's Quest by Kat Zhang	Fic	$12.59	1	$12.59
2418204	978-1-6659-4105-1	Maple's Formula for Victory by Kate McMillan	Fic	$10.49	1	$10.49
2393448	978-1-5364-8748-0	Spider-Man: The Bug Bite That Changed Everything by Ned Hartley	Fic	$16.95	1	$16.95
2435889	978-1-5248-9481-8	Matt Sprouts and the Search for the Chompy Wompers by Matthew Eicheldinger	Fic	$16.09	1	$16.09
2438955	978-1-6659-6416-6	Freakiest Trip Ever! by Wanda Coven	Fic	$10.49	1	$10.49
2415121	978-1-250-81434-0	Home Sweet Home by Tae Keller	Fic	$13.99	1	$13.99
2404040	978-0-06-338962-5	Still Sal by Kevin Henkes	Fic	$13.29	1	$13.29
2446395	978-0-316-55529-6	Secrets of the Purple Pearl by Kate McKinnon	Fic	$12.59	1	$12.59
2410146	978-0-06-316132-0	Sea Queen by Natasha Hastings	Fic	$13.99	1	$13.99
2393062	978-1-77488-182-8	Sleeping Giant by David A. Robertson	Fic	$12.59	1	$12.59
2443477	978-0-06-339256-4	Moonleapers by Margaret Peterson Haddix	Fic	$13.99	1	$13.99
2439830	978-0-06-325487-9	Dire Deeds of Doctor Gargo by Steve Behling	Fic	$11.19	1	$11.19
2433576	978-0-316-58225-4	Sleuths on the Loose by G. T. Karber	Fic	$11.19	1	$11.19

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2425043	978-1-77278-336-0	Classified Catnapping by Colleen Nelson	Fic	$13.27	1	$13.27
2404979	978-1-77278-327-8	Mystery at the Biltmore by Colleen Nelson	Fic	$12.57	1	$12.57
2448483	978-1-77278-348-3	Recipe for Robbery by Colleen Nelson	Fic	$13.27	1	$13.27
2402951	978-1-5364-8868-5	School of Phantoms by Kory Merritt	Fic	$20.95	1	$20.95
2450719	978-0-06-345005-9	No Sam! and the Meow of Deception by Drew Daywalt	Fic	$11.19	1	$11.19
2450712	978-0-06-331462-7	Nox Winters and the Stygian Serpent by Rochelle Hassan	Fic	$13.99	1	$13.99
2446728	978-1-4197-6406-6	Evolution Changes Everything! by Jorge Cham	Fic	$11.19	1	$11.19
2402305	978-1-4197-6410-3	Volcanoes Are Hot! by Jorge Cham	Fic	$11.19	1	$11.19
2419824	978-1-5364-9100-5	Omega Morales and the Curse of el Cucuy by Laekan Zea Kemp	Fic	$19.95	1	$19.95
2402311	978-1-951836-68-9	Star Horse: A Girl and Her Horse Take Center Stage by Sarah Maslin Nir	Fic	$11.89	1	$11.89
2415220	978-1-6659-6320-6	Quest of Danger by Stuart Gibbs	Fic	$12.59	1	$12.59
2422583	978-0-06-332649-1	Opal Watson: Private Eye by Brittany J. Thurman	Fic	$13.29	1	$13.29
2434088	978-1-5364-9275-0	Penny Draws a Best Friend by Sara Shepard	Fic	$19.95	1	$19.95
2446554	978-1-5364-9521-8	Penny Draws a Class Trip by Sara Shepard	Fic	$19.95	1	$19.95
2434090	978-1-5364-9277-4	Penny Draws a Secret Adventure by Sara Shepard	Fic	$19.95	1	$19.95
2436507	978-0-593-70034-1	Penny Draws a First Crush by Sara Shepard	Fic	$10.49	1	$10.49
2417401	978-0-593-70031-0	Penny Draws a Team Sport by Sara Shepard	Fic	$10.49	1	$10.49
2404457	978-1-6659-1647-9	Challenger by Terri Farley	Fic	$13.29	1	$13.29
2414525	978-0-06-330392-8	After Ever After by Alex London	Fic	$13.29	1	$13.29
2446096	978-0-316-57301-6	Pumpkin Princess and the Buried Castle by Steven Banbury	Fic	$13.29	1	$13.29
2412193	978-1-4549-4631-1	Quest Kids and the Mystery of the Goblin Gazebo by Mark Leiknes	Fic	$11.89	1	$11.89
2400534	978-1-6659-5232-3	Search for the Shadowsoul by Callie C. Miller	Fic	$13.29	1	$13.29
2418360	978-1-63993-326-6	Secret of Moonrise Manor by Stephanie Bearce	Fic	$13.99	1	$13.99
2427623	978-1-6690-8164-7	Reeya Rai and the Emerald Glasses by Anita Nahta Amin	Fic	$19.49	1	$19.49
2427624	978-1-6690-8178-4	Reeya Rai and the Fiery Cross of Goa by Anita Nahta Amin	Fic	$19.49	1	$19.49
2427625	978-1-6690-8171-5	Reeya Rai and the Legendary Cup by Anita Nahta Amin	Fic	$19.49	1	$19.49
2427626	978-1-6690-8157-9	Reeya Rai and the Lost Pirate City by Anita Nahta Amin	Fic	$19.49	1	$19.49
2408341	978-0-06-322505-3	On Precarious Peaks by Stacy Hinojosa	Fic	$13.29	1	$13.29
2437350	978-1-5364-9400-6	Cursed Catacombs by Nick Eliopulos	Fic	$20.95	1	$20.95
2404498	978-1-6659-4784-8	Rolling On by Jamie Sumner	Fic	$12.59	1	$12.59
2434157	978-1-5364-9285-9	Roswell Johnson Saves the World! by Chris Colfer	Fic	$19.95	1	$19.95
2412164	978-1-4197-5990-1	Secret of Matter by Ryan Calejo	Fic	$13.29	1	$13.29
2434388	978-1-5248-8679-0	Family Charms by Amelia Mora	Fic	$15.39	1	$15.39
2400377	978-1-5248-8677-6	Wizards in School by Amelia Mora	Fic	$15.39	1	$15.39
2408305	978-1-338-79254-6	Winter Frost by Liz Montague	Fic	$10.49	1	$10.49
2402327	978-1-4197-5685-6	Duke's Curse by Gregory Mone	Fic	$11.19	1	$11.19
2449042	979-8-88964-116-2	Nina and the Keeper of the Keystone by Marti Dumas	Fic	$11.89	1	$11.89
2446636	978-1-5364-9530-0	Sherlock Society by James Ponti	Fic	$19.95	1	$19.95
2443762	978-1-6659-3256-1	Hurricane Heist by James Ponti	Fic	$13.29	1	$13.29
2418183	978-1-5248-9629-4	Moving Up and Moving On by Rennie Dyball	Fic	$16.09	1	$16.09
2423427	978-0-593-48141-7	Sea Swept by Leah Cypess	Fic	$12.59	1	$12.59
2434460	978-1-5364-9296-5	Skandar and the Chaos Trials by A. F. Steadman	Fic	$22.95	1	$22.95
2460980	978-1-6659-8117-0	First Unicorn Rider: A World of Skandar Story by A. F. Steadman	Fic	$12.59	1	$12.59
2443813	978-1-6659-6623-8	Skandar and the Spirit War by A. F. Steadman	Fic	$13.29	1	$13.29
2404519	978-1-6659-4307-9	Sparrow Spreads Her Wings by Gail Donovan	Fic	$11.89	1	$11.89
2453671	978-1-6659-6329-9	Sparrow, Always by Gail Donovan	Fic	$11.89	1	$11.89
2403152	978-1-4549-5417-0	Fathomless by Samantha San Miguel	Fic	$12.59	1	$12.59
2425007	978-1-6659-5517-1	Spirit Service by Sarena Nanua	Fic	$12.59	1	$12.59
2449497	978-0-06-332631-6	City of Secrets by Marieke Nijkamp	Fic	$13.29	1	$13.29
2439097	978-1-6659-7936-8	Playing for Keeps by Lee Heart	Fic	$12.59	1	$12.59
2409797	978-1-5364-8951-4	Stella Diaz Leaps to the Future by Angela Dominguez	Fic	$17.95	1	$17.95
2418615	978-0-88448-972-6	Willy and Stone Fox by Robert Tate Miller	Fic	$11.89	1	$11.89
2424961	978-1-6659-6244-5	Storm Singer by Sarwat Chadda	Fic	$13.29	1	$13.29
2423402	978-0-593-37541-9	Destructo World by Yarrow Cheney	Fic	$13.29	1	$13.29
2434596	978-1-64595-199-5	Search for the Sunken Statue by Michael D. Beil	Fic	$12.59	1	$12.59
2439902	978-0-06-329822-4	Visitors by Yamile Saied Mendez	Fic	$11.19	1	$11.19
2451076	978-1-5364-9578-2	Taylors by Jen Calonita	Fic	$19.95	1	$19.95
2400684	978-0-374-38885-0	Team Chu and the Wild Ghost Chase by Julie C. Dao	Fic	$13.99	1	$13.99
2446417	978-1-5364-9487-7	(Not So) Superheroes by Swapna Haddow	Fic	$16.95	1	$16.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2390638	978-1-6659-0683-8	Theodora Hendrix and the Monstrous League of Monsters by Jordan Kopy	Fic	$13.99	1	$13.99
2439825	978-1-335-47138-3	Totally Popular by Brigid Martin	Fic	$13.99	1	$13.99
2330106	978-1-335-45374-7	Totally Psychic by Brigid Martin	Fic	$13.29	1	$13.29
2414798	978-0-593-88976-3	Pearl Buck: Jewel of the East by Ann Hood	Fic	$12.59	1	$12.59
2400553	978-1-6659-0133-8	Secrets of Lunis by Janelle McCurdy	Fic	$12.59	1	$12.59
2418274	978-1-6659-5763-2	River of Spirits by Shana Targosz	Fic	$13.29	1	$13.29
2452114	978-1-77321-977-6	Danica Dela Torre, Dream Detective by Mikaela Lucido	Fic	$13.99	1	$13.99
2402145	978-1-77321-896-0	Danica Dela Torre: Certified Sleuth by Mikaela Lucido	Fic	$13.99	1	$13.99
2408464	978-1-5362-2911-0	Greatest Host of All Time by Suma Subramaniam	Fic	$12.59	1	$12.59
2452961	978-1-5362-2912-7	Greatest Ranger of All Time by Suma Subramaniam	Fic	$12.59	1	$12.59
2408036	978-1-5364-8909-5	Secret of the Reaping by Kalynn Bayron	Fic	$19.95	1	$19.95
2404641	978-1-5476-1160-7	Rise of the Wrecking Crew by Kalynn Bayron	Fic	$13.29	1	$13.29
2417449	978-1-61963-903-4	My Mummy vs. Your Ghost by Paul Tobin	Fic	$13.29	1	$13.29
2419858	978-1-5364-9110-4	How to Win the Gruesome Games by Ryan Hammond	Fic	$19.95	1	$19.95
2414400	978-0-06-341513-3	Wolf Called Fire by Rosanne Parry	Fic	$13.29	1	$13.29
2444171	978-1-6659-5534-8	Mummy Snatcher Curse by Tiffany McDaniel	Fic	$13.99	1	$13.99
2392335	978-1-6659-5531-7	Sky Full of Dragons by Tiffany McDaniel	Fic	$13.29	1	$13.29
2387489	978-1-250-88619-4	Spindle of Fate by Aimee Lim	Fic	$12.59	1	$12.59
2436849	978-1-250-88622-4	Thread of Destiny by Aimee Lim	Fic	$12.59	1	$12.59
2400549	978-1-6659-4720-6	Rise of the Spider by Michael P. Spradlin	Fic	$12.59	1	$12.59
2436096	978-1-6659-4723-7	Threat of the Spider by Michael P. Spradlin	Fic	$12.59	1	$12.59
2438621	978-0-316-57269-9	Weirdies by Michael Buckley	Fic	$10.49	1	$10.49
2443910	978-1-6659-5084-8	Into the Fire by Ann Brashares	Fic	$13.29	1	$13.29
2435917	978-1-6659-5016-9	Impossible Trials of Benjamiah Creek by Jordan Lees	Fic	$13.99	1	$13.99
2427809	978-1-6690-8610-9	Adrift on the Indian Ocean by Ailynn Collins	Fic	$20.99	1	$20.99
2427810	978-1-6690-8617-8	Lost in Saskachoo Swamp by Thomas Kingsley Troupe	Fic	$20.99	1	$20.99
2427811	978-1-6690-8603-1	Missing on Matridge Mountain by Thomas Kingsley Troupe	Fic	$20.99	1	$20.99
2427812	978-1-6690-8596-6	Stranded in the Mojave Desert by Ailynn Collins	Fic	$20.99	1	$20.99
2439852	978-1-5364-9431-0	Captivity by Roland Smith	Fic	$24.95	1	$24.95
2439785	978-1-5364-9430-3	Vaquita by Roland Smith	Fic	$24.95	1	$24.95
2454173	978-1-250-33139-7	Harper and the Horse Show Sabotage by Kaitlyn Sage Patterson	Fic	$12.59	1	$12.59
2415093	978-1-250-33136-6	Presley and the Impossible Dream by Kaitlyn Sage Patterson	Fic	$12.59	1	$12.59
2406846	978-1-338-85384-1	House of Elephants by Claribel A. Ortega	Fic	$12.59	1	$12.59
2446457	978-1-5461-4531-8	Scepter of Memories by Claribel A. Ortega	Fic	$13.29	1	$13.29
2423348	978-1-915071-62-0	Forest Yet to Come by Sam Thompson	Fic	$11.89	1	$11.89
2435078	978-0-316-41202-5	Great Mouse Escape by James Patterson	Fic	$12.59	1	$12.59
2424921	978-1-5248-9038-4	Journey to the Center of Time by Dustin Brady	Fic	$15.39	1	$15.39
2434061	978-1-5364-9256-9	Thursday by Eva Amores	Fic	$17.95	1	$17.95
2402913	978-1-5364-8857-9	Wednesday by Eva Amores	Fic	$17.95	1	$17.95
2423420	978-0-593-96156-8	Mayan Pyramid Mystery by Becky Baines	Fic	$10.49	1	$10.49

Total quantity	471 Titles(471 Books)
Subtotal	$6,783.41
Processing Options Total	$1,554.30
Shipping & Handling	$135.67
Shipping Discount	-$135.67
Tax	$854.62
Grand Total	$9,192.33

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: JUVENILE CHAPTER BOOKS ODC 1
List#: 207790
Date: 2/17/2026 6:15:34 PM
Total quantity: 221 Titles(221 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	221	$729.30

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2453751	978-0-593-81224-2	Find That Ferret! by Ron Roy	Fic	$12.34	1	$12.34
2448363	978-1-64607-177-7	Drought, Wind, and Fire by Marianne Hering	Fic	$10.49	1	$10.49
2448407	978-1-77321-995-0	Salma Speaks Up by Danny Ramadan	Fic	$13.99	1	$13.99
2452098	978-1-77840-277-7	Sketch by Jacques Goldstyn	Fic	$13.97	1	$13.97
2452147	979-8-8752-0651-1	Ali the Great, Swimming Champ by Saadia Faruqi	Fic	$16.99	1	$16.99
2445964	978-1-4998-1725-6	Winter Festival by A. I. Newton	Fic	$11.89	1	$11.89
2448844	978-1-4788-8034-9	Other Side of the Wall by Adria Quinones	Fic	$11.87	1	$11.87
2434566	978-1-5362-2971-4	Ava Lin, Super-Duper Happy by Vicky Fang	Fic	$11.89	1	$11.89
2494098	979-8-8752-3878-9	Screams-a-Lotl's Spooky Night by C.W. Estes	Fic	$16.99	1	$16.99
2494100	979-8-8752-3854-3	Tags-a-Lotl Is It by C.W. Estes	Fic	$16.99	1	$16.99
2446461	978-1-5364-9501-0	Karen's Brothers by Ann M. Martin	Fic	$16.95	1	$16.95
2460712	978-1-5364-9663-5	Karen's Home Run by Ann M. Martin	Fic	$17.95	1	$17.95
2437212	978-1-5364-9357-3	Bad Guys 2 Movie Novelization by Kate Howard	Fic	$16.95	1	$16.95
2461542	978-1-5364-9682-6	Best of the Worst by Maria S. Barbo	Fic	$17.95	1	$17.95
2486771	978-1-250-78244-1	Bad Kitty: Kitten Trouble by Nick Bruel	Fic	$10.49	1	$10.49
2446779	978-1-5364-9552-2	Indu's Time to Shine by Yasmine Naghdi	Fic	$16.95	1	$16.95
2446780	978-1-5364-9553-9	Yara's Chance to Dance by Yasmine Naghdi	Fic	$16.95	1	$16.95
2432565	978-1-64595-271-8	Fetch! by Maria Bea Alfano	Fic	$11.89	1	$11.89
2453111	978-1-64595-272-5	Leave It! by Maria Bea Alfano	Fic	$11.89	1	$11.89
2452086	978-1-4788-8049-3	Becca the Brave and Warren the Worst by Judith Henderson	Fic	$11.17	1	$11.17
2452168	979-8-8752-1257-4	Betty the Yeti Has a Snow Day by Mandy R. Marx	Fic	$16.99	1	$16.99
2455526	978-1-64519-917-5	Bigfoot Goes to Yellowstone by Kelley Barth	Fic	$23.07	1	$23.07

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2455512	978-1-64519-921-2	Bigfoot Goes to the Amusement Park by Kelley Barth	Fic	$23.07	1	$23.07
2455516	978-1-64519-918-2	Bigfoot Goes to the Zoo by Kelley Barth	Fic	$23.07	1	$23.07
2453620	979-8-217-14335-1	Bluey: The Sign	741.5	$10.49	1	$10.49
2452174	979-8-8752-1158-4	Bo Finds the Bright Side by Andrew Bambridge	Fic	$16.99	1	$16.99
2452175	979-8-8752-1150-8	Bo Takes a Breath by Andrew Bambridge	Fic	$16.99	1	$16.99
2452177	979-8-8752-1174-4	Musical Shoes by Andrew Bambridge	Fic	$16.99	1	$16.99
2435594	978-1-5364-9318-4	Dive for the Black Pearl by Robin Yardi	Fic	$16.95	1	$16.95
2460714	978-1-5364-9665-9	Pug the Unicorn by Kyla May	Fic	$17.95	1	$17.95
2437208	978-1-5364-9355-9	Super Pug by Kyla May	Fic	$16.95	1	$16.95
2440200	978-1-5364-9438-9	Magic of the Wizard Dragon by Tracey West	Fic	$16.95	1	$16.95
2459806	978-1-5364-9651-2	Vortex of the Chaos Dragon by Tracey West	Fic	$17.95	1	$17.95
2459805	978-1-5364-9650-5	Super Jump Between Worlds! by Thomas Flintham	Fic	$17.95	1	$17.95
2494083	979-8-2952-0086-1	Corner Kick! by Andrew Maraniss	Fic	$17.95	1	$17.95
2446108	978-1-5461-2006-3	Hut! Hut! Hike! by Andrew Maraniss	Fic	$23.74	1	$23.74
2485417	978-1-6659-8658-8	Bravepaw and the Heartstone of Alluria by L. M. Wilkinson	Fic	$9.79	1	$9.79
2455529	978-1-64519-939-7	Babysitting Trouble by Paul Morton	Fic	$23.07	1	$23.07
2460760	978-1-5362-4030-6	Bunny and Clyde on the Lam by Megan McDonald	Fic	$13.29	1	$13.29
2452181	979-8-8752-1913-9	Goodbye Garbage by D. L. Green	Fic	$16.99	1	$16.99
2452183	979-8-8752-1916-0	Mystery of the Missing Book by D. L. Green	Fic	$16.99	1	$16.99
2452184	979-8-8752-1915-3	Problems on the Pitch by D. L. Green	Fic	$16.99	1	$16.99
2445688	979-8-3849-2186-8	New to the Crew by Emily L. Hay Hinsdale	Fic	$23.95	1	$23.95
2493435	979-8-3849-2309-1	Autumn Sounds the Alarm by Emma Bland Smith	Fic	$23.95	1	$23.95
2493436	979-8-3849-2310-7	Charlie Brings the Cheer by Emma Bland Smith	Fic	$23.95	1	$23.95
2493437	979-8-3849-2311-4	Nico Follows His Nose by Emma Bland Smith	Fic	$23.95	1	$23.95
2493439	979-8-3849-2313-8	Sam Gets Schooled by Emma Bland Smith	Fic	$23.95	1	$23.95
2445661	979-8-3849-2192-9	(NOT) Cuban Valentines by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2445662	979-8-3849-2190-5	Easter Bunny Race by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2445663	979-8-3849-2191-2	Halloween Contest by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2445664	979-8-3849-2193-6	Posaditas by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2445665	979-8-3849-2194-3	Shamrock Shake-up by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2445666	979-8-3849-2195-0	Thanksgiving Squabble by Terry Catasus Jennings	Fic	$27.95	1	$27.95
2449198	978-1-5362-3943-0	Secret and Other Stories by Jarvis	Fic	$11.89	1	$11.89
2455535	978-1-64519-949-6	Ant Attack! by Robin Twiddy	Fic	$23.07	1	$23.07
2455536	978-1-64519-951-9	Kitty Caper by Kirsty Holmes	Fic	$23.07	1	$23.07
2455538	978-1-64519-952-6	Monkey Business by Kirsty Holmes	Fic	$23.07	1	$23.07
2433049	978-1-4549-4227-6	Little Princess by Frances Hodgson Burnett	Fic	$6.99	1	$6.99
2457228	978-1-0398-8100-6	Dazzling Director by Stephanie Moore	Fic	$24.50	1	$24.50
2457229	978-1-0398-8096-2	Dynamic Doctor by Stephanie Moore	Fic	$24.50	1	$24.50
2453673	978-1-6659-6364-0	Ellie Finds Her Voice by Callie Barkley	Fic	$12.59	1	$12.59
2485396	978-1-6659-8976-3	Liz Plays Matchmaker by Callie Barkley	Fic	$12.59	1	$12.59
2460786	978-1-5364-9670-3	Natalie's Sprinkle of Light by Coco Simon	Fic	$16.95	1	$16.95
2460819	978-1-5364-9675-8	Ren's Cupcake Mission by Coco Simon	Fic	$16.95	1	$16.95
2494220	979-8-8752-4604-3	Bane's Batcave Blitz: Featuring Batgirl! by Steve Korte	Fic	$18.99	1	$18.99
2452126	979-8-8752-0892-8	Clayface's Shape-Shift Showdown: Featuring The Signal! by Steve Korte	Fic	$18.99	1	$18.99
2452128	979-8-8752-0873-7	Mr. Freeze's Coldest Case: Featuring Bluebird! by Steve Korte	Fic	$18.99	1	$18.99
2494221	979-8-8752-4596-1	Poison Ivy's Wicked Spell by Steve Korte	Fic	$18.99	1	$18.99
2452129	979-8-8752-0900-0	Riddler's Puzzle Prank: Featuring Nightwing! by Steve Korte	Fic	$18.99	1	$18.99
2450761	978-1-6659-6673-3	Beast Mode Unleashed by Andres Miedoso	Fic	$12.59	1	$12.59
2446811	978-1-4197-8048-6	Mystery at Emerald Pond by Henry Winkler	Fic	$10.49	1	$10.49
2452757	979-8-8816-0342-7	Hour of Enchantment by Cube Kid	Fic	$15.39	1	$15.39
2493789	978-1-368-10758-7	Green Jolene and the Backyard Bees by Wendy Mass	Fic	$10.49	1	$10.49
2451602	978-1-5364-9600-0	Ocean Chase by Kieran Larwood	Fic	$20.95	1	$20.95
2463545	978-1-4788-9073-7	Wild Ride by Nikki Grimes	Fic	$11.87	1	$11.87
2463407	978-1-7972-1375-0	Ella Josephine and the Perfectly Imperfect Day by Nina LaCour	Fic	$10.49	1	$10.49
2452234	979-8-8752-0621-4	Special Pumpkin by C. L. Reid	Fic	$16.99	1	$16.99
2452235	979-8-8752-0629-0	Speedy Sled by C. L. Reid	Fic	$16.99	1	$16.99
2462109	978-1-6659-8401-0	Wish for Lily by Bea Jackson	Fic	$12.59	1	$12.59
2486624	979-8-2952-0070-0	Eliza And The Hobgoblins by Megan McDonald	Fic	$16.95	1	$16.95
2462120	978-1-6659-8964-0	Flutterfly Effect by Hannah Fay	Fic	$12.59	1	$12.59

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2462118	978-1-6659-8961-9	No Rain, No Rainbow by Hannah Fay	Fic	$12.59	1	$12.59
2463489	978-1-4642-6885-4	Princess And The Unicorn by A.M. Luzzader	Fic	$10.49	1	$10.49
2463491	978-1-4642-6889-2	Princess and the Dragon by A. M. Luzzader	Fic	$10.49	1	$10.49
2433321	978-0-06-311628-3	Mermaid Mission by Monica Brown	Fic	$12.59	1	$12.59
2433347	978-0-06-311634-4	Pet Peeves by Monica Brown	Fic	$12.59	1	$12.59
2439741	979-8-7654-1183-4	George the Flybot and the Missing Coins of Black Canyon by Nessa Bellido Schwarz	Fic	$16.14	1	$16.14
2439742	979-8-7654-1184-1	George the Flybot and the Treasure of Cocos Island by Nessa Bellido Schwarz	Fic	$16.14	1	$16.14
2461543	978-1-5364-9683-3	Legend of Chocolate Hills by Geronimo Stilton	Fic	$19.95	1	$19.95
2453690	978-1-5461-4183-9	Midnight Heist by Geronimo Stilton	Fic	$13.99	1	$13.99
2446815	978-1-4197-8384-5	Ghoulia and the Sunken Secret by Barbara Cantini	Fic	$9.09	1	$9.09
2494248	979-8-8752-3913-7	Fisher Family, Hurricane Hosts by Hollie Michaels	Fic	$16.99	1	$16.99
2494249	979-8-8752-3889-5	Golda and Ezra's Animal Rescue by Hollie Michaels	Fic	$16.99	1	$16.99
2494251	979-8-8752-3905-2	Golda the Brave by Hollie Michaels	Fic	$16.99	1	$16.99
2450782	978-1-6659-7432-5	Snow Show by Cam Higgins	Fic	$12.59	1	$12.59
2493330	978-0-593-81296-9	You're a Winner, Gracie Wei by Kristen Mei Chase	Fic	$11.19	1	$11.19
2493694	978-0-593-81300-3	You're the Boss, Gracie Wei by Kristen Mei Chase	Fic	$11.19	1	$11.19
2446092	978-0-316-56773-2	Family Forever by Kallie George	Fic	$11.89	1	$11.89
2442805	978-1-5364-9477-8	Henry Heckelbeck Knights! Robots! Action! by Wanda Coven	Fic	$17.95	1	$17.95
2435834	978-1-5364-9346-7	Henry Heckelbeck and the Not-So-Dark Day by Wanda Coven	Fic	$17.95	1	$17.95
2442923	978-1-5364-9485-3	Henry and the Something New by Jenn Bailey	Fic	$16.95	1	$16.95
2463398	978-1-5362-2494-8	Hocus and Pocus and the Snow Day Sorcery by A. R. Capetta	Fic	$11.89	1	$11.89
2494461	979-8-8752-4204-5	Earth Day with Yasmin by Saadia Faruqi	Fic	$16.99	1	$16.99
2494462	979-8-8752-4212-0	Lunar New Year with Yasmin by Saadia Faruqi	Fic	$16.99	1	$16.99
2437347	978-1-5364-9397-9	Doom of the Darkwing by Cressida Cowell	Fic	$16.95	1	$16.95
2452277	979-8-8752-1495-0	Ana's Smart Move by Shannon McClintock Miller	Fic	$16.99	1	$16.99
2494276	979-8-8752-4746-0	Carly's Tough Task by Shannon Mcclintock Miller	Fic	$16.99	1	$16.99
2452279	979-8-8752-1511-7	Jack's Playground Plan by Shannon McClintock Miller	Fic	$16.99	1	$16.99
2452280	979-8-8752-1519-3	Sonia Speaks Up by Shannon McClintock Miller	Fic	$16.99	1	$16.99
2439510	978-1-6689-6417-0	Baylee Likes to Cheer by Elizabeth Scully	Fic	$22.45	1	$22.45
2439512	978-1-6689-6418-7	On a Flight by Elizabeth Scully	E	$22.45	1	$22.45
2439513	978-1-6689-6419-4	Rose and Her Goat by Elizabeth Scully	E	$22.45	1	$22.45
2439515	978-1-6689-6416-3	Stray Cat by Elizabeth Scully	E	$22.45	1	$22.45
2449522	978-1-62354-472-0	Growing Up Beth by Beth York	Fic	$11.89	1	$11.89
2463081	978-0-316-44216-9	Mighty Macy by Kwame Alexander	Fic	$11.89	1	$11.89
2451843	978-1-952397-30-1	Totally Possum by Trey Hays	Fic	$11.87	1	$11.87
2449235	978-1-5362-3281-3	Tove under the Tree by Larissa Theule	Fic	$12.59	1	$12.59
2486721	978-1-250-38718-9	Unlikely Tale of Chase and Finnegan by Jasmine Warga	Fic	$13.29	1	$13.29
2432695	978-1-68115-690-3	Warton and the King of the Skies by Russell Erickson	Fic	$13.27	1	$13.27
2493334	978-1-960616-37-1	Wildflower Girls: Quest to Save Unicorn Magic by Ashley Wall	Fic	$6.97	1	$6.97
2450802	978-1-6659-7486-8	Make Way for Ballet by Melody Mews	Fic	$12.59	1	$12.59
2462228	978-1-6659-7489-9	Sleepover Surprise by Melody Mews	Fic	$12.59	1	$12.59
2452283	979-8-8752-1724-1	Space Chase by Scott Nickel	Fic	$18.99	1	$18.99
2452284	979-8-8752-1740-1	Treasure Tracker by Scott Nickel	Fic	$18.99	1	$18.99
2494278	979-8-8752-4236-6	Indigo Undercover by Natasha Deen	Fic	$16.99	1	$16.99
2443438	978-0-06-331562-4	Super-Scary Sleepover by Dawn Quigley	Fic	$12.59	1	$12.59
2452291	979-8-8752-1328-1	Sparkling Space at the Planetarium by Fran Manushkin	Fic	$16.99	1	$16.99
2452292	979-8-8752-1336-6	Underwater Wonders at the Aquarium by Fran Manushkin	Fic	$16.99	1	$16.99
2437343	978-1-5364-9393-1	Olive Little Gets Crafty by Linda Urban	Fic	$16.95	1	$16.95
2453941	978-1-5364-9639-0	Theo Chang Is Not a Cat by Mike Jung	Fic	$16.95	1	$16.95
2453944	978-1-5364-9640-6	Thunder Nelson Does the Impossumble by Martha Brockenbrough	Fic	$16.95	1	$16.95
2486654	978-0-316-59438-7	Fia Hosein Finds Her Beat by Tracey Baptiste	Fic	$11.89	1	$11.89
2486658	978-0-316-59432-5	Sebastian Metzger Solves a Sticky Situation by Kyle Lukoff	Fic	$11.89	1	$11.89
2485445	978-1-6659-7324-3	Awake Among the Stars by Jordan Quinn	Fic	$12.59	1	$12.59
2437174	978-1-6659-7320-5	Guardian of the Sea by Jordan Quinn	Fic	$12.59	1	$12.59
2454646	979-8-7656-4857-5	Huxley Higgins, Fairy Catcher by Jenny Moore	Fic	$21.99	1	$21.99
2454647	979-8-7656-4860-5	Huxley Higgins, Vampire Hunter by Jenny Moore	Fic	$21.99	1	$21.99
2454648	979-8-7656-4859-9	Huxley Higgins, Worm Charmer by Jenny Moore	Fic	$21.99	1	$21.99
2454655	979-8-7656-2836-2	JoJo and the Glitter Girls by Annette M. Clayton	Fic	$23.99	1	$23.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2454656	979-8-7656-2834-8	JoJo and the Puppy by Annette M. Clayton	Fic				$23.99	$23.99
2492844	978-1-68115-720-7	Mysterious Lopsided Letter by Ellen Schwartz	Fic				$12.57	$12.57
2461058	978-0-316-57807-3	Ling and Ting's Lunar New Year: Two Times Lucky by Grace Lin	Fic				$11.89	$11.89
2434071	978-1-5364-9265-1	Curse of the Quakes by Megan Reyes	Fic				$16.95	$16.95
2453888	978-1-5364-9615-4	Search for the Sea Monster by Megan Reyes	Fic				$16.95	$16.95
2486635	978-0-316-58069-4	Lola Levine Runs Out of Steam by Monica Brown	Fic				$11.89	$11.89
2486631	978-0-316-58066-3	Lola Levine and the Dinosaur Scene by Monica Brown	Fic				$11.89	$11.89
2432561	978-0-8234-5780-9	Lone Wolf Goes to the Library by Kiah Thomas	Fic				$11.89	$11.89
2432564	978-0-8234-5779-3	Lone Wolf on Vacation by Kiah Thomas	Fic				$11.89	$11.89
2459813	978-1-5364-9658-1	Lucy Lancaster It's Opposite Day! by Willow Coven	Fic				$17.95	$17.95
2440238	978-1-5364-9461-7	Lucy Lancaster in the Spotlight by Willow Coven	Fic				$17.95	$17.95
2485412	978-1-6659-6412-8	Lucy Lancaster Wants a Rematch by Willow Coven	Fic				$12.59	$12.59
2456807	978-1-63163-961-6	Maggie Sparks and the School of Slime by Steve Smallman	Fic				$19.95	$19.95
2440243	978-1-5364-9463-1	Reptil and Ghost-Spider Join Forces! by MacKenzie Cadenhead	Fic				$14.95	$14.95
2446366	978-1-4197-7497-3	Marya Khan and the Abominable Ski Trip by Saadia Faruqi	Fic				$10.49	$10.49
2434978	978-0-593-89978-6	Maya and Rainbow by Julie Sykes	Fic				$12.34	$12.34
2452293	978-0-7565-8882-3	Bike Ride Guide by Kristin Smedley	Fic				$16.99	$16.99
2452295	978-0-7565-8881-6	Play It By Ear by Kristin Smedley	Fic				$16.99	$16.99
2452296	978-0-7565-8880-9	Super Surfing by Kristin Smedley	Fic				$16.99	$16.99
2453595	978-0-593-75277-7	Top Chef by Kelly Starling Lyons	Fic				$16.14	$16.14
2443211	978-0-593-61880-6	Millie Magnus for Mayor by Brittany Mazique	Fic				$12.59	$12.59
2446662	978-0-7534-8124-0	Milly-Molly-Mandy Storybook by Joyce Lankester Brisley	Fic				$11.19	$11.19
2449561	979-8-217-03223-5	Eyes of the Endermen! by Caleb Zane Huett	Fic				$7.69	$7.69
2493723	979-8-217-11935-6	When the Warden Calls by Caleb Zane Huett	Fic				$7.69	$7.69
2439114	978-1-4197-7242-9	Discovery of Dragons by Leah Cypess	Fic				$13.99	$13.99
2484828	979-8-2952-0069-4	Stormy Weather by Brett Bean	Fic				$16.95	$16.95
2435604	978-1-5364-9322-1	Murray the Knight by Adam Stower	Fic				$16.95	$16.95
2462927	979-8-2952-0009-0	Murray the Pirate by Adam Stower	Fic				$16.95	$16.95
2435612	978-1-5364-9323-8	Murray the Viking by Adam Stower	Fic				$16.95	$16.95
2437153	978-1-6659-4300-0	No More Mr. Mice Guy by Jarrett Lerner	Fic				$12.59	$12.59
2437256	978-1-5364-9370-2	Fright Night! by Dan Gutman	Fic				$16.95	$16.95
2436436	978-0-06-329025-9	Fright Night! by Dan Gutman	Fic				$13.29	$13.29
2451645	978-1-5364-9610-9	Miss Sherman Is Determined! by Dan Gutman	Fic				$16.95	$16.95
2484242	979-8-2952-0044-1	Mrs. Granger Is in Danger! by Dan Gutman	Fic				$16.95	$16.95
2434926	979-8-8816-0179-9	Welcome to the End by Cube Kid	Fic				$13.99	$13.99
2443164	978-1-5362-2552-5	Lost Evangeline by Kate DiCamillo	Fic				$12.59	$12.59
2439992	978-0-593-75318-7	Only Ghost at Summer Camp by Tara J. Hannon	Fic				$11.89	$11.89
2439989	978-0-593-75315-6	Only Ghost in School by Tara J. Hannon	Fic				$11.89	$11.89
2440231	978-1-5364-9456-3	When Fairies Go Too Far by Kate Korsh	Fic				$17.95	$17.95
2436647	979-8-88777-169-4	Wicked Wood by Kirsty Applebaum	Fic				$10.49	$10.49
2324526	978-1-5364-7887-7	Aaron Slater and the Sneaky Snake by Andrea Beaty	Fic				$17.95	$17.95
2278256	978-1-5364-7324-7	Ada Twist and the Disappearing Dogs by Andrea Beaty	Fic				$17.95	$17.95
2462279	978-1-6659-1780-3	Wiggles of Medusa by Joan Holub	Fic				$12.59	$12.59
2438560	978-1-6672-0984-5	This Lake Is Fake! by Julian Gough	Fic				$6.99	$6.99
2437285	978-1-6659-6355-8	I'm No Scaredy-Rat by Cam Higgins	Fic				$12.59	$12.59
2453816	978-1-6659-8100-2	In the Pet House by Cam Higgins	Fic				$12.59	$12.59
2462217	978-1-6659-8854-4	Pie-Rat on Seventh Street by Cam Higgins	Fic				$12.59	$12.59
2453109	978-1-5362-2767-3	Box of Possibilities by Janet Costa Bates	Fic				$11.89	$11.89
2390639	978-1-6659-2209-8	Welcome to Scare School by Jarrett Lerner	Fic				$12.59	$12.59
2462188	979-8-3471-0203-7	Leader of the Pack by Cam Higgins	Fic				$12.59	$12.59
2462189	979-8-3471-0206-8	Pup vs. Squirrel by Cam Higgins	Fic				$12.59	$12.59
2435159	978-1-4197-6752-4	Lucky Day by Lourdes Heuer	Fic				$10.49	$10.49
2484898	978-1-5362-3901-0	Not-So-Bossy Best Friend by Kirby Larson	Fic				$11.89	$11.89
2484953	978-0-8234-5943-8	Mystery In The Grand Canyon by Dusti Bowling	Fic				$11.89	$11.89
2450922	978-1-64375-007-1	Rock Paper Incisors by Amy Timberlake	Fic				$13.29	$13.29
2452334	979-8-8752-1198-0	Stable Snob by Mari Bolte	Fic				$17.99	$17.99
2452335	979-8-8752-1212-3	Stakeout at the Stables by Mari Bolte	Fic				$17.99	$17.99
2443715	978-1-7972-1971-4	Mermaids and Mix-Ups by Annie Barrows	Fic				$11.19	$11.19
2446740	978-1-5364-9542-3	Story of Gumluck and the Dragon's Eggs by Adam Rex	Fic				$17.95	$17.95
2438707	978-1-338-68785-9	Adventures of Super Diaper Baby (Color Edition) by Dav Pilkey	Fic				$10.49	$10.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2494449	979-8-8752-3965-6	Tana Cooks for Field Day Fun by Stacy Wells	Fic	$17.99	1	$17.99
2452403	979-8-8752-1236-9	Tana Cooks to Beat a Bad Day by Stacy Wells	Fic	$17.99	1	$17.99
2453947	978-1-5364-9641-3	Too Small Tola Makes It Count by Atinuke	Fic	$16.95	1	$16.95
2439089	978-1-6659-7773-9	Chaos in Witwicky! by Ryder Windham	Fic	$12.59	1	$12.59
2462349	978-1-5364-9703-8	Tuck and Tina and the Boone School Ghost by Jess Brallier	Fic	$22.95	1	$22.95
2446697	978-1-5364-9535-5	Tuck and Tina and the Lost Fortune by Jess Brallier	Fic	$22.95	1	$22.95
2493679	978-1-223-18969-7	Who Stole the Mermaid's Purse? by Becky Baines	Fic	$18.04	1	$18.04
2451606	978-1-5364-9602-4	Dance Show by Ana Punset	Fic	$16.95	1	$16.95
2462370	978-1-5364-9711-3	Frozen Palace by Ana Punset	Fic	$16.95	1	$16.95
2492959	978-1-4197-7744-8	Don't Eat the Birthday Boy! by Donna Barba Higuera	Fic	$10.49	1	$10.49
2462111	978-1-6659-6946-8	Venus Washington and the Lasagna Drama by Maisha Oso	Fic	$12.59	1	$12.59
2443914	978-1-6659-7357-1	Not Ready Player One by Andy Nonamus	Fic	$12.59	1	$12.59
2444259	978-1-5253-1157-4	Wednesday Wilson Looks on the Fright Side by Bree Galbraith	Fic	$11.19	1	$11.19
2450706	978-0-00-864808-4	House at Pooh Corner (100th Anniversary Edition) by A. A. Milne	Fic	$13.99	1	$13.99
2450705	978-0-00-864802-2	Now We Are Six (100th Anniversary Edition) by A. A. Milne	Fic	$13.99	1	$13.99
2450704	978-0-00-864798-8	When We Were Very Young (100th Anniversary Edition) by A. A. Milne	Fic	$13.99	1	$13.99
2443084	978-0-593-97147-5	Spell for Disaster by Jennie Poh	Fic	$13.29	1	$13.29
2438892	979-8-217-02586-2	Changing Magic by Kara LaReau	Fic	$11.19	1	$11.19
2483303	979-8-217-02587-9	Puddles And Potions by Kara LaReau	Fic	$11.19	1	$11.19
2438889	979-8-217-02585-5	Sweet Magic by Kara LaReau	Fic	$11.19	1	$11.19
2442279	978-0-8075-8013-4	Freddie Ramos Cracks the Case by Jacqueline Jules	Fic	$10.49	1	$10.49
2440314	978-1-68369-460-1	Zoomi and Zoe and the Sibling Situation by Corey Ann Haydu	Fic	$11.19	1	$11.19

Total quantity	221 Titles(221 Books)
Subtotal	$3,494.78
Processing Options Total	$729.30
Shipping & Handling	$69.90
Shipping Discount	-$69.90
Tax	$432.97
Grand Total	**$4,657.05**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: JUVENILE BEGINNER READER ODC 1
List#: 207788
Date: 2/17/2026 6:14:57 PM
Total quantity: 449 Titles(449 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	449	$1,481.70

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2407819	978-1-338-89505-6	Help the Strong Cheetah (The Inside Scouts) by Mitali Banerjee Ruths	E	$22.79	1	$22.79
2451053	978-1-5364-9570-6	Ember the Fire Dragon (Dragon Hill) by Tracey West	E	$16.95	1	$16.95
2494507	979-8-2952-0088-5	Gus the Mushroom Dragon (Dragon Hill) by Tracey West	E	$16.95	1	$16.95
2414019	978-1-5364-8988-0	I Can Grow It! (Princess Truly) by Kelly Greenawalt	E	$16.95	1	$16.95
2418848	978-1-5364-9092-3	Poppleton Has Fun by Cynthia Rylant	E	$14.95	1	$14.95
2402907	978-1-5364-8855-5	Razzle Dazzle (Unicorn and Yeti) by Heather Ayris Burnell	E	$16.95	1	$16.95
2458700	979-8-225-00825-3	Dragon Tales (Dragon) by Dav Pilkey	E	$10.49	1	$10.49
2449322	978-0-593-90198-4	Bears' Christmas (The Berenstain Bears) by Stan Berenstain	E	$6.99	1	$6.99
2461881	979-8-217-03246-4	Best Bunny Brother Ever by Marilyn Sadler	E	$6.99	1	$6.99
2432733	978-0-593-64623-6	Gertrude Gish on a Dish on a Fish by Sarah Hwang	E	$6.99	1	$6.99
2412165	978-0-593-64621-2	Hello, Sun! by Lala Watkins	E	$6.99	1	$6.99
2461864	979-8-217-11764-2	If It Were My Birthday Party by Dr. Seuss	E	$6.99	1	$6.99
2461869	978-0-593-64627-4	Momo Sees the Sea by Avani Dwivedi	E	$6.99	1	$6.99
2418579	978-0-394-87180-6	On the Moon (Berenstain Bears) by Stan Berenstain	E	$6.99	1	$6.99
2444950	979-8-89304-438-6	Green by Rachael Barnes	580	$20.97	1	$20.97
2423927	979-8-89304-211-5	EMTs by Amy McDonald	362.18	$20.97	1	$20.97
2396251	979-8-88687-008-4	Firefighters by Betsy Rathburn	363.37	$20.97	1	$20.97
2423930	979-8-89304-213-9	Garbage Collectors by Amy McDonald	628.4	$20.97	1	$20.97
2423932	979-8-89304-214-6	Librarians by Amy McDonald	020.92	$20.97	1	$20.97
2444971	979-8-89304-433-1	Light and Dark by Amy McDonald	551	$20.97	1	$20.97
2444972	979-8-89304-434-8	Loud and Quiet by Amy McDonald	307	$20.97	1	$20.97
2396351	979-8-88687-016-9	Concrete Mixers by Mari C. Schuh	624.1	$20.97	1	$20.97
2423955	979-8-89304-217-7	Foxes by Clare Koll	599.775	$20.97	1	$20.97

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2445033	979-8-89304-445-4	Baby Hedgehog or Baby Porcupine? by Kirsten Chang	599.33	$20.97	1	$20.97
2396338	979-8-88687-975-9	Pangolins by Rachel A. Koestler-Grack	599.3	$20.97	1	$20.97
2445064	979-8-89304-486-7	How Do You Build a Bridge? by Bryan Langdo	530	$20.97	1	$20.97
2445065	979-8-89304-487-4	How Do You Build a Car? by Bryan Langdo	530	$20.97	1	$20.97
2445067	979-8-89304-489-8	How Do You Build a House? by Bryan Langdo	530	$20.97	1	$20.97
2445068	979-8-89304-490-4	How Do You Build a Ship? by Bryan Langdo	530	$20.97	1	$20.97
2445069	979-8-89304-491-1	How Do You Build an Airplane? by Bryan Langdo	530	$20.97	1	$20.97
2396396	979-8-88687-037-4	Copperheads by Suzane Nguyen	597.963	$20.97	1	$20.97
2396397	979-8-88687-038-1	Corn Snakes by Joanne Mattern	597.962	$20.97	1	$20.97
2445102	979-8-89304-479-9	Sea Snakes by Joanne Mattern	597.96	$20.97	1	$20.97
2396400	979-8-88687-041-1	Sidewinders by Joanne Mattern	597.96	$20.97	1	$20.97
2423990	979-8-89304-237-5	Axlotols by Chris Bowman	597.8	$20.97	1	$20.97
2445115	979-8-89304-464-5	Brown Bats by Janie Scheffer	590	$20.97	1	$20.97
2423989	979-8-89304-239-9	Gray Squirrels by Janie Scheffer	599.36	$20.97	1	$20.97
2423987	979-8-89304-240-5	Great White Sharks by Janie Scheffer	597.3	$20.97	1	$20.97
2423985	979-8-89304-241-2	Koalas by Janie Scheffer	599.2	$20.97	1	$20.97
2445117	979-8-89304-466-9	Komodo Dragons by Chris Bowman	597.95	$20.97	1	$20.97
2445118	979-8-89304-467-6	Mountain Goats by Janie Scheffer	599.64	$20.97	1	$20.97
2445119	979-8-89304-468-3	Narwhals by Chris Bowman	599.5	$20.97	1	$20.97
2445122	979-8-89304-471-3	Porcupines by Janie Scheffer	599.35	$20.97	1	$20.97
2445123	979-8-89304-472-0	Puffins by Chris Bowman	598.33	$20.97	1	$20.97
2445124	979-8-89304-473-7	Red Pandas by Chris Bowman	599.76	$20.97	1	$20.97
2423986	979-8-89304-244-3	Rock Hyraxes by Chris Bowman	599.32	$20.97	1	$20.97
2423988	979-8-89304-245-0	Sea Horses by Chris Bowman	597.6798	$20.97	1	$20.97
2396442	979-8-88687-978-0	Barred Owls by Rachael Barnes	598.9	$20.97	1	$20.97
2396443	979-8-88687-979-7	Saw-whet Owls by Rachael Barnes	590	$20.97	1	$20.97
2396444	979-8-88687-980-3	Screech Owls by Rachael Barnes	598.9	$20.97	1	$20.97
2396445	979-8-88687-981-0	Snowy Owls by Rachael Barnes	598.9	$20.97	1	$20.97
2396318	979-8-88687-990-2	Ants by Rebecca Pettiford	595.79	$20.97	1	$20.97
2396330	979-8-88687-993-3	Honeybees by Rebecca Pettiford	595.79	$20.97	1	$20.97
2445133	979-8-89304-510-9	Bee Hives by Rachel Grack	595.79	$20.97	1	$20.97
2445134	979-8-89304-511-6	Flamingo Flocks by Rachel Grack	590	$20.97	1	$20.97
2445135	979-8-89304-512-3	Hyena Clans by Rachel Grack	590	$20.97	1	$20.97
2445136	979-8-89304-513-0	Lion Prides by Rachel Grack	590	$20.97	1	$20.97
2445137	979-8-89304-514-7	Orca Pods by Rachel A. Koestler-Grack	599.53	$20.97	1	$20.97
2396408	979-8-88687-043-5	African Lions by Janie Scheffer	599.757	$20.97	1	$20.97
2396411	979-8-88687-045-9	Bengal Tigers by Chris Bowman	599.756	$20.97	1	$20.97
2396413	979-8-88687-047-3	Canada Geese by Janie Scheffer	598.4	$20.97	1	$20.97
2396414	979-8-88687-968-1	Giant Pandas by Chris Bowman	599.789	$20.97	1	$20.97
2396415	979-8-88687-969-8	Gray Wolves by Chris Bowman	599.773	$20.97	1	$20.97
2396416	979-8-88687-970-4	Grizzly Bears by Chris Bowman	599.784	$20.97	1	$20.97
2396417	979-8-88687-971-1	Humpback Whales by Janie Scheffer	599.5	$20.97	1	$20.97
2396418	979-8-88687-972-8	Raccoons by Janie Scheffer	599.76	$20.97	1	$20.97
2396419	979-8-88687-973-5	Red Foxes by Chris Bowman	599.775	$20.97	1	$20.97
2424001	979-8-89304-255-9	Snow Leopards by Shannon Anderson	599.7555	$20.97	1	$20.97
2484441	979-8-2952-0062-5	Bluey: Bingo	E	$14.95	1	$14.95
2435826	978-1-5364-9340-5	Bluey: Hammerbarn	E	$14.95	1	$14.95
2451158	978-1-5364-9591-1	Granny Mobile (Bluey)	E	$14.95	1	$14.95
2433412	978-0-593-90583-8	Clam-I-Am! All About The Beach by Tish Rabe	578.769	$12.34	1	$12.34
2425133	978-0-593-90371-1	Fine Feathered Friends: All About Birds by Tish Rabe	598	$12.34	1	$12.34
2425136	978-0-593-90375-9	Happy Pi Day to You!: All About Measuring Circles by Bonnie Worth	513.2	$12.34	1	$12.34
2425138	978-0-593-90372-8	High? Low? Where Did It Go?: All about Animal Camouflage by Tish Rabe	591.47	$12.34	1	$12.34
2063257	978-0-375-82885-0	Ice Is Nice!: All About the North and South Poles by Bonnie Worth	910.911	$6.99	1	$6.99
2425147	978-0-593-90374-2	Inside Your Outside!: All About the Human Body by Tish Rabe	611	$12.34	1	$12.34
2425150	978-0-593-90370-4	Is a Camel a Mammal?: All About Mammals by Tish Rabe	599	$12.34	1	$12.34
2433420	978-0-593-90581-4	Miles and Miles of Reptiles: All About Reptiles by Tish Rabe	597.9	$12.34	1	$12.34
2425160	978-0-593-90369-8	My, Oh My, A Butterfly!: All About Butterflies by Tish Rabe	595.78	$12.34	1	$12.34
2425161	978-0-593-90378-0	Oh Say Can You Seed?: All About Flowering Plants by Bonnie Worth	580	$12.34	1	$12.34
2433426	978-0-593-90587-6	Safari, So Good!: All About African Wildlife by Bonnie Worth	591.96	$12.34	1	$12.34
2394935	978-1-0398-3866-6	Mara the Mermaid Meets a Dolphin by Amy Culliford	E	$18.50	1	$18.50
2394936	978-1-0398-3869-7	Mara the Mermaid Meets a Manatee by Amy Culliford	E	$18.50	1	$18.50

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2394937	978-1-0398-3867-3	Mara the Mermaid Meets a Sea Turtle by Amy Culliford	E				$18.50	$18.50
2394938	978-1-0398-3864-2	Mara the Mermaid Meets a Seahorse by Amy Culliford	E				$18.50	$18.50
2394940	978-1-0398-3868-0	Mara the Mermaid Meets a Walrus by Amy Culliford	E				$18.50	$18.50
2457033	978-1-0398-8021-4	Bad-ish Bunnies at the Beach by Laurie Friedman	E				$22.50	$22.50
2457053	978-1-0398-8020-7	Bad-ish Bunnies on the Bus by Laurie Friedman	E				$22.50	$22.50
2457060	978-1-0398-8018-4	Postcard from India by Laurie B. Friedman	E				$22.50	$22.50
2457061	978-1-0398-8019-1	Postcard from Mexico by Laurie B. Friedman	E				$22.50	$22.50
2484215	979-8-2952-0058-8	Meet the Crew (Pokemon) by Sophie Dryburgh	791.45				$14.95	$14.95
2462966	979-8-2952-0028-1	Meet the Ninja (LEGO Ninjago) by Laura Palosuo	E				$14.95	$14.95
2417350	978-1-5364-9068-8	New Journey (Pokemon) by Julia March	E				$13.95	$13.95
2414136	978-1-5364-9029-9	Princess Leia's Adventures (Star Wars) by Ruth Amos	E				$13.95	$13.95
2437274	978-1-5364-9373-3	Sweet Surprise (Pokemon) by Julia March	E				$13.95	$13.95
2436987	978-0-593-96239-8	Day in the Life of a Pilot by Paige Towler	387.7				$10.49	$10.49
2437146	978-0-593-96248-0	Day in the Life of a Scientist by Ruth A. Musgrave	509.2				$10.49	$10.49
2436991	978-0-593-96235-0	Day in the Life of a Teacher by Paige Towler	372.11				$10.49	$10.49
2417352	978-1-5364-9069-5	Battle Buddies! (Pokemon) by Lara Hutcheson	E				$13.95	$13.95
2484434	979-8-2952-0059-5	Here Come the Explorers (Pokemon) by Sophie Dryburgh	794.85				$14.95	$14.95
2462971	979-8-2952-0029-8	Pet Pals (LEGO Friends)	E				$14.95	$14.95
2437281	978-1-5364-9374-0	Ready, Set, Catch! (Pokemon) by Lara Hutcheson	E				$13.95	$13.95
2437148	978-0-593-96600-6	Daring Dinosaur by Rebecca Baines	567.9				$10.49	$10.49
2404766	978-0-593-84725-1	Dog Dude by Rebecca Baines	636.7				$10.49	$10.49
2436779	978-0-593-96647-1	Life in the Stone Age by Deborah Lock	930.1				$10.49	$10.49
2437149	978-0-593-96594-8	Prancing Pony by Rebecca Baines	599.665				$10.49	$10.49
2437150	978-0-593-96596-2	Sassy Sloth by Rebecca Baines	599.3				$10.49	$10.49
2404770	978-0-593-84723-7	Snarky Shark by Rebecca Baines	597.3				$10.49	$10.49
2417356	978-1-5364-9070-1	Go Team Spidey! (Marvel: Spidey and His Amazing Friends) by Frankie Hallam	E				$13.95	$13.95
2401913	978-0-7440-9446-6	Coyote's Tale by Angela Modany	599.76				$10.49	$10.49
2401920	978-0-593-84721-3	Eagle's Tale	598.9				$10.49	$10.49
2401924	978-0-593-84719-0	Mustang's Tale	636.1				$10.49	$10.49
2423229	978-0-593-64966-4	Bad Idea and Other Stories by Greg Pizzoli	E				$7.69	$7.69
2436640	978-0-593-64970-1	Big Mess and Other Stories by Greg Pizzoli	E				$7.69	$7.69
2453686	978-0-593-64974-9	Snow Problem and Other Stories by Greg Pizzoli	E				$7.69	$7.69
2454396	979-8-7656-7019-4	Job for Pop by Jenny Jinks	E				$22.99	$22.99
2454398	979-8-7656-7020-0	Popping Pam by Jenny Moore	E				$22.99	$22.99
2419107	979-8-7656-4719-6	Fish Thief by Jenny Moore	E				$22.99	$22.99
2419108	979-8-7656-4717-2	Hiding Hetty by Jenny Moore	E				$22.99	$22.99
2419109	979-8-7656-4718-9	Rolling Pumpkins by Heather Pindar	428.6				$22.99	$22.99
2419110	979-8-7656-4716-5	Shipwrecked by Jenny Jinks	E				$22.99	$22.99
2405265	979-8-7656-2708-2	My Pet & Full Bed by Rebecca Colby	E				$22.99	$22.99
2405272	979-8-7656-2711-2	In the Den & Mick and Mom by Elizabeth Dale	E				$22.99	$22.99
2405271	979-8-7656-2710-5	Robot Rocket & You Are It! by Rebecca Colby	428.6				$22.99	$22.99
2419113	979-8-7656-4721-9	Bigfoots at the Beach by Rebecca Colby	E				$22.99	$22.99
2419114	979-8-7656-4720-2	Catch That Star! by Jenny Jinks	E				$22.99	$22.99
2419115	979-8-7656-4722-6	In a Stew by Sheryl Webster	E				$22.99	$22.99
2454404	979-8-7656-7016-3	Magic Dad by Elizabeth Dale	E				$22.99	$22.99
2454406	979-8-7656-7017-0	Robber Rabbit by Alice Hemming	E				$22.99	$22.99
2434572	978-1-5362-1642-4	Elena Camps by Juana Medina	E				$7.69	$7.69
2446541	978-1-368-10899-7	Elephant & Piggie Biggie-Biggie!: Volume 2 by Mo Willems	E				$13.99	$13.99
2446543	978-1-368-10900-0	Elephant and Piggie Biggie! Volume 3 by Mo Willems	E				$13.99	$13.99
2446546	978-1-368-10902-4	Elephant and Piggie Biggie! Volume 5 by Mo Willems	E				$13.99	$13.99
2446540	978-1-368-10898-0	Elephant and Piggie Biggie!: Volume 1 by Mo Willems	E				$13.99	$13.99
2446544	978-1-368-10901-7	Elephant and Piggie Biggie!: Volume 4 by Mo Willems	E				$13.99	$13.99
2484186	979-8-2952-0052-6	Monster and Puppet Show! by Mo Willems	E				$22.95	$22.95
2444754	979-8-89213-867-3	Amy's First Airplane Ride by Katie Chanez	E				$20.99	$20.99
2401069	979-8-89213-041-7	Bri Goes to the Beach by Alyssa Krekelberg	E				$20.99	$20.99
2444678	979-8-89213-870-3	Drew's First Dance Class by Katie Chanez	E				$20.99	$20.99
2444679	979-8-89213-873-4	Fern's First Time at the Farm by Katie Chanez	E				$20.99	$20.99
2401071	979-8-89213-047-9	Hal Gets a Haircut by Alyssa Krekelberg	E				$20.99	$20.99
2401073	979-8-89213-053-0	Mel's Moving Day by Alyssa Krekelberg	E				$20.99	$20.99
2400948	979-8-89213-056-1	Sarah's First Soccer Game by Alyssa Krekelberg	E				$20.99	$20.99
2444770	979-8-89213-984-7	If I Made Friends with a Mastodon by Jenna Gleisner	E				$20.99	$20.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2401088	979-8-89213-089-9	Day with a Dentist by Mari Schuh	E	$20.99	1	$20.99
2401089	979-8-89213-092-9	Day with a Lifeguard by Mari Schuh	E	$20.99	1	$20.99
2401090	979-8-89213-095-0	Day with a Police Officer by Mari Schuh	E	$20.99	1	$20.99
2400951	979-8-89213-209-1	Neil Armstrong Lands on the Moon by Janie Havemeyer	629.45	$20.99	1	$20.99
2400952	979-8-89213-212-1	Sacajawea Explores the West by Janie Havemeyer	978.004	$20.99	1	$20.99
2427981	979-8-89213-474-3	Day in Ancient China by Janie Havemeyer	951	$20.99	1	$20.99
2427982	979-8-89213-477-4	Day in Ancient Egypt by Janie Havemeyer	932	$20.99	1	$20.99
2427983	979-8-89213-480-4	Day in Ancient Greece by Janie Havemeyer	938	$20.99	1	$20.99
2427984	979-8-89213-483-5	Day in Ancient Maya by Janie Havemeyer	972.81	$20.99	1	$20.99
2427985	979-8-89213-486-6	Day in Ancient Rome by Janie Havemeyer	937	$20.99	1	$20.99
2427986	979-8-89213-489-7	Day in the Inca Empire by Janie Havemeyer	985	$20.99	1	$20.99
2444800	979-8-89213-741-6	Greek Myths and Legends by Alyssa Krekelberg	398.20938	$20.99	1	$20.99
2444802	979-8-89213-756-0	Maya Myths and Legends by Janie Havemeyer	355.02	$20.99	1	$20.99
2415739	978-1-5364-9040-4	Night Night! Sleep Tight! (Little Critter) by Mercer Mayer	741.5	$14.95	1	$14.95
2462360	978-1-5364-9706-9	Amazing Daisies (Girl Scouts) by Girl Scouts	E	$14.95	1	$14.95
2462362	978-1-5364-9707-6	Amazing Daisies Hunt for Colors (Girl Scouts) by Girl Scouts	E	$14.95	1	$14.95
2434077	978-1-5364-9269-9	Berenstain Bears Get Outdoors by Mike Berenstain	E	$14.95	1	$14.95
2462356	978-1-5364-9705-2	Berenstain Bears Visit the Ice Age by Mike Berenstain	E	$14.95	1	$14.95
2459816	978-1-5364-9661-1	Clydeo Versus Peanut Butter by Jennifer Aniston	E	$14.95	1	$14.95
2422009	978-1-5364-9132-6	Here Come the Bears! (The Berenstain Bears) by Mike Berenstain	E	$14.95	1	$14.95
2411692	978-1-5364-8957-6	I Want to Be an Artist by Laura Driscoll	700.23	$14.95	1	$14.95
2403278	978-1-5364-8889-0	Magic Runs Wild (My Little Pony) by Alexandra West	E	$14.95	1	$14.95
2451615	978-1-5364-9605-5	Meet the Agents (The Creature Cases) by Alexandra West	E	$14.95	1	$14.95
2409375	978-1-5364-8947-7	Pete the Cat and the Wright Brothers by Kimberly Dean	E	$14.95	1	$14.95
2435816	978-1-5364-9333-7	Pete the Cat's Mars Mission by Kimberly Dean	E	$14.95	1	$14.95
2391661	978-1-5364-8688-9	Sketty and Meatball by Sarah Weeks	E	$14.95	1	$14.95
2426585	978-1-0982-5513-8	Pete the Cat Goes Camping by James Dean	E	$23.95	1	$23.95
2426586	978-1-0982-5514-5	Pete the Cat Saves Up by James Dean	E	$23.95	1	$23.95
2426584	978-1-0982-5510-7	Pete the Cat and the Cool Caterpillar by James Dean	E	$23.95	1	$23.95
2408061	978-1-5364-8939-2	Chip Plays Grown-Up by Maddie Frost	741.5	$14.95	1	$14.95
2403096	978-1-5364-8878-4	Scavenger Hunt (Curious George) by H. A Rey	741.5	$14.95	1	$14.95
2422007	978-1-5364-9130-2	Makeda Makes a Mountain (Makeda Makes) by Olugbemisola Rhuday-Perkovich	E	$14.95	1	$14.95
2403271	978-1-5364-8886-9	Neighborhood Helper (Reina Ramos) by Emma Otheguy	E	$14.95	1	$14.95
2445466	978-1-0982-5580-0	Flat Stanley and the Bees by Jeff Brown	E	$23.95	1	$23.95
2445467	978-1-0982-5581-7	Flat Stanley and the Lost Treasure by Jeff Brown	E	$23.95	1	$23.95
2445468	978-1-0982-5582-4	Flat Stanley and the Very Big Cookie by Jeff Brown	E	$23.95	1	$23.95
2445469	978-1-0982-5579-4	Show-and-Tell, Flat Stanley! (Flat Stanley) by Jeff Brown	E	$23.95	1	$23.95
2445285	978-1-0982-5585-5	Splat the Cat and the Lemonade Stand by Rob Scotton	E	$23.95	1	$23.95
2408056	978-1-5364-8934-7	Power Up With Power Drill (The Fix-Its) by Sarah Lynne Reul	741.5	$14.95	1	$14.95
2433139	978-0-06-333497-7	Freedom Celebration: A Juneteenth Party by Angela Dalton	E	$12.59	1	$12.59
2435728	978-0-06-338794-2	Iris and Walter by Elissa Haden Guest	E	$12.59	1	$12.59
2435731	978-0-06-338797-3	Iris and Walter and the Field Trip by Elissa Haden Guest	E	$12.59	1	$12.59
2393491	978-1-5364-8760-2	Biscuit Visits the Firehouse by Alyssa Satin Capucilli	E	$14.95	1	$14.95
2423855	978-1-5364-9195-1	Biscuit's Puppy Sleepover by Alyssa Satin Capucilli	E	$14.95	1	$14.95
2408043	978-1-5364-8921-7	Fox Plays Ball by Corey R. Tabor	E	$14.95	1	$14.95
2448561	978-1-5364-9562-1	Making a Mistake (Big Dog and Little Dog) by Dav Pilkey	E	$14.95	1	$14.95
2391652	978-1-5364-8685-8	Misty's Tale (My Little Pony) by Matthew Corrigan	E	$14.95	1	$14.95
2415738	978-1-5364-9039-8	Perfect Spot (Dot the Ladybug) by Kallie George	E	$14.95	1	$14.95
2484246	979-8-2952-0045-8	Pete the Kitty And The Beanstalk by James Dean	E	$14.95	1	$14.95
2448564	978-1-5364-9565-2	Snow Day for Dog (Little Critter) by Mercer Mayer	E	$14.95	1	$14.95
2445718	978-1-0982-5577-0	Biscuit Loves the Park by Alyssa Satin Capucilli	E	$23.95	1	$23.95
2445715	978-1-0982-5574-9	Biscuit and Friends Visit the Community Garden by Alyssa Satin Capucilli	E	$23.95	1	$23.95
2445716	978-1-0982-5575-6	Biscuit and the Big Parade! by Alyssa Satin Capucilli	E	$23.95	1	$23.95
2445717	978-1-0982-5576-3	Biscuit and the Little Llamas by Alyssa Satin Capucilli	E	$23.95	1	$23.95
2426587	978-1-0982-5509-1	Pete the Cat and the Bad Banana by James Dean	E	$23.95	1	$23.95
2426588	978-1-0982-5511-4	Pete the Cat and the Lost Tooth by James Dean	E	$23.95	1	$23.95
2426589	978-1-0982-5512-1	Pete the Cat and the Tip-Top Tree House by James Dean	E	$23.95	1	$23.95
2426594	978-1-0982-5515-2	Pete the Cat's Groovy Bake Sale by James Dean	E	$23.95	1	$23.95
2426595	978-1-0982-5516-9	Pete the Cat's Train Trip by James Dean	E	$23.95	1	$23.95
2426591	978-1-0982-5506-0	Pete the Cat: Play Ball! by James Dean	E	$23.95	1	$23.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2426592	978-1-0982-5507-7	Pete the Cat: Sir Pete the Brave by James Dean	E				$23.95 | $23.95
2426593	978-1-0982-5508-4	Pete the Cat: Too Cool for School by James Dean	E				$23.95 | $23.95
2484846	978-0-06-337095-1	Fox Catches A Wave by Corey R. Tabor	E				$13.29 | $13.29
2484849	978-0-06-346426-1	Getting in Trouble (Big Dog And Little Dog) by Dav Pilkey	E				$13.29 | $13.29
2389881	978-0-06-335473-9	Gossie by Olivier Dunrea	E				$12.59 | $12.59
2378973	978-0-06-334373-3	Ollie the Stomper by Olivier Dunrea	E				$12.59 | $12.59
2460780	978-0-8234-6108-0	Bug on the Bus by David Catrow	E				$11.19 | $11.19
2449273	978-0-8234-5838-7	I Dance by Diana Ranola	E				$11.19 | $11.19
2434599	978-0-8234-5958-2	I Like Hoops by Juwanda G. Ford	E				$11.19 | $11.19
2423694	978-0-8234-5888-2	I Want It! by Paul Meisel	E				$11.19 | $11.19
2449275	978-0-8234-5965-0	Just One Owl by Carolyn Crimi	E				$11.19 | $11.19
2402383	978-0-8234-4507-3	My Dog Is Best by David Catrow	E				$11.19 | $11.19
2434601	978-0-8234-6031-1	Letter Setters in Bop! by Ethan Long	E				$10.49 | $10.49
2460784	978-0-8234-6032-8	Letter Setters in Fun! by Ethan Long	E				$10.49 | $10.49
2460782	978-0-8234-5949-0	Boy Who Cried Robots! by Chris Britt	741.5				$10.49 | $10.49
2434598	978-0-8234-6051-9	Duck and Cat Ride the Riverboat by Drew Panckeri	741.5				$10.49 | $10.49
2402389	978-0-8234-5712-0	Here and There (Owl and Penguin) by Vikram Madan	741.5				$10.49 | $10.49
2423695	978-0-8234-5637-6	Luna Sisters Battle for the Moon Blossom by Dan Yaccarino	741.5				$10.49 | $10.49
2423696	978-0-8234-5816-5	Night Light by Michael Emberley	741.5				$10.49 | $10.49
2402379	978-0-8234-5154-8	Pair of Parrots by David A. Adler	741.5				$10.49 | $10.49
2434602	978-0-8234-6030-4	Pickle on Wheels by Sylvie Kantorovitz	741.5				$10.49 | $10.49
2423698	978-0-8234-5696-3	Snap! Crunch! Munch? by Diana Castillo	741.5				$10.49 | $10.49
2440934	978-1-5324-5461-5	Dump Truck by August Hoeft	629				$17.49 | $17.49
2440936	978-1-5324-5469-1	Garbage Truck by August Hoeft	629.225				$17.49 | $17.49
2440937	978-1-5324-5473-8	Pickup Truck by August Hoeft	629				$17.49 | $17.49
2438580	978-1-83874-936-1	Froggy: A Pond Full of Pals! by Paige Walshe	741.5				$22.79 | $22.79
2446637	978-1-5476-1242-0	I Like Cheese! by Salina Yoon	E				$9.09 | $9.09
2486727	978-1-5476-1245-1	Let's Have a Sleepover! by Salina Yoon	E				$9.09 | $9.09
2419191	978-1-959223-78-8	Akua Goes to the Post Office by Artika R. Tyner	E				$21.99 | $21.99
2454572	979-8-89605-003-2	Kofi Goes to the Bank by Artika R. Tyner	E				$21.99 | $21.99
2419192	978-1-959223-79-5	Kojo Goes to the Library by Artika R. Tyner	E				$21.99 | $21.99
2401690	978-1-63163-870-1	Five Dollars for Fun by Rebecca J. Allen	E				$17.99 | $17.99
2401693	978-1-63163-874-9	My Cat Can't Tell Time (But I Can) by Rebecca J. Allen	E				$17.99 | $17.99
2399652	978-1-68450-040-6	Dog That Called the Pitch by Matt Christopher	E				$19.95 | $19.95
2399653	978-1-68450-043-7	Dog That Called the Signals by Matt Christopher	E				$19.95 | $19.95
2399655	978-1-68450-049-9	Dog That Stole Football Plays by Matt Christopher	E				$19.95 | $19.95
2399656	978-1-68450-052-9	Dog That Stole Home by Matt Christopher	E				$19.95 | $19.95
2434486	978-1-5364-9310-8	Barbie's Big Move by Courtney Carbone	E				$14.95 | $14.95
2446643	978-1-5364-9532-4	Barbie: Winter Wonder by Anna Membrino	E				$14.95 | $14.95
2434479	978-1-5364-9308-5	Secret Recipe (Barbie and Teresa) by Courtney Carbone	E				$14.95 | $14.95
2402802	978-1-5364-8829-6	Snake Attack! (Hot Wheels Let's Race) by Eric Geron	E				$14.95 | $14.95
2437348	978-1-5364-9398-6	Disaster Alert! (Marvel's Storm) by Daka Hermon	E				$14.95 | $14.95
2392208	978-1-5364-8706-0	Spider-Man Bugs Out! (Marvel) by Daka Hermon	595.7				$14.95 | $14.95
2414170	978-1-5364-9013-8	Iron Man Goes Magnetic (Marvel) by Charlie Price	538				$14.95 | $14.95
2493989	978-1-4263-7817-1	Make A Splash Collection	590				$18.99 | $18.99
2425031	978-1-4263-7787-7	Polar Babies by Maya Myers	591.7				$15.19 | $15.19
2402719	978-1-223-18847-8	Blexi, Play! by Alliah Agostini	E				$11.19 | $11.19
2451977	978-1-223-18692-4	Chameleon Cat by Rachel DiNunzio	E				$11.19 | $11.19
2423669	978-1-223-18876-8	I Can Make a Friend! by Melissa H. Mwai	302				$11.89 | $11.89
2434111	978-0-593-89129-2	Harry Gets Ready for School by Harriet Ziefert	E				$11.89 | $11.89
2393416	978-1-5364-8738-1	Charlie and the Chocolate Factory: They All Come Out in the Wash by Roald Dahl	E				$14.95 | $14.95
2453927	978-1-5364-9633-8	Fantastic Flying Fruit (James and the Giant Peach) by Roald Dahl	E				$14.95 | $14.95
2393496	978-1-5364-8763-3	Matilda's Miracles by Roald Dahl	E				$14.95 | $14.95
2460862	979-8-217-05033-8	Black Out!: Animals That Live In the Dark by Ginjer L. Clarke	591.5				$11.89 | $11.89
2458749	979-8-217-05181-6	Planets (TIME for Kids) by Sarah Jospitre	523.4				$11.89 | $11.89
2434110	978-0-593-89119-3	Sharks! by Ginjer L. Clarke	597.3				$11.89 | $11.89
2459529	978-0-374-39479-0	Meet Pip, Pout-Pout Fish! by Deborah Diesen	E				$12.59 | $12.59
2419313	979-8-7656-4766-0	Blossom and the Daisies by Ruthie Van Oosbree	E				$20.99 | $20.99
2419052	979-8-7656-4767-7	Composting Pie by Ruthie Van Oosbree	E				$20.99 | $20.99
2419053	979-8-7656-4768-4	Ernie the Earthworm by Ruthie Van Oosbree	E				$20.99 | $20.99
2419054	979-8-7656-4772-1	Grandpa's Trees by Ruthie Van Oosbree	E				$20.99 | $20.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2419314	979-8-7656-4771-4	Growing Upward by Ruthie Van Oosbree	E			$20.99	$20.99
2419315	979-8-7656-4769-1	Our Garden by Ruthie Van Oosbree	E			$20.99	$20.99
2419316	979-8-7656-4770-7	Sidney's Seeds by Ruthie Van Oosbree	E			$20.99	$20.99
2454721	979-8-7656-6883-2	Jade's Martin Luther King Jr. Day by Lucie Miller	E			$20.99	$20.99
2454722	979-8-7656-6879-5	Milo's Earth Day by Lucie Miller	E			$20.99	$20.99
2454726	979-8-7656-6885-6	Sofia's Veterans Day Project by Lucie Miller	E			$20.99	$20.99
2405497	979-8-7656-2618-4	Frosty's Snow Day by Ruthie Van Oosbree	E			$20.99	$20.99
2405498	979-8-7656-2619-1	Harper and the Ice by Ruthie Van Oosbree	E			$20.99	$20.99
2405499	979-8-7656-2620-7	Norman's Deep Dive by Ruthie Van Oosbree	E			$20.99	$20.99
2405504	979-8-7656-2625-2	Owen's Feathers by Ruthie Van Oosbree	E			$20.99	$20.99
2405501	979-8-7656-2622-1	Pedro's Family by Ruthie Van Oosbree	E			$20.99	$20.99
2405502	979-8-7656-2623-8	Polar Bear Lessons by Ruthie Van Oosbree	E			$20.99	$20.99
2405503	979-8-7656-2624-5	Reindeer Hooves by Ruthie Van Oosbree	E			$20.99	$20.99
2419326	979-8-7656-4775-2	Earthworms Help Plants by Katherine Chu	592			$20.99	$20.99
2419327	979-8-7656-4779-0	Parts of a Tree by Katherine Chu	582.16			$20.99	$20.99
2419328	979-8-7656-4777-6	Planting Seeds by Katherine Chu	631.5			$20.99	$20.99
2454736	979-8-7656-6871-9	Celebrating Earth Day by Katie Peters	394.262			$20.99	$20.99
2454740	979-8-7656-6875-7	Celebrating Martin Luther King Jr. Day by Katie Peters	323.092			$20.99	$20.99
2454742	979-8-7656-6870-2	Celebrating the 100th Day of School by Katie Peters	370.2			$20.99	$20.99
2405513	979-8-7656-2626-9	Arctic Fox on the Move by Katie Peters	599.775			$20.99	$20.99
2405519	979-8-7656-2632-0	Learn about Reindeer by Katie Peters	599.65			$20.99	$20.99
2405515	979-8-7656-2628-3	Life of a Narwhal by Katie Peters	599.5			$20.99	$20.99
2405520	979-8-7656-2633-7	Meet a Snowy Owl by Katie Peters	598.9			$20.99	$20.99
2405514	979-8-7656-2627-6	So Many Harp Seals by Katie Peters	599.79			$20.99	$20.99
2436360	978-0-8234-5962-9	Pumpkin and Beetle: Two Vampire Cats by Jannie Ho	741.5			$11.89	$11.89
2451190	978-1-5364-9597-3	Dance Pants! (Dog and Pony Show) by Jeff Mack	741.5			$17.95	$17.95
2423547	978-1-5364-9161-6	Dinosaur Friends! (Dinosaur Roar!) by Peter Curtis	E			$14.95	$14.95
2460817	978-1-5364-9673-4	Dinosaur Snores! (Dinosaur Roar!) by Peter Curtis	E			$14.95	$14.95
2440240	978-1-5364-9462-4	Elvis and Romeo Go to Dog School (Elvis and Romeo) by David Soman	E			$14.95	$14.95
2442804	978-1-5364-9476-1	Elvis and Romeo Visit the Vet by David Soman	E			$14.95	$14.95
2434455	978-1-5364-9291-0	Fairy Fashion Show (Fairies Welcome) by Bea Jackson	E			$14.95	$14.95
2417192	978-1-5364-9059-6	Fairy Finds Her Song (Fairies Welcome) by Bea Jackson	E			$14.95	$14.95
2462330	978-1-5364-9695-6	Favorite Hat (Olive and Oscar) by Ariel Bernstein	E			$14.95	$14.95
2451163	978-1-5364-9593-5	Fun Day with Bash! (Dinosaur Roar!) by Peter Curtis	E			$14.95	$14.95
2462332	978-1-5364-9697-0	I Am a Big Fish! by Susie Lee Jin	E			$14.95	$14.95
2451184	978-1-5364-9596-6	May's Too-Big Pizza (All About May) by A. T. Woehling	E			$14.95	$14.95
2393919	978-1-5364-8795-4	Nothing Scares a Dinosaur (Junior Monster Scouts) by Jonathan Fenske	E			$14.95	$14.95
2413482	978-1-5364-8969-9	Parker Takes a Trip by Parker Curry	E			$14.95	$14.95
2393920	978-1-5364-8796-1	Parker's Slumber Party by Parker Curry	E			$13.95	$13.95
2393928	978-1-5364-8799-2	Penguin Parade by Heidi E. Stemple	E			$13.95	$13.95
2413483	978-1-5364-8970-5	Sabrina Sue Loves the Mountains by Priscilla Burris	E			$14.95	$14.95
2411161	978-1-6659-6571-2	From Rain Clouds to Rainbows by Marion Dane Bauer	551.5			$9.09	$9.09
2410517	978-1-6659-5911-7	Groundhog Day by Margaret McNamara	E			$12.59	$12.59
2390633	978-1-6659-5168-5	Halloween Fun (Robin Hill School) by Margaret McNamara	E			$12.59	$12.59
2444162	978-1-6659-5920-9	Milky Way (Our Universe) by Marion Dane Bauer	523.1			$13.29	$13.29
2392357	978-1-6659-5843-1	Solar System (Our Universe) by Marion Dane Bauer	523.2			$12.59	$12.59
2462327	978-1-5364-9693-2	Bad Banana by Michael Rex	E			$14.95	$14.95
2442797	978-1-5364-9475-4	Don't Wake Dracula (Junior Monster Scouts) by Joe McGee	E			$14.95	$14.95
2393948	978-1-5364-8809-8	Game On! (Kids Around the World) by Maria Le	790			$13.95	$13.95
2462331	978-1-5364-9696-3	Getting All Dressed Up! (Kids Around the World) by Patty Michaels	E			$14.95	$14.95
2391583	978-1-5364-8661-2	Hide-And-Seek Pup (Junior Monster Scouts) by Joe McGee	E			$13.95	$13.95
2462338	978-1-5364-9699-4	Porcupine Wedding (Mouse and Spoon) by Cynthia Rylant	E			$14.95	$14.95
2393921	978-1-5364-8797-8	School's in Session (Kids Around the World) by Elizabeth Dennis	372.10421			$14.95	$14.95
2437337	978-1-5364-9387-0	Smoosh's Super-Duper-Fun Day by Michael Slack	E			$14.95	$14.95
2435992	978-1-6659-6216-2	Elephant's Birthday (Mouse and Spoon) by Cynthia Rylant	E			$13.29	$13.29
2435997	978-1-6659-6219-3	Owlets and Tarts (Mouse and Spoon) by Cynthia Rylant	E			$13.29	$13.29
2437246	978-1-6659-7021-1	Pumpkin Party (Junior Monster Scouts) by Joe McGee	E			$13.29	$13.29
2410919	978-1-6659-6332-9	Dog That Dug for Dinosaurs by Shirley Raye Redmond	567.9			$13.29	$13.29
2462328	978-1-5364-9694-9	Beep Bop Boop! by Ethan Long	E			$14.95	$14.95
2393944	978-1-5364-8806-7	Big Unicorn Feelings (Not Quite Narwhal) by Maggie Testa	E			$13.95	$13.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2413485	978-1-5364-8971-2	Bunny Hop by Sarah Hwang	E			$14.95	$14.95
2446729	978-1-5364-9538-6	Kelp and the Special Plant (Not Quite Narwhal) by Gloria Cruz	E			$14.95	$14.95
2434457	978-1-5364-9293-4	Kick It into High Gear! (Mighty Monsterwheelies) by Gloria Cruz	E			$14.95	$14.95
2462333	978-1-5364-9698-7	Nat the Cat Finds a Map by Jarrett Lerner	E			$14.95	$14.95
2434472	978-1-5364-9304-7	Nervous Narwhal (Not Quite Narwhal) by Maria Le	E			$14.95	$14.95
2442810	978-1-5364-9480-8	Rockslide Rescue! (Mighty Monsterwheelies) by Maria Le	E			$14.95	$14.95
2413500	978-1-5364-8978-1	Cece Has a Little Cat (CoComelon) by Maria Le	E			$14.95	$14.95
2393916	978-1-5364-8792-3	Hide-and-Seek Fun! (CoComelon) by Maria Le	E			$13.95	$13.95
2462339	978-1-5364-9700-7	Rumble! by Lola M. Schaefer	E			$14.95	$14.95
2435165	978-1-63655-136-4	Really Bird, Really Good Beach Party! by Harriet Ziefert	E			$9.09	$9.09
2409031	978-1-63655-119-7	Really Bird, Really Lucky! by Harriet Ziefert	E			$9.09	$9.09
2440181	978-1-5364-9432-7	Gabby's Dollhouse: The Movie by Gabrielle Reyes	E			$14.95	$14.95
2483434	979-8-2952-0032-8	If the Boot Fits (Dora) by Gabrielle Reyes	E			$14.95	$14.95
2391579	978-1-5364-8657-5	Movie Night (Peppa Pig) by Cala Spinner	E			$14.95	$14.95
2417115	978-1-5364-9052-7	Peppa the Unicorn by Cala Spinner	E			$14.95	$14.95
2438650	978-1-63715-803-6	Cookie Monster's Dinner Party by Mary Kenney	741.5			$5.59	$5.59
2404905	978-0-593-88698-4	Sonic the Hedgehog: 5-Minute Stories by Jake Black	E			$10.49	$10.49
2494424	979-8-8752-7706-1	Buses by Haley Williams	428			$16.99	$16.99
2452362	979-8-8752-2694-6	Dog or Cat? by Laura Stickney	636.7			$16.99	$16.99
2452363	979-8-8752-2695-3	Hats by Laura Stickney	646.3			$16.99	$16.99
2452364	979-8-8752-2696-0	My Pet at the Vet by Laura Stickney	636.089			$16.99	$16.99
2494425	979-8-8752-7714-6	Pigs by Haley Williams	428			$16.99	$16.99
2452209	979-8-8752-2693-9	Rocks by Laura Stickney	552			$16.99	$16.99
2452213	979-8-8752-2703-5	Crabs by Marley Richmond	595.3			$16.99	$16.99
2452365	979-8-8752-2702-8	Grab a Snack by Marley Richmond	641.5			$16.99	$16.99
2452366	979-8-8752-2698-4	Plants by Laura Stickney	428			$16.99	$16.99
2494429	979-8-8752-7730-6	Sled Dogs by Marley Richmond	428			$16.99	$16.99
2494433	979-8-8752-7746-7	Fish by Haley Williams	428			$16.99	$16.99
2452371	979-8-8752-2708-0	Look at the Graph by Laura Stickney	428			$16.99	$16.99
2452373	979-8-8752-2705-9	Shells by Laura Stickney	428			$16.99	$16.99
2452374	979-8-8752-2707-3	Sloths by Laura Stickney	599.3			$16.99	$16.99
2452378	979-8-8752-2715-8	Ice by Laura Stickney	551.31			$16.99	$16.99
2452379	979-8-8752-2710-3	In Space by Laura Stickney	520			$16.99	$16.99
2452381	979-8-8752-2720-2	Boats That Float by Marley Richmond	623.82			$16.99	$16.99
2452382	979-8-8752-2717-2	Goal! by Marley Richmond	428			$16.99	$16.99
2452383	979-8-8752-2719-6	Night Flight by Marley Richmond	599.4			$16.99	$16.99
2452384	979-8-8752-2721-9	Space Crew by Marley Richmond	629.45			$16.99	$16.99
2494444	979-8-8752-7786-3	Earth Changes by Laura Stickney	428			$16.99	$16.99
2452389	979-8-8752-2723-3	Kinds of Sounds by Laura Stickney	428			$16.99	$16.99
2452390	979-8-8752-2725-7	On the Farm by Laura Stickney	630			$16.99	$16.99
2427754	979-8-8752-1805-7	Bed for Ten by Tiffany Renando	E			$16.99	$16.99
2427755	979-8-8752-1789-0	Bug Club by Tiffany Renando	E			$16.99	$16.99
2427756	979-8-8752-1765-4	Dogs Do a Lot by Tiffany Renando	E			$16.99	$16.99
2427757	979-8-8752-1781-4	Fun in the Sun by Tiffany Renando	E			$16.99	$16.99
2397160	978-0-7565-9560-9	Gus the Bus by Leanna Koch	E			$16.99	$16.99
2397161	978-0-7565-9634-7	In the Mud by Leanna Koch	E			$16.99	$16.99
2427758	979-8-8752-1773-9	Jon on the Job by Tiffany Renando	E			$16.99	$16.99
2397162	978-0-7565-9566-1	Let's Go by Leanna Koch	E			$16.99	$16.99
2427760	979-8-8752-1821-7	Max the Cat by Tiffany Renando	E			$16.99	$16.99
2427761	979-8-8752-1797-5	Pets by Tiffany Renando	E			$16.99	$16.99
2427762	979-8-8752-1749-4	Sid Will Fix It by Tiffany Renando	E			$16.99	$16.99
2397453	978-0-7565-9513-5	I Can Do It! by Leanna Koch	E			$16.99	$16.99
2397454	978-0-7565-9505-0	Jen's Big Job by Leanna Koch	E			$16.99	$16.99
2397455	978-0-7565-9508-1	On the Tracks by Leanna Koch	E			$16.99	$16.99
2397457	978-0-7565-9488-6	Sam Helps by Leanna Koch	E			$16.99	$16.99
2397468	978-0-7565-9643-9	Lucky Rat by Leanna Koch	E			$16.99	$16.99
2397469	978-0-7565-9501-2	Pets Wash Up by Leanna Koch	E			$16.99	$16.99
2397486	978-0-7565-9533-3	Attack of the Slime by Leanna Koch	E			$16.99	$16.99
2397487	978-0-7565-9626-2	Blake Can Skate by Leanna Koch	E			$16.99	$16.99
2397488	978-0-7565-9543-2	Busy Spring Days by Leanna Koch	E			$16.99	$16.99
2397489	978-0-7565-9521-0	Camping with Squish and Squeeze by Leanna Koch	E			$16.99	$16.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2397490	978-0-7565-9555-5	Ezra Makes Magic by Leanna Koch	E				$16.99	$16.99
2397493	978-0-7565-9649-1	Sage's Plants by Leanna Koch	E				$16.99	$16.99
2397502	978-0-7565-9515-9	Cat Food Clues by Leanna Koch	E				$16.99	$16.99
2397503	978-0-7565-9518-0	Cleaning Day by Leanna Koch	E				$16.99	$16.99
2397504	978-0-7565-9549-4	Drew's New Fits by Leanna Koch	E				$16.99	$16.99
2397507	978-0-7565-9563-0	Laila's New Room by Leanna Koch	E				$16.99	$16.99
2397508	978-0-7565-9494-7	Riley Likes to Fly by Leanna Koch	E				$16.99	$16.99
2397526	978-0-7565-9540-1	Birthday Party with Squish and Squeeze by Leanna Koch	E				$16.99	$16.99
2397528	978-0-7565-9545-6	Caring for Coco by Leanna Koch	E				$16.99	$16.99
2397531	978-0-7565-9569-2	Let's Go Camping! by Leanna Koch	E				$16.99	$16.99
2397535	978-0-7565-9584-5	Save the Orca by Leanna Koch	E				$16.99	$16.99
2397537	978-0-7565-9622-4	Shark's Sore Tooth by Leanna Koch	E				$16.99	$16.99
2417215	978-1-5364-9064-0	More Trees, Please! by Alastair Heim	741.5				$14.95	$14.95
2462851	979-8-2952-0003-8	Catch That Robot! (Iron Man and His Awesome Friends) by Steve Behling	E				$14.95	$14.95
2444242	978-0-593-90613-2	Cooking with Cindy-Lou Who by Cat Reynolds	E				$16.14	$16.14
2393231	978-0-593-80774-3	Halloween Night! (Family Fun with the Day Kids!) by Candice F. Ransom	E				$14.24	$14.24
2409142	978-1-5364-8946-0	Purple Stew! (GoNoodle)	741.5				$14.95	$14.95
2462865	978-1-5364-9727-4	Save the Lookout! (PAW Patrol) by Frank Berrios	E				$14.95	$14.95
2459807	978-1-5364-9652-9	100 Days! (All Are Welcome) by Alexandra Penfold	E				$14.95	$14.95
2434064	978-1-5364-9258-3	Birthday Treasure Hunt! (Disney Moana 2) by Kamalani Hurley	E				$14.95	$14.95
2462856	978-1-5364-9724-3	Camping Trip! (Disney Stitch) by Nicole Johnson	E				$14.95	$14.95
2402862	978-1-5364-8842-5	Creature Powers: The Biggest! (Wild Kratts) by Martin Kratt	E				$14.95	$14.95
2434065	978-1-5364-9259-0	Creature Powers: The Fastest! (Wild Kratts) by Martin Kratt	E				$14.95	$14.95
2446517	978-1-5364-9514-0	Curse of the Mummy (The Boxcar Children) by Gertrude Chandler Warner	E				$14.95	$14.95
2419861	978-1-5364-9112-8	Dog Show (Disney Stitch) by Nicole Johnson	E				$14.95	$14.95
2366573	978-1-5364-8347-5	Elio Goes to Space! (Disney/Pixar Elio) by Cynthea Liu	E				$14.95	$14.95
2434066	978-1-5364-9260-6	How Do Toilets Work? (StoryBots) by Scott Emmons	E				$14.95	$14.95
2402943	978-1-5364-8864-7	I Am Powerful: A Positive Power Story by Suzy Capozzi	E				$14.95	$14.95
2414172	978-1-5364-9020-6	Meet the Boxcar Children (Boxcar Children) by Gertrude Chandler Warner	E				$14.95	$14.95
2446503	978-1-5364-9505-8	Mia the Masterpiece: An Empowering Story About Inclusivity and Growing up with Down Syndrome by Mia Armstrong	E				$14.95	$14.95
2446510	978-1-5364-9507-2	Milo the Doctor by Mei Nakamura	E				$14.95	$14.95
2408041	978-1-5364-8919-4	Moana's Canoe Crew (Disney Moana 2) by Natasha Bouchard	E				$14.95	$14.95
2440227	978-1-5364-9452-5	My Cousin, the Quinceanera by Julissa Mora	E				$14.95	$14.95
2435617	978-1-5364-9325-2	Mystery at the Old Ranch (The Boxcar Children) by Gertrude Chandler Warner	E				$14.95	$14.95
2446519	978-1-5364-9516-4	Pizza Problem (The Boxcar Children) by Gertrude Chandler Warner	E				$14.95	$14.95
2462930	979-8-2952-0011-3	Pond Crew (Disney/Pixar Hoppers)	E				$14.95	$14.95
2462923	979-8-2952-0007-6	Ready, Set, Bath! (Dr. Seuss's Horton!) by Theodor S. Geisel	E				$14.95	$14.95
2446514	978-1-5364-9511-9	Rescue Crew (The SpongeBob Movie: Search for SquarePants) by David Lewman	E				$14.95	$14.95
2435618	978-1-5364-9326-9	Secret of the Yellow House (The Boxcar Children) by Gertrude Chandler Warner	E				$14.95	$14.95
2409048	978-0-7364-9051-1	Holiday Party (Disney Frozen) by Andrea Posner-Sanchez	E				$14.24	$14.24
2460740	978-0-7364-9061-0	Race and Rescue! (Disney/Pixar Cars) by Nicole Johnson	E				$16.14	$16.14
2446465	978-1-5364-9503-4	Dino Flight! (Jurassic World: Chaos Theory) by Steve Behling	741.5				$14.95	$14.95
2425023	978-0-593-90163-2	Free the Dinosaurs! (Jurassic World: Chaos Theory) by Steve Behling	741.5				$14.24	$14.24
2462933	979-8-2952-0012-0	Friend Like You (Disney/Pixar Hoppers)	E				$14.95	$14.95
2408042	978-1-5364-8920-0	Great Voyage (Disney Moana 2) by Natasha Bouchard	E				$14.95	$14.95
2462909	979-8-2952-0001-4	Search for the Snowy Wolf (Minecraft) by Nada Shawish Dutka	E				$14.95	$14.95
2462251	979-8-217-12161-8	Hoppy Easter! (L. O. L. Surprise!) by B. B. Arthur	E				$16.14	$16.14
2425032	978-0-593-64685-4	Save the Pearl! (Tales of the Teenage Mutant Ninja Turtles) by Matt Huntley	E				$14.24	$14.24
2434881	978-1-6626-6545-5	Little Mouse Saves the Day by Jeff Smith	E				$9.79	$9.79
2438588	978-1-6626-6533-2	Fire-Breathing Duckling by Frank Cammuso	741.5				$9.79	$9.79
2402445	978-1-6626-6543-1	Hearing Things by Ben Sears	741.5				$9.09	$9.09
2493632	978-1-0982-5736-1	Dolphin Rescue by Liz Kessler	E				$23.95	$23.95

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2394607	978-1-0982-5456-8	Mickey Mouse Mixed-Up Adventures: Campy Camper Day by Bill Scollon	E				$23.95	1 $23.95
2394762	978-1-0982-5458-2	Spider-Man: This is Miles Morales by Alexandra West	E				$23.95	1 $23.95
2394606	978-1-0982-5444-5	Mickey Mouse Funhouse: Homesick! by Sheila Sweeny Higginson	E				$23.95	1 $23.95
2394625	978-1-0982-5446-9	Minnie's Bow Toons: Daisy's Crazy Hair Day by Annie Auerbach	E				$23.95	1 $23.95
2394624	978-1-0982-5445-2	Minnie: Spring at the Bow-tique by Allison Grote	E				$23.95	1 $23.95
2394763	978-1-0982-5449-0	Spidey and His Amazing Friends: House-Sitting at Tony's by Steve Behling	E				$23.95	1 $23.95
2394764	978-1-0982-5450-6	Spidey and His Amazing Friends: Super Hero Hiccups by Steve Behling	E				$23.95	1 $23.95
2393444	978-1-5364-8746-6	Dino-Rama (Spidey and His Amazing Friends) by Josh Haber	E				$14.95	1 $14.95
2440255	978-1-5364-9470-9	Meet the Iron Friends (Iron Man and His Awesome Friends) by Steve Behling	E				$14.95	1 $14.95
2453891	978-1-5364-9618-5	Spidey Cat (Spidey and His Amazing Friends) by Steve Behling	E				$14.95	1 $14.95

Total quantity	449 Titles(449 Books)
Subtotal	$7,576.05
Processing Options Total	$1,481.70
Shipping & Handling	$151.52
Shipping Discount	-$151.52
Tax	$928.42
Grand Total	**$9,986.17**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: BB ODC
List#: 211025
Date: 2/17/2026 6:14:22 PM
Total quantity: 58 Titles(58 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End
Processing Options

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2438427	978-1-5362-4068-9	Ada's Rainy Day by Daishu Ma	E	$5.59	1	$5.59
2417891	978-0-593-90073-4	Big Feelings by Alexandra Penfold	E	$6.29	1	$6.29
2418612	978-0-500-65373-9	Little Robin's Book of the Birds by Yuval Zommer	598	$6.99	1	$6.99
2436338	978-0-8234-6045-8	Crane Jane! by Andrea Griffing Zimmerman	E	$6.29	1	$6.29
2435133	978-1-7972-1997-4	Hello Hello Numbers by Brendan Wenzel	E	$6.99	1	$6.99
2433849	979-8-88859-375-2	Won't Go! by Sumana Seeboruth	E	$6.99	1	$6.99
2439783	978-1-4197-7092-0	Who I Am: Words I Tell Myself by Susan Verde	E	$6.29	1	$6.29
2446045	978-1-4547-1276-3	10 Dogs by Emily Gravett	E	$6.99	1	$6.99
2434225	978-0-593-85930-8	Alphabedtime by Susanna Leonard Hill	E	$6.29	1	$6.29
2434340	978-1-6659-6980-2	Beehive by Jorey Hurley	E	$6.29	1	$6.29
2443060	978-0-06-344815-5	Charlotte's Web by E. B. White	E	$7.69	1	$7.69
2414496	978-0-06-342642-9	Digger and the Flower Board Book by Joseph Kuefler	E	$7.69	1	$7.69
2436296	978-1-5362-4144-0	Don't Wake up the Tiger by Britta Teckentrup	E	$6.29	1	$6.29
2439002	979-8-88663-746-5	Gilmore Girls: Goodnight, Stars Hollow by Morgan English	E	$7.69	1	$7.69
2436595	978-0-593-75364-4	Goodnight, Broom: A Spine-Tingling Spoof by Deb Adamson	E	$6.29	1	$6.29
2452110	978-1-77321-982-0	Hello Little Ones by Amandine Piu	E	$11.19	1	$11.19
2443408	978-1-62354-666-3	Hot Pot Night! by Vincent Chen	E	$6.29	1	$6.29
2434750	978-1-250-39419-4	I Will Be Fierce! by Bea Birdsong	E	$6.29	1	$6.29
2449186	978-1-5362-4698-8	Is This ... Winter? by Helen Yoon	E	$5.59	1	$5.59
2453536	978-0-00-869506-4	Mog's Bedtime Tales by Judith Kerr	E	$10.49	1	$10.49
2440311	978-1-6643-5199-8	Moo Deng Says No!: The Pygmy Hippo Internet Sensation! by Nicola Edwards	E	$6.29	1	$6.29
2423734	978-1-338-68725-5	My Moms Love Me by Anna Membrino	E	$6.29	1	$6.29
2418342	978-1-4197-4219-4	One, Two, Grandma Loves You by Shelly Becker	E	$6.29	1	$6.29
2422114	978-1-5362-4084-9	One-Osaurus, Two-osaurus by Kim Norman	E	$6.29	1	$6.29
2430511	978-1-4598-4232-8	Oops! by Julie Massy	E	$9.07	1	$9.07
2446064	978-1-4549-6440-7	Pigeon WON't Count To 10! by Mo Willems	E	$6.99	1	$6.99
2426022	978-1-4547-1214-5	Rainbow Snail by Karin Akesson	E	$6.99	1	$6.99
2416923	978-1-4598-3788-1	Runaway Blanket by Nancy Deas	E	$7.67	1	$7.67
2436880	978-0-374-39373-1	Scariest Kitten in the World by Kate Messner	E	$6.29	1	$6.29
2416501	978-1-957363-93-6	Snap! by Anna Walker	E	$9.07	1	$9.07
2418169	979-8-88777-142-7	Sometimes Families ... by Charlotte Trounce	E	$7.69	1	$7.69
2438985	978-0-593-90307-0	Spooky, Scary Skeletons by Andrew Gold	E	$6.29	1	$6.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2423339	978-0-593-69288-2	This Is the First Book I Will Read to You by Francesco Sedita	E	$6.29	1	$6.29
2453530	978-1-4197-4209-5	Too Early by Nora Ericson	E	$6.99	1	$6.99
2446227	978-1-4998-1716-4	We're All in This Together by Ernie Young	E	$6.99	1	$6.99
2413415	978-1-6659-5202-6	Welcome Book by Danna Smith	E	$6.29	1	$6.29
2443534	978-1-62354-659-5	Wombat by Philip Bunting	E	$6.29	1	$6.29
2439993	978-0-593-88866-7	World to Meet by Katie Harnett	E	$6.29	1	$6.29
2435127	979-8-89509-015-2	Art'bracadabra: Discover the Magic of Art with a Surprise on Every Page! by Raphael Garnier	702	$18.89	1	$18.89
2413813	978-0-593-75200-5	Birds Around the World: An Opposites Book by Chloe Goodhart	598	$6.99	1	$6.99
2441409	978-1-4236-6821-3	C Is for Cats by Greg Paprocki	808.7	$9.09	1	$9.09
2416483	978-1-63819-189-6	Grow, Seed, Grow! by Caroline Derlatka	635	$10.49	1	$10.49
2414145	978-1-64170-971-2	I Love Me from A to Z by Emily Lauren Dick	421.1	$9.09	1	$9.09
2413277	978-0-7440-9923-2	You and Your Body: A First Look Inside the Human Body by Punam Krishan	612	$11.89	1	$11.89
2426771	978-1-76121-190-4	You're Fabulous As You Are by Sophie Beer	170	$8.39	1	$8.39
2450908	978-0-316-58750-1	Knight Owl's Little Christmas by Christopher Denise	E	$6.29	1	$6.29
2436495	978-0-593-69899-0	Little Bunny, Fall Is Here! by Deborah Marcero	E	$6.29	1	$6.29
2413760	978-0-593-69896-9	Little Bunny, Spring Is Here! by Deborah Marcero	E	$6.29	1	$6.29
2449191	978-1-5362-4699-5	Mushroom Lullaby by Kenneth Kraegel	E	$6.29	1	$6.29
2452006	978-1-4998-1743-0	Poe and Lars by Kashelle Gourley	E	$6.29	1	$6.29
2422129	978-1-5362-2907-3	River's Journey by Sally M. Walker	551	$5.59	1	$5.59
2415445	978-1-6643-5143-1	One Little Tadpole: Exploring Nature for Curious Kids by Molly Littleboy	598	$9.09	1	$9.09
2453455	978-1-4642-3031-8	I Love You with All My Hearts! by Rose Rossner	E	$9.09	1	$9.09
2450819	978-0-310-17664-0	Rosie's Wild Ride: Chasing Big Dreams by Paige Murray	E	$7.69	1	$7.69
2432592	978-80-00-07442-9	Whose Baby Is This? by Radka Piro	591	$9.07	1	$9.07
2453615	978-0-593-75418-4	This Is Hip-Hop: And Other Street Dances by Rekha S. Rajan	792	$6.29	1	$6.29
2434778	978-1-62354-609-0	Whose Egg Is That? by Darrin Lunde	591.4	$6.29	1	$6.29
2414992	978-1-5362-3083-3	Your Forest by Jon Klassen	E	$6.29	1	$6.29

Total quantity	58 Titles(58 Books)
Subtotal	$430.54
Processing Options Total	$0.00
Shipping & Handling	$8.61
Shipping Discount	-$8.61
Tax	$44.13
Grand Total	**$474.67**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: ADULT SPANISH ODC 1
List#: 207786
Date: 2/17/2026 6:13:42 PM
Total quantity: 206 Titles(206 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	206	$679.80

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2474704	978-84-9070-793-7	Reina roja (Edicion limitada, cantos pintados) (Red Queen (Limited Edition, Sprayed Edges)) by Juan Gomez-jurado	Fic	$11.87	1	$11.87
2349268	978-0-7440-8906-6	Libro de la Arquitectura (The Architecture Book)	720	$20.99	1	$20.99
2349263	978-0-7440-8909-7	Libro de la Historia LGBTQ+ (The LGBTQ+ History Book)	306	$19.59	1	$19.59
2317278	978-0-7440-7910-4	Libro de la Quimica (The Chemistry Book)	540	$19.59	1	$19.59
2381066	978-84-18395-67-3	Abadia de Northanger (Northanger Abbey) by Jane Austen	Fic	$13.97	1	$13.97
2380976	978-84-18395-55-0	Al Faro (To the Lighthouse) by Virginia Woolf	Fic	$13.27	1	$13.27
2380977	978-84-18395-83-3	Ana de Avonlea (Anne of Avonlea) by Lucy Maud Montgomery	Fic	$14.67	1	$14.67
2380981	978-84-18395-62-8	Ana de Tejas Verdes (Anne of Green Gables) by Lucy Maud Montgomery	Fic	$14.67	1	$14.67
2380982	978-84-18933-47-9	Ana de la Isla (Anne of the Island) by L. M. Montgomery	Fic	$14.67	1	$14.67
2417222	978-84-18008-98-6	Antologia de Relatos de Miedo (Scary Stories Anthology)	Fic	$13.97	1	$13.97
2381019	978-84-18395-68-0	Arsene Lupin, Caballero Ladron (Arsene Lupin, Gentleman Burglar) by Maurice Leblanc	Fic	$11.17	1	$11.17
2381027	978-84-18395-82-6	Arsene Lupin: Contra Herlock Sholmes (Arsene Lupin vs. Herlock Sholmes) by Maurice Leblanc	Fic	$11.17	1	$11.17
2381032	978-84-18933-75-2	Arsene Lupin: La Aguja Hueca (Arsene Lupin: The Hollow Needle) by Maurice Leblanc	Fic	$13.27	1	$13.27
2381083	978-84-18395-87-1	Aventuras de Tom Sawyer (Spanish Edition) by Mark Twain	Fic	$13.27	1	$13.27
2381068	978-84-18933-55-4	Carta de una Desconocida (Letter from a Stranger) by Stefan Zweig	Fic	$9.77	1	$9.77
2381085	978-84-18395-57-4	Conde de Montecristo (The Count of Monte Cristo) by Alexandre Dumas	Fic	$33.57	1	$33.57

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2381087	978-84-18395-13-0	Corazon de las Tinieblas (Heart of Darkness) by Joseph Conrad	Fic	$9.07	1	$9.07
2381078	978-84-18395-86-4	Cuentos de Navidad misteriosos (Mysterious Christmas Stories)	Fic	$15.37	1	$15.37
2381039	978-84-18395-97-0	Emma (Spanish Edition) by Jane Austen	Fic	$17.47	1	$17.47
2381089	978-84-18395-18-5	Gran Gatsby (The Great Gatsby) by Francis Scott Fitzgerald	Fic	$11.17	1	$11.17
2381102	978-84-17430-10-8	Heidi (Spanish Edition) by Johanna Spyri	Fic	$11.17	1	$11.17
2381091	978-84-18395-64-2	Hombre que sabia demasiado y otros relatos (The Man Who Knew Too Much) by G. K. Chesterton	Fic	$18.87	1	$18.87
2381101	978-84-18395-03-1	Hombrecitos (Spanish Edition) by Louisa May Alcott	Fic	$13.97	1	$13.97
2381067	978-84-18395-85-7	Inquilina de Wildfell Hall (Spanish Edition) by Anne Bronte	Fic	$21.67	1	$21.67
2381093	978-84-18933-73-8	Jardin Secreto (The Secret Garden) by Frances Hodgson Burnett	Fic	$14.67	1	$14.67
2381096	978-84-18395-27-7	Libro de la selva (The Jungle Book) by Rudyard Kipling	Fic	$14.67	1	$14.67
2381088	978-84-18933-54-7	Mendel el de Los Libros (Spanish Edition) by Stefan Zweig	Fic	$9.07	1	$9.07
2381069	978-84-18395-14-7	Mujer de Blanco (Spanish Edition) by William Wilkie Collins	Fic	$20.97	1	$20.97
2381086	978-84-18395-56-7	Olas (Spanish Edition) by Adeline Virginia Woolf	Fic	$13.27	1	$13.27
2381029	978-84-18933-39-4	Rebelion en la Granja (Animal Farm) by George Orwell	Fic	$11.17	1	$11.17
2438108	978-84-18933-26-4	Relatos de Fantasmas (Ghost Short Stories)	Fic	$15.37	1	$15.37
2381033	978-84-18395-84-0	Rimas y Leyendas (Spanish Edition) by Gustavo Adolfo Becquer	Fic	$14.67	1	$14.67
2381035	978-84-18395-63-5	Robinson Crusoe (Spanish Edition) by Daniel Defoe	Fic	$21.67	1	$21.67
2381044	978-84-18395-33-8	Su Ultimo Saludo (His Last Bow) by Arthur Conan Doyle	Fic	$13.97	1	$13.97
2381048	978-84-18395-79-6	Veinte Poemas de Amor y una Cancion Desesperada (Spanish Edition) by Pablo Neruda	861	$10.47	1	$10.47
2381073	978-84-18395-98-7	Vuelta al Mundo en 80 Dias (Spanish Edition) by Jules Verne	Fic	$13.97	1	$13.97
2438443	978-84-10190-60-3	Casa de Llama y Sombra (House o F Flame and Shadow) (Special Edition) by Sarah J. Maas	Fic	$19.57	1	$19.57
2474980	978-84-01-03136-6	Quien esta mintiendo? (Who Is Lying?) by Modesto Garcia	741.5	$18.17	1	$18.17
2475172	979-8-217-12987-4	Espiritus, fantasmas y mundo sobrenatural: Una historia ilustrada(History of Ghosts, Spirits and the Supernatural) by Dk	133	$24.50	1	$24.50
2475175	979-8-217-13016-0	Libro de la historia militar (Military History Book) by Dk	355	$20.99	1	$20.99
2349228	978-0-7440-8898-4	Como Funciona la Politica (How Politics Works)	320	$17.50	1	$17.50
2475291	978-84-19260-54-3	Viento y verdad (Wind and Truth) by Brandon Sanderson	Fic	$25.87	1	$25.87
2475294	978-84-19260-51-2	Bosque oscuro. (Edicion ilustrada) (The Dark Forest (Illustrated Edition)) by Cixin Liu	Fic	$20.27	1	$20.27
2488215	978-84-01-03828-0	Anatema (Edicion cantos pintados) (Anathema (Sprayed Edges Edition)) by Keri Lake	Fic	$23.07	1	$23.07
2488302	978-84-19982-41-4	Fallen Gods (Spanish Edition) by Rachel Van Dyken	Fic	$18.17	1	$18.17
2488329	978-84-264-3192-9	Jane. Una biografia literaria de Jane Austen (Jane. A Literary Biography of Jane Austen) by Cristina Onoro	920	$18.17	1	$18.17
2480052	978-84-264-2557-7	Miedo (The Fear) by Maria Hesse	920	$17.47	1	$17.47
2488298	978-84-19940-84-1	Yo, Julio Cesar (I, Julius Caesar) by Alfred De Montesquiou	920	$27.97	1	$27.97
2488355	978-84-663-5957-3	1984 (edicion definitiva avalada por The Orwell Estate) (edicion especial limitada con cantos pintados) (1984 (Edition Endorsed by The Orwell Estate)) by George Orwell	Fic	$13.97	1	$13.97
2488137	978-84-10381-71-1	Africanus (Edicion limitada con cantos tintados) (Africanus (Limited Sprayed Edges Edition)) by Santiago Posteguillo	Fic	$16.07	1	$16.07
2487709	978-84-10050-07-5	Alchemised (Edicion especial, tapa dura) (Alchemised (Special Edition, Hardcover)) by Senlinyu	Fic	$27.27	1	$27.27
2488195	978-628-7745-93-3	Algo que brilla como el mar (Something that Glitters Like the Sea) by Hiromi Kawakami	Fic	$10.47	1	$10.47
2488421	978-84-9105-777-2	Alicia en el pais de las maravillas (edicion limitada con cantos tintados) (Alice in Wonderland (Limited Sprayed Edges Edition)) by Lewis Carroll	Fic	$10.47	1	$10.47
2481282	978-84-9129-802-1	Aliento de las llamas (The Breath of Flames) by Angela Banzas	Fic	$17.47	1	$17.47
2481548	979-13-87652-07-4	Aliento de los dioses (Edicion cantos pintados) (Warbreaker (Sprayed Edges Edition)) by Brandon Sanderson	Fic	$13.97	1	$13.97
2488356	978-84-663-6059-3	Amiga estupenda (edicion especial limitada con cantos pintados) (My Brilliant Friend (Limited Edition with Sprayed Edges)) by Elena Ferrante	Fic	$13.97	1	$13.97
2328050	978-84-9105-518-1	Anna Karenina (Spanish Edition) by Lev Tolstoy	Fic	$13.27	1	$13.27
2480864	978-84-19409-77-5	Aqui (Here) by Richard Mcguire	741.5	$19.57	1	$19.57
2492827	978-84-18067-95-2	Ariel (Spanish Edition) by Sylvia Plath	811	$18.17	1	$18.17
2488428	978-84-947092-0-3	Arte de la guerra by Sun Tzu	950	$8.37	1	$8.37
2366139	978-84-18051-81-4	Aunque Vuelvas a Tener Miedo (Even If You're Afraid Again) by Manu Erena	811	$11.87	1	$11.87

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2488316	978-84-253-6913-1	Autocuidado (Self-Care: 52 Weeks to Take Care of Yourself) by Yolanda Cuevas	153	$17.47	1	$17.47
2488690	979-8-217-13545-5	Bella Italia: Un viaje a traves de la cultura, el arte, los paisajes y la gastronomia(Italian Way)	914	$17.50	1	$17.50
2368867	978-84-19965-41-7	Bella Rosalina (Fair Rosaline) by Natasha Solomons	Fic	$16.07	1	$16.07
2481371	978-84-666-8040-0	Biblioteca de Cordoba (The Library in Cordoba) by Andrea D. Morales	Fic	$17.47	1	$17.47
2481335	978-84-666-8008-0	Boligrafo de gel verde (Edicion especial cantos pintados) (The Green Gel Pen (Special Edition Srayed Edges)) by Eloy Moreno	Fic	$17.47	1	$17.47
2488144	978-84-663-8789-7	Brillo de las luciernagas (edicion limitada con cantos tintados) (The Glow of the Fireflies (Limited Sprayed Edges Edition)) by Paul Pen	Fic	$13.97	1	$13.97
2481197	978-84-253-6854-7	Buen vasallo (The Good Servant) by Francisco Narla	Fic	$18.17	1	$18.17
2487451	978-607-38-6228-8	Cabeza de mi padre (Edicion especial) (My Father's Head (Special Edition)) by Alma Delia Murillo	Fic	$18.87	1	$18.87
2488227	978-84-03-52535-1	Camino del artista (Edicion especial limitada) (The Artist Way (Special Limited edition)) by Julia Cameron	153	$20.97	1	$20.97
2488359	978-84-663-7505-4	Capitan Alatriste (edicion especial limitada con cantos pintados) (Captain Alatriste (Limited Edition with Sprayed Edges)) by Arturo Peres-reverte	Fic	$13.97	1	$13.97
2480690	978-84-10352-62-9	Carlitos y Snoopy. Las mejores tiras de Peanuts (Charlie Brown and Snoopy. The Best Peanuts Comic Strips) by Charles M. Schulz	741.5	$24.47	1	$24.47
2480681	978-84-01-03577-7	Carrie (50 Aniversario) (Carrie (50th Anniversary Edition)) by Stephen King	Fic	$22.37	1	$22.37
2342671	978-1-64473-682-1	Casa de Los Espiritus (The House of the Spirits) by Isabel Allende	Fic	$20.97	1	$20.97
2488308	978-84-253-6513-3	Casa de huespedes (The Guest House) by Ana Lena Rivera	Fic	$17.47	1	$17.47
2481347	978-84-666-8075-2	Casa de la mina (The House at the Mine) by Maica Gorgal	Fic	$16.77	1	$16.77
2481350	978-84-663-8081-2	Casa de los espiritus (Edicion especial cantos pintados) (The House of the Spirits) by Isabel Allende	Fic	$13.97	1	$13.97
2480549	978-84-264-3134-9	Casa en La Ciudad (A House in the City) by Ilu Ros	741	$22.37	1	$22.37
2487858	978-84-663-8817-7	Catedral del mar (edicion limitada con cantos tintados) (Cathedral of the Sea (Limited Sprayed Edges Edition)) by Ildefonso Falcones	Fic	$14.67	1	$14.67
2487857	978-84-663-8816-0	Chica de nieve (edicion limitada con cantos tintados) (The Snow Girl (Limited Sprayed Edges Edition)) by Javier Castillo	Fic	$13.27	1	$13.27
2323706	978-84-19004-78-9	Cocina Los Postres de Harry Potter (Cook the Harry Potter Desserts) by Tom Grimm	641	$13.97	1	$13.97
2369301	978-0-7440-9386-5	Como No Matar Tus Plantas (How Not to Kill Your Houseplant) by Veronica Peerless	635	$11.89	1	$11.89
2307389	978-84-264-1101-3	Companera (The Companion) by Agustina Guerrero	920	$17.47	1	$17.47
2480715	978-0-593-85013-8	Corte y confeccion: Prendas de vestir a medida(Tailoring Book) by Alison Smith	646.43	$28.00	1	$28.00
2481560	978-84-666-7631-1	Cuando llega la noche (When Night Falls) by Mikel Santiago	Fic	$16.07	1	$16.07
2488260	978-84-10433-95-3	Cuando todo encaja (When Everything Fits) by Raul Refree	703	$16.77	1	$16.77
2480575	978-84-663-7890-1	Cuento perfecto (Edicion limitada, cantos pintados) (A Perfect Story (Limited Edition, Sprayed Edges)) by Elisabet Benavent	Fic	$13.97	1	$13.97
2290503	978-84-9105-528-0	Cumbres Borrascosas (Wuthering Heights) by Emily Bronte	Fic	$11.87	1	$11.87
2488424	978-84-9105-781-9	Cumbres borrascosas (edicion limitada con cantos tintados) (Wutheirng Heights (Limited Edition, Sprayed Edges)) by Emily Bronte	Fic	$13.27	1	$13.27
2481424	978-84-204-7644-5	Detectives salvajes (edicion ilustrada) (The Savage Detectives (Illustrated Edition)) by Roberto Bolano	Fic	$29.37	1	$29.37
2481297	978-84-663-8082-9	Dia que se perdio el amor (Edicion especial cantos pintados) (The Day Love Was Lost (Special Edition Sprayed Edges)) by Javier Castillo	Fic	$12.57	1	$12.57
2481300	978-84-663-7892-5	Dia que se perdio la cordura (Edicion limitada, cantos pintados) (The Day Sanity was Lost (Limited Edition, Sprayed Edges)) by Javier Castillo	Fic	$12.57	1	$12.57
2285171	978-1-4002-3202-4	Dios No Te Olvido: El Esta Contigo, aun en Tiempos Inciertos (God Has Not Forgotten You, Even In Uncertain Times) by David Jeremiah	248.8	$11.19	1	$11.19
2480751	978-84-01-03578-4	Diva (Diva) by Reyes Monforte	Fic	$18.87	1	$18.87
2488277	978-84-17347-62-8	Dune (Edicion ilustrada) (Spanish Edition) by Frank Herbert	Fic	$24.47	1	$24.47
2488151	978-607-38-6424-4	Emprendedor ((Edicion Especial) (The Entrepreneur (Special Edition)) by Arturo Elias Ayub	338	$16.07	1	$16.07

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2480903	978-84-306-2691-5	En el jardin de las americanas (In the Garden of the Americans) by Cristina Onoro	305	$17.47	1	$17.47
2480904	978-84-666-7814-8	En el nombre de Borgia (In the Name of Borgia) by Juanjo Braulio	Fic	$20.27	1	$20.27
2480900	978-84-666-8177-3	En todos mis universos (In All My Universes) by Marianela Dos Santos	612	$15.37	1	$15.37
2480674	978-84-19437-74-7	Encias quemadas (Burnt Gums) by Natalia Velarde	741.5	$26.57	1	$26.57
2488390	978-84-666-8192-6	Enigma (Edicion limitada, cantos pintados) (Spanish Edition) by Runyx	Fic	$18.17	1	$18.17
2481074	978-84-01-03194-6	Erase una vez un libro (Once Upon a Time, There Was a Book) by Shinsuke Yoshitake	Fic	$18.87	1	$18.87
2481225	978-84-666-8186-5	Escalon 33 (Step 33) by Luis Zueco	Fic	$16.77	1	$16.77
2481439	978-84-253-6998-8	Espanol (The Spaniard) by Jorge Molist	Fic	$18.17	1	$18.17
2481312	978-84-18897-04-7	Eternauta 1969 (The Eternaut) by Hector German Oesterheld	741.5	$16.77	1	$16.77
2480793	978-84-663-8062-1	Fahrenheit 451 (Edicion conmemorativa) by Ray Bradbury	Fic	$10.47	1	$10.47
2480569	978-84-9129-708-6	Faro de la sirena (The Mermaid's Lighthouse) by Lucia Lago	Fic	$17.47	1	$17.47
2481031	978-84-264-0057-4	Fiesta de la senora Dalloway (edicion ilustrada) (Mrs. Dalloway's Party (Illustrated Edition)) by Virginia Woolf	Fic	$20.97	1	$20.97
2488142	978-84-663-8269-4	Fiesta del Chivo (edicion conmemorativa) (The Feast of the Goat (Commemorative Edition)) by Mario Vargas Llosa	Fic	$13.97	1	$13.97
2488284	978-84-19260-52-9	Fin de la muerte (Edicion ilustrada) (Death's End (Illustrated Edition)) by Cixin Liu	Fic	$24.47	1	$24.47
2480201	978-84-10298-40-8	Fuego en el cielo (Edicion especial limitada cantos pintados) (A Fire in the Sky (Limited Edition with Sprayed Edges)) by Sophie Jordan	Fic	$18.17	1	$18.17
2480828	978-84-253-6942-1	Germanico (Germanicus) by Valerio Massimo Germanico	Fic	$15.37	1	$15.37
2462570	979-8-217-12994-2	Gran Libro de la Costura. Nueva Edicion (The Sewing Book 3rd Edition) by Alison Smith	646	$28.00	1	$28.00
2480843	979-8-217-13186-0	Grand Prix by Dk	796	$20.99	1	$20.99
2481420	978-84-10352-57-5	Habitacion de al lado (The Room Next Door) by Pedro Almodovar	Fic	$16.77	1	$16.77
2481561	978-84-01-03562-3	Hasta que caiga la luna (Edicion limitada, cantos pintados) (When the Moon Hatched (Limited Edition, Sprayed Edges)) by Sarah A. Parker	Fic	$19.57	1	$19.57
2480865	978-84-666-8000-4	Herodes El Grande (Herod the Great) by Jose Luis Corral	Fic	$16.77	1	$16.77
2480734	978-84-10323-81-0	Hija de la venganza (Daughter of Vengeance) by Michael Mcdowell	Fic	$13.97	1	$13.97
2480911	978-84-253-6972-8	Invencible (Invincible) by Carlos Bassas Del Rey	Fic	$17.47	1	$17.47
2488275	978-84-125728-8-9	Invitada en casa (A Guest In the House) by E.m. Carroll	741.5	$24.47	1	$24.47
2310850	978-84-9105-591-4	Isla Del Tesoro (Treasure Island) by Robert Louis Stevenson	Fic	$9.77	1	$9.77
2480617	978-84-253-6242-2	Isla para esconderte (An Island to Hide On) by Elena Moreno Scheredre	Fic	$17.47	1	$17.47
2488285	978-84-19260-57-4	Islas de la Ascuaoscura (Isles of the Emberdark) by Brandon Sanderson	Fic	$20.97	1	$20.97
2290816	978-84-9105-526-6	Jane Eyre (Spanish) by Charlotte Bronte	Fic	$11.87	1	$11.87
2328052	978-84-9105-657-7	Julio Cesar (Julius Caesar) by William Shakespeare	822.3	$9.77	1	$9.77
2474419	978-84-15887-84-3	Lagrimas en H Mart: Una historia de amor, perdida y cocina coreana by Michelle Zauner	920	$17.50	1	$17.50
2488257	978-84-10340-65-7	Libro de mis vidas (Book of Lives: A Memoir of Sorts) by Margaret Atwood	920	$20.97	1	$20.97
2488339	978-84-272-5167-0	Llamada de Cthulhu y El color que cayo del cielo (The Call of Cthulhu and The Color Out of Space) by H. P. Lovecraft	Fic	$21.67	1	$21.67
2481120	978-84-666-7996-1	Luna roja (Red Moon) by Nieves Herrero	Fic	$16.77	1	$16.77
2290814	978-84-9105-524-2	Madame Bovary (Spanish Edition) by Gustave Flaubert	Fic	$11.87	1	$11.87
2481383	978-84-272-4043-8	Magia de los suenos (The Magic of Dreams) by Triana Fernandez Gomez	135	$15.37	1	$15.37
2481230	978-84-397-4459-7	Manual para la obediencia (Study for Obedience) by Sarah Bernstein	Fic	$13.97	1	$13.97
2480995	978-84-666-7911-4	Mapa de un mundo nuevo (Map of a New World) by Luis Zueco	Fic	$16.77	1	$16.77
2488213	978-84-01-03783-2	Misterio de Salem's Lot (ed. 50 aniversario) (Salem's Lot) by Stephen King	Fic	$22.37	1	$22.37
2488307	978-84-253-6057-2	Monje que vendio su Ferrari (edicion ilustrada) (The Monk Who Sold His Ferrari (Illustrated Edition)) by Robin Sharma	291	$22.37	1	$22.37
2307392	978-84-18870-82-8	Muerte en Santa Rita (Death at Santa Rita) by Elia Barcelo	Fic	$18.17	1	$18.17
2481390	979-8-89098-393-0	Murmullo de las abejas (Edicion 10 Aniversario) (The Murmur of Bees) by Sofia Segovia	Fic	$23.07	1	$23.07

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2480658	978-84-253-6829-5	Nacida de venus (Born of Venus) by Sonia Lleonart Dormua	Fic	$16.77	1	$16.77
2488577	979-13-87652-02-9	Nacidos de la Bruma (Edicion limitada con cantos tintados) (Mistborn I. The Final Empire (Limited Edition Sprayed Edges)) by Brandon Sanderson	741.5	$15.37	1	$15.37
2481060	978-84-253-6882-0	Nada sucede la vispera (Nothing Happens on the Eve) by Chufo Llorens	Fic	$17.47	1	$17.47
2488399	978-84-666-8281-7	Navidad londinense (A Londonesque Christmas) by Monica Gutierrez	Fic	$15.37	1	$15.37
2481280	978-84-663-8050-8	Nino con el pijama de rayas (Edicion limitada firmada) (The Boy in the Striped Pajamas (Limited Signed Edition)) by John Boyne	Fic	$13.27	1	$13.27
2488317	978-84-253-6938-4	No hagas montanas (ed. ilustrada) (Don't Make a Mountain Out of a Molehill (and EVERYTHING is a Molehill) (Illustrated Edition)) by Rafael Santandreu	158	$18.87	1	$18.87
2283645	978-84-18051-46-3	Nos Quedaran Mas Atardeceres (We Will Have More Sunsets) by Manu Erena	861	$9.77	1	$9.77
2487859	978-84-663-8956-3	Omnibus Saga Silvia (ediciOn especial limitada con cantos pintados) (The Silvia Series (Limited Sprayed Edges Edition)) by Elisabet Benavent	Fic	$17.47	1	$17.47
2488143	978-84-663-8788-0	Paciente silenciosa (edicion limitada con cantos tintados) (The Silent Patient (Limited Sprayed Edges Edition)) by Alex Michaelides	Fic	$13.97	1	$13.97
2488332	978-84-264-3295-7	Pan de angeles (Bread of Angels) by Patti Smith	920	$17.47	1	$17.47
2487860	978-84-663-9027-9	Parque Jurasico (edicion limitada) (Jurassic Park) by Michael Crichton	Fic	$13.97	1	$13.97
2481435	978-84-666-8111-7	Pequeno libro de las madres (The Small Book of Moms) by 72 Kilos	741.5	$13.97	1	$13.97
2481375	978-84-666-7738-7	Pequeno libro del amor (The Little Book of Love) by 72 Kilos	741.5	$13.27	1	$13.27
2488688	979-8-217-13541-7	Permaculture Garden (Spanish Edition) by Huw Richards	635	$21.00	1	$21.00
2488388	978-84-666-8139-1	Persiguiendo las estrellas (Las mujeres Hard I) (Chasing the Stars) by Sarah Lark	Fic	$16.77	1	$16.77
2481437	978-84-397-4435-1	Piedra blanda (The Soft Stone) by Rodrigo Cortes	741.5	$24.47	1	$24.47
2481116	978-84-10396-11-1	Piel de cuervo (edicion especial con cantos pintados) (Raven Skin (Special Edition with Sprayed Edges)) by Nia Blanco	Fic	$16.77	1	$16.77
2481408	978-84-19940-04-9	Plaga (The Plague) by Javier Gallego	741.5	$20.97	1	$20.97
2480947	978-84-253-6831-8	Pluma en el aire (Light as a Feather) by Alejandra Beigbedere	Fic	$18.87	1	$18.87
2488252	978-84-10299-74-0	Poesia reunida Cesar Vallejo (Edicion conmemorativa de la RAE y la ASALE) (Collected Poems by Cesar Vallejo (Commemorative Edition by the RAE and ASALE)) by Cesar Vallejo	811	$17.47	1	$17.47
2417186	978-84-397-4183-1	Pondre Mi oido en la Piedra Hasta Que Hable (I Will Put My Ear on the Stone Until It Speaks) by William Ospina	Fic	$15.37	1	$15.37
2481362	978-607-38-4870-1	Por el placer de vivir (Edicion de Regalo) (The Joy of Living (Gift Edition)) by Cesar Lozano	152.4	$13.97	1	$13.97
2488397	978-84-666-8277-0	Profeta (The Prophet) by Jose Maria Zavala	Fic	$17.47	1	$17.47
2481255	978-607-38-6129-8	Psicoanalista (The Analyst) by John Katzenbach	Fic	$20.99	1	$20.99
2488403	978-84-666-8310-4	Quiere mucho, pero nunca te olvides de quererte a ti (Love Deeply, But Never Forget to Love Yourself) by Manu Erena	808	$17.47	1	$17.47
2488694	979-8-217-13832-6	Quilts: Colchas de patchwork: Guia completa paso a paso(Quilting Book)	746	$28.00	1	$28.00
2480607	978-84-10257-55-9	Recuerda siempre: El nino, el topo, el zorro, el caballo y la tormenta (Always Remember: The Boy, the Mole, the Fox, the Horse and the Storm) by Charlie Mackesy	Fic	$17.47	1	$17.47
2488244	979-13-87652-31-9	Regalo (edicion limitada con cantos tintados) (The Gift (Limited Edition Sprayed Edges)) by Eloy Moreno	Fic	$13.97	1	$13.97
2481241	978-607-38-5293-7	Relatos de la noche (Ed. Especial, cantos pintados) (Tales of the Night (Special Edition Sprayed Edges)) by Uriel Reyes	Fic	$18.87	1	$18.87
2481105	978-84-666-7677-9	Retrato de una corte (Portrait of a Court) by Clara Mendivil	Fic	$18.17	1	$18.17
2311271	978-84-9105-530-3	Romeo y Julieta (Romeo and Juliet) by William Shakespeare	822.3	$9.77	1	$9.77
2488247	979-13-87724-08-5	Ship of Spells (Spanish Edition) by H. Leighton Dickson	Fic	$18.17	1	$18.17
2488574	979-13-87600-26-6	Si Einstein lo hubiera sabido (If Einstein Had Known) by Alain Aspect	530	$18.87	1	$18.87
2488382	978-84-663-8259-5	Siddhartha (edicion especial en tapa dura) (Siddhartha (Special Edition, Hard Cover)) by Hermann Hesse	Fic	$13.27	1	$13.27
2481487	978-84-666-7820-9	Siempre vienen de noche (They Always Come at Nightfall) by Alberto Caliani	Fic	$22.37	1	$22.37
2481172	978-84-663-8134-5	Soldados de Salamina (Edicion limitada firmada) (Soldiers of Salamis (Limited and Signed Edition)) by Javier Cercas	Fic	$13.27	1	$13.27

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2480550	978-84-264-3130-1	Tan poca vida (Edicion especial con cantos pintados) (A Little Life (Special Edition with Sprayed Edges)) by Hanya Yanagihara	Fic	$23.07	1	$23.07
2480383	978-84-9129-439-9	Te he llamado por tu nombre (I Have Called You by Your Name) by Christian Galvez	Fic	$17.47	1	$17.47
2481401	978-84-272-4486-3	The Pairing (Menu para dos) by Casey Mcquiston	Fic	$19.57	1	$19.57
2480931	978-84-666-6918-4	Tierra sin rey (Land Without a King) by Luis Zueco	Fic	$17.47	1	$17.47
2488570	979-13-87512-95-8	Toda la verdad de mis mentiras (Edicion cantos pintados) (The Whole Truth about My Lies (Sprayed Edges Edition)) by Elisabet Benavent	Fic	$23.07	1	$23.07
2488569	979-13-87512-87-3	Todas esas cosas que te dire manana (ed. especial) (All Those Things I'll Tell You Tomorrow (Special Edition)) by Elisabet Benavent	158	$20.27	1	$20.27
2480783	978-84-306-2392-1	Todos los seres vivos (Premio Pulitzer) (Every Living Thing. The Great and Deadly Race to Know All Life) by Jason Roberts	508	$18.87	1	$18.87
2488396	978-84-666-8270-1	Tres mundos (The Three Worlds) by Santiago Posteguillo	Fic	$19.57	1	$19.57
2488279	978-84-18037-54-2	Trilogia Fundacion (Edicion ilustrada) (The Foundation Trilogy (Illustrated Edition)) by Isaac Asimov	Fic	$32.87	1	$32.87
2481519	978-628-7638-73-0	Triptico de la infamia (Ed.Conmemorativa) (Triptych of Infamy (Commemorative Edition)) by Pablo Montoya	Fic	$18.17	1	$18.17
2481428	978-1-64473-419-3	Ultimo secreto (The Secret of Secrets) by Dan Brown	Fic	$23.07	1	$23.07
2481531	978-84-01-03304-9	Unicas (Unique) by Alicia Vallina	Fic	$18.87	1	$18.87
2481534	978-84-253-6609-3	V2 (V2: A novel of World War II) by Robert Harris	Fic	$16.07	1	$16.07
2481456	978-84-663-8049-2	Verdad sobre el caso Harry Quebert (Edicion limitada firmada) (The Truth About the Harry Quebert Affair (Limited Signed Edition)) by Joel Dicker	Fic	$13.27	1	$13.27
2480541	978-84-204-7762-6	Vida breve (Edicion conmemorativa de la RAE y la ASALE) (A Brief Life) by Juan Carlos Onetti	Fic	$16.07	1	$16.07
2481542	978-84-663-7893-2	Violeta (edicion limitada con cantos pintados) (Violeta (Limited Edition with Sprayed Edges)) by Isabel Allende	Fic	$11.87	1	$11.87
2481087	978-628-7659-87-2	Virgen de los sicarios. Edicion Conmemorativa (Our Lady of the Assassins) by Fernando Vallejo	Fic	$11.87	1	$11.87
2489067	979-8-89098-598-9	Yiye que yo conoci: Lecciones de vida (The Yiye I Knew: Life Lessons) by Luis Angel Diaz Pabon	200	$13.99	1	$13.99
2481773	978-84-666-8127-8	Pintora de la luz (The Painter of Light) by Inma Aguilera	Fic	$16.77	1	$16.77
2482013	978-84-10274-04-4	Cita con la muerte (An Appointment with Death) by Elia Barcelo	Fic	$17.47	1	$17.47
2302036	978-84-397-2231-1	Aventuras de Pinocho (The Adventures of Pinocchio) by Carlo Collodi	Fic	$12.57	1	$12.57
2462018	978-84-9105-753-6	Don Quijote de la Mancha (Edicion Conmemorativa) (Don Quixote (Commemorative Edition)) by Miguel de Cervantes	Fic	$13.97	1	$13.97
2482649	978-84-666-8129-2	Atelier de la calle Lagasca (The Atelier of Lagasca Street) by Lucia Chacon	Fic	$16.77	1	$16.77
2482539	978-84-666-8002-8	Promesa de sangre (Blood Oath) by Lucia G. Sobrado	Fic	$18.17	1	$18.17
2482540	978-84-666-7984-8	Rey de sombras (King of Shadows) by Lucia G. Sobrado	Fic	$18.17	1	$18.17
2388436	978-84-18037-81-8	Trenza Del Mar Esmeralda (Tress of the Emerald Sea) by Brandon Sanderson	Fic	$20.97	1	$20.97
2482905	978-84-666-7247-4	Todo arde (Everything Burns) by Juan Gomez-jurado	Fic	$13.97	1	$13.97
2482773	978-84-666-7992-3	Todo muere (Everything Dies) by Juan Gomez-jurado	Fic	$13.97	1	$13.97
2482906	978-84-666-7568-0	Todo vuelve (Everything Comes Back) by Juan Gomez-jurado	Fic	$13.97	1	$13.97
2482873	978-84-666-7929-9	Romper el hielo (Edicion especial cantos pintados) (Icebreaker (Special Edition Sprayed Edges)) by Hannah Grace	Fic	$19.57	1	$19.57
2483116	978-84-19260-67-3	Sombras de identidad (ed. ilustrada) (Shadows of Self (Illustrated Edition)) by Brandon Sanderson	Fic	$19.57	1	$19.57
2483110	978-84-19848-74-1	Etereo (Edicion limitada, cantos pintados) (Ethereal (Limited Edition, Sprayed Edges)) by Joana Marcus	Fic	$19.57	1	$19.57
2483111	978-84-10396-40-1	Sempiterno (edicion especial limitada en tapa dura y con cantos tintados) (Sempiternal (Special Limited Edition, Hardcover, Sprayed Edges)) by Joana Marcus	Fic	$19.57	1	$19.57

Total quantity	206 Titles(206 Books)
Subtotal	$3,534.84
Processing Options Total	$679.80
Shipping & Handling	$70.70
Shipping Discount	-$70.70
Tax	$432.00
Grand Total	$4,646.64

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: ADULT NONFICTION ODC 1
List#: 207778
Date: 2/17/2026 6:08:58 PM
Total quantity: 591 Titles(591 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions

Barcode Range Start

Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	591	$1,950.30

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2487034	978-1-7972-4109-8	Has Anyone Seen My Hormones?: And Other Hot Flashes of Wisdom from Menopause and Midlife by Anne Taintor	817	$11.87	1	$11.87
2492670	978-1-68555-177-3	Away to See: Martha's Vineyard	709	$21.00	1	$21.00
2474777	978-0-8070-1905-4	Broken Spears: The Aztec Account of the Conquest of Mexico by Miguel Leon-portilla	972	$16.80	1	$16.80
2490155	978-0-8070-2412-6	Silencing the Past: Power and the Production of History by Michel-rolph Trouillot	972	$16.80	1	$16.80
2489942	978-0-593-96678-5	History Book	903	$24.49	1	$24.49
2488674	979-8-217-12831-0	Military Transport: The Definitive Visual History	358	$28.00	1	$28.00
2462542	978-0-593-96351-7	Civil War: A Visual History	355	$31.50	1	$31.50
2475217	979-8-217-12632-3	Simply Genetics: Facts Made Fast by Dk	576	$13.99	1	$13.99
2492993	978-1-4197-8734-8	Karl Lagerfeld: Fashion Icon	746	$28.00	1	$28.00
2466660	978-1-7972-3690-2	Sorry in advance for making things weird.: A Disappointing Affirmations Collection by Dave Tarnowski	158.1	$10.47	1	$10.47
2475319	978-0-593-47228-6	Nagasaki: The Last Witnesses by M. G. Sheftall	940.54	$24.50	1	$24.50
2466681	978-1-83758-614-1	Lonely Planet Epic Train Trips of the World	910.202	$28.00	1	$28.00
2475356	979-8-217-00718-9	Fruits of the Earth: Harvest Poems	808	$14.00	1	$14.00
2483440	978-1-57715-656-7	Camp Cooking	641.5	$11.89	1	$11.89
2483442	978-1-57715-654-3	Griddling by Editors of Press	641	$11.89	1	$11.89
2466766	978-1-83600-643-5	Martin Scorsese: The Iconic Filmmaker and His Work by Ian Nathan	791	$26.60	1	$26.60
2488474	978-90-209-8868-0	Chanel Illustrated by Siska Lyssens	746	$28.00	1	$28.00
2487559	978-1-84181-651-7	10 Spiritual Lessons You Can Learn from Your Cat: Essential Life Lessons We Can Learn From Our Furry Friend by Joanna Sandsmark	155	$8.39	1	$8.39
2487560	978-1-84181-652-4	10 Spiritual Lessons You Can Learn from Your Dog: Essential Life Lessons We Can Learn From Our Furry Friend by Joanna Sandsmark	155	$8.39	1	$8.39
2471081	979-8-3374-0055-6	100 Years of Anime by Matthieu Pinon	791	$27.99	1	$27.99
2490115	978-0-7893-4638-4	101 Ways to Use a Unicorn by Robb Pearlman	817	$5.59	1	$5.59

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2471103	978-90-209-3103-7	150 Libraries You Need to Visit Before You Die by Lea Teuscher	910			$27.97 | $27.97
2471107	978-1-59813-409-4	1619 Project Myth by Phillip W. Magness	306.3			$20.97 | $20.97
2477234	978-0-593-29696-7	1929: Inside the Greatest Crash in Wall Street History--and How It Shattered a Nation by Andrew Ross Sorkin	330			$24.50 | $24.50
2467397	978-1-5416-0321-9	1942: When World War II Engulfed the Globe by Peter Fritzsche	940			$24.50 | $24.50
2471115	978-1-5107-8415-4	21st Century Brain: How Our Brains Are Changing in Response to the Challenges of Social Networks, AI, Climate Change, and Stress by Richard Restak	612			$23.09 | $23.09
2477246	978-0-670-03457-4	33 Strategies of War by Robert Greene	303.6			$35.00 | $35.00
2487523	978-1-83799-705-3	365 Days of Self-Care: Daily Guidance for Greater Well-Being by Chris Spriggs	158			$7.69 | $7.69
2487562	978-1-84181-654-8	365 Reasons Why You're the Perfect Dad: A Little Book of Perfect Words to let Your Dad Know How Much You Love Him by Rebecca Hall	640			$8.39 | $8.39
2487561	978-1-84181-653-1	365 Reasons Why You're the Perfect Mom: A Little Book of Perfect Words to let Your Mom Know How Much You Love Her by Michael Powell	640			$8.39 | $8.39
2490220	978-1-250-35964-3	99 Ways to Die: And How to Avoid Them by Ashely Alker	613			$21.00 | $21.00
2492476	978-1-6680-5316-4	ADHD Field Guide for Adults by Cate Osborn	150			$21.00 | $21.00
2489136	979-8-89414-101-5	Abortion Companion: An Affirming Handbook for Your Choice and Your Journey by Becca Rea-tucker	362.1988			$15.40 | $15.40
2471140	978-1-6680-5324-9	Access: Inside the Abortion Underground and the Sixty-Year Battle for Reproductive Freedom by Rebecca Grant	362.1988			$20.99 | $20.99
2477276	978-0-7352-8202-5	Accidental Villain: A Soldier's Tale of War, Deceit and Exile by Linden Macintyre	942.082092			$19.95 | $19.95
2489702	978-0-451-49476-4	Advance Britannia: The Epic Story of the Second World War, 1942-1945 by Alan Allport	940			$28.00 | $28.00
2471155	978-1-5072-2434-2	Affirmations for Self-Love: 100 Lessons for Learning to Love Yourself Through the Beautiful Days, the Hard Days, and Everything in Between by Zanna Keithley	158			$12.60 | $12.60
2471157	978-1-83562-270-4	African Ancient Origins: Stories Of People and Civilization by Robin Walker	930			$10.49 | $10.49
2477330	979-8-217-15522-4	Alien and Sedition Acts	325			$14.00 | $14.00
2467437	978-0-306-83688-6	All In: The Pathway to Personal Growth and Professional Excellence by Brent Gleeson	158			$21.00 | $21.00
2467438	978-1-83600-295-6	All Roads Lead to Rome: Why we think about the Roman Empire daily by Rhiannon Garth Jones	937			$22.39 | $22.39
2477345	978-0-262-04979-5	Alphabet for Dreamers: How to See the World with Eyes Closed by Sharon Sliwinski	154.6			$19.57 | $19.57
2489262	979-8-89565-329-6	America in the 21st Century: A History of the Past Quarter Century by Larry Schweikart	940			$24.50 | $24.50
2477363	978-0-8065-4374-1	America's Most Gothic: Haunted History Stranger than Fiction by Leanna Renee Hieber	305			$20.30 | $20.30
2476968	978-0-7893-4448-9	America's National Historic Trails: Walking the Trails of History by Karen Berger	910			$13.99 | $13.99
2464239	978-0-06-325915-7	American Grammar: Race, Education, and the Building of a Nation by Jarvis R. Givens	370.97309			$22.40 | $22.40
2477356	978-0-593-71951-0	American Revolution and the Fate of the World by Richard Bell	973			$24.50 | $24.50
2483609	978-0-593-59755-2	American Struggle: Democracy, Dissent, and the Pursuit of a More Perfect Union: An Anthology by Jon Meacham	973			$26.60 | $26.60
2486941	978-1-914314-91-9	Ancient Britain For Modern Folk: A field guide to mounds, megaliths and more by Tom Howells	914			$13.97 | $13.97
2471221	978-1-6672-1164-0	Ancient Greek Philosophers	938			$20.99 | $20.99
2465544	978-1-250-38896-4	Animals Are A-holes: Meet the Biggest Jerks of the Animal Kingdom	817			$14.00 | $14.00
2471244	978-82-8154-160-3	Anna-Eva Bergman: Becoming Anna-Eva Bergman	709			$25.20 | $25.20
2486878	978-1-83799-753-4	Anxiety First-Aid Kit: Tips and Techniques to Help You Manage Anxiety in Various Situations by Claire Chamberlain	613			$8.39 | $8.39
2492576	978-1-78551-606-1	Architecture of Canterbury Cathedral by Jonathan Foyle	726			$28.00 | $28.00
2487025	978-1-7972-3683-4	Art But Make It Sports: Epic Matchups Where Art and Sports Collide by Lj Rader	817			$13.27 | $13.27
2490333	978-1-250-36453-1	Art Cure: The Science of How the Arts Save Lives by Daisy Fancourt	158			$20.29 | $20.29
2467473	978-1-83600-549-0	Art Fraud: Infamous forgers and how their fakes were uncovered by Susie Hodge	364			$18.20 | $18.20
2492135	978-1-63774-797-1	Art of the Craftsman: Advice, Inspiration, and Cautionary Tales for Anyone Who Dreams of Starting Their Own Shop by Jesse James	330			$17.47 | $17.47
2477449	978-0-7893-4446-5	At Home in The American Barn by James B. Garrison	645			$13.99 | $13.99
2491674	978-1-5235-3318-3	At Least You're Not an English Major: And Other Comforting Sentiments for the New Graduate by Glenn Boozan	817			$10.50 | $10.50
2489388	978-0-8478-4224-7	At the Derby: Kentucky's Grandest Celebration of Fashion by Lili Kobielski	746			$31.50 | $31.50

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2489520	978-0-262-05176-7	Atlas of Botanical Fragrance by Jean-claude Ellena	635.9			$20.97 1 $20.97
2467491	978-1-83600-602-2	Atlas of Unidentified Flying Objects: and Unidentified Anomalous Phenomena by Andy Mcgrillen	133			$19.60 1 $19.60
2471329	978-2-36195-910-4	Atlas of geographical curiosities - United Kingdom by Vitali Vitaliev	910			$20.97 1 $20.97
2462470	978-0-593-96675-4	Attention Seeker: A Neurodivergent Comedian's Guide to Thriving with ADHD by Darcy Michael	817			$20.99 1 $20.99
2491039	978-1-4019-9864-6	Awaken Your Highest Self: The Limiting Beliefs That Keep You Stuck--And the Heart Work That Sets You Free by Danny Morel	153			$19.59 1 $19.59
2487020	978-1-7972-3525-7	Awaken Your Myth: 6 Steps to Discover a Life of Peace and Purpose by Erik Ireland	158			$13.97 1 $13.97
2483976	978-0-593-23605-5	Awakening: The Path to Freedom and Enlightenment by Deepak Chopra	158			$19.60 1 $19.60
2467506	978-1-4549-5656-3	Bake It Gluten Free: 100 Recipes for Classic Treats by Dana Pollack	641			$24.50 1 $24.50
2489896	978-0-593-85074-9	Balancing Act: Creating Healthy Dependency and Connection Without Losing Yourself by Nedra Glover Tawwab	152			$21.00 1 $21.00
2491031	978-1-4019-9830-1	Be Your Own Bestie: A No-Nonsense Guide to Changing the Way You Treat Yourself by Misha Brown	158			$18.89 1 $18.89
2464257	978-0-06-339243-4	Be Yourself at Work: The Groundbreaking Power of Showing Up, Standing Out, and Leading from the Heart by Claude Silver	658			$22.40 1 $22.40
2471384	978-1-6680-2774-5	Beast in the Clouds: The Roosevelt Brothers' Deadly Quest to Find the Mythical Giant Panda by Nathalia Holt	508.5496			$20.99 1 $20.99
2489513	978-0-262-05151-4	Becoming Martian: How Living in Space Will Change Our Bodies and Minds by Scott Solomon	520			$20.97 1 $20.97
2477583	978-1-4019-9693-2	Becoming an Artist: How to Make Art Like a Human by Embracing Failure, Discovering Your Creative Voice and Finding Joy in the Process by Scott Christian Sava	153			$17.49 1 $17.49
2477587	978-1-84994-498-4	Bedside Companion to Folklore and Magic by Jane Mcmorland Hunter	808			$24.50 1 $24.50
2467527	978-1-78325-658-7	Bedtime Stories to Help You Sleep: Relaxing tales for adults by Taesha Glasgow	616			$13.99 1 $13.99
2491672	978-1-5235-3171-4	Begin Again, and Again, and Again: Notes on the Art of Perpetual Renewal by Alessandra Olanow	153			$14.00 1 $14.00
2489631	978-0-349-12869-6	Beliefism: How to stop hating the people we disagree with by Paul Dolan	150			$16.09 1 $16.09
2490046	978-0-8070-2486-7	Best Things in Life Aren't Things: Celebrating What Matters Most by Joann Davis	153			$14.00 1 $14.00
2491450	978-1-4930-9110-2	Bewitching Place: The Story of the Mark Twain House in Hartford by Steve Courtney	818			$20.97 1 $20.97
2488616	979-8-217-04403-0	Beyond Infidelity: How to Turn the End of Your Relationship into the Beginning of Your Life by Lauren Larusso	306			$21.00 1 $21.00
2467549	978-1-83600-422-6	Beyond the Veil: The Victorian Obsession With Mourning and Death by Paul Gambino	940			$20.30 1 $20.30
2464262	978-0-06-341560-7	Big Kids, Bigger Feelings: Navigating Defiance, Meltdowns, and Anxiety to Raise Confident, Connected Kids by Alyssa Blask Campbell	649			$20.29 1 $20.29
2489648	978-0-593-85531-7	Big Talk: How to Skip the Small Talk, Make Meaningful Connections, and Enrich Your Life by Kalina Silverman	158			$21.00 1 $21.00
2492543	978-1-6680-8205-8	Big Unlock: Liberate Your Creativity Through Mindful Journaling by Laura L. Rubin	158			$19.60 1 $19.60
2464974	978-1-250-28510-2	Biography of a Mountain: The Making and Meaning of Mount Rushmore by Matthew Davis	977			$21.00 1 $21.00
2471433	978-1-63774-623-3	Biology of Trauma: How the Body Holds Fear, Pain, and Overwhelm, and How to Heal It by Aimie Apigian	302			$20.97 1 $20.97
2490206	978-0-8117-7771-1	Bitter End: The Final Battles on the Eastern Front in World War II by Antonio J. Munoz	930			$24.47 1 $24.47
2487964	978-1-9848-6016-3	Black Film: A History of Black Representation and Participation in the Movies by David F. Walker	791.43			$17.49 1 $17.49
2464268	978-0-06-341817-2	Black Out Loud: The Transformative History of Black Comedy in America by Geoff Bennett	973			$23.09 1 $23.09
2477637	978-0-593-47423-5	Black-Owned: The Revolutionary Life of the Black Bookstore by Char Adams	973			$22.40 1 $22.40
2492174	978-1-63973-215-9	Blood Countess: Murder, Betrayal, and the Making of a Monster by Shelley Puhak	305			$23.09 1 $23.09
2489350	979-8-89710-030-9	Blood and Treasure: The Economics of Conflict from the Vikings to the Modern Era by Duncan Weldon	355			$22.40 1 $22.40
2477643	978-0-593-80308-0	Blood in Winter: England on the Brink of Civil War, 1642 by Jonathan Healey	941			$24.50 1 $24.50
2467618	978-1-5416-0770-5	Bloody Crowns: A New History of the Hundred Years War by Michael Livingston	941			$28.00 1 $28.00
2491223	978-1-4728-6562-5	Bloody Skies: Fifteenth Fighter Command Against all Odds by Thomas Mckelvey Cleaver	355			$22.40 1 $22.40

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2489756	978-0-593-59398-1	Bonded by Evolution: The New Science of Love and Connection by Paul Eastwick	155			$22.40 | $22.40
2413740	978-1-3990-9918-9	Book in the Ancient World: How the Wisdom of the Ages Was Preserved by Paul Chrystal	930			$30.07 | $30.07
2471474	978-1-63936-975-1	Book of Memory: How We Become Who We Are by Mark Rowlands	100			$18.87 | $18.87
2477663	978-1-80092-342-3	Book of Paper Gardens, The: 50 botanical paper projects to make by Fideli Sundqvist	745			$17.47 | $17.47
2490108	978-0-7893-4620-9	Book of Red Flags: Dating Signs They Aren't It by Jenny Gorelick	817			$17.47 | $17.47
2465617	978-1-3994-1452-4	Book of Sea Monsters: Leviathans of Literature by Prema Arasu	359			$24.50 | $24.50
2492074	978-1-6680-6623-2	Born to Flourish: How New Science and Ancient Wisdom Reveal a Simple Path to Thriving by Richard J. Davidson	158			$21.00 | $21.00
2470745	978-1-63936-588-3	Born: A History of Childbirth by Lucy Inglis	612			$20.97 | $20.97
2489165	979-8-89515-017-7	Boston, 1776: A Rogue Tour of Revolution City by Jd Dickey	973			$20.99 | $20.99
2492076	978-1-6680-7797-9	Brain Never Sleeps: Why We Dream and What It Means for Our Health by Karen Van Kampen	616			$19.59 | $19.59
2467647	978-0-7603-9523-3	Break Up with Narcissism: How to Break Free and Stay Free: The 4-Step Plan for Surviving Narcissistic Abuse by Dr. Alina Kastner	362			$19.60 | $19.60
2477689	978-0-7710-3034-5	Breaking Point: The New Big Shifts Putting Canada at Risk by Darrell Bricker	320			$21.00 | $21.00
2464275	978-0-06-337445-4	Breath of the Gods: The History and Future of the Wind by Simon Winchester	909			$24.50 | $24.50
2467575	978-1-0354-0217-5	Brief History of the End of the F*cking World: The hilarious and fascinating new book from the international bestselling author of HUMANS by Tom Phillips	909			$19.60 | $19.60
2464278	978-0-06-342945-1	Bright and Borrowed Light: Poems by Courtney Kampa	808			$18.20 | $18.20
2486840	978-1-78678-974-7	Bring Me Love: Finding and Keeping Love Using Divination and Folk Magic by Icy Sedgwick	613			$17.47 | $17.47
2485714	978-1-335-00703-2	Bring Me the Head of Joaquin Murrieta: The Bandit Chief Who Terrorized California and Launched the Legend of Zorro by John Boessenecker	920			$22.40 | $22.40
2483680	979-8-217-04399-6	But I'm Bored!: Discover the Power of Independent Play to Raise Confident, Resilient Kids by Lizzie Assa	649			$20.30 | $20.30
2487028	978-1-7972-3827-2	Butter Book by Anna Stockwell	641			$13.97 | $13.97
2477772	978-0-593-44790-1	CIA Book Club: The Secret Mission to Win the Cold War with Forbidden Literature by Charlie English	028.70947			$24.50 | $24.50
2488595	979-8-217-03559-5	Calm in a Book: Soothing Self-Care Rituals for Every Day by My Self-love Supply	155			$11.19 | $11.19
2471560	978-1-5107-8490-1	Can I Say That?: Why Free Speech Matters and How to Use It Fearlessly by Chloe Carmichael	158			$23.09 | $23.09
2467598	978-0-349-14644-7	Captain de Havilland's Moth: Tales of High Adventure from the Golden Age of Aviation by Alexander Norman	900			$20.30 | $20.30
2454960	979-8-89331-059-7	Captain's Dinner: A Shipwreck, an Act of Cannibalism, and a Murder Trial That Changed Legal History by Adam Cohen	364			$22.40 | $22.40
2471568	978-1-63936-973-7	Captives and Companions: A History of Slavery and the Slave Trade in the Islamic World by Justin Marozzi	297			$24.50 | $24.50
2471583	979-8-89565-118-6	Catastrophic Disclosure: The Deep State, Aliens, and the Truth by Kent Heckenlively	520			$22.40 | $22.40
2489930	978-0-7893-4642-1	Cats and Books by Universe	817			$6.99 | $6.99
2486937	978-1-84994-985-9	Cats in Pants by Naomi Tipping	817			$10.47 | $10.47
2471588	979-8-3374-0056-3	Cats in Pop Culture by Stephanie Chaptal	636			$27.99 | $27.99
2491653	978-1-5107-8486-4	Censorship-Industrial Complex by Andrew Lowenthal	364			$20.99 | $20.99
2471597	978-1-63936-977-5	Chain of Fire: The Siege of Khartoum and the Campaign of Egypt and the Sudan by Peter Hart	941			$24.50 | $24.50
2467686	978-1-5416-0651-7	Charlatans: How Grifters, Swindlers, and Hucksters Bamboozle the Media, the Markets, and the Masses by Moises Naim	364.16			$21.00 | $21.00
2448821	978-1-64445-341-4	Charlottesville: An American Story by Deborah Baker	975.5			$24.50 | $24.50
2489678	978-0-374-61502-4	Chasing Lewis's Monkeyflower: The Amazing Afterlife of the Lewis and Clark Expedition's Wild Plants by Elizabeth Adelman	635			$22.40 | $22.40
2477758	978-0-593-96162-9	Chemistry 100 Ideas in 100 Words: A Whistle-Stop Tour of Chemistry's Key Concepts by Dk	509			$11.89 | $11.89
2491654	978-1-5107-8509-0	Chemtrails Exposed: A New Manhattan Project by Peter A Kirby	628			$27.99 | $27.99
2492104	978-1-63557-838-6	Chosen and The Damned: Native Americans and the Making of Race in the United States by David J. Silverman	973			$25.19 | $25.19
2471635	978-82-8154-067-5	Christian Krohg: Pictures that captivate	709			$16.10 | $16.10
2487022	978-1-7972-3593-6	Citrus, Illustrated: A Cookbook of 35 Sweet and Savory Recipes by George Geary	641			$13.97 | $13.97
2490216	978-1-0350-8473-9	Cleaning Magic: 101 hints and tips for a green home by Nancy Birtwhistle	648			$18.19 | $18.19
2489446	978-0-262-05274-0	Clearing the Air: A Hopeful Guide to Solving Climate Change in 50 Questions and Answers by Hannah Ritchie	551			$19.57 | $19.57

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2492292	978-1-64604-798-7	Clutter Rehab: 101 Tips and Tricks to Declutter Your Home and Organize Your Space by Laura Wittmann	031.106				$13.99 | $13.99
2463719	978-1-4549-5811-6	Cocina Puerto Rico: Recipes From My Abuela's Kitchen To Yours by Mia Castro	641				$28.00 | $28.00
2490142	978-0-8070-1749-4	Collective Cure: Upstream Solutions for Better Public Health by Monica L. Wang	302				$19.57 | $19.57
2477789	978-0-593-71534-5	Collective Edge: Unlocking the Secret Power of Groups by Colin M. Fisher	305				$22.40 | $22.40
2489835	978-0-593-73066-9	Colored People Time: A Case for (Casual) Rebellion by Manny Fidel	814				$19.60 | $19.60
2467731	978-0-349-14670-6	Colour of Injustice by Lee Lawrence	306				$21.00 | $21.00
2490639	978-1-250-41028-3	Coming Storm: Power, Conflict, and Warnings from History by Odd Arne Westad	940				$19.59 | $19.59
2477816	978-1-80092-256-3	Companion by Caroline Bayol-lavoux	746				$11.87 | $11.87
2467757	978-1-5387-6950-8	Conjuring of America: Mojos, Mermaids, Medicine, and 400 Years of Black Women's Magic by Lindsey Stewart	299.6				$21.00 | $21.00
2477834	978-1-4019-7921-8	Connectability: Heal the Hidden Ways You Isolate, Find Your People, and Feel (At Last) Like You Belong by Anna Runkle	616				$17.49 | $17.49
2471700	978-1-63936-997-3	Conquering the North: China, Russia, Mongolia: 2,000 Years of Conflict by John Man	951				$20.97 | $20.97
2471701	978-1-5107-8403-1	Conspiracy Against Lithium: The Suppressed Essential Nutrient and its Benefits for Mental Health by Michael Nehls	573				$23.09 | $23.09
2471706	978-1-6680-6551-8	Convent Wisdom: How Sixteenth-Century Nuns Could Save Your Twenty-First-Century Life by Ana Garriga	305				$20.29 | $20.29
2489901	978-0-593-85274-3	Cost of Quiet: How to Have the Hard Conversations That Create Secure, Lasting Love by Colette Jane Fehr	152				$21.00 | $21.00
2487024	978-1-7972-3682-7	Crafting for Your Cat: 25 Playful Projects for You and Your Feline Friends by Annika Hinds	636.80028				$17.47 | $17.47
2471728	978-1-6680-3527-6	Crash of the Heavens: The Remarkable Story of Hannah Senesh and the Only Military Mission to Rescue Europe's Jews During World War II by Douglas Century	940				$21.00 | $21.00
2477874	978-1-68369-483-0	Crone Zone: How to Get Older with Style, Nerve, and a Little Bit of Magic by Nina Bargiel	158.1084				$13.29 | $13.29
2471747	979-8-89710-001-9	Crucible of Light: Islam and the Forging of European Civilization by Elizabeth Drayson	940				$24.50 | $24.50
2461600	978-1-5095-6395-1	Cruelty: A Cultural History by Wolfgang Muller-Funk	301				$24.50 | $24.50
2491483	978-1-4930-9361-8	DOOM 34: A Firsthand Account of the Top-Secret Mission that Launched Operation Desert Storm by Trey Morriss	956.7044				$20.97 | $20.97
2492777	978-1-78325-550-4	Dad Jokes: Greatest of All Time	808				$9.09 | $9.09
2471777	978-1-6680-2363-1	Dangerous Miracle: The Astonishing Rise and Looming Disaster of Antibiotics by Liam Shaw	570				$21.00 | $21.00
2465696	978-0-374-61107-1	Daring to Be Free: Rebellion and Resistance of the Enslaved in the Atlantic World by Sudhir Hazareesingh	909				$23.10 | $23.10
2467825	978-1-83600-424-0	Dark London: A Journey Through the City's Mysterious and Macabre Underworld by Dr. Drew Gray	940				$16.09 | $16.09
2471784	978-1-6680-1390-8	Dark Side of the Earth: Russia's Short-lived Victory over Totalitarianism by Mikhail Zygar	947				$22.40 | $22.40
2492396	978-1-6680-6217-3	Days of Love and Rage: A Story of Ordinary People Forging a Revolution by Anand Gopal	940				$24.50 | $24.50
2471794	979-8-88674-283-1	Dead in the Kitchen: The Official Grateful Dead Cookbook by Gabi Moskowitz	641				$24.50 | $24.50
2477943	978-0-593-98481-9	Deadpool's Affirmations: Feel Yourself to Heal Yourself by Rob Kutner	791				$11.89 | $11.89
2460342	978-0-593-53785-5	Deadwood: Gold, Guns, and Greed in the American West by Peter Cozzens	978.39101				$24.50 | $24.50
2485661	978-1-250-32959-2	Dealing With Feeling: Use Your Emotions to Create the Life You Want by Marc Brackett	152.4				$20.99 | $20.99
2488594	979-8-217-03532-8	Dear Love: A Book About Being Together by Charles Mcenerney	306.7				$11.19 | $11.19
2489712	978-0-593-18710-4	Death of Trotsky: The True Story of the Plot to Kill Stalin's Greatest Enemy by Josh Ireland	909				$24.50 | $24.50
2490325	978-1-0350-6424-3	Deep Meaningful Conversations with Yourself: For Reflection, Healing and Growth by Vex King	158				$17.49 | $17.49
2465707	978-1-4728-6286-0	Defenders of the Reich: The Luftwaffe's War against America's Bombers by Robert Forsyth	940				$28.00 | $28.00
2471816	978-1-5107-8291-4	Delivery Man: The Enemy-Alien Nisei Translator Who Saved his Battalion by Rory Laverty	940				$23.09 | $23.09
2460359	978-1-6680-9239-2	Devil Reached Toward the Sky: An Oral History of the Making and Unleashing of the Atomic Bomb by Garrett M. Graff	355.825119097309044				$24.50 | $24.50
2478011	978-0-8065-4288-1	Dig Me a Grave: The Inside Story of the Serial Killer Who Seduced the South by Richard A. Harpootlian	364				$20.30 | $20.30
2478012	978-0-593-85123-4	Digital Exhaustion: Simple Rules for Reclaiming Your Life by Paul Leonardi	158				$21.00 | $21.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2489706	978-0-525-61342-8	Dining Room: Exploring the Design of Twelve Iconic Rooms in Search of the Perfect Dining Experience by John Ota	729			$19.60 | $19.60
2460431	978-0-316-49655-1	Dinner with King Tut: How Rogue Archaeologists Are Re-Creating the Sights, Sounds, Smells, and Tastes of Lost Civilizations by Sam Kean	930.1028			$22.75 | $22.75
2471856	979-8-3374-0306-9	Disney Enchanted Elixirs: 40 Sweet and Savory Drinks and Soups Inspired by Disney and Pixar Animated Films by Thibaud Villanova	641			$20.99 | $20.99
2471860	979-8-3374-0098-3	Disney Villains Amigurumi: 20+ Crochet Patterns for the Unapologetic Crafter by Insight Editions	746			$17.49 | $17.49
2489869	978-0-593-80501-5	Distance of a Shout: Selected Poems by Michael Ondaatje	811			$24.50 | $24.50
2491375	978-1-4930-8805-8	Doctors' Riot of 1788: Body Snatching, Bloodletting, and Anatomy in America by Andy Mcphee	364			$20.97 | $20.97
2464311	978-0-06-341753-3	Does Anyone Else Feel This Way?: Essays on Conquering the Quarter-Life Crisis by Eli Rallo	158			$20.29 | $20.29
2465715	978-1-63973-688-1	Dog Affirmations: An Illustrated Journey Through Your Dog's Thoughts by Andrea Caceres	636			$12.59 | $12.59
2491701	978-1-5417-0593-7	Doom Loop: Why the World Economic Order is Spiraling into Disorder by Eswar S. Prasad	337			$22.40 | $22.40
2492466	978-1-6680-4983-9	Dopamine Kids: A Science-Based Plan to Rewire Your Child's Brain and Take Back Your Family in the Age of Screens and Ultraprocessed Foods by Michaeleen Doucleff	649.122			$21.00 | $21.00
2464313	978-0-06-334696-3	Dorie's Anytime Cakes by Dorie Greenspan	641			$24.50 | $24.50
2489661	978-0-374-60127-0	Dream Factory: London's First Playhouse and the Making of William Shakespeare by Daniel Swift	792.09421			$21.00 | $21.00
2471903	978-1-5072-2449-6	Dungeonmeister: The Expanded Edition: RPG Cocktails and Mocktails to Shake Up Your Campaign by Jef Aldrich	641			$13.30 | $13.30
2489890	978-0-593-83676-7	Dungeons and Dragons Crochet: A Book of Many Patterns by Stacy King	746.43			$20.99 | $20.99
2465727	978-1-80454-999-5	Eagle Days: Life and Death for the Luftwaffe in the Battle of Britain by Victoria Taylor	909			$23.09 | $23.09
2490817	978-1-5294-4196-3	Earth to Earth: Lives and Violent Deaths of a Devon Farming Family: A True Crime Classic Revisited by John Cornwell	364			$21.00 | $21.00
2491187	978-1-4549-6299-1	Einstein Vendetta: Hitler, Mussolini, and a True Story of Murder by Thomas Harding	909			$20.30 | $20.30
2490214	978-1-0350-7694-9	Eleanor: A 200-Mile Walk in Search of England's Lost Queen by Alice Loxton	940			$20.99 | $20.99
2478096	979-8-217-12630-9	Elements by Dk	540			$28.00 | $28.00
2467905	978-1-5416-0526-8	Emergent Mind: How Intelligence Arises in People and Machines by Gaurav Suri	006			$22.40 | $22.40
2471943	978-1-6682-2201-0	Emperor of All Maladies: A Biography of Cancer by Siddhartha Mukherjee	610			$23.10 | $23.10
2471946	978-1-9821-7501-6	Empire Without End: A New History of Britain and the Caribbean by Imaobong Umoren	972			$21.70 | $21.70
2471945	978-1-6680-0391-6	Empire of the Elite: Inside Conde Nast, the Media Dynasty That Reshaped America by Michael M. Grynbaum	070.50973			$20.99 | $20.99
2490106	978-0-7893-4618-6	Enchanting Book Nooks: Miniature Worlds and Settings to Craft and Decorate by Raphaele Vidaling	745			$24.50 | $24.50
2467912	978-1-5387-6643-9	End Emotional Outsourcing: How to Overcome Your Codependent, Perfectionist, People-Pleasing Habits and Reclaim Your Life by Beatriz Victoria Albina	362			$21.00 | $21.00
2489570	978-0-316-38194-9	End of Days: Ruby Ridge, the Apocalypse, and the Unmaking of America by Chris Jennings	364			$21.00 | $21.00
2489993	978-0-7198-4504-8	English Clocks: 800 Years of Innovation by Stephen Crouchman	681			$25.89 | $25.89
2467919	978-1-57715-534-8	Epic Earth: A Wild Ride Through the History of our Planet by Lindsay Nikole	576			$13.99 | $13.99
2472000	978-1-5107-8597-7	Essence of Bipolar Disorder: Based on Progress in Neuroscience and Genetics by William J. Walsh	616			$23.09 | $23.09
2491486	978-1-4930-9379-3	Everyday Extraordinary: A Scientist Ponders a Lifetime of Magical, Bizarre, and Paranormal Experiences by Barry Markovsky	520			$20.97 | $20.97
2491924	978-1-5460-0937-5	Everyday Spiritual Habits: Small, Simple Ways to Transform Your Faith, Starting Now by Hanna Seymour	240			$19.60 | $19.60
2467937	978-1-5294-3529-0	Everything is Great: The Weird, Wild and Wonderful World of Modern Britain by Dean Kinsella	808			$15.40 | $15.40
2443033	978-0-306-83404-2	Expert Witness: The Weight of Our Testimony When Justice Hangs in the Balance by Ann Wolbert Burgess	363.25			$21.00 | $21.00
2462474	979-8-217-13805-0	Face Yoga by Anastasia Goron	613			$15.39 | $15.39
2467960	978-0-7537-3564-0	Faeries, Sprites and Malevolent Spirits: An Anthology of Classic Poetry and Stoires by Aurora Thorne	809			$7.69 | $7.69
2463727	978-1-4549-5880-2	Fairylore: A Compendium Of The Fae Folk by Brittany Warman	133			$21.00 | $21.00
2485688	978-1-324-03652-4	Far Edges of the Known World: Life Beyond the Borders of Ancient Civilization by Owen Rees	903			$22.39 | $22.39

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2472067	978-1-6680-4629-6	Fatherhood: A History of Love and Power by Augustine Sedgewick	306.874				$21.00 | $21.00
2478214	979-8-217-04532-7	Fawning: Why the Need to Please Makes Us Lose Ourselves--and How to Find Our Way Back by Ingrid Clayton	150				$22.40 | $22.40
2464762	978-1-5416-0378-3	Feed The People!: Why Industrial Food is Good And How To Make it Even Better by Jan Dutkiewicz	363				$21.00 | $21.00
2478254	978-0-8070-0806-5	Fight for Sex Ed: The Century-Long Battle Between Truth and Doctrine by Margaret Grace Myers	613.9071				$20.97 | $20.97
2478257	978-0-593-47586-7	Fighting Fifteen: The Navy's Top Ace and the Deadliest Hellcat Squadron of the Pacific War by Stephen L. Moore	940				$24.50 | $24.50
2487693	978-1-923208-52-0	Final Word: A practical guided journal for you and your loved ones by Lisa Doust	153				$17.47 | $17.47
2489958	978-0-593-98016-3	Finally Hopeful: The Personalized, Whole-Body Plan to Find and Fix the Root Causes of Your Depression by James Greenblatt	616				$19.60 | $19.60
2467998	978-0-306-83433-2	Finding Focus: Own Your Attention in an Age of Distraction by Zelana Montminy	153.7				$20.30 | $20.30
2468000	978-1-5294-4293-9	Finnish Sauna: Steam, Wood, Stone and How to Build Your Own by Lassi A. Liikkanen	615				$21.00 | $21.00
2467604	978-1-5235-2775-5	First Contact: The Story of Our Obsession with Aliens by Becky Ferreira	520				$18.90 | $18.90
2460296	978-1-324-05110-7	Flashes of Brilliance: The Genius of Early Photography and How It Transformed Art, Science, and History by Anika Burgess	770.9				$24.50 | $24.50
2489641	978-0-525-62070-9	Flourish: The Art of Building Meaning, Joy, and Fulfillment by Daniel Coyle	158				$19.60 | $19.60
2490072	978-0-7624-8906-0	Flower Energy: Channeling the Healing Power of Blooms by Jenny Barker	745				$22.40 | $22.40
2472134	978-1-6680-1714-2	Flower Traveled in My Blood: The Incredible True Story of the Grandmothers Who Fought to Find a Stolen Generation of Children by Haley Cohen Gilliland	362.870982				$21.00 | $21.00
2490212	978-0-8478-7627-3	Flowers of Japan: Great Works of Japanese Woodblock Printing by Amelie Balcou	709				$24.50 | $24.50
2465770	978-0-374-39460-8	Flyboy in the Buttermilk: Essays on Contemporary America by Greg Tate	781.64089				$21.00 | $21.00
2468020	978-1-5235-3300-8	For the Love of Kewpie: A Cookbook and Celebration	641.81				$17.50 | $17.50
2478295	979-8-217-18222-0	Forgotten 500: The Untold Story of the Men Who Risked All for the Greatest Rescue Mission of World War II by Gregory A. Freeman	940				$22.40 | $22.40
2491523	978-1-4967-5077-8	Forgotten Souls: The Search for the Lost Tuskegee Airmen by Cheryl W. Thompson	355				$21.00 | $21.00
2478298	978-0-262-05096-8	Formula for Better Health: How to Save Millions of Lives--Including Your Own by Tom Frieden	353				$20.97 | $20.97
2491647	978-1-5107-8274-7	Fortunate Wind: How the Irish Famine Changed America by Niall O'dowd	940				$23.09 | $23.09
2491643	978-1-5107-5627-4	Four Died Trying	940				$23.09 | $23.09
2465776	978-1-250-37090-7	Fourth Intelligence Revolution: The Future of Espionage and the Battle to Save America by Anthony Vinci	327				$21.69 | $21.69
2492541	978-1-6680-8022-1	From Mistakes to Meaning: Owning Your Past So It Doesn't Own You by Michael Lynton	330				$21.00 | $21.00
2489436	979-8-9995299-8-5	From Trauma to Enlightenment by Brian Alman	150				$18.90 | $18.90
2478352	979-8-217-13762-6	Fungi for Gardeners: Know Your Garden Fungi and How to Grow Them by Dk	635				$13.29 | $13.29
2489381	978-0-8065-4413-7	G.I. G-Men: The Untold Story of the FBI's Search for American Traitors, Collaborators, and Spies in World War II Europe by Stephen Harding	355				$20.30 | $20.30
2478362	978-1-961293-40-3	Gandhi Book of Quotes: A Collection of Speeches, Quotations, Essays and Advice by Travis Hellstrom	954				$10.50 | $10.50
2491447	978-1-4930-9092-1	Gaslit Brain: Protect Your Brain from the Lies of Bullying, Gaslighting, and Institutional Complicity by Jennifer Fraser	362				$24.47 | $24.47
2465791	978-1-250-32300-2	Gemini: Stepping Stone to the Moon, the Untold Story by Jeffrey Kluger	520				$22.40 | $22.40
2486920	978-1-78884-332-4	Genius of Rei Kawakubo: The woman who founded Comme des Garcons by Terry Newman	745				$31.50 | $31.50
2489938	978-0-8117-7648-6	Gettysburg Surgeons: Facing a Common Enemy in the Civil War's Deadliest Battle by Barbara Franco	973.7				$24.47 | $24.47
2490316	978-1-0350-3402-4	Ghost Nation: The Story of Taiwan and Its Struggle for Survival by Chris Horton	958				$21.00 | $21.00
2487837	978-1-964786-06-3	Gilded Age Fashion: 50 Iconic Looks and the Stories Behind Them by Block	745				$19.25 | $19.25
2489384	978-0-8065-4460-1	Globemaster Down: Soviet Espionage and the Doomed American Attempt to Sneak Nukes into Europe by Tod Robberson	909				$20.30 | $20.30
2464764	978-1-5460-0898-9	God Made Easy: A Simple Guide To Connecting With The Divine by Patrice Karst	269				$12.59 | $12.59

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2489260	979-8-89565-295-4	God Shot: Healing Trauma's Legacy: The Science, the Stories, the Solution by Eugene Lipov	613			$21.00 | $21.00
2490109	978-0-7893-4621-6	Good Enough to Eat: The Art of Noah Verrier by Noah Verrier	709			$24.50 | $24.50
2478453	978-0-593-80141-3	Great Contradiction: The Tragic Side of the American Founding by Joseph J. Ellis	306.3			$21.70 | $21.70
2468111	978-1-83799-478-6	Great Minds Think Differently: Quotes and Affirmations to Celebrate the Power of Neurodiversity	616			$7.69 | $7.69
2491664	978-1-5107-8629-5	Great Train Heist: The California SMART Taxpayer Rip-off by Michael J. Coffino	330			$23.09 | $23.09
2471973	978-1-9821-8131-4	Greatest Sentence Ever Written by Walter Isaacson	973			$14.00 | $14.00
2478458	978-1-64502-379-1	Green Crime: Inside the Minds of the People Destroying the Planet, and How to Stop Them by Julia Shaw	363			$19.57 | $19.57
2487439	978-1-915406-56-9	Guest Among Stars by Mark Ford	809			$20.27 | $20.27
2478483	978-1-923239-40-1	Guide to the Night Sky: The science and lore behind our constellations by Dr. Sara Webb	520			$18.87 | $18.87
2468127	979-8-89414-032-2	Guide(s) Book: Mapping Out Life's Journey with Spirit by Your Side by Maryann Dimarco	158			$20.30 | $20.30
2489884	978-0-593-83346-9	Guilt Free: Reclaiming Your Life from Unreasonable Expectations by Jennifer Reid	152			$21.00 | $21.00
2460308	978-1-9848-7890-8	Gunfighters: How Texas Made the West Wild by Bryan Burrough	976.405			$24.50 | $24.50
2472339	978-1-965429-08-2	Gut Cure: Stop the Rot: Restore Your Body from the Inside Out by Dr. Mercola	615			$17.49 | $17.49
2472345	978-1-61243-964-8	Hair of the Dog to Paint the Town Red: The Curious Origins of Everyday Sayings and Fun Phrases by Andrew Thompson	031.279			$13.97 | $13.97
2492511	978-1-6680-7058-1	Hannibal Lecter: A Life by Brian Raftery	791			$21.00 | $21.00
2478503	978-1-80429-810-7	Hate: The Uses of a Powerful Emotion by Seyda Kurt	155			$17.47 | $17.47
2487962	978-1-9821-9884-8	Healing Power of Resilience: A New Prescription for Health and Well-Being by Tara Narula	616			$21.00 | $21.00
2489651	978-0-593-65676-1	Healing the Oppressed Body: A Therapeutic Guide for Radical Self-Liberation by Andrea Gutierrez-glik	362			$20.30 | $20.30
2472382	978-1-63936-829-7	Heiresses: Marriage, Inheritance, and Slavery in the Caribbean by Miranda Kaufmann	941			$24.50 | $24.50
2472406	978-1-6680-3804-8	Hiroshima Men: The Quest to Build the Atomic Bomb, and the Fateful Decision to Use It by Iain Macgregor	355.8			$22.40 | $22.40
2472409	978-1-6680-9899-8	History Matters by David Mccullough	973			$18.90 | $18.90
2491194	978-1-4549-6553-4	History of Art in One Sentence: 500 Years of Art (But Funny) by Verity Babbs	709			$15.40 | $15.40
2472414	978-1-6672-0522-9	History of the World in 500 Buildings by Sophie Collins	909			$19.59 | $19.59
2490387	978-1-0359-1248-3	Hitler Years: Holocaust 1933-1945 by Frank Mcdonough	940			$31.50 | $31.50
2490138	978-0-8065-4478-6	Hollywood vs. Nazis: How the Movie Studios Took On Nazis Infiltrating Los Angeles by Michael Benson	973			$20.30 | $20.30
2492720	978-1-76145-188-1	Home: DIY Recipes for a Toxin-Free, Low-Waste Life by Birrell	648			$16.09 | $16.09
2464771	978-0-316-57788-5	Hormone Healthy Eats: 100 Recipes to Balance Your Hormones, Support Your Cycle, and Feel Your Absolute Best by Lauren Chambers	613			$24.50 | $24.50
2468224	978-1-57715-549-2	Hot Girl Walk: Find Happiness, Achieve Your Dreams, and Cultivate Confidence by Mia Lind	158			$11.89 | $11.89
2468226	978-1-5294-4665-4	Hot Victorians: Meet Your Dream Man From the Past by Aaron Radford-wattley	817			$13.29 | $13.29
2492613	978-1-6682-1675-0	How Equality Wins: A New Vision for an Inclusive America by Kenji Yoshino	330			$20.30 | $20.30
2492448	978-1-6680-2600-7	How Great Ideas Happen: The Hidden Steps Behind Breakthrough Success by George Newman	153			$21.00 | $21.00
2490514	978-1-250-36372-5	How Not to Die: Revised and Updated: Discover the Foods Scientifically Proven to Prevent and Reverse Disease by Michael Greger	613			$25.89 | $25.89
2487524	978-1-83799-709-1	How to Awaken Your Inner Goddess: Empowering Rituals to Help You Radiate Divine Feminine Energy by Sally Brockway	613			$8.39 | $8.39
2464378	978-0-06-339481-0	How to Be Bold: The Surprising Science of Everyday Courage by Ranjay Gulati	158			$22.40 | $22.40
2487116	978-1-80024-232-6	How to Build a Spitfire by David Price	940			$24.50 | $24.50
2487526	978-1-83799-743-5	How to De-Stress in Five Minutes a Day: Inspiring Ideas to Help You Unwind Every Day by Joanne Mallon	158			$8.39 | $8.39
2489904	978-0-593-85500-3	How to Disagree Better by Julia Minson	302			$21.00 | $21.00
2492551	978-1-6680-8489-2	How to Live a Meaningful Life: Using Design Thinking to Unlock Purpose, Joy, and Flow Every Day by Bill Burnett	158			$21.00 | $21.00
2489965	978-0-593-98118-4	How to Retreat: A Seasonal Guide to Finding Space for Your Self by Caroline Sylge	158			$17.50 | $17.50
2478578	978-1-80429-919-7	How to be Real: A Survival Guide in Challenging Times by Stephen Frosh	146			$18.87 | $18.87

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2468243	978-1-0354-2904-2	How to be an Adult: Everything you need to know about being a grown up, from bills to break-ups by Ann Russell	158			$14.70 | $14.70
2468276	978-1-78472-872-4	Hugh Johnson's Pocket Wine Book 2026 by Margaret Rand	641			$13.29 | $13.29
2484069	979-8-89070-043-8	Human Approach to World Peace Special Edition by Dalai Lama	294			$20.97 | $20.97
2489940	978-0-593-96352-4	Human Brain Book: A Visual Guide to the Structure and Function by Rita Carter	612			$28.00 | $28.00
2468277	978-0-316-57758-8	Humanish: What Talking to Your Cat or Naming Your Car Reveals About the Uniquely Human Need to Humanize by Justin Gregg	155			$21.00 | $21.00
2462608	978-0-385-55068-0	Humor Me: How Laughing More Can Make You Present, Creative, Connected, and Happy by Christopher Duffy	158			$20.30 | $20.30
2488829	978-0-306-83679-4	Hunger Crushing Combo Method: The Simple Secret to Eating Well Without Ever Dieting Again by Abbey Sharp	613			$22.75 | $22.75
2491794	978-1-5387-6788-7	Hush: How to Radiate Power and Confidence Without Saying a Word by Linda Clemons	158			$19.60 | $19.60
2478614	978-0-262-05094-4	Hypocrisy Trap: How Changing What We Criticize Can Improve Our Lives by Michael Halisworth	302.2			$20.97 | $20.97
2468284	978-1-83799-713-8	I Love You: Romantic Quotes for the One You Love	158			$7.69 | $7.69
2468355	978-0-316-57876-9	IVF Blueprint: Everything You Need to Know About In Vitro Fertilization, Egg Freezing, and Embryo Transfer by Abby Eblen	616			$21.00 | $21.00
2491397	978-1-4930-8893-5	Idea Machine: How Books Built Our World and Shape Our Future by Joel J. Miller	940			$24.47 | $24.47
2486084	978-1-5064-8765-6	In Defense of Dabbling: The Brilliance of Being a Total Amateur by Karen Walrond	790.1			$19.59 | $19.59
2465834	978-1-3994-2629-9	In Machines We Trust: How to navigate the risks of AI and unlock its true potential by Ray Eitel-porter	650			$24.50 | $24.50
2487358	978-1-83681-056-8	Infinite Edge: Master the Six Inner Forces to Find Your Edge by James Vincent	153			$16.07 | $16.07
2490996	978-1-3998-2240-4	Interrupted Journeys: Badgers and Other Roadside Distractions by Adrian Potter	508			$14.69 | $14.69
2489645	978-0-593-59662-3	Intimacy: A Field Guide to Finding Connection and Feeling Your Deep Desires by Ita O'brien	152			$21.00 | $21.00
2489595	978-0-316-59403-5	Intimate Animal: The Science of Sex, Fidelity, and Why We Live and Die for Love by Justin R. Garcia	152			$21.00 | $21.00
2465847	978-1-4728-6699-8	Into the Reich: The Red Army's advance to the Oder in 1945 by Prit Buttar	940			$24.50 | $24.50
2490754	978-1-250-89162-4	Invisible ADHD: Proven Mood and Life Management for Smart Yet Scattered Women by Shanna Pearson	616.85			$21.69 | $21.69
2489453	978-0-06-334467-9	Island at the Edge of the World: The Forgotten History of Easter Island by Mike Pitts	995			$23.80 | $23.80
2478716	978-0-8070-1879-8	Israel on the Brink: And the Eight Revolutions that Could Lead to Decolonization and Coexistence by Ilan Pappe	956.05			$19.57 | $19.57
2489566	978-0-306-83737-1	It's Not You. It's the World: A Mental Health Survival Guide by Joanna Cheek	613			$21.00 | $21.00
2459835	978-1-250-42090-9	Jane Austen Romance Guide for Well-Bred Women: Spotting Red Flags from Across the Ballroom by Emily Reed	809			$10.50 | $10.50
2468358	978-1-83783-472-3	Jane Said It Best: Musings on Life and Love from the Wit of a Generation by Quadrille	808			$9.09 | $9.09
2478743	978-1-59853-801-4	Jim Crow: Voices from a Century of Struggle Part 2 (LOA #387): 1919-1976: Tulsa to the Boston Busing Crisis	305.800973			$29.75 | $29.75
2465858	978-1-4728-6664-6	Jungle Commandos: The Battle for Arakan, Burma 1945 by Lucy Betteridge-dyson	940			$19.60 | $19.60
2492546	978-1-6680-8240-9	Kennedy's Coup: How America Descended into Vietnam by Jack Cheevers	940			$24.50 | $24.50
2468387	978-0-306-83764-7	Kiku: The Japanese Art of Good Listening by Haru Yamada	158			$21.00 | $21.00
2491668	978-1-5107-8650-9	Killed to Order: China's Organ Harvesting Industry and the True Nature of America's Biggest Adversary by Jan Jekielek	320			$19.59 | $19.59
2491051	978-1-4087-3194-9	Killer Cults by Emma Kenny	364			$19.60 | $19.60
2491799	978-1-5387-6904-1	Killers of Roe: My Investigation into the Mysterious Death of Abortion Rights by Amy Littlefield	940			$21.00 | $21.00
2478234	978-1-4000-6852-4	Killing Season: The Autumn of 1914, Ypres, and the Afternoon That Cost Germany a War by Robert Cowley	940.4			$28.00 | $28.00
2468388	978-1-4549-5626-6	Kim Chi Eats the World: 75 Recipes Fit for a (Drag) Queen - A Cookbook by Kim Chi	641			$24.50 | $24.50
2472674	978-1-6680-6065-0	Kin: The Future of Family by Sophie Lucido Johnson	158			$20.30 | $20.30
2472689	978-1-5107-6643-3	Kings Mountain: America's Most Forgotten Battle That Changed the Course of the American Revolution by Phillip Thomas Tucker	973			$24.50 | $24.50
2488678	979-8-217-13432-8	Knitting Book: A Step-by-Step Guide to Creating Imaginative Projects for the Home and to Wear	746			$28.00 | $28.00
2472436	979-8-88674-275-6	Knitting the U.S.A.: Fifty Easy-to-Follow Designs for Beautiful Beanies Inspired by Each State in America by Nancy Bates	746			$22.75 | $22.75
2465867	978-1-4728-6975-3	Korea: War Without End by Richard Dannatt	951			$24.50 | $24.50

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2483919	978-0-593-80274-8	Language as Liberation: Reflections on the American Canon by Toni Morrison	810			$22.40 1 $22.40
2468413	978-0-306-83566-7	Last Great Dream: How Bohemians Became Hippies and Created the Sixties by Dennis Mcnally	306.0973			$22.75 1 $22.75
2460449	978-1-6680-1778-4	Launching Liberty: The Epic Race to Build the Ships That Took America to War by Doug Most	940.54			$21.69 1 $21.69
2490501	978-1-250-35835-6	Laws of Thought: The Quest for a Mathematical Theory of the Mind by Tom Griffiths	320			$22.39 1 $22.39
2478845	978-1-68369-507-3	Leaving the Ocean Was a Mistake: Life Lessons from Sixty Sea Creatures by Cara Giaimo	578.77			$10.49 1 $10.49
2490118	978-0-7893-4649-0	Leonardo da Vinci: A Life in Drawing by Martin Clayton	709			$12.59 1 $12.59
2468434	978-1-5387-5830-4	Less Is Liberation: Finding Freedom from a Life of Overwhelm by Christine Platt	158			$19.60 1 $19.60
2489479	978-0-241-76291-2	Lessons from a Default Parent: Surviving the Front Line of Family Life (Without Losing Your Sh*t) by Lou Beckett	158			$17.49 1 $17.49
2465875	978-0-374-60967-2	Let My Country Awake: Indian Revolutionaries in America and the Fight to Overthrow the British Raj by Scott Miller	954			$21.00 1 $21.00
2465880	978-1-63973-428-3	Library of Lost Maps: An Archive of a World in Progress by James Cheshire	907			$28.00 1 $28.00
2489244	979-8-89565-028-8	Life Is Lifey: The A to Z's on Navigating Life's Messy Middle by Sarah Shahi	158			$20.29 1 $20.29
2489688	978-0-374-61797-4	Life You Want by Adam Phillips	150			$18.20 1 $18.20
2487525	978-1-83799-717-6	Little Book of Ikigai: An Introduction to the Japanese Philosophy of Leading a Happy and Meaningful Life by Jo Peters	158			$9.79 1 $9.79
2472793	978-1-5072-2439-7	Little Book of Winter: A Cozy Guide to a Season of Comfort and Happiness by Brittany Viklund	158			$11.20 1 $11.20
2478914	978-0-593-47526-3	Little Woodchucks: Offerman Woodshop's Guide to Tools and Tomfoolery by Nick Offerman	745.51			$24.50 1 $24.50
2484171	978-0-593-71656-4	Liturgies Of The Wild: Myths That Make Us by Martin Shaw	248			$21.00 1 $21.00
2491729	978-1-5294-4719-4	Live Like Wes: Home Decor Inspired by Wes Anderson Movies by Jessie Atkinson	645			$19.60 1 $19.60
2472816	978-1-957588-32-2	Long Game: A Playbook of the World's Most Enduring Companies by Eric Becker	338			$19.60 1 $19.60
2489306	979-8-89565-588-7	Longevity Made Simple: Live Healthier for Longer with the DRESS Code by Shad Marvasti	613			$20.29 1 $20.29
2465564	978-1-250-36100-4	Love the Teen You Have: A Practical Guide to Transforming Conflict into Connection by Dr. Ann-louise Lockhart	649.1			$21.69 1 $21.69
2490236	978-0-8129-9755-2	Love's Labor: How We Break and Make the Bonds of Love by Stephen Grosz	150			$19.60 1 $19.60
2490635	978-1-250-40871-6	Lucky Egg: Understanding Your Fertility and How to Get Pregnant NOW by Dr. Lucky Sekhon	613			$24.50 1 $24.50
2492478	978-1-6680-5642-4	Mafia: A Global History by Ryan Gingeras	364			$24.50 1 $24.50
2478990	978-0-385-69818-4	Maple Syrup: A Short History of Canada's Sweetest Obsession by Peter Kuitenbrouwer	971			$18.19 1 $18.19
2489844	978-0-593-73640-1	Marriage Habit: 10 Simple Practices to Build a More Intentional, Thriving Relationship by Casey Caston	306			$18.90 1 $18.90
2468558	979-8-89414-000-1	Math Cats: Scratching the Surface of Mathematical Concepts by Daniel M Look	510			$14.00 1 $14.00
2462467	978-0-593-85059-6	Mattering: The Secret to a Life of Deep Connection and Purpose by Jennifer Breheny Wallace	158			$21.00 1 $21.00
2486548	979-8-88770-285-8	Mayo Clinic Guide to Arthritis: Managing Joint Pain for an Active Life by Courtney A. Arment	616.7			$21.00 1 $21.00
2472912	979-8-89710-003-3	Meaning of Life: Answers to Life's Biggest Questions from the World's Most Extraordinary People by James Bailey	153			$20.97 1 $20.97
2489751	978-0-593-54542-3	Meaning of Your Life: Finding Purpose in an Age of Emptiness by Arthur C. Brooks	158			$21.00 1 $21.00
2492133	978-1-63774-793-3	Meat: How the Next Agricultural Revolution Will Transform Humanity's Favorite Food: and Our Future by Bruce Friedrich	664			$20.97 1 $20.97
2479057	978-1-4019-6869-4	Medical Medium Life-Changing Foods Expanded Edition: Save Yourself and Your Loved Ones with Fruits, Leafy Greens, Herbs, Wild Foods and Vegetables by Anthony William	613			$27.99 1 $27.99
2490054	978-0-8478-7611-2	Medicine from the Trees: Herbal Remedies from the Forest for Whole-Body Health and Wellness by Jj Pursell	613			$24.47 1 $24.47
2491005	978-1-3998-2734-8	MenoWars: Why menopause's moment has gone horribly wrong, and how you can navigate your way through it by Fiona Clark	613			$17.49 1 $17.49
2468575	978-1-3998-1363-1	Menopause Moment: Mindset, Hormones and Science for Optimal Longevity by Kelly Casperson	613			$17.49 1 $17.49
2493757	978-0-8021-6484-1	Mexico: An Epic National Story by Paul Gillingham	972			$24.50 1 $24.50
2454852	978-1-6680-5141-2	Midnight Flyboys: The American Bomber Crews and Allied Secret Agents Who Aided the French Resistance in World War II by Bruce Henderson	940			$21.00 1 $21.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal	
2456947	978-0-593-47561-4	Midnight on the Potomac: The Last Year of the Civil War, the Lincoln Assassination, and the Rebirth of America by Scott Ellsworth	973.7				$22.40 | $22.40
2460411	978-1-250-28574-4	Milena and Margarete: A Love Story in Ravensbruck by Gwen Strauss	940.53				$20.30 | $20.30
2492508	978-1-6680-6933-2	Mind Over Grind: How to Break Free When Work Hijacks Your Life by Guy Winch	150				$20.30 | $20.30
2472952	978-1-912983-88-9	Mindful Meowments: A cat's guide to feeling purrfectly zen by Rus Hudda	817				$9.09 | $9.09
2491941	978-1-57715-741-0	Mindful Mom: 365 Peaceful Reflections and Daily Gratitude for Moms by Meg Sylvester	158				$13.99 | $13.99
2489823	978-0-593-72667-9	Misfit: A Survival Guide by Sean Mortimer	158				$20.30 | $20.30
2454880	978-1-78884-336-2	Modern Guide to Vintage Jewellery by Beth Bernstein	739				$24.50 | $24.50
2487032	978-1-7972-3939-2	Mom Meditations: Survive the WTF Moments of Motherhood (Without Losing Your Sh*t) by Serena Dorman	640				$11.87 | $11.87
2491678	978-1-5266-4412-1	Moonlight Express: Around the World By Night Train by Monisha Rajesh	647				$20.99 | $20.99
2489652	978-0-593-65704-1	Moving Toward Freedom: The Political Education of Enslaved Americans by Susan Eva O'donovan	973				$24.50 | $24.50
2468625	978-1-83783-450-1	Mushrooms: A Guide for the Curious by Susan E. Clark	595				$10.49 | $10.49
2488593	979-8-217-03380-5	My Life in Stories: A Guided Journal from The Moth by The Moth	158				$16.09 | $16.09
2465940	978-1-4728-7298-2	Nation in Arms: The Five Armies That Made Europe by Barney White-spunner	355				$21.00 | $21.00
2491731	978-1-5294-4846-7	National Parks by Mel White	508				$24.50 | $24.50
2479187	978-0-593-83340-7	Nations Apart: How Clashing Regional Cultures Shattered America by Colin Woodard	973				$22.40 | $22.40
2468651	978-1-5417-0233-2	Nazi Mind: Twelve Warnings from History by Laurence Rees	943.086				$24.50 | $24.50
2489561	978-0-306-83518-6	No One's Coming: The Rogue Heroes Our Government Turns to When There's Nowhere Else to Turn by Kevin Hazzard	909				$21.00 | $21.00
2485702	978-1-324-05117-6	Nuclear Age: An Epic Race for Arms Power and Survival by Serhii Plokhy	900				$22.39 | $22.39
2479292	978-0-593-84700-8	Offline Humans: How to Stop Scrolling and Reconnect with the Real World by Natalie Alzate	650				$17.50 | $17.50
2479212	978-0-593-83379-7	On Antisemitism: A Word in History by Mark Mazower	909				$20.30 | $20.30
2479297	978-1-58834-776-3	On a Mission: The Smithsonian History of US Women Astronauts by Valerie Neal	520				$20.97 | $20.97
2473176	978-1-912983-87-2	On the Ball: Amazing sports facts from football to pickleball, baseball to golf by Alf Alderson	817				$10.49 | $10.49
2490419	978-1-250-28433-4	Once There Was a Town: The Memory Books of a Lost Jewish World by Jane Ziegelman	909				$19.60 | $19.60
2473182	979-8-9907958-4-6	One Day Better: Mental Performance Concepts to Transform Your Game and Life by Jeff Troesch	796				$20.97 | $20.97
2491440	978-1-4930-9064-8	One Hand Clapping: Unraveling the Mystery of the Human Mind by Nikolay Kukushkin	320				$23.07 | $23.07
2489746	978-0-593-53503-5	Open Space: From Earth to Eternity--the Global Race to Explore and Conquer the Cosmos by David Ariosto	520				$24.50 | $24.50
2465979	978-1-4728-6946-3	Opening the Gates of Hell: Operation Barbarossa, June-July 1941 by Richard Hargreaves	940				$24.50 | $24.50
2473212	978-1-63936-919-5	Operation Bowler: The Audacious Allied Bombing of Venice during World War II by Jonathan Glancey	940.54				$22.40 | $22.40
2489736	978-0-593-44762-8	Original Sin: On the Genetics of Vice, the Problem of Blame, and the Future of Forgiveness by Kathryn Paige Harden	576				$21.00 | $21.00
2490141	978-0-8070-1492-9	Our Diaries, Ourselves: How Diarists Chronicle Their Lives and Document Our World by Betsy Rubiner	306				$20.27 | $20.27
2473080	979-8-89331-066-5	Overthinker's Guide to Making Decisions: How to Make Decisions without Losing Your Mind by Joseph Nguyen	153				$15.40 | $15.40
2473260	978-1-62371-615-8	Palestine Mapped: From the River to the Sea in Early Geographic Thought by Thomas Suarez	956				$31.50 | $31.50
2489853	978-0-593-79881-2	Parenting Anxiety: Breaking the Cycle of Worry and Raising Resilient Kids by Meredith Elkins	152				$21.00 | $21.00
2486575	979-8-89242-213-0	Parents Have Feelings Too: A Guide to Navigating Your Emotions So You and Your Family Can Thrive by Hilary Jacobs Hendel	640				$20.99 | $20.99
2487311	978-1-83600-981-8	Paul Nicklen: A Photography Masterclass by Paul Nicklen	771				$17.50 | $17.50
2465994	978-1-4728-6531-1	Pearl Harbor: Japan's Greatest Disaster by Mark Stille	940				$24.50 | $24.50
2464491	978-0-06-338247-3	Period Brain: The New Science of Why We PMS and How to Fix It: A Manifesto for Women by Sarah E. Hill	613				$20.99 | $20.99
2468748	978-1-5417-0546-3	Personal Branding for Introverts by Goldie Chan	158				$21.00 | $21.00
2487197	978-1-80429-602-8	Philosophy of War: Why We Fight by Frederic Gros	320				$12.57 | $12.57
2490622	978-1-250-40250-9	Picky: How American Children Became the Fussiest Eaters in History by Helen Zoe Veit	613				$20.30 | $20.30

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2490105	978-0-7893-4616-2	Plane Food: A Frequent Flier's Taste of Feasts and Fails by Dori Sadovnik	817			$19.57 | $19.57
2479425	978-0-593-32122-5	Planning Miracles: How to Prevent Future Pandemics by Jon Cohen	579			$24.50 | $24.50
2468783	978-1-7972-3674-2	Pleasures of Wintering: Winter-Inspired Rituals for Rejuvenation, Serenity, and Joy by Erin Niimi Longhurst	158			$13.27 | $13.27
2490324	978-1-0350-6307-9	Poems for Happiness	808			$10.49 | $10.49
2492436	978-1-6680-5715-5	Poisonous People: How to Resist Them and Improve Your Life by Leanne Ten Brinke	150			$20.30 | $20.30
2468797	978-1-64503-040-9	Power and the Glory: The History of the World Cup by Jonathan Wilson	790			$24.50 | $24.50
2490347	978-1-0354-1881-7	Power and the Palace: The Inside Story of the Monarchy and 10 Downing Street by Valentine Low	940			$22.40 | $22.40
2492132	978-1-63774-772-8	Power of Guilt: Why We Feel It and Its Surprising Ability to Heal by Chris Moore	158			$19.57 | $19.57
2492542	978-1-6680-8112-9	Power of Real Optimism: A Practical, Science-Based Guide to Staying Resilient, Curious, and Open Even When Life Is Hard by Deepika Chopra	150			$20.99 | $20.99
2490932	978-1-3994-2439-4	Power of Self-Healing: Take action over your trauma by Sarah Woodhouse	616			$18.20 | $18.20
2492491	978-1-6680-6279-1	Powerful Primate: How Controlling Energy Enabled Us to Build Civilization by Roland Ennos	320			$21.00 | $21.00
2473360	978-1-68555-173-5	Practicing the Art of Becoming: Embracing Risk and Discovering Your Authentic Being by Patty Elvey	158			$16.07 | $16.07
2468824	978-1-5416-0611-1	Price of Democracy: The Revolutionary Power of Taxation in American History by Vanessa S. Williamson	973			$22.40 | $22.40
2489855	978-0-593-79911-6	Price of Mercy: Unfair Trials, a Violent System, and a Public Defender's Search for Justice in America by Emily Galvin Almanza	345.73			$22.40 | $22.40
2492108	978-1-63586-876-0	Printing from the Garden: Create Stunning, One-of-a-Kind Prints with Flowers and Leaves by Alison Kelly	745			$21.00 | $21.00
2466015	978-1-250-27831-9	Progress: How One Idea Built Civilization and Now Threatens to Destroy It by Samuel Miller Mcdonald	909			$23.80 | $23.80
2466016	978-1-250-33874-7	Project Mind Control: Sidney Gottlieb, the CIA, and the Tragedy of MKULTRA by John Lisle	327.1273			$21.00 | $21.00
2466017	978-1-250-33028-4	Promise Delivered: Ten American Heroes and the Battle to Rename Our Nation's Military Bases by Ty Seidule	973			$20.30 | $20.30
2468828	978-0-349-12893-1	Prosecuting the Powerful: War Crimes and the Battle for Justice by Steve Crawshaw	900			$20.30 | $20.30
2464498	978-0-06-342462-3	Psychobabble: Viral Mental Health Myths and the Truths to Set You Free by Joe Nucci	362			$20.29 | $20.29
2490525	978-1-250-37138-6	Pull: How Gravity Shapes Your Body, Steadies the Mind, and Guides Our Health by Brennan Spiegel	612.68			$21.00 | $21.00
2473402	978-1-63774-747-6	Pursuit of Home: A Real Estate Guide to Achieving the American Dream by Scott Harris	643			$21.00 | $21.00
2473403	978-1-6680-5374-4	Pursuit of Liberty: How Hamilton vs. Jefferson Ignited the Lasting Battle Over Power in America by Jeffrey Rosen	973			$21.70 | $21.70
2485600	978-0-8021-6596-1	Queer Enlightenments: A Hidden History of Lovers Lawbreakers and Homemakers by Anthony Delaney	306.7609033			$21.00 | $21.00
2492783	978-1-78472-982-0	Quiet Home: House Hushing for Calm and Intentional Living by Michelle Halford	648			$23.09 | $23.09
2489421	979-8-9912674-9-6	REAL Confidence by Simone Knego	153			$19.59 | $19.59
2479544	978-1-4967-5131-7	Radical Senora Era: Ancestral Latin American Secrets for a Happier, Healthier Life by Christina Kelmon	158			$18.90 | $18.90
2479547	978-0-8070-1488-2	Radical Unlearning: The Art and Science of Creating Change from Within by Lewis Raven Wallace	152			$20.27 | $20.27
2484040	978-1-6682-0502-0	Rage and the Republic: The Unfinished Story of the American Revolution by Jonathan Turley	320			$21.70 | $21.70
2468854	978-1-4087-1909-1	Rage of Party by George Owers	941			$25.20 | $25.20
2492141	978-1-63774-838-1	Rain Date: Unpredictable Lessons from My Life Forecasting the Weather by Nick Pittman	158			$19.60 | $19.60
2489563	978-0-306-83604-6	Raised on Radio: Power Ballads, Cocaine and Payola - the AOR Glory Years 1976-1986 by Paul Rees	782.4216609			$21.00 | $21.00
2468858	978-1-4549-6232-8	Read My Lips: Understanding the Hidden Messages in Your Kiss by Jilly Eddy	152			$11.90 | $11.90
2479562	979-8-217-05904-1	Read Your Mind: Proven Habits for Success from the World's Greatest Mentalist by Oz Pearlman	158			$21.00 | $21.00
2492177	978-1-63973-397-2	Red Dawn Over China: How Communism Conquered a Quarter of Humanity by Frank Dikotter	950			$23.10 | $23.10
2485689	978-1-324-05062-9	Replaceable You: Adventures in Human Anatomy by Mary Roach	617.95			$20.29 | $20.29
2492134	978-1-63774-795-7	Resonance: The Art and Science of Human Connection by Michael Trainer	158			$20.97 | $20.97
2489750	978-0-593-54538-6	Revealing: The Underrated Power of Oversharing by Leslie John	302			$21.00 | $21.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2489643	978-0-525-65943-3	Revolutionists: The Story of the Extremists Who Hijacked the 1970s by Jason Burke	909			$28.00] $28.00
2466050	978-1-4728-5992-1	Rhineland: Hitler's Last Defence, 1944-45 by Anthony Tucker-jones	940			$24.50] $24.50
2473509	978-1-63936-927-0	Ring of Fire: A New History of the World at War: 1914 by Alexandra Churchill	940.3			$24.50] $24.50
2473525	978-1-4767-4674-6	Road That Made America: A Modern Pilgrim's Journey on the Great Wagon Road by James Dodson	388.10975			$22.40] $22.40
2473524	978-0-9532389-9-6	Road is Wider Than Long by Roland Penrose	709			$13.65] $13.65
2468914	978-1-5416-1981-4	Romans: A 2,000-Year History by Edward J. Watts	937			$28.00] $28.00
2460268	978-1-250-34645-2	Rope: How a Bundle of Twisted Fibers Became the Backbone of Civilization by Tim Queeney	909			$18.90] $18.90
2489497	978-0-241-78474-7	Route 66: A Tribute to an American Icon	917			$24.50] $24.50
2466064	978-1-250-37447-9	Running Deep: Bravery, Survival, and the True Story of the Deadliest Submarine in World War II by Tom Clavin	940.54			$21.00] $21.00
2489145	979-8-89414-265-4	Safe Baby Handling Tips (Revised and Even Safer Edition): Because They Really Should Come with a Manual by David Sopp	817			$11.20] $11.20
2462589	979-8-89710-022-4	Saint Petersburg: Sacrifice and Redemption in the City That Defied Hitler by Sinclair McKay	940			$24.50] $24.50
2488634	979-8-217-06094-8	Scandal in Konigsberg by Christopher Clark	940			$18.90] $18.90
2468718	978-1-5417-0549-4	Science Under Siege: How to Fight the Five Most Powerful Forces that Threaten Our World by Michael E. Mann	551			$22.40] $22.40
2490747	978-1-250-88628-6	Science of Second Chances: A Revolution in Criminal Justice by Jennifer Doleac	364			$20.99] $20.99
2466077	978-1-250-35258-3	Sea Captain's Wife: A True Story of Mutiny, Love, and Adventure at the Bottom of the World by Tilar J. Mazzeo	910			$21.00] $21.00
2468959	978-1-3997-0157-0	Secrets of Blythswood Square: The gripping and scandalous new 2024 Scottish historical novel from the acclaimed author of The Fair Botanists by Sara Sheridan	813			$18.20] $18.20
2490180	978-0-8117-7677-6	Seeds of Victory: Defeat, Triumph, and the American Way of War by James Ellman	355.00973			$20.97] $20.97
2486877	978-1-83799-751-0	Self-Care First-Aid Kit: Tips and Techniques to Help You Practise Self-Care for Mind, Body and Spirit by Anna Barnes	158			$8.39] $8.39
2489697	978-0-385-55168-7	Self-Help from the Middle Ages: What the Seven Deadly Sins Can Teach Us About Living by Peter Jones	158			$21.00] $21.00
2473665	978-1-63936-863-1	Seven Rivers: A Journey through the Currents of Human History by Vanessa Taylor	911			$22.40] $22.40
2492437	978-1-6680-5739-1	Sextinction: The Decline of Sex and the Future of Intimacy by Debra Soh	300			$21.00] $21.00
2466084	978-1-5266-0973-1	Shape of Things Unseen: A New Science of Imagination by Adam Zeman	900			$22.39] $22.39
2479752	978-0-593-70202-4	Shape of Wonder: How Scientists Think, Work, and Live by Alan Lightman	501			$19.60] $19.60
2464532	978-0-06-306858-2	She Kills: The Murderous Socialite, the Cross-Dressing Bank Robber, and Other True Crime Tales by Skip Hollandsworth	364			$21.00] $21.00
2479757	978-1-63217-575-5	Shibui: The Japanese Art of Finding Beauty in Aging by Sanae Ishida	155			$13.97] $13.97
2492139	978-1-63774-834-3	Shine, Revised Edition: How Driven People Can Live a Life of Exceptional Success and Profound Purpose by Gino Wickman	330			$20.97] $20.97
2485712	978-1-335-00132-0	Short History of Ancient Rome by Pascal Hughes	900			$17.49] $17.49
2460152	978-1-78929-789-8	Short History of the World in 50 Failures by Ben Gazur	970			$13.99] $13.99
2489519	978-0-262-05175-0	Silent Monoliths: The Cooling Tower Project by Jeff Brouws	778			$27.97] $27.97
2483458	978-1-57715-573-7	Simple Snack Cakes: 100 Recipes for Sweet and Savory Snackable Cakes by Jennifer Lee	641			$13.99] $13.99
2465567	978-1-3994-1405-0	Sink or Swim: How the world needs to adapt to a changing climate by Susannah Fisher	551			$19.60] $19.60
2479786	978-0-8065-4376-5	Sisters in Death: The Black Dahlia, the Prairie Heiress, and Their Hunter by Eli Frankel	364			$20.30] $20.30
2489041	979-8-89070-008-7	Sit: Twenty-Eight Days to a Rock-Solid Daily Meditation Habit by Bodhipaksa	294.3			$13.97] $13.97
2454874	978-1-63936-983-6	Sitting Bull's War: The Battle of Little Big Horn and the Fight for Buffalo and Freedom on the Plains by Paul L. Hedren	909			$24.50] $24.50
2479796	979-8-217-15459-3	Smartphone Nation: Building Digital Boundaries When Offline Isn't an Option by Kaitlyn Regehr	158			$20.30] $20.30
2490557	978-1-250-39267-1	Smitten: Romantic Obsession, the Neuroscience of Limerence, and How to Make Love Last by Tom Bellamy	158			$21.00] $21.00
2490125	978-0-7893-4656-8	Snapshots of Dangerous Women by Peter J. Cohen	778			$9.09] $9.09
2464537	978-0-06-343761-6	Sober Shift: A Modern-Day Guide to Living an Abundant Sober Life by Suzanne Warye	362			$19.59] $19.59
2466094	978-1-3994-2188-1	Soft: A Brief History of Sentimentality by Ferdinand Mount	306			$21.00] $21.00
2492564	978-1-6680-9187-6	Something to Hold Onto: Simple Metaphors, Images, and Practical Tools to Transform Your Life by Kate Robson	613			$16.10] $16.10

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2490918	978-1-3994-1246-9	Spinosaur Tales: The Biology and Ecology of the Spinosaurs by David Hone	560			$19.60 | $19.60
2473830	978-1-6682-1412-1	Spiritual Hygiene by Iyanla Vanzant	153			$20.30 | $20.30
2490137	978-0-8065-4472-4	Spirituality Through a Highly Sensitive Lens by Elaine N. Aron	152			$19.60 | $19.60
2466102	978-0-374-19190-0	Splendid Liberators: Heroism, Betrayal, Resistance, and the Birth of American Empire by Joe Jackson	973.8			$27.30 | $27.30
2489349	979-8-89710-026-2	Spy in the Archive: How One Man Tried to Kill the KGB by Gorden Corera	940			$20.97 | $20.97
2466114	978-1-3994-2138-6	Still Me: A neuroscientist's guide to caring for someone with dementia by Sabina Brennan	616			$19.60 | $19.60
2487785	978-1-961293-48-9	Stoicism Quotes for Mind and Body: Over 200 Quotations on Health and Well-Being by Nick Benas	613			$9.45 | $9.45
2485599	978-0-8021-6590-9	Stolen Crown: Treachery Deceit and the Death of the Tudor Dynasty by Tracy Borman	942.055092			$21.00 | $21.00
2473864	979-8-89710-011-8	Stone Lands: A Journey of Darkness and Light Through Britain's Ancient Places by Fiona Robertson	941			$20.97 | $20.97
2491201	978-1-4721-1683-3	Stones of Britain: A History of Britain through its Geology by Jon Cannon	940			$20.29 | $20.29
2466117	978-1-5290-3416-5	Strangers and Intimates: Rise and Fall of Private Life, The by Tiffany Jenkins	306			$20.29 | $20.29
2479919	978-0-593-60108-2	Stronger in the Difficult Places: Heal Your Relationship with Yourself by Untangling Complex Shame by Zoe Shaw	152.4			$18.20 | $18.20
2488957	979-8-89003-419-9	Stupid Faces in Stunning Paintings: A Serious Exploration of Art History's Silliest Expressions by Matthijs Van Mierlo	817			$17.49 | $17.49
2490196	978-0-8117-7729-2	Submarine Aircraft Carriers: From World War I to the Age of Drones by Jacob Gunnarson	355			$27.97 | $27.97
2487363	978-1-83799-739-8	Sunday Reset: Simple Self-Care Rituals to Set Yourself Up for a Successful Week by Sophie Golding	158			$8.39 | $8.39
2489863	978-0-593-80268-7	Super Nintendo: The Game-Changing Company That Unlocked the Power of Play by Keza Macdonald	794			$22.40 | $22.40
2490963	978-1-3997-3514-8	Super Stimulated: How Our Biology Is Being Manipulated to Create Bad Habits - and What We Can Do About It by Nicklas Brendborg	158			$21.00 | $21.00
2421934	978-1-9821-3461-7	Super Visible: The Story of the Women of Marvel by Margaret Stohl	305.42			$24.50 | $24.50
2491649	978-1-5107-8384-3	Superhero Leadership: 28 Ways to Lead with Courage, Strength, and Compassion by Peter Cuneo	330			$23.09 | $23.09
2487331	978-1-83643-077-3	Surgeon, The Midwife, The Quack: How to Stay Alive in Renaissance England by Alanna Skuse	940			$20.27 | $20.27
2469095	978-0-316-57278-1	Surviving Climate Anxiety: A Guide to Coping, Healing, and Thriving by Dr. Thomas Doherty	158			$21.00 | $21.00
2492248	978-1-64445-371-1	Swirl and Vortex: Collected Poems by Larry Levis	811			$24.50 | $24.50
2469108	978-1-5235-2731-1	Talk to Your Boys: 16 Conversations to Help Tweens and Teens Grow into Confident, Caring Young Men by Joanna Schroeder	649.132			$19.60 | $19.60
2491478	978-1-4930-9289-5	Task Force Called Faith: The Untold Story of the U.S. Army Soldiers Who Fought for Survival at Chosin Reservoir: and Honor Back Home by Steve Vogel	940			$27.97 | $27.97
2491786	978-1-5387-5814-4	Tell Me Where It Hurts: The New Science of Pain and How to Heal by Rachel Zoffness	615			$21.00 | $21.00
2464568	978-0-06-344302-0	There Is No Other: The Way to Harmony and Wholeness by Ram Dass	130			$18.89 | $18.89
2473992	979-8-89710-005-7	These Divided Isles: Britain and Ireland, Past and Future by Philip Stephens	941			$20.97 | $20.97
2490250	978-0-8263-6937-6	They Kill People: Bonnie and Clyde, a Hollywood Revolution, and America's Obsession with Guns and Outlaws by Kirk Ellis	791			$20.97 | $20.97
2469141	978-0-600-63965-7	Things to Do Now That You're Retired by Jane Garton	153			$7.69 | $7.69
2469139	978-0-600-63964-0	Things to Do Now That You're a Grandparent by Amy Goyer	306			$7.69 | $7.69
2489271	979-8-89565-420-0	Think It: How to Train Your Thinking to Get Everything You Want by Sarah Centrella	158			$20.29 | $20.29
2491716	978-1-5294-3581-8	Think Like a Stoic: The Ancient Path to a Life Well Lived by Ken Mogi	181			$15.39 | $15.39
2479332	978-1-923239-35-7	This Book is Literally Just Pictures of Cute Dogs That Will Bring You Joy by Smith Street Books	817			$11.87 | $11.87
2492440	978-1-68369-498-4	This Is Terrible, This Is Wonderful: Dispatches from the Postpartum Universe by Rani Ban	306			$13.99 | $13.99
2464570	978-0-06-328371-8	This Is for You: Gift-Giving as a Way of Life by Lea Redmond	158			$18.20 | $18.20
2487035	978-1-7972-4176-0	This Is the Only Book of Dad Jokes You'll Ever Need: 302 of the Best and Most Cringeworthy Dad Jokes by Thomas Nowak	808			$11.87 | $11.87
2480103	978-0-593-18439-4	Three Roads to Gettysburg: Meade, Lee, Lincoln, and the Battle That Changed the War, the Speech That Changed the Nation by Tim Mcgrath	973			$27.30 | $27.30
2490208	978-0-8117-7778-0	Thunder Over Normandy: How Allied Airmen Helped Liberate France from D-Day to Paris and Beyond by Joseph T., Jr.	930			$24.47 | $24.47

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2469164	978-1-5387-7046-7	Tidying the Abyss: A Practical Guide to Cleaning and Organizing While Exhausted and Overwhelmed by Amanda Dodson	648			$20.30 | $20.30
2489675	978-0-374-61098-2	Tigers Between Empires: The Improbable Return of Great Cats to the Forests of Russia and China by Jonathan C. Slaght	599.7560947			$23.10 | $23.10
2487500	978-1-83783-509-6	Timeless Knits: Classic Knitting Patterns from the Heart of Uruguay by Malabriga	746			$24.50 | $24.50
2454968	978-1-63774-767-4	Titan Unfinished: An Untold Story of Exploration, Innovation, and the OceanGate Tragedy by Guillermo A. M. Sohnlein	363.12			$22.40 | $22.40
2460276	978-0-593-49309-0	To Lose a War: The Fall and Rise of the Taliban by Jon Lee Anderson	958.104			$21.00 | $21.00
2460706	978-0-374-61712-7	Tomorrow Is Yesterday: Life, Death, and the Pursuit of Peace in Israel/Palestine by Hussein Agha	956.9405			$21.00 | $21.00
2464580	978-0-06-337320-4	Traitors Circle by Jonathan Freedland	909			$22.40 | $22.40
2469184	978-0-306-83521-6	Traveling in Bardo: The Art of Living in an Impermanent World by Ann Tashi Slater	294.3			$20.30 | $20.30
2469189	978-1-5387-2520-7	Trick of the Mind: How the Brain Invents Your Reality by Daniel Yon	155			$21.00 | $21.00
2469190	978-1-64503-063-8	Trillion Dollar War Machine: How Runaway Military Spending Drives America into Foreign Wars and Bankrupts Us At Home by William D Hartung	973			$21.00 | $21.00
2489502	978-0-262-05102-6	Unconscious: A Cultural History from Hippocrates to Philip K. Dick and Beyond by Antonio Melechi	155			$20.97 | $20.97
2460423	978-1-5247-4613-1	Undiscovered Country: Triumph, Tragedy, and the Shaping of the American West by Paul Andrew Hutton	973			$24.50 | $24.50
2466173	978-1-63973-744-4	Unknown Enemy: The Hidden Nazi Force That Built the Third Reich by Charles Dick	940			$20.99 | $20.99
2483525	978-0-593-65587-0	Until The Last Gun Is Silent: A Story of Patriotism, the Vietnam War, and the Fight to Save America's Soul by Matthew F. Delmont	973			$22.40 | $22.40
2480249	978-1-80429-737-7	Up in the Air: A History of High Rise Britain by Holly Smith	720			$20.97 | $20.97
2469241	978-0-7537-3562-6	Vampires and the Shadow World: An Anthology of Classic Poetry and Stoires by Aurora Thorne	809			$7.69 | $7.69
2480259	978-0-7352-3686-8	Vanished Beyond the Map: The Mystery of Lost Explorer Hubert Darrell by Adam Shoalts	971			$18.90 | $18.90
2466180	978-1-4728-7229-6	Vikings: Culture of Discovery and Plunder	948			$24.50 | $24.50
2489295	978-0-593-49185-0	Wall Dancers: Searching for Freedom and Connection on the Chinese Internet by Yi-ling Liu	302.23			$21.00 | $21.00
2490201	978-0-8117-7758-2	War Is Hell: The Rise of Total War from Napoleon to the Present by Daniel E. Long	940			$31.47 | $31.47
2489747	978-0-593-53769-5	War Within a War: The Black Struggle in Vietnam and at Home by Wil Haygood	973			$24.50 | $24.50
2466184	978-1-4728-7267-8	War Without Mercy: Liberty or Death in the American Revolution by Mark Edward Lender	973			$22.40 | $22.40
2462565	978-1-5247-4642-1	Warhead: The Quest to Build the Perfect Weapon in the Age of Modern Warfare by Jeffrey E. Stern	973			$24.50 | $24.50
2491232	978-1-4728-6902-9	Warriors of Athena: Heroes by Joseph A. Mccullough	793			$24.50 | $24.50
2491233	978-1-4728-6903-6	Warriors of Athena: Quests by Joseph A. Mccullough	793			$24.50 | $24.50
2490191	978-0-8117-7713-1	Washington's Lieutenants: Major versus Brigadier Generals in the Revolutionary War by Douglas M. Branson	973.3			$23.07 | $23.07
2466192	978-1-3994-2026-6	Way of the Waves: A cycling odyssey to rediscover the soul of European surfing by Martin Dorey	796			$21.00 | $21.00
2480324	978-0-593-96413-2	We Love You: An Optimistic Guide to Life on a Rock Floating Through Space by Thomas Sullivan	158			$17.49 | $17.49
2483484	978-1-63149-608-0	We the People: A History of the U.S. Constitution by Jill Lepore	342.7302			$27.99 | $27.99
2491072	978-1-4197-7081-4	What Happened to Millennials: In Defense of a Generation by Charlie Wells	300			$19.60 | $19.60
2488944	979-8-88845-186-1	What I Learned from Mom: 27 Celebrated Individuals on How Mother's Wisdom Shaped Their Lives by Jeffrey D. Dunn	640			$21.00 | $21.00
2480340	978-0-593-83388-9	What Matters Most: Lessons the Dying Teach Us About Living by Diane Button	158.1			$20.30 | $20.30
2474257	978-1-6680-1157-7	When Everyone Knows That Everyone Knows . . .: Common Knowledge and the Mysteries of Money, Power, and Everyday Life by Steven Pinker	302			$21.00 | $21.00
2489568	978-0-306-83770-8	When Good Moms Feel Bad: An Empowering Guide for Transforming Guilt, Anxiety, and Anger into Compassion, Confidence, and Connectedness by Jessica Tomich Sorci	158			$21.00 | $21.00
2490159	978-0-8070-4532-9	When It's Darkness on the Delta: How America's Richest Soil Became Its Poorest Land by W. Ralph Eubanks	976.2			$21.00 | $21.00
2469312	978-1-5416-0464-3	Whispers of Rock: The Stories That Stone Tells About Our World and Our Lives by Dr. Anjana Khatwa	508			$21.00 | $21.00
2491967	978-1-58270-959-8	Whole New Human: Ten Ways We Must Evolve to Survive in the AI Age by Derek Rydall	158			$20.30 | $20.30
2480370	978-0-593-85084-8	Why Brains Need Friends: The Neuroscience of Social Connection by Ben Rein	302			$21.70 | $21.70

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2469319	978-0-306-83654-1	Why Do I Keep Doing This?: Unlearn the Habits Keeping You Stuck and Unhappy by Kati Morton	158			$18.20 1 $18.20
2490328	978-1-0350-6584-4	Why Nobody Understands Quantum Physics: The Story of the Science That Shapes Our World by Frank Verstraete	530			$20.99 1 $20.99
2469322	978-1-64326-487-5	Why Rats Laugh and Jellyfish Sleep: And Other Enchanting Stories of Evolution by David Stipp	576			$21.00 1 $21.00
2490488	978-1-250-35245-3	Why We Click: The Emerging Science of Interpersonal Synchrony by Kate Murphy	302			$21.00 1 $21.00
2490582	978-1-250-39292-3	Why We Drink Too Much: The Impact of Alcohol on Our Bodies and Culture by Charles Knowles	362			$19.60 1 $19.60
2483734	978-0-593-58153-7	Why We Suffer and How We Heal: Using Narrative, Ritual, and Purpose to Flourish Through Life's Challenges by Suzan Song	362			$21.00 1 $21.00
2464611	978-0-06-327988-9	Without Consent: A Landmark Trial and the Decades-Long Struggle to Make Spousal Rape a Crime by Sarah Weinman	364			$22.40 1 $22.40
2469345	978-1-5416-0472-8	Wolfpack: Inside Hitler's U-Boat War by Roger Moorhouse	940			$24.50 1 $24.50
2474321	978-1-80444-113-8	Women Who Ruled the World: 5000 Years of Female Monarchy by Elizabeth Norton	305			$20.97 1 $20.97
2469349	978-0-7624-8870-4	Women of the Fairy Tale Resistance: The Forgotten Founding Mothers of the Fairy Tale and the Stories That They Spun by Jane Harrington	398.2092			$21.00 1 $21.00
2484172	979-8-217-17965-7	Work Like A Monk: A Buddhist Guide To Embracing What Matters by Shoukei Matsumoto	158			$12.60 1 $12.60
2469365	978-1-78472-986-8	World Atlas of Coffee 3rd edition: From beans to brewing - coffees explored, explained and enjoyed by James Hoffmann	641			$27.99 1 $27.99
2480444	978-0-593-65738-6	World Enemy No. 1: Nazi Germany, Soviet Russia, and the Fate of the Jews by Jochen Hellbeck	940			$24.50 1 $24.50
2473970	978-88-544-2154-7	World Maps: A Journey Back in Time by Kevin J. Brown	911			$21.00 1 $21.00
2491717	978-1-5294-3825-3	World of Black Film: A Journey Through Cinematic Blackness in 100 Films With a Foreword by John Akomfrah by Ashley Clark	791			$31.50 1 $31.50
2466230	978-1-83793-338-9	World's Game: Reflections on Western Culture by Frederic Raphael	900			$24.50 1 $24.50
2480452	978-0-593-29869-5	Wounded Generation: Coming Home After World War II by David Nasaw	940.54			$24.50 1 $24.50
2480484	978-0-593-35522-0	Year God Died: Jesus and the Roman Empire in 33 AD by James Lacey	232.9			$22.40 1 $22.40
2469382	978-1-57715-548-5	Year of Ikigai: Daily Inspiration For Creating a Fulfilling Life the Japanese Way by Nicholas Kemp	181			$13.99 1 $13.99
2464779	978-1-64326-640-4	You're Overwatering It!: A Plant Guru's Guide to Houseplants by Jonny Balchandani	635			$21.00 1 $21.00
2480507	979-8-217-04560-0	You, Your Husband, and His Mother: Create a Healthy Relationship with Your Mother-in-Law--and Your Spouse--in Five Simple Steps by Tracy Dalgleish	306			$21.00 1 $21.00
2466243	978-1-250-34822-7	Zorg: A Tale of Greed and Murder That Inspired the Abolition of Slavery by Siddharth Kara	306.362			$21.00 1 $21.00
2466283	978-1-3994-0337-5	Why Plato Matters Now by Angie Hobbs	100			$15.40 1 $15.40
2482271	978-1-63217-658-5	Raising Securely Attached Kids: Using Connection-Focused Parenting to Create Confidence, Empathy, and Resilience by Eli Harwood	649			$19.57 1 $19.57
2482281	978-0-241-76406-0	Discourses and Selected Writings by Epictetus	180			$17.50 1 $17.50
2464692	978-0-06-327663-5	Pioneer Woman Cooks: The Essential Recipes: 125 Greatest Hits, New Twists, and Perfected Classics by Ree Drummond	641			$22.75 1 $22.75
2490139	978-0-8070-0855-3	Black Queer History of the United States by C. Riley Snorton	973			$20.27 1 $20.27
2486409	978-1-83529-401-7	Rough Guides Wild Earth: Discover the World's Wildest Places	917			$31.50 1 $31.50
2487690	978-1-923208-01-8	Beauty Apothecary: Soulful remedies to foster beauty inside and out by Lorriane Anderson	158			$17.47 1 $17.47
2492441	978-1-68369-514-1	Stuff Every Bird Lover Should Know by Alice Sun	598			$7.69 1 $7.69
2483192	978-1-68369-527-1	Worst-Case Scenario Pocket Guide: Driving by David Borgenicht	808			$6.99 1 $6.99
2483193	978-1-68369-525-7	Worst-Case Scenario Pocket Guide: Retirement by David Borgenicht	817			$6.99 1 $6.99

Total quantity	591 Titles(591 Books)
Subtotal	$11,920.44
Processing Options Total	$1,950.30
Shipping & Handling	$238.41
Shipping Discount	-$238.41
Tax	$1,421.75
Grand Total	$15,292.49

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: ADULT LARGE PRINT ODC 1
List#: 207784
Date: 2/17/2026 6:08:02 PM
Total quantity: 85 Titles(99 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	99	$326.70

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2388674	979-8-88579-767-2	Antique Hunter's Guide to Murder by C.L. Miller	Fic	$36.09	1	$36.09
2424755	978-1-5387-6649-1	Atlas Maneuver by Steve Berry	Fic	$30.40	1	$30.40
2464740	978-1-4205-2574-8	Court of Frost and Starlight by Sarah J. Maas	Fic	$34.19	1	$34.19
2464741	978-1-4205-2611-0	Court of Silver Flames by Sarah J. Maas	Fic	$34.19	1	$34.19
2374398	979-8-88579-708-5	Court of Thorns and Roses by Sarah J. Maas	Fic	$33.24	1	$33.24
2401858	978-1-4205-1575-6	Court of Wings and Ruin by Sarah J. Maas	Fic	$33.24	1	$33.24
2342672	979-8-88578-434-4	Choice by Nora Roberts	Fic	$37.99	1	$37.99
2492843	978-0-593-82028-5	Dungeon Anarchist's Cookbook by Matt Dinniman	Fic	$21.00	1	$21.00
2435112	978-0-316-57886-8	Farewell, Amethystine by Walter Mosley	Fic	$30.40	1	$30.40
2027689	978-0-316-39675-2	Wrong Side of Goodbye by Michael Connelly	Fic	$43.70	1	$43.70
2223723	978-1-4328-3940-6	Alice Network by Kate Quinn	Fic	$32.29	1	$32.29
2148552	978-1-4104-7022-5	All the Light We Cannot See by Anthony Doerr	Fic	$34.19	1	$34.19
2460479	978-1-4205-2067-5	Amish Healing and Ollie's Story by Beth Wiseman	Fic	$33.24	1	$33.24
2148557	978-1-4328-3912-3	Before We Were Yours by Lisa Wingate	Fic	$34.19	1	$34.19
2342661	978-1-4328-9454-2	Big Dark Sky by Dean Koontz	Fic	$37.04	1	$37.04
2321059	978-1-4328-6764-5	Boy and His Dog at the End of the World by C. A. Fletcher	Fic	$29.44	1	$29.44
2463737	979-8-217-16997-9	Buckeye by Patrick Ryan	Fic	$30.40	1	$30.40
2424554	979-8-88579-656-9	Carl Weber's Kingpins: The Ultimate Hustle by T. Friday	Fic	$33.24	1	$33.24
2416917	979-8-88579-337-7	Covenant of Water by Abraham Verghese	Fic	$36.09	1	$36.09
2390526	979-8-88579-759-7	Coworker by Freida McFadden	Fic	$36.09	1	$36.09
2095178	978-1-5387-1468-3	Every Breath by Nicholas Sparks	Fic	$40.85	1	$40.85
2484028	979-8-217-29468-8	Exes by Leodora Darlington	Fic	$29.45	1	$29.45
2422198	979-8-88578-158-9	Fairy Tale by Stephen King	Fic	$37.04	1	$37.04
2305498	978-1-4328-9993-6	Family Chao by Lan Samantha Chang	Fic	$31.34	1	$31.34
2027658	978-1-4555-7115-4	Fix by David Baldacci	Fic	$48.45	1	$48.45
2422202	978-1-4328-6666-2	Flight or Fright: 17 Turbulent Tales by Stephen King	Fic	$35.14	1	$35.14

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2155810	978-1-4328-5008-1	Friend by Sigrid Nunez	Fic			$29.44 | $29.44
2082768	978-1-4104-0785-6	Grapes of Wrath by John Steinbeck	Fic			$28.49 | $28.49
2275169	978-1-4328-8848-0	Great Gatsby by F. Scott Fitzgerald	Fic			$25.64 | $25.64
2342689	978-1-4104-1553-0	Help by Kathryn Stockett	Fic			$31.30 | $31.30
2422203	979-8-88579-077-2	Holly by Stephen King	Fic			$38.94 | $38.94
2424737	979-8-21263-125-9	Home is Where the Bodies Are by Jeneva Rose	Fic			$35.14 | $35.14
2289068	978-1-4328-9710-9	Honor by Thrity Umrigar	Fic			$29.44 | $29.44
2027665	978-0-316-55247-9	Identicals by Elin Hilderbrand	Fic			$35.15 | $35.15
2422208	978-1-4328-7755-2	If It Bleeds by Stephen King	Fic			$37.04 | $37.04
2289064	978-1-4328-9838-0	Island of Missing Trees by Elif Shafak	Fic			$32.29 | $32.29
2324556	979-8-88578-040-7	Kaiju Preservation Society by John Scalzi	Fic			$31.34 | $31.34
2306059	979-8-88578-325-5	Kaikeyi by Vaishnavi Patel	Fic			$34.19 | $34.19
2289063	978-1-4328-9855-7	Latecomer by Jean Hanff Korelitz	Fic			$36.09 | $36.09
2123131	978-1-4328-6361-6	Night Olivia Fell by Christina McDonald	Fic			$29.44 | $29.44
2155846	978-1-4328-5536-9	Number One Chinese Restaurant by Lillian Li	Fic			$30.39 | $30.39
2133652	978-1-5387-3384-4	Old Bones by Douglas Preston	Fic			$28.50 | $28.50
2424762	979-8-88579-297-4	Other Year by Rea Frey	Fic			$32.29 | $32.29
2005170	978-1-4104-4324-3	Rules of Civility by Amor Towles	Fic			$30.39 | $30.39
2265778	978-0-446-57367-2	Safe Haven by Nicholas Sparks	Fic			$42.75 | $42.75
2289071	978-1-4328-9673-7	Sister Stardust by Jane Green	Fic			$37.04 | $37.04
2342693	978-1-4328-4893-4	Solar Bones by Mike Mccormack	Fic			$29.44 | $29.44
2155861	978-1-4328-5280-1	Song of a Captive Bird by Jasmin Darznik	Fic			$29.44 | $29.44
2306032	979-8-88578-123-7	Sophie Go's Lonely Hearts Club by Roselle Lim	Fic			$33.24 | $33.24
2483516	978-1-4205-2721-6	Summer You Were Mine by Jill Francis	Fic			$34.19 | $34.19
2350154	978-1-4328-7356-1	Supernova by Marissa Meyer	Fic			$28.49 | $28.49
2424081	978-0-316-57785-4	Swan Song by Elin Hilderbrand	Fic			$30.40 | $30.40
2287395	978-0-316-36289-4	Sweetness of Water by Nathan Harris	Fic			$44.65 | $44.65
2289072	978-1-4328-9605-8	Take My Hand by Dolen Perkins-Valdez	Fic			$35.14 | $35.14
2082792	978-1-4328-4694-7	Things They Carried by Tim O'Brien	Fic			$25.65 | $25.65
2483519	978-1-4205-2511-3	Unshaken by Shelley Grey Gray	Fic			$35.14 | $35.14
2326325	979-8-88578-486-3	Villa by Rachel Hawkins	Fic			$36.09 | $36.09
2464732	978-0-593-80472-8	What We Can Know by Ian McEwan	Fic			$21.00 | $21.00
2289061	978-1-4328-9892-2	Woman of Endurance by Dahlma Llanos-Figueroa	Fic			$30.39 | $30.39
2422211	978-1-4205-1437-7	You Like It Darker by Stephen King	Fic			$38.94 | $38.94
2424788	979-8-8746-7891-3	Bits and Pieces: My Mother, My Brother, and Me by Whoopi Goldberg	791.4			$37.04 | $37.04
2342664	978-1-4328-9428-3	Book of Hope: A Survival Guide for Trying Times by Jane Goodall	128			$31.34 | $31.34
2342666	978-1-4104-5954-1	Boys in the Boat: Nine Americans and Their Epic Quest for Gold at the 1936 Berlin Olympics by Daniel James Brown	797.12			$32.29 | $32.29
2205111	978-0-316-43989-3	Code Girls: The Untold Story of the American Women Code Breakers of World War II by Liza Mundy	940.54			$46.55 | $46.55
2342677	979-8-88578-769-7	Dickens and Prince: A Particular Kind of Genius by Nick Hornby	823			$32.29 | $32.29
2390519	979-8-88579-618-7	Doppelganger: A Trip into the Mirror World by Naomi Klein	320.082			$34.19 | $34.19
2390574	979-8-88579-667-5	Easy Money: Cryptocurrency, Casino Capitalism, and the Golden Age of Fraud by Ben McKenzie	332.4			$33.24 | $33.24
2390564	979-8-88579-762-7	George Harrison: The Reluctant Beatle by Philip Norman	780			$33.24 | $33.24
2295599	978-0-316-44541-2	Happy-Go-Lucky by David Sedaris	814			$29.45 | $29.45
2390576	979-8-88579-710-8	How to Say Babylon by Safiya Sinclair	818			$33.24 | $33.24
2390560	979-8-88579-719-1	Jackie: Public, Private, Secret by J. Randy Taraborrelli	973.922092			$34.19 | $34.19
2289077	9798885781718	Lessons from the Edge: A Memoir by Marie Yovanovitch	973.933092			$34.19 | $34.19
2148567	978-1-4328-5232-0	Line Becomes a River: Dispatches from the Border by Francisco Cantu	363.28			$33.24 | $33.24
1917043	978-1-4104-7027-0	Lone Survivor by Marcus Luttrell	958.104			$31.34 | $31.34
2390562	979-8-88579-761-0	Memoir of My Former Self: A Life in Writing by Hilary Mantel	823			$36.09 | $36.09
2342691	979-8-88578-360-6	My Travels with Mrs. Kennedy by Clint Hill	973.922092			$35.14 | $35.14
2390573	979-8-88579-666-8	Old-Fashioned on Purpose: Cultivating a Slower, More Joyful Life by Jill Winger	179			$32.29 | $32.29
2390524	979-8-88579-751-1	Phoenix Crown by Kate Quinn	813			$35.14 | $35.14
2289058	978-1-4328-9806-9	Queen of Our Times: The Life of Queen Elizabeth II by Robert Hardman	941.085092			$34.19 | $34.19
2067071	978-1-4328-3903-1	Radium Girls: The Dark Story of America's Shining Women by Kate Moore	363.17990820973			$32.29 | $32.29
2425545	978-1-5387-6941-6	Situation Room: The Inside Story of Presidents in Crisis by George Stephanopoulos	973.09			$38.00 | $38.00
2390570	979-8-88579-546-3	Six: The Untold Story of America's First Women Astronauts by Loren Grush	629			$33.24 | $33.24

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal		
2141358	978-1-4328-4907-8	Stowaway: A Young Man's Extraordinary Adventure to Antarctica by Laurie Gwen Shapiro	919.8904				$30.39	$30.39
2425418	978-0-593-24391-6	Supercommunicators: How to Unlock the Secret Language of Connection by Charles Duhigg	153.6				$22.40	$22.40
2390572	979-8-88579-617-0	Wandering Through Life by Donna Leon	813				$33.24	$33.24
2390575	979-8-88579-671-2	Worthy by Jada Pinkett Smith	791.4				$36.09	$36.09
2096999	978-1-4104-2938-4	Die Trying by Lee Child	Fic				$30.39	$30.39
2097001	978-1-4104-3010-6	Killing Floor by Lee Child	Fic				$30.39	$30.39
2097560	978-1-4104-2940-7	Running Blind by Lee Child	Fic				$31.34	$31.34
2097002	978-1-4104-3009-0	Tripwire by Lee Child	Fic				$30.39	$30.39
2390257	979-8-88579-026-0	Watchmaker's Hand by Jeffery Deaver	Fic				$37.99	$37.99
2390014	979-8-88579-480-0	Inheritance by Nora Roberts	Fic				$38.94	$38.94
1960809	978-0-316-40717-5	Alert by James Patterson	Fic				$40.85	$40.85
2181653	978-1-4328-7691-3	Night by Elie Wiesel	940.53				$23.74	$23.74
2289060	978-1-4328-9869-4	Passing by Nella Larsen	Fic				$29.44	$29.44
2463098	978-1-4328-5535-2	Circe by Madeline Miller	Fic				$29.44	$29.44
2493038	978-1-4205-2206-8	Stuart Woods' Finders Keepers by Brett Battles	Fic				$38.94	$38.94
2412477	978-1-9747-5258-4	Vagabond Definitive Edition, Vol. 01 by Takehiko Inoue	741.5				$52.25	$52.25
2482433	978-0-8254-4853-9	Through Water And Stone by Karen Barnett	Fic				$16.14	$16.14

Total quantity	85 Titles(99 Books)
Subtotal	$2,867.15
Processing Options Total	$326.70
Shipping & Handling	$66.10
Shipping Discount	-$66.10
Tax	$327.37
Grand Total	$3,959.05

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: ADULT FICTION ODC 1
List#: 207782
Date: 2/17/2026 6:07:16 PM
Total quantity: 779 Titles(779 Books)

Order Information

Shipping Address

Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address

Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative

Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	0	$0.00
Tier 3 Cataloging and Processing	$3.30	779	$2,570.70

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2485911	978-1-4642-4861-0	Fellowship of Games & Fables by J. Penner	Fic	$18.89	1	$18.89
2464826	978-1-250-37856-9	Sugar and Spite: An Agatha Raisin Mystery by M. C. Beaton	Fic	$18.90	1	$18.90
2489611	978-0-316-60282-2	Along Came a Spider: An Alex Cross Thriller by James Patterson	Fic	$22.40	1	$22.40
2456945	978-0-316-56956-9	Return of the Spider by James Patterson	Fic	$22.40	1	$22.40
2485713	978-1-335-00233-4	Don't Say a Word by Allison Brennan	Fic	$21.00	1	$21.00
2492453	978-1-6680-3206-0	Antique Hunter's Murder at the Castle: A Novel by C.I. Miller	Fic	$20.30	1	$20.30
2466531	978-0-316-58168-4	Final Orbit: A Novel by Chris Hadfield	Fic	$21.00	1	$21.00
2448233	978-0-06-338082-0	Pitcher Perfect by Tessa Bailey	Fic	$21.00	1	$21.00
2474821	978-1-64129-646-5	Bitter Wind by James R. Benn	Fic	$20.27	1	$20.27
2485673	978-1-250-89536-3	Blood for the Undying Throne by Sung-il Kim	Fic	$20.29	1	$20.29
2463776	978-0-06-342760-0	Calling All Blessings: A Blessings Novel by Beverly Jenkins	Fic	$21.00	1	$21.00
2440103	978-0-06-338697-6	Blonde Who Came in from the Cold by Ally Carter	Fic	$17.49	1	$17.49
2474857	978-1-64129-722-6	Blood Like Ours by Stuart Neville	Fic	$20.97	1	$20.97
2459897	978-1-963135-41-1	Primal of Blood and Bone by Jennifer L. Armentrout	Fic	$22.39	1	$22.39
2484229	978-0-593-82014-8	Gods Beneath The Ice by Alexandra Kennington	Fic	$21.00	1	$21.00
2455916	978-0-316-59709-8	Fury of the Gods by John Gwynne	Fic	$22.40	1	$22.40
2455915	978-0-316-59707-4	Hunger of the Gods by John Gwynne	Fic	$22.40	1	$22.40
2455914	978-0-316-59699-2	Shadow of the Gods by John Gwynne	Fic	$22.40	1	$22.40
2487156	978-1-80328-511-5	God of Countless Guises by Bradley P. Beaulieu	Fic	$21.00	1	$21.00
2474872	978-0-593-81921-0	Perilous Plot by Lorna Barrett	Fic	$21.00	1	$21.00
2486873	978-1-83698-000-1	Of Blood And Fire by Ryan Cahill	Fic	$18.89	1	$18.89
2474877	978-1-4967-4219-3	Murder in an Italian Piazza by Michael Falco	Fic	$18.90	1	$18.90

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2457006	978-0-593-95501-7	Mate by Ali Hazelwood	Fic	$21.00	1	$21.00
2489946	978-0-593-97523-7	Traitor Queen (Deluxe Edition) by Danielle L. Jensen	Fic	$24.50	1	$24.50
2490405	978-1-0359-2555-1	Wolf and the Crown of Blood by Elizabeth May	Fic	$20.99	1	$20.99
2492647	978-1-68281-651-6	Bound in Blood by Sadie Kincaid	Fic	$23.09	1	$23.09
2464918	978-1-68281-644-8	Forged in Blood by Sadie Kincaid	Fic	$23.09	1	$23.09
2464919	978-1-68281-650-9	Promised in Blood by Sadie Kincaid	Fic	$23.09	1	$23.09
2489875	978-0-593-81870-1	Heir of Twisted Lies by Lj Andrews	Fic	$21.00	1	$21.00
2474886	978-1-80336-867-2	We Are Always Tender with Our Dead: (Burnt Sparrow, 1) by Eric Larocca	Fic	$19.59	1	$19.59
2474892	978-1-4967-4475-3	Calder Strong by Janet Dailey	Fic	$19.60	1	$19.60
2474895	978-1-64566-194-8	Philosophy of Thieves by Fran Wilde	Fic	$19.60	1	$19.60
2474905	978-1-4967-5302-1	Matter of Pedigree by Leslie Meier	Fic	$18.90	1	$18.90
2464934	978-1-0350-4194-7	Carnival of Lies by D. V. Bishop	Fic	$19.59	1	$19.59
2444257	978-1-250-81222-3	Thief of Night by Holly Black	Fic	$20.99	1	$20.99
2464936	978-1-250-76716-5	Hidden City: A Charles Lenox Mystery by Charles Finch	Fic	$20.30	1	$20.30
2466597	978-0-7858-4761-8	Crime and Punishment by Fyodor Dostoyevsky	Fic	$13.99	1	$13.99
2474928	978-1-4967-5197-3	May Contain Murder by Orlando Murrin	Fic	$19.60	1	$19.60
2459932	978-1-250-32817-5	Black Wolf by Louise Penny	Fic	$21.00	1	$21.00
2464942	978-1-250-39799-7	Lies Weeping: Volume 1 of the Black Company Saga: A Pitiless Rain by Glen Cook	Fic	$20.99	1	$20.99
2474941	978-0-525-62017-4	Coyote Hills: A Novel by Jonathan Kellerman	Fic	$21.00	1	$21.00
2461446	978-0-316-58600-9	Hallmarked Man by Robert Galbraith	Fic	$28.00	1	$28.00
2492544	978-1-6680-8228-7	Cormorant Hunt: A Novel by Michael Idov	Fic	$20.30	1	$20.30
2474590	978-1-4967-5532-2	Come Through Your Door by Carlene O'connor	Fic	$19.60	1	$19.60
2464977	978-1-250-36523-1	Damned by Harper L. Woods	Fic	$23.09	1	$23.09
2491563	978-1-4967-5844-6	Witching Hours by Heather Graham	Fic	$19.60	1	$19.60
2464980	978-1-250-85550-3	To Clutch a Razor by Veronica Roth	Fic	$15.39	1	$15.39
2491048	978-1-4087-2402-6	Stone Dead by T F Muir	Fic	$20.30	1	$20.30
2492395	978-1-6680-5253-2	Wicked and the Damned by Rebecca Robinson	Fic	$20.30	1	$20.30
2459934	978-1-250-90417-1	Gone in the Night by Joanna Schaffhausen	Fic	$21.00	1	$21.00
2464989	978-1-250-40376-6	Quiet Mother by Arnaldur Indridason	Fic	$20.30	1	$20.30
2483518	979-8-89242-260-4	Dark Horse by Felix Francis	Fic	$20.99	1	$20.99
2475168	978-1-83541-243-5	Flesh King: The Discreet Eliminators series by Richard Kadrey	Fic	$16.09	1	$16.09
2489290	978-0-06-346271-7	To Cage a Wild Bird (Deluxe Limited Edition): A Novel by Brooke Fast	Fic	$22.40	1	$22.40
2490462	978-1-250-34226-3	Nobody's Baby by Olivia Waite	Fic	$17.49	1	$17.49
2491508	978-1-4967-4642-9	Murder by Moonrise by Patrice Mcdonough	Fic	$18.90	1	$18.90
2475201	979-8-217-19004-1	This Inevitable Ruin by Matt Dinniman	Fic	$27.30	1	$27.30
2475357	978-0-7564-1962-2	Bloodtide by Sophie Burnham	Fic	$21.00	1	$21.00
2492566	978-1-6680-9339-9	Two Kinds of Stranger: A Novel by Steve Cavanagh	Fic	$20.30	1	$20.30
2491517	978-1-4967-5010-5	Eleanor and the South Beach Murders by Ellen Yardley	Fic	$18.90	1	$18.90
2460242	978-1-250-35093-0	One Final Turn by Ashley Weaver	Fic	$19.60	1	$19.60
2475204	978-1-4967-4600-9	Murder at Donwell Abbey by Vanessa Kelly	Fic	$18.90	1	$18.90
2460078	978-1-6680-0774-7	Dear Miss Lake by A. J. Pearce	Fic	$19.59	1	$19.59
2456992	978-1-250-24537-3	Empire of the Dawn by Jay Kristoff	Fic	$24.50	1	$24.50
2419761	978-1-64937-715-9	Onyx Storm by Rebecca Yarros	Fic	$20.99	1	$20.99
2448518	978-1-998341-32-0	Dirty Lying Sirens by Sabrina Blackburry	Fic	$19.59	1	$19.59
2475336	978-0-593-65380-7	Lion Hearts: A Novel by Dan Jones	Fic	$21.00	1	$21.00
2490480	978-1-250-34927-9	White Wolf: An Evan Ryder Novel by Eric Van Lustbader	Fic	$20.99	1	$20.99
2483490	978-1-6625-2649-7	Fallen Star by Lee Goldberg	Fic	$20.29	1	$20.29
2460241	978-1-250-86554-0	Dark and Deadly Journey by Julia Kelly	Fic	$19.60	1	$19.60
2475341	978-0-593-95502-4	Ever King by Lj Andrews	Fic	$21.00	1	$21.00
2475342	978-0-593-95505-5	Ever Queen by Lj Andrews	Fic	$21.00	1	$21.00
2475343	978-0-593-95508-6	Mist Thief by Lj Andrews	Fic	$21.00	1	$21.00
2475397	978-1-4967-5631-2	Deadly Trade by Sara Driscoll	Fic	$19.60	1	$19.60
2455911	978-1-5387-7600-1	Brimstone by Callie Hart	Fic	$21.00	1	$21.00
2455912	978-1-5387-7579-0	Quicksilver by Callie Hart	Fic	$21.00	1	$21.00
2465030	978-1-250-79419-2	Fallen City by Adrienne Young	Fic	$22.40	1	$22.40
2475392	979-8-217-25307-4	Kiss of Hammer and Flame: The must-read, sizzling romantasy de-but for fans of Throne of Glass by Amy De La Force	Fic	$20.99	1	$20.99

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2466694	978-1-3997-3156-0	Book of Gold: the sweeping first book in The Feral Gods trilogy by Ruth Frances Long	Fic	$19.60	1	$19.60
2465031	978-0-312-60686-2	At Midnight Comes the Cry: A Clare Fergusson/Russ Van Alstyne Mystery by Julia Spencer-fleming	Fic	$20.30	1	$20.30
2490448	978-1-250-33759-7	Finlay Donovan Crosses the Line: A Novel by Elle Cosimano	Fic	$19.60	1	$19.60
2459941	978-1-5387-6510-4	Kiss Her Goodbye by Lisa Gardner	Fic	$19.60	1	$19.60
2454843	978-1-6680-2747-9	King's Ransom by Janet Evanovich	Fic	$21.00	1	$21.00
2465042	978-1-0359-1129-5	Daughter of the Otherworld by Shauna Lawless	Fic	$20.99	1	$20.99
2475472	978-1-4967-4108-0	In Deadly Fashion by Rosemary Simpson	Fic	$18.90	1	$18.90
2475473	978-1-4967-5325-0	Murder at Arleigh by Alyssa Maxwell	Fic	$18.90	1	$18.90
2463844	978-0-06-325436-7	Dawn of Fate and Fire: A Novel by Mariely Lares	Fic	$22.40	1	$22.40
2465055	978-1-250-38575-8	Legalist: A Novel in the Grand Illusion by Jr. Modesitt	Fic	$24.49	1	$24.49
2475538	978-0-7564-0882-4	Falling in a Sea of Stars by Kristen Britain	Fic	$22.40	1	$22.40
2488768	979-8-3471-1294-4	Dark Lord's Guide to Dating (and Other War Crimes) by Tiffany Hunt	Fic	$21.70	1	$21.70
2475567	978-0-593-73305-9	Living and the Dead: A Novel About a Crime by Christoffer Carlsson	Fic	$20.30	1	$20.30
2466733	978-0-316-51401-9	Hatchet Girls by Joe R. Lansdale	Fic	$21.00	1	$21.00
2475579	978-1-4967-5249-9	Mysterious Death of Junetta Plum by Valerie Wilson Wesley	Fic	$18.90	1	$18.90
2490484	978-1-250-35182-1	First Sign of Danger: A Haven's Rock Novel by Kelley Armstrong	Fic	$20.30	1	$20.30
2488720	979-8-217-19086-7	And Now, Back to You by B.k. Borison	Fic	$21.00	1	$21.00
2465060	978-1-250-28404-4	Cathedral of Lost Souls by Paula Brackston	Fic	$20.30	1	$20.30
2466736	978-1-0354-1554-0	Deadly Dancing at the Seaview Hotel: A Helen Dexter mystery 4 by Glenda Young	Fic	$21.00	1	$21.00
2454847	978-1-9821-4123-3	Strength of the Few by James Islington	Fic	$23.80	1	$23.80
2456928	978-0-316-56483-0	War Beyond by Andrea Stewart	Fic	$21.00	1	$21.00
2489786	978-0-593-72259-6	Innamorata by Ava Reid	Fic	$23.09	1	$23.09
2466762	978-1-0354-0736-1	Immortal Murder: Hugh Corbett 25 by Paul Doherty	Fic	$20.29	1	$20.29
2474491	979-8-89242-215-4	Deadly Clue by Victoria Gilbert	Fic	$20.99	1	$20.99
2475728	978-0-593-85467-9	Something Wicked by Falon Ballard	Fic	$22.40	1	$22.40
2461440	978-1-250-37082-2	Framed in Death by J.D. Robb	Fic	$21.00	1	$21.00
2456968	978-0-593-47589-8	13 Months Haunted by Jimmy Juliano	Fic	$19.60	1	$19.60
2454855	978-1-6680-8769-5	59 Minutes by Holly Seddon	Fic	$20.30	1	$20.30
2446315	978-0-316-56785-5	Academy by Elin Hilderbrand	Fic	$21.00	1	$21.00
2475763	978-1-83541-078-3	Acquired Taste by Clay Mcleod Chapman	Fic	$20.29	1	$20.29
2470037	978-1-6682-0426-9	After Midnight: Thirteen Tales for the Dark Hours by Daphne Du Maurier	Fic	$23.10	1	$23.10
2483501	978-1-61316-686-4	After That, The Dark by Andrew Klavan	Fic	$18.87	1	$18.87
2490543	978-1-250-37565-0	After The Fall by Edward Ashton	Fic	$20.30	1	$20.30
2489377	978-0-593-97325-7	Agnes Aubert's Mystical Cat Shelter by Heather Fawcett	Fic	$20.30	1	$20.30
2475769	978-0-593-97270-0	Alchemised by Senlinyu	Fic	$24.50	1	$24.50
2465101	978-1-250-78915-0	Alchemy of Secrets: A Novel by Stephanie Garber	Fic	$20.99	1	$20.99
2470047	978-1-949846-72-0	Alice, or The Wild Girl by Michael Robert Liska	Fic	$20.97	1	$20.97
2470051	978-1-6680-8317-8	All That We See or Seem by Ken Liu	Fic	$21.00	1	$21.00
2463748	978-1-250-34999-6	All This Could Be Yours by Hank Phillippi Ryan	Fic	$20.30	1	$20.30
2492590	978-1-6682-0059-9	All the World Can Hold by Jung Yun	Fic	$21.00	1	$21.00
2475790	978-0-593-85492-1	Amberglow Candy Store by Hiyoko Kurisu	Fic	$19.60	1	$19.60
2492224	978-1-64375-725-4	American Han: A Novel by Lisa Lee	Fic	$20.30	1	$20.30
2466786	978-0-316-45624-1	Amity: A Novel by Nathan Harris	Fic	$20.30	1	$20.30
2470060	978-1-64821-161-4	Amputation: A Novel by Bruce Wagner	Fic	$19.59	1	$19.59
2462484	978-0-593-83445-9	Anatomy of an Alibi by Ashley Elston	Fic	$21.00	1	$21.00
2466788	978-1-64375-691-2	And I'll Take Out Your Eyes: A Novel by Allan Martin Sosa	Fic	$20.30	1	$20.30
2461436	978-1-9821-7930-4	Apostle's Cove by William Kent Krueger	Fic	$20.30	1	$20.30
2460075	978-1-6680-8309-3	Art of a Lie by Laura Shepherd-Robinson	Fic	$19.60	1	$19.60
2448267	978-1-6680-7896-9	At Last by Marisa Silver	Fic	$19.60	1	$19.60
2465114	978-1-250-42071-8	Austen Affair: A Novel by Madeline Bell	Fic	$21.70	1	$21.70
2465117	978-1-250-87906-6	Autumn Springs Retirement Home Massacre by Philip Fracassi	Fic	$20.29	1	$20.29
2463798	978-0-06-344527-7	Award: A Novel by Matthew Pearl	Fic	$21.00	1	$21.00
2475842	978-0-593-80373-8	Bad Bad Girl: A Novel by Gish Jen	Fic	$21.00	1	$21.00
2465121	978-0-374-61615-1	Ballad of the Last Guest: A Novel by Peter Handke	Fic	$18.20	1	$18.20
2440162	978-0-06-343661-9	Battle of the Bookshops by Poppy Alexander	Fic	$21.00	1	$21.00
2456948	978-0-316-58583-5	Beasts of the Sea by Iida Turpeinen	Fic	$19.60	1	$19.60

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2465126	978-1-250-27679-7	Before I Forget: A Novel by Tory Henwood Hoen	Fic	$20.30	1	$20.30
2488644	979-8-217-08648-1	Beheading Game: A Novel by Rebecca Lehmann	Fic	$20.30	1	$20.30
2465127	978-1-63973-700-0	Beings: A Novel by Ilana Masad	Fic	$20.29	1	$20.29
2448276	978-1-6680-8486-1	Belles by Lacey N. Dunham	Fic	$19.60	1	$19.60
2489263	979-8-89565-334-0	Best Boy by Deborah Goodrich Royce	Fic	$19.60	1	$19.60
2465129	978-1-250-40054-3	Best Offer Wins: A Novel by Marisa Kashino	Fic	$19.59	1	$19.59
2475659	978-0-593-72684-6	Best Wishes from the Full Moon Coffee Shop: A Novel by Mai Mochizuki	Fic	$16.80	1	$16.80
2475660	978-0-593-97568-8	Best Woman: A Novel by Rose Dommu	Fic	$20.30	1	$20.30
2466810	978-0-316-57003-9	Billion-Dollar Ransom: A Thriller by James Patterson	Fic	$22.40	1	$22.40
2475871	978-1-83541-409-5	Birds, Strangers and Psychos: New stories inspired by Alfred Hitchcock	Fic	$20.29	1	$20.29
2492164	978-1-63893-338-0	Black Bag: A Novel by Luke Kennard	Fic	$19.60	1	$19.60
2470138	978-1-6680-6610-2	Black Cherokee: A Novel by Antonio Michael Downing	Fic	$19.59	1	$19.59
2470142	978-1-6680-7284-4	Black Tie and Tails by Wen Spencer	Fic	$19.60	1	$19.60
2490554	978-1-250-37913-9	Blackthorn by J.t. Geissinger	Fic	$23.09	1	$23.09
2475887	978-0-593-95260-3	Blind Date with a Werewolf by Patricia Briggs	Fic	$21.00	1	$21.00
2491697	978-1-5294-1819-4	Blood Will Tell by Christian Unge	Fic	$18.89	1	$18.89
2488619	979-8-217-04482-5	Bloodfire, Baby: A Novel by Eirinie Carson	Fic	$21.00	1	$21.00
2491699	978-1-5387-4302-7	Bloodlust by Sandra Brown	Fic	$21.00	1	$21.00
2492567	978-1-6680-9355-9	Bloom: A Novel by Robbie Couch	Fic	$19.60	1	$19.60
2490818	978-1-5294-4217-5	Body at the Christmas Book Fair: A festive cosy mystery by Helen Cox	Fic	$19.60	1	$19.60
2465132	978-1-63557-966-6	Bog Queen: A Novel by Anna North	Fic	$20.29	1	$20.29
2463897	978-0-06-343968-9	Boleyn Traitor: A Novel by Philippa Gregory	Fic	$22.40	1	$22.40
2475903	978-0-593-55014-4	Bone Thief by Vanessa Lillie	Fic	$21.00	1	$21.00
2475662	978-1-4967-5409-7	Book of Autumn by Molly O'sullivan	Fic	$19.60	1	$19.60
2474503	978-0-593-97596-1	Book of Blood and Roses by Annie Summerlee	Fic	$21.00	1	$21.00
2466824	978-1-5387-7407-6	Book of Guilt by Catherine Chidgey	Fic	$21.00	1	$21.00
2492829	979-8-89242-276-5	Book of Heartbreak by Ova Ceren	Fic	$20.99	1	$20.99
2459939	978-1-6680-7634-7	Book of Lost Hours by Hayley Gelfuso	Fic	$20.99	1	$20.99
2466827	978-1-5294-4729-3	Bookish by Matthew Sweet	Fic	$19.60	1	$19.60
2456959	978-0-316-56183-9	Bookshop Below by Georgia Summers	Fic	$20.30	1	$20.30
2451755	978-1-6680-5627-1	Boom Town by Nic Stone	Fic	$19.60	1	$19.60
2489714	978-0-593-20041-4	Box Full of Darkness by Simone St. James	Fic	$21.00	1	$21.00
2475917	978-1-4967-5555-1	Brace for Impact by Anthony J. Tata	Fic	$20.30	1	$20.30
2489728	978-0-593-41842-0	Brawler: Stories by Lauren Groff	Fic	$20.30	1	$20.30
2470156	978-1-6680-2481-2	Break-In by Katherine Faulkner	Fic	$20.29	1	$20.29
2487207	978-1-80454-183-8	Bride Stone: the spellbinding new historical novel from the author of The Weather Woman by Sally Gardner	Fic	$20.99	1	$20.99
2470160	978-1-6682-1270-7	Brokeback Mountain by Annie Proulx	Fic	$14.00	1	$14.00
2463736	978-0-593-59503-9	Buckeye by Patrick Ryan	Fic	$21.00	1	$21.00
2470165	978-1-63936-985-0	Burning Grounds: A Novel by Abir Mukherjee	Fic	$20.27	1	$20.27
2465142	978-1-250-32052-0	Bury Our Bones in the Midnight Soil by V. E. Schwab	Fic	$20.99	1	$20.99
2490223	978-1-250-37045-7	Cabaret in Flames by Hache Pueyo	Fic	$17.49	1	$17.49
2460060	978-1-6680-9073-2	Cape Fever by Nadia Davids	Fic	$18.90	1	$18.90
2475938	978-1-64129-728-8	Captive by Kit Burgoyne	Fic	$20.30	1	$20.30
2475666	978-1-59376-809-6	Carnaval Fever: A Novel by Yuliana Ortiz Ruano	Fic	$18.90	1	$18.90
2465145	978-0-374-61631-1	Cartographer of Absences: A Novel by Mia Couto	Fic	$21.00	1	$21.00
2491516	978-1-4967-4951-2	Case of the Murdered Muckraker by Rob Osler	Fic	$18.90	1	$18.90
2470169	978-1-6680-6634-8	Cat Fight: A Novel by Kit Conway	Fic	$20.29	1	$20.29
2490712	978-1-250-86349-2	Celestial Lights: A Novel by Cecile Pin	Fic	$18.89	1	$18.89
2462582	979-8-89710-036-1	Cheerleader by Marina Evans	Fic	$20.27	1	$20.27
2470179	979-8-89515-039-9	Chosen Queen: A Novel of the Pendragon Prophecy by Sam Davey	Fic	$20.29	1	$20.29
2485790	978-1-4003-5476-4	Christmas Ring by Karen Kingsbury	Fic	$17.49	1	$17.49
2489910	978-0-593-87564-3	Cleopatra: A Novel by Saara El-arifi	Fic	$21.00	1	$21.00
2492997	978-1-335-09052-2	Closing Time by Michael Ledwidge	Fic	$21.00	1	$21.00
2475966	978-0-593-73340-0	Coffin Moon: A Novel by Keith Rosson	Fic	$21.00	1	$21.00
2475968	978-1-83541-254-1	Cold House by A.g. Slatter	Fic	$13.99	1	$13.99
2475690	978-0-593-49882-8	Color of Hope: A Novel by Danielle Steel	Fic	$20.30	1	$20.30
2489880	978-0-593-83290-5	Complex: A Novel by Karan Mahajan	Fic	$21.00	1	$21.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2460244	978-0-593-97727-9	Compound by Aisling Rawle	Fic	$20.30	1	$20.30
2475977	978-1-83541-183-4	Conan: Spawn of the Serpent God: A Scourge of the Serpent Men Novel by Tim Waggoner	Fic	$20.29	1	$20.29
2475978	978-1-80533-262-6	Consider the Consequences by Doris Webster	Fic	$13.27	1	$13.27
2470208	978-1-83562-647-4	Creative Futures by Allen Stroud	Fic	$18.89	1	$18.89
2463922	978-0-06-344557-4	Crooks: A Novel About Crime and Family by Lou Berney	Fic	$21.00	1	$21.00
2490281	978-1-250-35501-0	Cross Your Heart and Hope He Dies: A Novel by Jenny Elder Moke	Fic	$21.70	1	$21.70
2491530	978-1-4967-5135-5	Crown of Stars by Shana Abe	Fic	$19.60	1	$19.60
2451629	978-1-6680-9525-6	Cry Havoc by Jack Carr	Fic	$20.99	1	$20.99
2466861	978-1-5387-7582-0	Curse of Shadows and Ice (Standard Edition) by Catharina Maura	Fic	$21.00	1	$21.00
2476002	978-0-385-55147-2	Cursed Daughters: A Novel by Oyinkan Braithwaite	Fic	$20.30	1	$20.30
2470247	978-1-63936-963-8	Cut: A Novel by Richard Armitage	Fic	$19.57	1	$19.57
2465167	978-1-250-28681-9	Dark Sisters: A Novel by Kristi Demeester	Fic	$20.30	1	$20.30
2490536	978-1-250-37322-9	Darkening Song by Delphine Seddon	Fic	$20.30	1	$20.30
2463924	978-0-06-347251-8	Darker Days: A Novel by Thomas Olde Heuvelt	Fic	$22.40	1	$22.40
2490906	978-1-3987-2400-6	Darker Side of Paradise by Rj Ellory	Fic	$22.40	1	$22.40
2474545	978-0-06-341959-9	Darkrooms by Rebecca Hannigan	Fic	$21.00	1	$21.00
2491257	978-1-61316-677-2	Daughters by Joanna Margaret	Fic	$18.87	1	$18.87
2454948	978-1-80552-020-7	Daughters of Nicnevin by Shona Kinsella	Fic	$18.87	1	$18.87
2484199	978-0-593-85431-0	Dead First by Johnny Compton	Fic	$21.00	1	$21.00
2483482	979-8-89242-348-9	Dead Man Blues by S. D. House	Fic	$20.99	1	$20.99
2460036	978-1-6680-8409-0	Dead Ringer by Chris Hauty	Fic	$20.30	1	$20.30
2466871	978-1-4087-2044-8	Deadly Night at the Theatre by Katy Watson	Fic	$19.60	1	$19.60
2466872	978-0-349-44293-8	Deadly Remains: The next unmissable mystery in the DI Wesley Peterson crime series by Kate Ellis	Fic	$21.00	1	$21.00
2476023	978-0-593-63880-4	Deadly Storms by Christine Feehan	Fic	$21.00	1	$21.00
2476025	978-0-593-83157-1	Death at the White Hart: A Novel by Chris Chibnall	Fic	$21.00	1	$21.00
2490821	978-1-5387-7475-5	Death of a Groom by M. C. Beaton	Fic	$19.60	1	$19.60
2466877	978-1-4087-1979-4	Death on the Adriatic by Georgina Stewart	Fic	$19.60	1	$19.60
2456931	978-1-4549-6190-1	Deeper Than the Ocean by Mirta Ojito	Fic	$20.29	1	$20.29
2461438	978-1-63910-877-0	Deepest Cut by P. J. Tracy	Fic	$20.99	1	$20.99
2476043	978-1-83541-039-4	Demon Song by Kelsea Yu	Fic	$13.99	1	$13.99
2451708	978-0-06-325965-2	Devil Is a Southpaw by Brandon Hobson	Fic	$20.30	1	$20.30
2470274	978-1-958607-25-1	Devil's Trials by Jessi Elliott	Fic	$18.87	1	$18.87
2463934	978-0-06-338884-0	Different Kind of Tension: New and Selected Stories by Jonathan Lethem	Fic	$20.99	1	$20.99
2456906	978-0-316-59384-7	Dinner Party by Viola van de Sandt	Fic	$20.30	1	$20.30
2448238	978-1-335-01340-8	Dinner at the Night Library by Hika Harada	Fic	$15.39	1	$15.39
2475694	978-1-64009-736-0	Disinheritance: The Rediscovered Stories by Ruth Prawer Jhabvala	Fic	$21.00	1	$21.00
2470281	978-1-61188-380-0	Distributor by Jeff Doka	Fic	$19.57	1	$19.57
2476059	979-8-217-04760-4	Dogs of Venice by Steven Rowley	Fic	$14.00	1	$14.00
2490750	978-1-250-88891-4	Dollface: A Novel by Lindy Ryan	Fic	$20.30	1	$20.30
2465178	978-0-374-60933-7	Dominion: A Novel by Addie E. Citchens	Fic	$18.90	1	$18.90
2489640	978-0-374-61706-6	Down Time: A Novel by Andrew Martin	Fic	$19.60	1	$19.60
2491520	978-1-4967-5037-2	Dreadfuls: Deluxe Stenciled Edges by A. Rae Dunlap	Fic	$19.60	1	$19.60
2470297	978-1-78758-978-0	Echo of Children by Ramsey Campbell	Fic	$18.87	1	$18.87
2451697	978-0-7783-0573-6	Eight Heartbreaks of Hanukkah by Jean Meltzer	Fic	$21.00	1	$21.00
2465185	978-1-250-41036-8	Elements: A Novel by John Boyne	Fic	$20.99	1	$20.99
2476089	979-8-217-15419-7	Eleventh Hour: A Quintet of Stories by Salman Rushdie	Fic	$20.30	1	$20.30
2470305	978-1-63936-965-2	Elopement: A Novel by Gill Hornby	Fic	$20.27	1	$20.27
2465187	978-0-374-61472-0	Emergency: A Novel by George Packer	Fic	$20.30	1	$20.30
2470307	978-1-945863-89-9	Emperor's Twin by Honey Watson	Fic	$19.59	1	$19.59
2465191	978-0-374-61016-6	Estate: A Novel by Cynthia Zarin	Fic	$17.50	1	$17.50
2490691	978-1-250-79908-1	Everlasting by Alix E. Harrow	Fic	$20.99	1	$20.99
2490412	978-1-250-08789-8	Everything Lost Returns: A Novel by Sarah Domet	Fic	$20.99	1	$20.99
2476117	978-0-593-80109-3	Ex-Boyfriend's Favorite Recipe Funeral Committee: A Novel by Saki Kawashiro	Fic	$18.90	1	$18.90
2456989	978-0-593-85163-0	Exiles by Mason Coile	Fic	$19.60	1	$19.60
2466903	978-1-4087-1879-7	Exit Wounds: A breathtakingly unputdownable crime thriller by Neil Broadfoot	Fic	$20.29	1	$20.29
2465192	978-1-250-37384-7	Extremity by Nicholas Binge	Fic	$17.49	1	$17.49

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2465197	978-1-64937-467-7	Fallen Gods by Rachel Van Dyken	Fic	$23.09	1	$23.09
2485313	978-1-250-35689-5	False Witness by Phillip Margolin	Fic	$20.30	1	$20.30
2465202	978-1-250-29314-5	Fate's Bane by C. L. Clark	Fic	$17.49	1	$17.49
2476141	978-0-593-97467-4	Ferry Merry Christmas: A Novel by Debbie Macomber	Fic	$17.50	1	$17.50
2466920	978-1-5294-4296-0	Field Girls by Rosie Archer	Fic	$19.60	1	$19.60
2476146	978-0-593-71434-8	Fiend by Alma Katsu	Fic	$21.00	1	$21.00
2463716	978-0-316-59434-9	Final Problem by Arturo Perez-Reverte	Fic	$20.30	1	$20.30
2491553	978-1-4967-5659-6	Final Storm by Fern Michaels	Fic	$19.60	1	$19.60
2491041	978-1-4087-1753-0	Final Vow by M. W. Craven	Fic	$19.60	1	$19.60
2476151	978-0-593-87526-1	Finest Edge of Twilight: Dungeons and Dragons by R. A. Salvatore	Fic	$21.00	1	$21.00
2461809	978-1-6680-0296-4	First Time I Saw Him by Laura Dave	Fic	$20.30	1	$20.30
2459933	978-1-4642-2011-1	Five Found Dead by Sulari Gentill	Fic	$24.49	1	$24.49
2476153	978-1-64622-281-0	Flat Earth: A Novel by Anika Jade Levy	Fic	$18.20	1	$18.20
2442979	978-1-250-88797-9	Forget Me Not by Stacy Willingham	Fic	$20.30	1	$20.30
2465212	978-1-250-36927-7	Forget-Me-Not Library by Heather Webber	Fic	$20.30	1	$20.30
2489912	978-0-593-95268-9	Fortune Tellers of Rue Daru by Olesya Salnikova Gilmore	Fic	$21.00	1	$21.00
2466937	978-1-4087-3427-8	Fortunes of Ashmore Castle by Cynthia Harrod-eagles	Fic	$20.30	1	$20.30
2451741	978-1-6680-9868-4	Four Spent the Day Together by Chris Kraus	Fic	$20.30	1	$20.30
2476170	978-0-593-87411-0	Fox and Furious: A Novel by Rita Mae Brown	Fic	$21.00	1	$21.00
2489817	978-0-593-72443-9	Fox and the Devil by Kiersten White	Fic	$21.00	1	$21.00
2476175	978-0-385-70100-6	Frankie by Maxim Leo	Fic	$16.10	1	$16.10
2470366	978-0-7548-8888-8	French Run by Paul Anness	Fic	$17.50	1	$17.50
2489572	978-0-316-52865-8	From the Dust: A Novel by David Swinson	Fic	$21.00	1	$21.00
2470371	978-1-61188-396-1	Future Unfolds: A Novel by J.I. Yarrow	Fic	$19.57	1	$19.57
2451750	978-1-6680-9365-8	Gallery Assistant by Kate Belli	Fic	$19.60	1	$19.60
2448212	978-0-06-342395-4	Galloway's Gospel by Sam Rebelein	Fic	$21.00	1	$21.00
2489743	978-0-593-47436-5	Ghost Women: A Novel by Jennifer Murphy	Fic	$20.30	1	$20.30
2483488	978-1-4642-2128-6	Ghostwriter by Julie Clark	Fic	$19.59	1	$19.59
2489860	978-0-593-80100-0	Gift Before Dying: A Novel by Malcolm Kempt	Fic	$19.60	1	$19.60
2465219	978-1-250-88345-2	Girl Dinner by Olivie Blake	Fic	$20.99	1	$20.99
2490283	978-1-250-36751-8	Girl in the Green Dress: A Mystery Featuring Zelda Fitzgerald by Mariah Fredericks	Fic	$20.30	1	$20.30
2461442	978-0-593-53671-1	Girl with Ice in Her Veins by Karin Smirnoff	Fic	$20.30	1	$20.30
2490467	978-1-250-34308-6	Girls Before: A Novel by Kate Alice Marshall	Fic	$20.29	1	$20.29
2470377	978-1-6680-3086-8	Glass Man: A Novel by Anders De Motte	Fic	$22.40	1	$22.40
2463754	978-1-5387-7470-0	Gone Before Goodbye by Harlan Coben	Fic	$22.40	1	$22.40
2454871	978-1-63936-987-4	Good Daughters by Brigitte Dale	Fic	$19.57	1	$19.57
2488630	979-8-217-04804-5	Good Person by Kirsten King	Fic	$20.30	1	$20.30
2476233	978-0-593-80310-3	Good and Evil and Other Stories by Samanta Schweblin	Fic	$18.90	1	$18.90
2474538	978-1-250-37669-5	Graceless Heart by Isabel Ibanez	Fic	$21.70	1	$21.70
2465225	978-1-250-34075-7	Graceview Patient: A Novel by Caitlin Starling	Fic	$20.30	1	$20.30
2487773	978-1-958607-45-9	Grandma's Little Secret by Becca C. Smith	Fic	$13.97	1	$13.97
2461443	978-1-6625-1875-1	Grave Artist by Jeffery Deaver	Fic	$20.29	1	$20.29
2463753	978-0-316-57323-8	Gray Dawn: An Easy Rawlins Mystery by Walter Mosley	Fic	$20.30	1	$20.30
2492569	978-1-6680-9491-4	Great Act of Love: A Novel by Heather Rose	Fic	$20.30	1	$20.30
2476280	978-0-593-80487-2	Guardian and a Thief: A Novel by Megha Majumdar	Fic	$20.30	1	$20.30
2483477	978-0-7783-0571-2	Guest in Room 120 by Sara Ackerman	Fic	$21.00	1	$21.00
2470401	978-1-6680-3039-4	Gun Man Jackson Swagger: A Western by Stephen Hunter	Fic	$19.60	1	$19.60
2459935	978-1-4967-4942-0	Halloween Night Murder by Leslie Meier	Fic	$18.90	1	$18.90
2448261	978-1-6680-6295-1	Happiness and Love by Zoe Dubno	Fic	$18.90	1	$18.90
2485709	978-1-324-09439-5	Happy People Don't Live Here by Amber Sparks	Fic	$19.59	1	$19.59
2490479	978-1-250-34845-6	Hard Times: A Novel by Jeff Boyd	Fic	$20.99	1	$20.99
2465233	978-1-250-36056-4	Haunting of Paynes Hollow: A Novel by Kelley Armstrong	Fic	$20.30	1	$20.30
2476301	978-0-593-95349-5	Haven't Killed in Years by Amy K. Green	Fic	$21.00	1	$21.00
2464855	978-1-250-39735-5	He's to Die For: A Novel by Erin Dunn	Fic	$21.70	1	$21.70
2448222	978-1-335-01633-1	Healing Hippo of Hinode Park by Michiko Aoyama	Fic	$15.39	1	$15.39
2463747	978-0-8021-6517-6	Heart the Lover by Lily King	Fic	$19.60	1	$19.60
2490945	978-1-3996-1466-5	Hearthspace by Stephen Baxter	Fic	$23.09	1	$23.09
2491816	978-1-5387-7630-8	Heir Apparent by Rebecca Armitage	Fic	$20.30	1	$20.30
2464903	978-1-250-37206-2	Heist of Hollow London by Eddie Robson	Fic	$20.29	1	$20.29

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2442828	978-1-250-34203-4	Hemlock and Silver by T. Kingfisher	Fic	$20.29	1	$20.29
2475525	978-1-64129-638-0	Her One Regret by Donna Freitas	Fic	$20.97	1	$20.97
2451747	978-1-6680-8729-9	Her Wicked Roots by Tanya Pell	Fic	$20.30	1	$20.30
2451743	978-1-6680-8786-2	Herculine by Grace Byron	Fic	$19.60	1	$19.60
2489944	978-0-593-97222-9	Hiding Season: A Novel by Ava Glass	Fic	$21.00	1	$21.00
2470422	978-1-64604-865-6	High Finance: A Novel by Ken Miller	031.319	$19.57	1	$19.57
2442798	978-1-250-28393-1	High Season by Katie Bishop	Fic	$20.30	1	$20.30
2451667	978-0-7783-8764-0	Higher Magic by Courtney Floyd	Fic	$21.00	1	$21.00
2490487	978-1-250-35239-2	Hired Man: A Novel by Sandra Dallas	Fic	$19.60	1	$19.60
2476326	978-0-385-55111-3	Hole in the Sky: A Novel by Daniel H. Wilson	Fic	$21.00	1	$21.00
2465246	978-1-250-84588-7	Honeyeater by Kathleen Jennings	Fic	$19.59	1	$19.59
2476334	978-0-593-54801-1	Hong Kong Widow by Kristen Loesch	Fic	$21.00	1	$21.00
2489450	978-0-06-329048-8	Hospital at the End of the World: A Novel by Justin C. Key	Fic	$21.00	1	$21.00
2448280	978-1-6680-7002-4	Hot Wax by M. L. Rio	Fic	$20.30	1	$20.30
2476340	978-0-593-71638-0	House of Day, House of Night: A Novel by Olga Tokarczuk	Fic	$19.60	1	$19.60
2476341	978-0-7564-2010-9	House of Dusk by Deva Fagan	Fic	$21.00	1	$21.00
2476342	978-1-83541-421-7	House of Idyll by Delilah S. Dawson	Fic	$17.49	1	$17.49
2476344	978-0-593-81758-2	House of Monstrous Women by Daphne Fama	Fic	$20.30	1	$20.30
2470435	978-1-78512-496-9	House of Two Pharaohs by Wilbur Smith	Fic	$20.29	1	$20.29
2440146	978-0-06-339134-5	House of the Beast by Michelle Wong	Fic	$22.40	1	$22.40
2490078	978-0-7710-1348-5	Hovel: A Novel by Ailsa Ross	Fic	$18.20	1	$18.20
2489782	978-0-593-70224-6	How to Commit a Postcolonial Murder: A Novel by Nina Mcconigley	Fic	$18.20	1	$18.20
2470438	978-1-6682-0942-4	How to Defeat a Demon King in Ten Easy Steps by Andrew Rowe	Fic	$18.90	1	$18.90
2490636	978-1-250-40943-0	How to Get Away with Murder: A Novel by Rebecca Philipson	Fic	$20.30	1	$20.30
2476354	978-1-64129-449-2	Huguette by Cara Black	Fic	$20.97	1	$20.97
2476358	978-1-64566-280-8	Hunger We Pass Down by Jen Sookfong Lee	Fic	$19.60	1	$19.60
2476361	978-1-4967-4689-4	Hunting Ava by Kiki Swinson	Fic	$18.90	1	$18.90
2492582	978-1-6680-9857-8	I Am Agatha: A Novel by Nancy Foley	Fic	$19.60	1	$19.60
2476368	978-1-63893-206-2	I Am You by Victoria Redel	Fic	$19.60	1	$19.60
2488836	979-8-89003-365-9	I Will Kill Your Imaginary Friend for $200 by Robert Brockway	Fic	$19.59	1	$19.59
2466622	978-0-316-57956-8	I'll Quit When I'm Dead: A Novel by Luke Smitherd	Fic	$20.30	1	$20.30
2484228	979-8-217-18905-2	I'm Not The Only Murderer In My Retirement Home by Fergus Craig	Fic	$21.00	1	$21.00
2476373	978-0-593-73376-9	I, Medusa: A Novel by Ayana Gray	Fic	$21.00	1	$21.00
2490550	978-1-250-37812-5	If I Ruled the World: A Novel by Amy Dubois Barnett	Fic	$20.99	1	$20.99
2476377	978-0-593-83089-5	If the Dead Belong Here: A Novel by Carson Faust	Fic	$21.00	1	$21.00
2470454	979-8-89565-336-4	Illusions of Trust by Jeffrey Stephens	Fic	$20.29	1	$20.29
2492595	978-1-6682-0593-8	In Bloom: A Novel by Liz Allan	Fic	$19.60	1	$19.60
2492197	978-1-64009-760-5	In The Fields of Fatherless Children: A Novel by Pamela Steele	Fic	$19.60	1	$19.60
2470463	978-1-61188-409-8	Incandescent: A Winter Tale of Blackthorne Faire by John Adcox	Fic	$16.07	1	$16.07
2470466	978-1-63774-790-2	Ingram: A Novel by Louis C.k.	Fic	$19.57	1	$19.57
2476400	978-0-593-81931-9	Innocence Road by Laura Griffin	Fic	$21.00	1	$21.00
2451676	978-0-06-344084-5	Intemperance by Sonora Jha	Fic	$21.00	1	$21.00
2463745	978-1-4642-6091-9	Intruder by Freida McFadden	Fic	$19.59	1	$19.59
2489591	978-0-316-58707-5	Invisible Woman: A Thriller by James Patterson	Fic	$21.00	1	$21.00
2463743	978-1-250-40815-0	Irish Goodbye by Heather Aimee O'Neill	Fic	$20.29	1	$20.29
2476403	978-0-593-54033-6	Isabella's Not Dead by Beth Morrey	Fic	$20.30	1	$20.30
2465267	978-1-250-32924-0	Island of Last Things: A Novel by Emma Sloley	Fic	$20.29	1	$20.29
2467019	978-0-316-59508-7	Isle in the Silver Sea by Tasha Suri	Fic	$21.00	1	$21.00
2467023	978-1-5387-3956-3	It Had to Be Him by Adib Khorram	Fic	$18.20	1	$18.20
2474532	978-0-593-83209-7	It Should Have Been You: A Novel by Andrea Mara	Fic	$21.00	1	$21.00
2448217	978-0-06-343095-2	It's Me They Follow by Jeannine A. Cook	Fic	$17.50	1	$17.50
2476412	978-0-593-47475-4	Italian Secret: A Novel by Tara Moss	Fic	$21.00	1	$21.00
2454884	978-1-64821-153-9	Jack Slade: Song of the Butcherbird by Adrian Gostick	Fic	$23.09	1	$23.09
2465271	978-1-250-34050-4	Joy Moody Is Out of Time: A Novel by Kerryn Mayne	Fic	$20.30	1	$20.30
2451704	978-1-335-00109-2	Julia Song Is Undateable by Susan Lee	Fic	$21.00	1	$21.00
2490565	978-1-250-38787-5	Jump: A Novel by Natalie Keller Reinert	Fic	$20.29	1	$20.29
2465273	978-1-250-38591-8	Kaplan's Plot: A Novel by Jason Diamond	Fic	$20.99	1	$20.99
2440169	978-0-06-344624-3	Katabasis by R. F. Kuang	Fic	$22.40	1	$22.40
2451739	978-1-6680-5064-4	Keep This for Me by Jennifer Fawcett	Fic	$20.30	1	$20.30
2492509	978-1-6680-6991-2	Keeper of Lost Children: A Novel by Sadeqa Johnson	Fic	$21.00	1	$21.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2489723	978-0-593-49346-5	Keeper: A Novel by Tana French	Fic	$22.40	1	$22.40
2465274	978-1-250-37378-6	Kill the Beast by Serra Swift	Fic	$19.59	1	$19.59
2447477	978-0-7783-0570-5	Killer Motive by Hannah Mary McKinnon	Fic	$21.00	1	$21.00
2470491	978-1-6680-8353-6	Killer Question: A Novel by Janice Hallett	Fic	$21.00	1	$21.00
2448228	978-0-06-343221-5	Killer Wedding by Joan O'Leary	Fic	$21.00	1	$21.00
2490368	978-1-250-91007-3	Killing Me Softly: A Novel by Sandie Jones	Fic	$20.30	1	$20.30
2461455	978-1-250-35728-1	Killing Stones by Ann Cleeves	Fic	$20.30	1	$20.30
2451700	978-0-06-220060-0	King Sorrow by Joe Hill	Fic	$28.00	1	$28.00
2448819	978-1-250-83206-1	King of Ashes by S. A. Cosby	Fic	$20.29	1	$20.29
2456978	978-0-593-68680-5	Land So Wide by Erin A. Craig	Fic	$19.60	1	$19.60
2464046	978-0-06-346051-5	Land of Sweet Forever: Stories and Essays by Harper Lee	818.54	$21.00	1	$21.00
2467041	978-1-3997-0233-1	Landfall by James Bradley	Fic	$18.89	1	$18.89
2465279	978-1-0359-0238-5	Last Apartment in Istanbul by Defne Suman	Fic	$20.99	1	$20.99
2456927	978-1-5387-7288-1	Last Call at the Savoy by Brisa Carleton	Fic	$20.30	1	$20.30
2467043	978-0-316-58051-9	Last Days of Marilyn Monroe: A True Crime Thriller by James Patterson	Fic	$22.40	1	$22.40
2490274	978-1-250-32626-3	Last First Kiss: A Novel by Julian Winters	Fic	$13.30	1	$13.30
2465282	978-1-68281-648-6	Last Letter by Rebecca Yarros	Fic	$23.09	1	$23.09
2465284	978-1-0350-7207-1	Last Love Song by Lucinda Riley	Fic	$19.59	1	$19.59
2483473	979-8-89242-128-7	Last One Seen by Rebecca Kanner	Fic	$20.99	1	$20.99
2488635	979-8-217-06103-7	Last Seen: A Novel by Christopher Castellani	Fic	$21.00	1	$21.00
2470504	978-1-6680-5873-2	Last Spirits of Manhattan: A Novel by John A Mcdermott	Fic	$20.30	1	$20.30
2476464	979-8-217-18779-9	Last Witch by C. J. Cooke	Fic	$21.00	1	$21.00
2474518	978-0-593-73135-2	Last of Earth by Deepa Anappara	Fic	$20.30	1	$20.30
2442836	978-1-250-86732-2	Lessons in Magic and Disaster by Charlie Jane Anders	Fic	$20.99	1	$20.99
2470521	978-1-6680-7642-2	Leverage: A Novel by Amran Gowani	Fic	$20.29	1	$20.29
2461459	978-0-593-64045-6	Librarians by Sherry Thomas	Fic	$21.00	1	$21.00
2488671	979-8-217-09490-5	Lies that Summon the Night: A Novel by Tessonja Odette	Fic	$21.00	1	$21.00
2464964	978-1-250-37533-9	Life, and Death, and Giants: A Novel by Ron Rindo	Fic	$20.30	1	$20.30
2476507	978-0-593-32970-2	Lightbreakers: A Novel by Aja Gabel	Fic	$21.00	1	$21.00
2465286	978-1-250-80558-4	Lighthouse at the Edge of the World by J.r. Dawson	Fic	$20.29	1	$20.29
2476509	978-0-593-97855-9	Like Family: A Novel by Erin O. White	Fic	$20.30	1	$20.30
2476521	978-0-593-73675-3	Little Movements: A Novel by Lauren Morrow	Fic	$19.60	1	$19.60
2442758	978-1-250-34951-4	Locked Ward by Sarah Pekkanen	Fic	$20.30	1	$20.30
2476526	978-0-307-70015-5	Loneliness of Sonia and Sunny: A Novel by Kiran Desai	Fic	$22.40	1	$22.40
2492633	978-1-6682-3048-0	Long Walk by Stephen King	Fic	$20.30	1	$20.30
2460040	978-1-6682-1271-4	Long Winter by Colm Toibin	Fic	$14.00	1	$14.00
2470537	978-1-83786-567-3	Lord of Blackthorne by Jason Kingsley	Fic	$17.49	1	$17.49
2476252	978-0-593-83086-4	Lost Baker of Vienna: A Novel by Sharon Kurtzman	Fic	$21.00	1	$21.00
2476256	978-0-593-81692-9	Lost Story of Eva Fuentes by Chanel Cleeton	Fic	$21.00	1	$21.00
2463037	978-1-6680-9503-4	Love and Other Brain Experiments by Hannah Brohm	Fic	$13.30	1	$13.30
2490340	978-1-0354-1169-6	Love and Other Poisons: a gripping historical tale of scandal and murder, based on a true story by Lesley Mcdowell	Fic	$19.60	1	$19.60
2451764	978-1-63936-969-0	Love, Sex, and Frankenstein by Caroline Lea	Fic	$19.57	1	$19.57
2476547	978-0-593-65584-9	Loved One: A Novel by Aisha Muharrar	Fic	$21.00	1	$21.00
2470547	978-1-9821-7996-0	Lover Forbidden by J.r. Ward	Fic	$21.00	1	$21.00
2442793	978-1-250-39865-9	Lucky Day by Chuck Tingle	Fic	$19.59	1	$19.59
2454197	978-0-7783-8786-2	Lucky Seed by Justinian Huang	Fic	$21.00	1	$21.00
2467110	978-1-5294-4091-1	Malevolent Eight: The Bad, The Worse And The Wicked by Sebastien De Castell	Fic	$19.60	1	$19.60
2460187	979-8-89710-007-1	Man on the Endless Stair by Chris Barkley	Fic	$19.57	1	$19.57
2448770	978-1-6680-8833-3	Many Mothers of Dolores Moore by Anika Fajardo	Fic	$20.30	1	$20.30
2442874	978-1-250-35654-3	Marigold Cottages Murder Collective by Jo Nichols	Fic	$19.60	1	$19.60
2476574	978-0-593-85195-1	Marrow by Samantha Browning Shea	Fic	$20.30	1	$20.30
2464077	978-0-06-333797-8	Meet Me at the Crossroads: A Novel by Megan Giddings	Fic	$20.29	1	$20.29
2476581	978-1-64009-707-0	Mercy: A Novel by Joan Silber	Fic	$18.90	1	$18.90
2483474	979-8-89242-288-8	Merry by Susan Breen	Fic	$20.99	1	$20.99
2451649	978-1-335-00108-5	Merry Little Lie by Sarah Morgan	Fic	$21.00	1	$21.00
2476584	978-0-593-83517-3	Middle Spoon: A Novel by Alejandro Varela	Fic	$21.00	1	$21.00
2470575	978-1-6680-6942-4	Midnight Knock: A Novel by John Fram	Fic	$21.00	1	$21.00
2474541	978-0-06-346802-3	Midnight Pastry Shop Called Hwawoldang by Lee Onhwa	Fic	$15.39	1	$15.39

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2465313	978-1-63973-576-1	Midnight Shift by Seon-ran Cheon	Fic	$19.59	1	$19.59
2460188	978-1-6680-7301-8	Mills of the Gods by Tim Powers	Fic	$21.00	1	$21.00
2487519	978-1-83786-691-5	Misheard World by Aliya Whiteley	Fic	$19.59	1	$19.59
2492539	978-1-6680-7980-5	Missing: A Novel by E.a. Jackson	Fic	$19.60	1	$19.60
2489841	978-0-593-73460-5	More Than Enough: A Novel by Anna Quindlen	Fic	$20.30	1	$20.30
2474537	978-1-250-39620-4	Most Eligible by Isabelle Engel	Fic	$13.30	1	$13.30
2488622	979-8-217-04571-6	Mother Is Watching: A Novel by Karma Brown	Fic	$20.30	1	$20.30
2487774	978-1-958607-49-7	Mother Mercy by Chandra Arthur	Fic	$13.27	1	$13.27
2476600	978-0-7710-2027-8	Mother of God: A Novel by Sara Peters	Fic	$18.17	1	$18.17
2489603	978-0-316-59747-0	Mothers and Other Strangers: A Novel by Corey Ann Haydu	Fic	$20.30	1	$20.30
2476603	978-1-64622-253-7	Mothers: A Novel by Brenda Lozano	Fic	$18.90	1	$18.90
2459936	978-0-593-81881-7	Mrs. Christie at the Mystery Guild Library by Amanda Chapman	Fic	$20.30	1	$20.30
2483483	978-1-6625-2718-0	Mrs. Endicott's Splendid Adventure by Rhys Bowen	Fic	$20.29	1	$20.29
2489803	978-1-250-38261-0	Murder Will Out: A Mystery by Jennifer K. Breedlove	Fic	$19.60	1	$19.60
2474527	978-0-06-344808-7	Murder Your Darlings: A Novel by Jenna Blum	Fic	$21.00	1	$21.00
2454875	978-1-63936-993-5	Murder at the Christmas Emporium by Andreina Cordani	Fic	$19.57	1	$19.57
2440174	978-0-7783-8750-3	Murder by the Book by Amie Schaumberg	Fic	$21.00	1	$21.00
2476262	978-0-593-70162-1	Murder for Miss Hortense: A Mystery by Mel Pennant	Fic	$19.60	1	$19.60
2464083	978-0-06-331419-1	Murder in Paris: A Novel by Matthew Blake	Fic	$21.00	1	$21.00
2470595	978-1-63936-957-7	Murder in Tinseltown: A Hollywood Era Choose-Your-Own-Story Mystery by Max Nightingale	Fic	$19.57	1	$19.57
2465322	978-1-250-35648-2	Murderous Business: A Harriman and Mancini Mystery by Cathy Pegau	Fic	$19.60	1	$19.60
2476616	978-1-64622-277-3	Muscle Man: A Novel by Jordan Castro	Fic	$18.90	1	$18.90
2463749	979-8-217-04717-8	My Beloved by Jan Karon	Fic	$22.40	1	$22.40
2488709	979-8-217-17763-9	My Grandfather, the Master Detective by Masateru Konishi	Fic	$20.30	1	$20.30
2490450	978-1-250-33781-8	My Husband's Wife: A Novel by Alice Feeney	Fic	$20.29	1	$20.29
2461467	978-1-250-40826-6	Mysterious Case of the Missing Crime Writer by Ragnar Jonasson	Fic	$20.30	1	$20.30
2451968	978-0-593-83390-2	Names by Florence Knapp	Fic	$21.00	1	$21.00
2456936	978-1-5387-5798-7	Nash Falls by David Baldacci	Fic	$22.40	1	$22.40
2476636	978-0-593-44723-9	Needle Lake: A Novel by Justine Champine	Fic	$20.30	1	$20.30
2476642	978-0-593-71877-3	New New Me: A Novel by Helen Oyeyemi	Fic	$20.30	1	$20.30
2483504	978-1-6625-2841-5	Night Collector by Victor Methos	Fic	$20.29	1	$20.29
2476651	978-0-593-85343-6	Night That Finds Us All by John Hornor Jacobs	Fic	$21.00	1	$21.00
2491790	978-1-5387-5922-6	Night We Met (Deluxe Edition) by Abby Jimenez	Fic	$21.00	1	$21.00
2476648	978-1-83541-389-0	Night of the Living Dead: The Official Novelization by John Russo	Fic	$13.99	1	$13.99
2483475	978-0-345-49315-6	No Man's Land by Richard K. Morgan	Fic	$21.00	1	$21.00
2461469	978-1-250-36211-7	No Rest for the Wicked by Rachel Louise Adams	Fic	$19.60	1	$19.60
2459940	978-0-593-97705-7	Not Quite Dead Yet by Holly Jackson	Fic	$19.60	1	$19.60
2454177	978-1-335-01316-3	Not You Again by Erin La Rosa	Fic	$21.00	1	$21.00
2470616	978-1-6680-7259-2	Not that Kind of Good Guy by John Ringo	Fic	$19.60	1	$19.60
2492504	978-1-6680-6841-0	Nothing Tastes as Good: A Novel by Luke Dumas	Fic	$20.30	1	$20.30
2490709	978-1-250-86005-7	Nowhere Burning by Catriona Ward	Fic	$20.29	1	$20.29
2465342	978-1-250-33369-8	October Film Haunt: A Novel by Michael Wehunt	Fic	$20.30	1	$20.30
2490587	978-1-250-39367-8	Odds of You: A Novel by Kate Dramis	Fic	$13.30	1	$13.30
2474473	978-0-8007-4473-1	Once Upon A Christmas Carol by Melody Carlson	Fic	$13.29	1	$13.29
2492072	978-1-6680-2591-8	Once and Again: A Novel by Rebecca Serle	Fic	$18.90	1	$18.90
2442852	978-1-250-35867-7	Once and Future Me by Melissa Pace	Fic	$20.99	1	$20.99
2464102	978-0-06-335284-1	One of Them: A Novel by Kitty Zeldis	Fic	$21.00	1	$21.00
2465347	978-1-250-17523-6	One of Us: A Novel by Dan Chaon	Fic	$20.29	1	$20.29
2454949	978-1-78758-960-5	Opposite World by Elizabeth Anne Martins	Fic	$18.87	1	$18.87
2465349	978-1-5266-0811-6	Opt Out by Carolina Setterwall	Fic	$20.99	1	$20.99
2476692	978-0-593-98483-3	Ordeals: A Novel by Rachel Greenlaw	Fic	$21.00	1	$21.00
2456911	978-0-316-36994-7	Other People's Fun by Harriet Lane	Fic	$20.30	1	$20.30
2454160	978-0-7783-8726-8	Otherwise Engaged by Susan Mallery	Fic	$21.00	1	$21.00
2465355	978-1-250-31346-1	Overdue: A Novel by Stephanie Perkins	Fic	$21.70	1	$21.70
2489668	978-0-374-60907-8	Palaver: A Novel by Bryan Washington	Fic	$19.60	1	$19.60
2467204	978-0-316-59754-8	Particularly Nasty Case: A Novel by Adam Kay	Fic	$20.30	1	$20.30
2465360	978-1-5266-8272-7	Pentecost Papers by Ferdinand Mount	Fic	$20.99	1	$20.99
2454165	978-0-7783-0566-8	Perfect Hosts by Heather Gudenkauf	Fic	$21.00	1	$21.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2470668	978-1-61188-361-9	Perfectly Normal: A Novel by Zachary Steele	Fic	$18.87	1	$18.87
2467141	978-1-4087-1936-7	Pet Hates: A charming cosy murder mystery by Jo Cunningham	Fic	$16.79	1	$16.79
2485128	979-8-9911402-8-7	Phoebe Variations by Jane Hamilton	Fic	$19.59	1	$19.59
2467206	978-1-5387-5843-4	Picasso Heist: A Thriller by James Patterson	Fic	$22.40	1	$22.40
2476740	978-0-593-95395-2	Place Where They Buried Your Heart by Christina Henry	Fic	$21.00	1	$21.00
2492557	978-1-6680-8792-3	Plans I Have for You: A Novel by Lai Sanders	Fic	$20.30	1	$20.30
2456984	978-0-593-64257-3	Play Nice by Rachel Harrison	Fic	$21.00	1	$21.00
2476743	978-1-64622-227-8	Playing Wolf: A Novel by Zuzana Rihova	Fic	$18.90	1	$18.90
2483503	978-1-6625-2439-4	Please Don't Lie by Christina Baker Kline	Fic	$20.29	1	$20.29
2476748	978-0-593-49876-7	Portrait: A Novel by Danielle Steel	Fic	$20.30	1	$20.30
2476750	978-0-593-64107-1	Possession of Alba Diaz by Isabel Canas	Fic	$20.30	1	$20.30
2470106	978-1-5107-8545-8	Precious Freedom: A Novel by James Bradley	Fic	$23.09	1	$23.09
2489951	978-0-593-97676-0	Quarter Queen: A Novel by Kayla Hardy	Fic	$21.00	1	$21.00
2454250	978-1-5011-8944-9	Queen Esther by John Irving	Fic	$21.00	1	$21.00
2492002	978-1-63973-622-5	Railsong: A Novel by Rahul Bhattacharya	Fic	$20.99	1	$20.99
2476774	978-1-64129-720-2	Red Scare Murders by Con Lehane	Fic	$20.97	1	$20.97
2490510	978-1-250-36276-6	Red Winter by Cameron Sullivan	Fic	$20.99	1	$20.99
2476777	979-8-217-15404-3	Remain by Nicholas Sparks	Fic	$21.00	1	$21.00
2462416	978-1-6682-3156-2	Rest of Our Lives by Ben Markovits	Fic	$19.60	1	$19.60
2465388	978-1-250-37308-3	Righteous: A Novel by Ronald H. Balson	Fic	$21.00	1	$21.00
2465391	978-0-374-60901-6	Ripeness: A Novel by Sarah Moss	Fic	$19.60	1	$19.60
2470726	978-1-952126-75-8	Rising Knight by Catherine L. Akel	Fic	$18.90	1	$18.90
2470732	978-1-83562-292-6	Robots Past and Future Short Stories	Fic	$21.00	1	$21.00
2467244	978-1-3987-1465-6	Rome: For an empress to rise, a city must fall by Ben Kane	Fic	$17.50	1	$17.50
2492160	978-1-63893-232-1	Room 706: A Novel by Ellie Levenson	Fic	$19.60	1	$19.60
2488661	979-8-217-29983-6	Roots of Darkness: The Ashen Series; Book 2.5 by Demi Winters	Fic	$14.00	1	$14.00
2491800	978-1-5387-7052-8	Ruins by Lily Brooks-dalton	Fic	$20.30	1	$20.30
2492632	978-1-6682-3047-3	Running Man by Stephen King	Fic	$20.30	1	$20.30
2470752	978-1-63936-979-9	Rush: A Novel by Beth Lewis	Fic	$20.27	1	$20.27
2476801	978-0-593-71594-9	Ruth: A Novel by Kate Riley	Fic	$20.30	1	$20.30
2476802	978-1-64009-713-1	Sacrament: A Novel by Susan Straight	Fic	$20.30	1	$20.30
2465401	978-1-250-38096-8	Saltcrop: A Novel by Yume Kitasei	Fic	$21.69	1	$21.69
2467258	978-0-316-57589-8	Savage Blooms by S. T. Gibson	Fic	$20.30	1	$20.30
2483495	979-8-89242-309-0	Scar the Sky by J. Todd Scott	Fic	$20.99	1	$20.99
2489927	978-0-593-97655-5	Sea Child: A Novel by Linda Wilgus	Fic	$21.00	1	$21.00
2492634	978-1-6682-3171-5	Seascraper by Benjamin Wood	Fic	$18.20	1	$18.20
2451738	978-1-6680-8040-5	Second Chance Cinema by Thea Weiss	Fic	$20.30	1	$20.30
2476835	978-1-4967-4872-0	Shadow Play by Sara Driscoll	Fic	$20.30	1	$20.30
2476836	978-1-59420-610-8	Shadow Ticket by Thomas Pynchon	Fic	$21.00	1	$21.00
2463757	978-1-5387-7396-3	Sharp Force by Patricia Cornwell	Fic	$21.00	1	$21.00
2464144	978-0-06-321943-4	Sharpe's Storm: A Novel by Bernard Cornwell	Fic	$22.40	1	$22.40
2491163	978-1-4967-5570-4	She Thought She Was Safe by Terri Parlato	Fic	$19.60	1	$19.60
2489885	978-0-593-83425-1	Shock of the Light: A Novel by Lori Inglis Hall	Fic	$21.00	1	$21.00
2467277	978-1-5387-6829-7	Shocking Experiments of Miss Mary Bennet: A Novel by Melinda Taub	Fic	$20.30	1	$20.30
2465420	978-0-374-61831-5	Silver Book: A Novel by Olivia Laing	Fic	$18.90	1	$18.90
2465422	978-1-250-38429-4	Simultaneous: A Novel by Eric Heisserer	Fic	$19.59	1	$19.59
2465424	978-1-5266-5064-1	Single Neighbour by Senta Rich	Fic	$20.29	1	$20.29
2476472	978-0-593-63975-7	Sister's Curse by Nicola Solvinic	Fic	$21.00	1	$21.00
2489748	978-0-593-53773-2	Sisters in Yellow: A Novel by Mieko Kawakami	Fic	$21.00	1	$21.00
2470111	978-1-63936-925-6	Six Weeks by the Sea: A Novel by Paula Byrne	Fic	$20.27	1	$20.27
2476858	978-0-593-95464-5	Slashed Beauties by A. Rushby	Fic	$21.00	1	$21.00
2476859	978-0-7564-1968-4	Slayers of Old by Jim C. Hines	Fic	$20.30	1	$20.30
2470240	978-1-62371-583-0	Slightest Green: A Novel by Sahar Mustafah	Fic	$19.60	1	$19.60
2461471	978-0-593-49358-8	Slowly Dying Cause by Elizabeth George	Fic	$22.40	1	$22.40
2440152	978-0-06-332403-9	Society of Unknowable Objects by Gareth Brown	Fic	$21.00	1	$21.00
2492573	978-1-6680-9690-1	Sociopath's Guide to a Successful Marriage: A Novel by Mk Oliver	Fic	$20.30	1	$20.30
2470798	978-1-77041-815-8	Solitary Friend: A Joanne Kilbourn Mystery by Gail Bowen	Fic	$20.27	1	$20.27
2486986	978-1-83541-186-5	Solomon Kane: Suffer The Witch by Shaun Hamill	Fic	$20.29	1	$20.29
2476879	978-0-593-73441-4	Something to Look Forward To: Fictions by Fannie Flagg	Fic	$20.30	1	$20.30

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2488716	979-8-217-18823-9	Somewhat Wicked Witch of Brigandale by C. M. Waggoner	Fic	$21.00	1	$21.00
2491089	978-1-4197-7812-4	Songs for Other People's Weddings: A Novel by David Levithan	Fic	$19.60	1	$19.60
2476883	978-0-385-69921-1	Songs of Love on a December Night by David Adams Richards	Fic	$18.90	1	$18.90
2488626	979-8-217-04772-7	Sorry for Your Loss: A Novel by Georgia Mcveigh	Fic	$20.30	1	$20.30
2491189	978-1-4549-6368-4	Soyangri Book Kitchen: A Novel by Kim Jee Hye	Fic	$17.50	1	$17.50
2467297	978-1-5387-7165-5	Spellbound by Georgia Leighton	Fic	$21.00	1	$21.00
2464156	978-0-06-343591-9	Spent Bullets by Terao Tetsuya	Fic	$18.20	1	$18.20
2465437	978-1-250-38733-2	Spread Me by Sarah Gailey	Fic	$18.89	1	$18.89
2490561	978-1-250-38587-1	Stakeouts and Strollers: A Mystery by Rob Phillips	Fic	$19.60	1	$19.60
2476907	978-0-593-97829-0	Starting from Here: A Novel by Paula Saunders	Fic	$20.30	1	$20.30
2476911	978-0-593-47427-3	Stolen Queen: A Novel by Fiona Davis	Fic	$20.30	1	$20.30
2456924	978-1-5387-6628-6	Strangers in the Car by C. M. Ewan	Fic	$20.30	1	$20.30
2476932	978-0-593-98470-3	Summer War by Naomi Novik	Fic	$16.80	1	$16.80
2440171	978-0-06-341822-6	Sunflower Boys by Sam Wachman	Fic	$21.00	1	$21.00
2476942	978-1-9848-8218-9	Sunshine Man: A Novel by Emma Stonex	Fic	$21.00	1	$21.00
2490584	978-1-250-39328-9	Survivor by Andrew Reid	Fic	$20.30	1	$20.30
2476946	978-0-307-26758-0	Swallows: A Novel by Natsuo Kirino	Fic	$20.30	1	$20.30
2447466	978-0-06-330698-1	Sweet Heat by Bolu Babalola	Fic	$21.00	1	$21.00
2476973	978-1-64622-257-5	Sweetener: A Novel by Marissa Higgins	Fic	$18.90	1	$18.90
2470842	978-1-78758-969-8	Sword of Gold and Ruin by Anna Smith Spark	Fic	$18.87	1	$18.87
2451678	978-0-7783-8763-3	Sword of Light by Heather Graham	Fic	$21.00	1	$21.00
2470846	978-1-6680-9412-9	Sympathy Tower Tokyo: A Novel by Rie Qudan	Fic	$18.90	1	$18.90
2465453	978-1-250-41048-1	Tailored Realities by Brandon Sanderson	Fic	$20.99	1	$20.99
2476984	978-1-64566-202-0	Tall Is Her Body by Robert De La Chevotiere	Fic	$19.60	1	$19.60
2464170	978-0-06-344332-7	Television: A Novel by Lauren Rothery	Fic	$19.60	1	$19.60
2433687	978-1-368-10246-9	Tell Them You Lied by Laura Leffler	Fic	$18.89	1	$18.89
2470855	978-1-938461-72-9	Ten Swamps by Nancy Doyne	Fic	$17.49	1	$17.49
2470856	978-1-6680-8144-0	Ten Year Affair: A Novel by Erin Somers	Fic	$19.60	1	$19.60
2454138	978-0-7783-6029-2	That's Not How It Happened by Craig Thomas	Fic	$21.00	1	$21.00
2476998	978-0-593-98375-1	There Is No Antimemetics Division: A Novel by Qntm	Fic	$20.30	1	$20.30
2477000	978-1-83541-019-6	These Dreaming Spires: A Dark Academia Anthology	Fic	$20.29	1	$20.29
2477007	978-0-7564-2008-6	They Fear Not Men in the Woods by Gretchen Mcneil	Fic	$20.30	1	$20.30
2454883	978-1-64821-135-5	Things That Are Funny on a Submarine but Not Really by Yannick Murphy	Fic	$20.99	1	$20.99
2476953	978-1-59376-805-8	Third Love: A Novel by Hiromi Kawakami	Fic	$18.90	1	$18.90
2477009	979-8-217-08899-7	Thirst Trap: A Novel by Grainne O'hare	Fic	$19.60	1	$19.60
2491162	978-1-4967-5541-4	This House Will Feed by Maria Tureaud	Fic	$19.60	1	$19.60
2474519	978-0-525-65515-2	This Is Where the Serpent Lives by Daniyal Mueenuddin	Fic	$20.30	1	$20.30
2467307	978-1-61620-914-8	This Is the Only Kingdom: A Novel by Jaquira Diaz	Fic	$19.60	1	$19.60
2477017	978-0-593-47510-2	This Kind of Trouble: A Novel by Tochi Eze	Fic	$20.30	1	$20.30
2490595	978-1-250-39523-8	This Story Might Save Your Life: A Novel by Tiffany Crum	Fic	$20.99	1	$20.99
2467308	978-0-316-28753-1	This Vicious Hunger by Francesca May	Fic	$21.00	1	$21.00
2470864	978-1-80417-906-2	This Way Lies Madness	Fic	$18.89	1	$18.89
2477023	978-0-7352-5096-3	Three Parties by Ziyad Saadi	Fic	$18.17	1	$18.17
2470872	978-1-943272-49-5	Time Rider by Tom Delonge	Fic	$17.49	1	$17.49
2470874	978-1-5011-0187-8	Tin Men: A Novel by Nelson Demille	Fic	$20.30	1	$20.30
2487746	978-1-949846-76-8	Tomorrow, the War by Max Watman	Fic	$23.09	1	$23.09
2477044	978-0-593-10103-2	Too Old for This by Samantha Downing	Fic	$21.00	1	$21.00
2454254	978-1-6680-6862-5	Tortoise's Tale by Kendra Coulter	Fic	$19.60	1	$19.60
2454240	978-1-6680-8689-6	Town and Country by Brian Schaefer	Fic	$19.60	1	$19.60
2465472	978-0-374-61734-9	Trip: A Novel by Amie Barrodale	Fic	$19.60	1	$19.60
2477071	978-1-4000-4277-7	Unbroken Coast: A Novel by Nalini Jones	Fic	$21.00	1	$21.00
2488632	979-8-217-04831-1	Under Water: A Novel by Tara Menon	Fic	$20.30	1	$20.30
2477080	978-1-6626-0326-6	Underspin: A Novel by E. Y. Zhao	Fic	$18.90	1	$18.90
2477085	978-1-4967-4408-1	Unseen by Kat Martin	Fic	$20.30	1	$20.30
2451783	978-1-78758-957-5	Unseen Gods by Justin Holley	Fic	$18.87	1	$18.87
2470901	978-1-6680-5766-7	Unseen: A Novel by Ania Ahlborn	Fic	$20.29	1	$20.29
2467332	978-1-5294-3611-2	Unworthy by Roy Jacobsen	Fic	$19.60	1	$19.60
2460002	978-1-368-11379-3	Upstanding Young Man by Sharon Doering	Fic	$19.59	1	$19.59
2489957	978-0-593-97997-6	Upward Bound: A Novel by Woody Brown	Fic	$19.60	1	$19.60

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2477090	979-8-217-18809-3	Vanishing Place by Zoe Rankin	Fic	$21.00	1	$21.00
2477091	978-0-593-80116-1	Venetian Vespers: A Novel by John Banville	Fic	$21.00	1	$21.00
2470914	978-1-63936-959-1	Vianne: A Novel by Joanne Harris	Fic	$20.27	1	$20.27
2484217	979-8-217-05979-9	Warning Signs by Tracy Sierra	Fic	$21.00	1	$21.00
2470927	978-1-64821-127-0	Waseem: A Novel by Lilas Taha	Fic	$19.59	1	$19.59
2448284	978-1-6682-0477-1	Wasp Trap by Mark Edwards	Fic	$20.30	1	$20.30
2460045	978-1-5011-4172-0	Watch Us Fall by Christina Kovac	Fic	$19.60	1	$19.60
2461841	978-1-6682-2196-9	Watching Over Her by Jean-Baptiste Andrea	Fic	$20.30	1	$20.30
2483508	978-1-6625-3197-2	Water Lies by Amy Meyerson	Fic	$20.29	1	$20.29
2465479	978-0-374-61957-2	Wayfinder: A Novel by Adam Johnson	Fic	$21.00	1	$21.00
2470933	978-1-63936-907-2	We Can't Save You: A Tale of Politics, Murder, and Maine by Thomas E. Ricks	Fic	$19.57	1	$19.57
2483494	978-0-8021-6588-6	We Had a Hunch: A Mystery by Tom Ryan	Fic	$18.90	1	$18.90
2490079	978-0-7710-1985-2	We Inherit the Fire: A Novel by Kagiso Lesego Molope	Fic	$17.50	1	$17.50
2448773	978-1-6680-5986-9	We Love You, Bunny by Mona Awad	Fic	$21.00	1	$21.00
2477122	978-0-593-44806-9	We Loved to Run: A Novel by Stephanie Reents	Fic	$20.30	1	$20.30
2477130	978-0-593-81876-3	We'll Prescribe You Another Cat by Syou Ishida	Fic	$20.30	1	$20.30
2489966	978-0-593-98257-0	Weavingshaw by Heba Al-wasity	Fic	$21.00	1	$21.00
2454163	978-0-7783-0565-1	Weekend Crashers by Jamie Brenner	Fic	$21.00	1	$21.00
2442762	978-1-250-39734-8	Well, Actually by Mazey Eddings	Fic	$21.70	1	$21.70
2490542	978-1-250-37530-8	Westward Women: A Novel by Alice Martin	Fic	$20.30	1	$20.30
2492200	978-1-64129-691-5	What Boys Learn by Andromeda Romano-lax	Fic	$20.97	1	$20.97
2446665	978-1-250-37937-5	What Fury Brings by Tricia Levenseller	Fic	$22.39	1	$22.39
2470949	978-1-9821-9088-0	What We Left Unsaid: A Novel by Winnie M Li	Fic	$20.29	1	$20.29
2448236	978-0-06-341639-0	What a Time to Be Alive by Jade Chang	Fic	$20.29	1	$20.29
2470945	978-1-63936-981-2	What a Time to Be Alive: A Novel by Jenny Mustard	Fic	$19.57	1	$19.57
2470950	979-8-89565-238-1	What's with Baum? by Woody Allen	Fic	$19.60	1	$19.60
2464205	978-0-06-333874-6	Whatever Happened to Lori Lovely?: A Novel by Sarah McCoy	Fic	$21.00	1	$21.00
2490424	978-1-250-28944-5	When I Kill You: A Novel by B.a. Paris	Fic	$20.30	1	$20.30
2465489	978-1-250-36945-1	When They Burned the Butterfly by Wen-yi Lee	Fic	$19.59	1	$19.59
2460047	978-1-6680-4328-8	When the Fireflies Dance by Aisha Hassan	Fic	$20.30	1	$20.30
2477164	978-0-593-29838-1	Where Are You Really From: Stories by Elaine Hsieh Chou	Fic	$20.30	1	$20.30
2491552	978-1-4967-5646-6	Whiff of Murder by Angela M. Sanders	Fic	$18.90	1	$18.90
2460003	978-1-368-10145-5	While the Getting Is Good by Matt Riordan	Fic	$19.59	1	$19.59
2474523	978-0-7642-4565-7	Whispers At Painswick Court by Julie Klassen	Fic	$20.99	1	$20.99
2477173	978-0-593-73233-5	White Hot: A Novel by Quiara Alegria Hudes	Fic	$18.20	1	$18.20
2488640	979-8-217-08570-5	White River Crossing: A Novel by Ian Mcguire	Fic	$20.30	1	$20.30
2448774	978-1-6680-5770-4	Widow's Point: The Complete Haunting by Richard Chizmar	Fic	$20.30	1	$20.30
2463946	978-0-06-342602-3	Wild Animal: A Novel by Joel Dicker	Fic	$21.00	1	$21.00
2489808	978-1-250-82795-1	Wild Dark Shore: A Novel by Charlotte Mcconaghy	Fic	$20.29	1	$20.29
2465496	978-1-250-90791-2	Wild Instinct: A Novel by T. Jefferson Parker	Fic	$20.30	1	$20.30
2465497	978-1-250-37335-9	Wild Reverence: A Novel by Rebecca Ross	Fic	$22.40	1	$22.40
2448209	978-0-06-331877-9	Wilderness by Angela Flournoy	Fic	$21.00	1	$21.00
2477185	978-0-593-71855-1	Will There Ever Be Another You: A Novel by Patricia Lockwood	Fic	$20.30	1	$20.30
2442807	978-1-250-33868-6	Witch's Orchard by Archer Sullivan	Fic	$19.60	1	$19.60
2454241	978-1-6680-9400-6	With Friends Like These by Alissa Lee	Fic	$18.90	1	$18.90
2467362	978-1-64375-657-8	Wolf Bells: A Novel by Leni Zumas	Fic	$19.60	1	$19.60
2490699	978-1-250-82982-5	Wolf Worm by T. Kingfisher	Fic	$20.99	1	$20.99
2465502	978-1-0359-0652-9	Women at Ocean's End: The new captivating saga of secrets and friendship from the Irish bestseller by Faith Hogan	Fic	$20.99	1	$20.99
2451669	978-0-06-328285-8	Women of Wild Hill by Kirsten Miller	Fic	$21.00	1	$21.00
2477202	978-0-593-85192-0	Women, Seated by Zhang Yueran	Fic	$20.30	1	$20.30
2476488	978-0-385-35023-5	Wooded Shore: And Other Stories by Thomas Mcguane	Fic	$18.90	1	$18.90
2490504	978-1-250-36008-3	Workhorse: A Novel by Caroline Palmer	Fic	$22.39	1	$22.39
2465503	978-1-250-81121-9	Works of Vermin by Hiron Ennes	Fic	$20.29	1	$20.29
2464217	978-0-06-337534-5	World Pacific: A Novel by Peter Mann	Fic	$19.59	1	$19.59
2489911	978-0-593-87570-4	Worse Than a Lie: A Beau Lee Cooper Novel by Ben Crump	Fic	$21.00	1	$21.00
2451710	978-0-06-345391-3	Wreck by Catherine Newman	Fic	$18.89	1	$18.89
2477205	978-0-593-95398-3	Written on the Dark by Guy Gavriel Kay	Fic	$20.30	1	$20.30
2490222	978-1-250-36999-4	You Did Nothing Wrong: A Novel by Cg Drews	Fic	$20.30	1	$20.30

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2448279	978-1-6680-3807-9	You Weren't Meant to Be Human by Andrew Joseph White	Fic	$20.30	1	$20.30
2474499	978-0-593-97577-0	You'll Never Forget Me by Isha Raya	Fic	$21.00	1	$21.00
2492025	978-1-61316-723-6	Day of Judgment by Charles Todd	Fic	$20.29	1	$20.29
2481653	978-1-4967-5361-8	Burned Bridges by John Gilstrap	Fic	$19.60	1	$19.60
2491501	978-1-4967-4446-3	Murder at an Irish Session by Carlene O'connor	Fic	$18.90	1	$18.90
2481662	978-0-593-85356-6	Clive Cussler The Iron Storm by Jack Du Brul	Fic	$22.40	1	$22.40
2481667	978-0-593-95408-9	Turns of Fate by Anne Bishop	Fic	$21.00	1	$21.00
2481678	978-0-593-72584-9	Exit Strategy: A Reacher Novel by Lee Child	Fic	$21.00	1	$21.00
2481566	978-0-593-71803-2	Tom Clancy Terminal Velocity by M.p. Woodward	Fic	$22.40	1	$22.40
2481693	979-8-217-04493-1	Spasm by Robin Cook	Fic	$22.40	1	$22.40
2461441	978-0-06-325263-9	Girl from Devil's Lake by J. A. Jance	Fic	$21.00	1	$21.00
2442875	978-1-250-36413-5	Story That Wouldn't Die by Christina Estes	Fic	$19.60	1	$19.60
2481745	979-8-217-04535-8	Menu of Happiness by Hisashi Kashiwai	Fic	$18.90	1	$18.90
2481751	978-1-4967-4999-4	Lost in the Garden of Eve by L. Divine	Fic	$19.60	1	$19.60
2490537	978-1-250-37362-5	Crown of War and Shadow by J.r. Ward	Fic	$23.09	1	$23.09
2466296	978-1-250-37498-1	Sisterhood: A Lady Emily Mystery by Tasha Alexander	Fic	$20.30	1	$20.30
2466128	978-1-250-38739-4	Revenge, Served Royal: A Mystery by Celeste Connally	Fic	$20.30	1	$20.30
2492581	978-1-6680-9837-0	She Fell Away: A Novel by Lenore Nash	Fic	$20.30	1	$20.30
2466129	978-1-64937-911-5	Million Kisses in Your Lifetime by Monica Murphy	Fic	$23.09	1	$23.09
2466299	978-1-250-33488-6	Brigands and Breadknives by Travis Baldree	Fic	$20.29	1	$20.29
2448855	978-1-250-40796-2	Legends and Lattes by Travis Baldree	Fic	$20.29	1	$20.29
2491498	978-1-4967-4321-3	Bad Seeds by Mary Monroe	Fic	$19.60	1	$19.60
2469334	978-0-316-56382-6	Proving Ground: A Lincoln Lawyer Novel by Michael Connelly	Fic	$22.40	1	$22.40
2481855	978-1-4967-4820-1	Murder by the Millions by Daryl Wood Gerber	Fic	$18.90	1	$18.90
2481865	978-0-593-83070-3	Return to Sender: A Longmire Mystery by Craig Johnson	Fic	$21.00	1	$21.00
2466303	978-1-250-28879-0	Seven Rings: The Lost Bride Trilogy, Book 3 by Nora Roberts	Fic	$21.00	1	$21.00
2490547	978-1-250-37726-5	This Kingdom Will Not Kill Me by Ilona Andrews	Fic	$20.99	1	$20.99
2481903	978-1-4967-4252-0	Murder in the Making by Victoria Laurie	Fic	$18.90	1	$18.90
2481962	978-1-4967-4906-2	Death and the Runaways by Heather Redmond	Fic	$18.90	1	$18.90
2490386	978-1-0359-1175-2	Rage of Swords by David Gilman	Fic	$21.69	1	$21.69
2481987	978-1-4967-4665-8	Die Another Dane by Laurien Berenson	Fic	$18.90	1	$18.90
2492024	978-1-61316-717-5	Delivery by Andrew Welsh-huggins	Fic	$18.87	1	$18.87
2466317	978-1-250-38998-5	Snow Lies Deep: A Mercy Carr Mystery by Paula Munier	Fic	$20.30	1	$20.30
2482038	978-1-4967-5496-7	Miss Morton and the Missing Heir by Catherine Lloyd	Fic	$18.90	1	$18.90
2464725	978-1-6680-4587-9	Denied Access by Vince Flynn	Fic	$21.00	1	$21.00
2490615	978-1-250-39935-9	Vanished in the Crowd: A Molly Murphy Mystery by Rhys Bowen	Fic	$20.30	1	$20.30
2489915	978-0-593-95357-0	Monster in the Moonlight by Annelise Ryan	Fic	$21.00	1	$21.00
2454202	978-1-335-00111-5	Honeymoon Phase by Amy Daws	Fic	$21.00	1	$21.00
2482099	978-0-593-82021-6	Murder, She Wrote: The Body in the Trees by Jessica Fletcher	Fic	$20.30	1	$20.30
2466334	978-1-250-88567-8	Red City by Marie Lu	Fic	$20.99	1	$20.99
2451715	978-0-06-342451-7	Last Death of the Year by Sophie Hannah	Fic	$21.00	1	$21.00
2482169	978-0-593-63861-3	Knife in the Back by Karen Rose	Fic	$21.00	1	$21.00
2491534	978-1-4967-5203-1	Two Purloined Pillows by Allie Pleiter	Fic	$18.90	1	$18.90
2440155	978-0-06-333677-3	We Are All Guilty Here by Karin Slaughter	Fic	$22.40	1	$22.40
2461814	978-1-6680-7872-3	Wildwood by Amy Pease	Fic	$19.60	1	$19.60
2466347	978-1-250-37519-3	Silver and Lead by Seanan Mcguire	Fic	$20.99	1	$20.99
2482214	979-8-217-04465-8	Revenge of Odessa by Frederick Forsyth	Fic	$22.40	1	$22.40
2466265	978-1-250-90997-8	All My Bones: An Old Juniper Bookshop Mystery by P. J. Nelson	Fic	$19.60	1	$19.60
2466349	978-0-7653-8919-0	Shattering Peace by John Scalzi	Fic	$20.99	1	$20.99
2491835	978-1-5387-8134-0	Sing the Night by Megan Jauregui Eccles	Fic	$21.00	1	$21.00
2482231	979-8-217-04426-9	Clive Cussler Quantum Tempest by Mike Maden	Fic	$22.40	1	$22.40
2466358	978-1-250-29665-8	Pluto by Ben Bova	Fic	$23.09	1	$23.09
2490314	978-1-0350-2195-6	Spies of Hartlake Hall by R. L. Graham	Fic	$20.29	1	$20.29
2482284	978-0-241-73982-2	Idiot by Fyodor Dostoyevsky	Fic	$22.40	1	$22.40
2482322	978-1-4967-4278-0	Two Truths and a Murder by Colleen Cambridge	Fic	$18.90	1	$18.90
2482382	978-1-64009-775-9	Marce Catlett: The Force of a Story: A Port William Novel by Wendell Berry	Fic	$18.20	1	$18.20
2485327	978-0-7642-4557-2	Royal Artisan by Tessa Afshar	Fic	$20.99	1	$20.99
2469652	978-0-316-57292-7	Six Wild Crowns by Holly Race	Fic	$21.00	1	$21.00
2451766	978-1-83786-378-5	Door on the Sea by Caskey Russell	Fic	$18.89	1	$18.89

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2466397	978-1-250-82691-6	Queen Demon by Martha Wells	Fic	$20.99	1	$20.99
2487302	978-1-83562-782-2	Breath of Time	Fic	$21.00	1	$21.00
2459859	979-8-217-09413-4	In Your Dreams by Sarah Adams	Fic	$19.60	1	$19.60
2466401	978-1-63973-601-0	Among the Burning Flowers: A Novel by Samantha Shannon	Fic	$20.99	1	$20.99
2466138	978-1-0350-7222-4	Untitled Roy Grace Book 21 by Peter James	Fic	$19.59	1	$19.59
2482516	978-0-593-81705-6	By the Horns by Ruby Dixon	Fic	$21.00	1	$21.00
2482517	978-0-593-64139-2	From Cradle to Grave by Rhys Bowen	Fic	$21.00	1	$21.00
2482520	978-0-593-54949-0	Lady on Esplanade by Karen White	Fic	$21.00	1	$21.00
2466415	978-1-250-37465-3	Devil in Oxford: A Ruby Vaughn Mystery by Jess Armstrong	Fic	$19.60	1	$19.60
2466413	978-1-250-33670-5	Death at the Door: A Ruby and Cordelia Mystery by Olivia Blacke	Fic	$19.60	1	$19.60
2490037	978-0-7564-1899-1	Daughter Who Remains by Nnedi Okorafor	Fic	$16.10	1	$16.10
2466419	978-1-250-32682-9	Sub-Majer's Challenge by Jr. Modesitt	Fic	$21.69	1	$21.69
2489371	978-0-593-81720-9	Family Lies by Karen Rose	Fic	$21.00	1	$21.00
2466422	978-1-5290-8382-8	Damned: The magical final adventure in the Scarlet Revolution trilogy by Genevieve Cogman	Fic	$20.29	1	$20.29
2486574	979-8-89242-191-1	Death on a Scottish Train by Lucy Connelly	Fic	$20.99	1	$20.99
2482566	978-1-63893-210-9	Tourist Season: The Seasons of Carnage Trilogy by Brynne Weaver	Fic	$20.27	1	$20.27
2482572	978-1-4967-4382-4	Tattered Cover by Ellery Adams	Fic	$18.90	1	$18.90
2466428	978-1-250-42065-7	Tour to Die For: A Serial Killer Guide to San Francisco Mystery by Michelle Chouinard	Fic	$21.70	1	$21.70
2482623	978-0-593-81838-1	Princess of Blood by Sarah Hawley	Fic	$21.00	1	$21.00
2464965	978-1-64937-851-4	Shield of Sparrows by Devney Perry	Fic	$23.09	1	$23.09
2482644	978-1-64129-699-1	Diary of Lies by Philip Miller	Fic	$20.97	1	$20.97
2469772	978-1-4549-5896-3	Beowulf by Anonymous	Fic	$12.60	1	$12.60
2466431	978-1-250-38640-3	Mouthful of Dust by Nghi Vo	Fic	$17.49	1	$17.49
2487661	978-1-916926-35-6	Cinder Vale (Book 3 in the Sins of the Zodiac series) by Caroline Peckham	Fic	$23.09	1	$23.09
2463744	978-1-64129-726-4	Clown Town by Mick Herron	Fic	$20.97	1	$20.97
2482696	978-0-593-81796-4	Ember Eternal by Chloe Neill	Fic	$21.00	1	$21.00
2466439	978-1-250-39302-9	Blood Oath: An Alex Martel Thriller by Steve Urszenyi	Fic	$21.00	1	$21.00
2482109	979-8-217-04529-7	Robert B. Parker's Showdown by Mike Lupica	Fic	$22.40	1	$22.40
2466251	978-1-0359-0827-1	Kane: a gripping WWII spy thriller set in the aftermath of Pearl Harbor by Graham Hurley	Fic	$20.99	1	$20.99
2451626	978-1-6680-9589-8	Ring of Fire by David Mack	Fic	$20.29	1	$20.29
2482737	978-0-593-87473-8	Star Wars: Master of Evil by Adam Christopher	Fic	$21.00	1	$21.00
2451768	978-1-958607-46-6	Shadow Rises by Maelan Holladay	Fic	$21.00	1	$21.00
2482836	978-0-7564-2114-4	Disquiet Gods by Christopher Ruocchio	Fic	$24.50	1	$24.50
2490279	978-1-250-35492-1	What Stalks the Deep by T. Kingfisher	Fic	$13.99	1	$13.99
2491529	978-1-4967-5134-8	Love a Comeback by Ruthie Knox	Fic	$18.90	1	$18.90
2489870	978-0-593-81547-2	Death at a Firefly Tea by Laura Childs	Fic	$21.00	1	$21.00
2482861	978-0-593-85474-7	Stuart Woods' Blown Away by Brett Battles	Fic	$21.00	1	$21.00
2454856	978-1-6680-5147-4	Evil Bones by Kathy Reichs	Fic	$19.59	1	$19.59
2483507	978-1-6625-2865-1	Room of Lost Steps by Simon Tolkien	Fic	$20.29	1	$20.29
2488717	979-8-217-18842-0	First Step by Tao Wong	Fic	$21.00	1	$21.00
2488647	979-8-217-09102-7	Beneath: A Novel by Ariel Sullivan	Fic	$21.00	1	$21.00
2482882	979-8-217-09099-0	Conform: A Novel by Ariel Sullivan	Fic	$21.00	1	$21.00
2488651	979-8-217-09227-7	Laws of Love and Logic: A Novel by Debra Curtis	Fic	$21.00	1	$21.00
2461449	978-0-593-65325-8	Impossible Fortune: A Thursday Murder Club Mystery by Richard Osman	Fic	$21.00	1	$21.00
2491510	978-1-4967-4709-9	If Books Could Kill by Karen Rose Smith	Fic	$18.90	1	$18.90
2492184	978-1-63973-717-8	Case of Life and Limb: The Trials of Gabriel Ward by Sally Smith	Fic	$20.29	1	$20.29
2466456	978-1-250-27712-1	Vengeance by Rick Campbell	Fic	$22.40	1	$22.40
2482996	978-1-4967-4131-8	Smuggler's Cove by Fern Michaels	Fic	$19.60	1	$19.60
2483019	978-0-593-87122-5	Under the Oak Tree: Vol. 02 (The Novel) by Suji Kim	Fic	$22.40	1	$22.40
2466466	978-1-64937-916-0	Cruel Dawn by Rachel Howzell Hall	Fic	$23.09	1	$23.09
2448231	978-1-335-00106-1	Last on the List by Amy Daws	Fic	$21.00	1	$21.00
2491506	978-1-4967-4532-3	Crushing Walk in Cornwall by Nicholas George	Fic	$18.90	1	$18.90
2483101	978-0-593-23769-4	Art of Legend by Wesley Chu	Fic	$22.40	1	$22.40
2466469	978-1-250-40536-4	Daughter of No Worlds by Carissa Broadbent	Fic	$20.99	1	$20.99
2490626	978-1-250-40540-1	Mother of Death and Dawn by Carissa Broadbent	Fic	$20.99	1	$20.99
2463750	978-0-00-864028-6	End Game by Jeffrey Archer	Fic	$21.00	1	$21.00

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2466482	978-1-250-33864-8	Nameless Land by Kate Elliott	Fic	$23.09	1	$23.09
2489604	978-0-316-59773-9	Crossroads of Ravens by Andrzej Sapkowski	Fic	$21.00	1	$21.00
2448220	978-1-5258-0000-9	Dragon Fires Everywhere by Hazel Beck	Fic	$21.00	1	$21.00
2466486	978-0-7653-2360-6	No Life Forsaken by Steven Erikson	Fic	$19.59	1	$19.59
2464553	978-0-06-345501-6	Christmas at the Women's Hotel: A Biedermeier Story by Daniel M. Lavery	Fic	$15.40	1	$15.40
2483200	978-1-4967-3999-5	Murder at Somerset House by Andrea Penrose	Fic	$18.90	1	$18.90

Total quantity	779 Titles(779 Books)
Subtotal	$15,754.44
Processing Options Total	$2,570.70
Shipping & Handling	$315.09
Shipping Discount	-$315.09
Tax	$1,878.33
Grand Total	**$20,203.47**

LIBRARIA

Libraria
1387 Dutch American Way
Beecher Illinois 60401
1-800-230-1279

List Name: ADULT BIOGRAPHY ODC 1
List#: 207780
Date: 2/17/2026 5:58:09 PM
Total quantity: 99 Titles(99 Books)

Order Information

Shipping Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Billing Address
Shayna Balli
Irwindale Public Library
5050 Irwindale Ave
Irwindale, California, 91706
United States
T: (626)430-2229

Sales Representative
Peter DeVries
peterd@libraria.com

Special Instructions
Barcode Range Start
Barcode Range End

Processing Options

Shelf Ready Processing – Please specify tier selection below	$0.00	1	$0.00
Tier 3 Cataloging and Processing	$3.30	99	$326.70

- Includes Tier 1 and Tier 2 Cataloging and Processing
- MARC record with localized customization
- Z39.50 or live lookup
- Series or custom cuttering
- New vs. add MARC records
- Up to five additional program or custom labels

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2490156	978-0-8070-2413-3	Lieutenant Nun: The True Story of a Cross-Dressing, Transatlantic Adventurer Who Escaped From a Spanish Convent in 1599 and Lived as a Man by Catalina De Erauso	909	$16.80	1	$16.80
2486399	978-1-78675-185-0	Coco Chanel: The Graphic Novel by Carola Di Giovanni	920	$13.97	1	$13.97
2470965	978-1-6682-1165-6	107 Days by Kamala Harris	320	$21.00	1	$21.00
2489555	978-0-306-83183-6	Adult Braces: Driving Myself Sane by Lindy West	920	$20.30	1	$20.30
2460190	978-1-250-28685-7	Ain't Nobody's Fool: The Life and Times of Dolly Parton by Martha Ackmann	782.42164	$21.00	1	$21.00
2462584	979-8-89710-028-6	Always Carry Salt: A Memoir of Preserving Language and Culture by Samantha Ellis	920	$20.27	1	$20.27
2471414	978-1-63774-774-2	Best Scar Wins: How You Can Be More Than You Were Before by MI Cavanaugh	355	$19.60	1	$19.60
2489249	979-8-89565-153-7	Bigger You Think: 70 Years of Entrepreneurial Success in Business, Philanthropy, Love, and Life by Sheldon G. Adelson	920	$22.75	1	$22.75
2492530	978-1-6680-7590-6	Black Dahlia: Murder, Monsters, and Madness in Midcentury Hollywood by William J Mann	364	$21.70	1	$21.70
2489735	978-0-593-44754-3	Black. Single. Mother.: Real Life Tales of Longing and Belonging by Jamilah Lemieux	920	$22.40	1	$22.40
2462101	978-0-385-54751-2	Book of Lives: A Memoir of Sorts by Margaret Atwood	813.54	$24.50	1	$24.50
2477688	978-1-101-87512-4	Bread of Angels: A Memoir by Patti Smith	782.42164092	$21.00	1	$21.00
2464288	978-0-06-339812-2	Cave Mountain: A Disappearance and a Reckoning in the Ozarks by Benjamin Hale	364	$21.00	1	$21.00
2490104	978-0-7893-4615-5	Celebrating George: Three Decades of George Michael through the Lens by Brian Aris	781	$38.50	1	$38.50
2489732	978-0-593-44369-9	Chasing Freedom: Coming of Age at the End of Empire by Simukai Chigudu	920	$22.40	1	$22.40
2489833	978-0-593-73017-1	Citizenship: Notes on an American Myth by Daisy Hernandez	304	$20.30	1	$20.30

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2491541	978-1-5107-8565-6	Civil Rights Warrior: A Life on the Front Lines of Justice, Equality, and the American Dream by Evelyn Jones Rich	920			$20.29 | $20.29
2489565	978-0-306-83616-9	Cosmic Music: The Life, Art, and Transcendence of Alice Coltrane by Andy Beta	780			$22.75 | $22.75
2460054	978-1-6680-5364-5	Danger to the Minds of Young Girls: Margaret C. Anderson, Book Bans, and the Fight to Modernize Literature by Adam Morgan	306			$20.30 | $20.30
2490498	978-1-250-35763-2	Delusions: Of Grandeur, of Romance, of Progress by Cazzie David	814			$20.30 | $20.30
2484062	978-1-6682-2248-5	Devout: Losing My Faith to Find Myself by David Archuleta	920			$20.30 | $20.30
2471538	979-8-89710-088-0	Dianarama: Deception, Entrapment, Cover-Up: The Betrayal of Princess Diana by Andy Webb	920			$24.50 | $24.50
2489293	978-0-593-49011-2	Elusive Body: Patients, Doctors, and the Diagnosis Crisis by Alexandra Sifferlin	616			$21.00 | $21.00
2491797	978-1-5387-6857-0	Emergence: A Memoir of Boyhood, Computation, and the Mysteries of Mind by David Sussillo	920			$21.00 | $21.00
2489758	978-0-593-59428-5	Empire of Madness: Reimagining Western Mental Health Care for Everyone by Khameer Kidia	362			$22.40 | $22.40
2489558	978-0-306-83375-5	Even the Good Girls Will Cry: A '90s Rock Memoir by Melissa Auf Maur	780			$22.75 | $22.75
2489886	978-0-593-83490-9	Everybody's Fly: A Life of Art, Music, and Changing the Culture by Fab 5 Freddy	709			$22.40 | $22.40
2492555	978-1-6680-8705-3	Everything You Want Is on the Other Side of Hard: A Memoir by Ken Rideout	920			$21.00 | $21.00
2472048	978-1-64821-179-9	Eyes From Penumbra: How Doing Hard Time Awakened My Power, Freed My Mind, and Opened My Heart by Adam Lacerda	920			$23.09 | $23.09
2488824	979-8-89710-013-2	Fashioning the Crown: A Story of Power and Couture by Justine Picardie	940			$24.50 | $24.50
2472097	978-1-6680-5427-7	Finding My Way: A Memoir by Malala Yousafzai	371.822095			$21.00 | $21.00
2487951	978-1-9821-7671-6	Freedom Lost, Freedom Won: A Personal History of America by Eugene Robinson	920			$21.00 | $21.00
2488515	979-8-217-08758-7	Friends of the Good: How Remarkable Friendships Transform Our Lives by Demond Martin	920			$19.60 | $19.60
2489081	979-8-89331-090-0	Future Relic: Failures, Disasters, Detours, and How I Made a Career as an Artist by Daniel Arsham	920			$21.00 | $21.00
2490061	978-0-7603-9848-7	Gallagher's Guitars: The Rory Gallagher Collection	787.87166092			$52.50 | $52.50
2462650	978-1-957588-38-4	Giving and Receiving: Memoirs of an Immigrant Curator and Philanthropist by Marica Vilcek	920			$24.50 | $24.50
2491806	978-1-5387-7210-2	Golden Years: What I've Learned from Love, Loss, and Reality TV by Gerry Turner	920			$21.00 | $21.00
2492607	978-1-6682-1170-0	Heartland: A Forgotten Place, an Impossible Dream, and the Miracle of Larry Bird by Keith O'brien	796			$21.00 | $21.00
2472430	978-1-63763-437-0	Hope All the Way: Discovering Divine Signs in Life after Loss by Theo Boyd	155			$18.20 | $18.20
2472536	978-1-6682-1035-2	I'm Sad and Horny by Haley Lu Richardson	808			$20.29 | $20.29
2489695	978-0-375-40039-1	In the Days of My Youth I Was Told What It Means to Be a Man: A Memoir by Tom Junod	920			$22.40 | $22.40
2463738	978-0-306-83363-2	It's No Wonder: The Life And Times Of Motown's Legendary Songwriter Sylvia Moy by Margena Christian	781.49/092			$21.00 | $21.00
2483969	978-0-593-71444-7	Judy Blume: A Life by Mark Oppenheimer	809			$24.50 | $24.50
2489960	978-0-593-98039-2	Junglekeeper: What It Takes to Change the World by Paul Rosolie	333			$21.00 | $21.00
2491811	978-1-5387-7366-6	Kids, Wait Till You Hear This! by Liza Minnelli	790			$25.20 | $25.20
2492536	978-1-6680-7909-6	Kutchinsky's Egg: A Family's Story of Obsession, Love, and Loss by Serena Kutchinsky	920			$21.00 | $21.00
2472724	978-1-63774-787-2	Last Hart Beating: From the Dungeon to WWE by Nattie Neidhart	796.812082			$20.97 | $20.97
2490738	978-1-250-87872-4	Last Kings of Hollywood: Coppola, Lucas, Spielberg: and the Battle for the Soul of American Cinema by Paul Fischer	791.4302			$22.40 | $22.40
2491252	978-1-5387-7541-7	Last Rites by Ozzy Osbourne	780			$21.00 | $21.00
2492497	978-1-6680-6484-9	Last Titans: How Churchill and de Gaulle Saved Their Nations and Transformed the World by Richard Vinen	909			$21.00 | $21.00
2489698	978-0-385-55189-2	Leaving Home: A Memoir in Full Colour by Mark Haddon	809			$24.50 | $24.50
2489715	978-0-593-24214-8	Let the Poets Govern: A Declaration of Freedom by Camonghne Felix	920			$18.20 | $18.20
2487325	978-1-83636-013-1	Letters to Sophia: The Afterlives of Hester Thrale by Kate Chisholm	920			$14.00 | $14.00
2488706	979-8-217-15503-3	Light and Thread by Han Kang	895.75			$14.00 | $14.00
2489257	979-8-89565-280-0	Lincoln's Speechwriter: John Hay and the Friendship That Inspired American Eloquence by Jan Cigliano Hartman	940			$24.50 | $24.50
2491126	978-1-4262-2254-2	Lost: Amelia Earhart's Three Mysterious Deaths and One Extraordinary Life by Rachel Hartigan	910			$19.60 | $19.60

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2454253	978-1-6682-0934-9	Luigi: The Making and the Meaning by John H. Richardson	364			$20.30 | $20.30
2478962	978-0-8065-4475-5	Mafia Secrets: Untold Tales from the Hollywood Godfather by Gianni Russo	364			$20.30 | $20.30
2489806	978-1-250-82452-3	Making Art and Making a Living: Adventures in Funding a Creative Life by Mason Currey	709			$21.00 | $21.00
2489363	979-8-89710-070-5	Margaret Beaufort: Survivor, Rebel, Kingmaker by Lauren Johnson	940			$24.50 | $24.50
2491922	978-1-5460-0895-8	Missing Me: A Memoir of Postpartum Psychosis and the Long Road Back by Ayana Lage	616			$19.60 | $19.60
2448260	978-1-6680-9471-6	Mother Mary Comes to Me by Arundhati Roy	823.914			$21.00 | $21.00
2489361	979-8-89710-062-0	Muv: The Story of the Mitford Girls' Mother by Rachel Trethewey	920			$20.97 | $20.97
2490031	978-0-7352-5025-3	No Place Like Home: The Missing Key to Our Housing Crisis by Jessica Barrett	307			$19.60 | $19.60
2489644	978-0-593-59624-1	Nonviolent: A Memoir of Resistance, Agitation, and Love by James Lawson	920			$25.20 | $25.20
2487846	978-1-9821-7870-3	Not Your Founding Father: How a Nonbinary Minister Became America's Most Radical Revolutionary by Nina Sankovitch	300			$21.00 | $21.00
2490136	978-0-8065-4410-6	On Both Sides of the Wall: A Resistance Fighter's Firsthand Account of the Warsaw Ghetto by Vladka Meed	920			$20.30 | $20.30
2492191	978-1-64009-715-5	Partially Devoured: How Night of the Living Dead Saved My Life and Changed the World by Daniel Kraus	791			$19.60 | $19.60
2478903	978-1-9848-6210-5	Poems and Prayers by Matthew McConaughey	811			$20.30 | $20.30
2489900	978-0-593-85257-6	Power of Life: The Invention of Biology and the Revolutionary Science of Jean-Baptiste Lamarck by Jessica Riskin	570			$22.40 | $22.40
2489172	979-8-89515-094-8	Project Tiger: The Birth of Genius and the Price of Greatness by Gavin Newsham	920			$20.99 | $20.99
2484223	978-0-593-47597-3	Real Ones: How to Disrupt the Hidden Ways Racism Makes Us Less Authentic by Maya Rupert	323			$21.00 | $21.00
2491662	978-1-5107-8608-0	Rise and Climb: Finding Purpose Through Pain by Ben Barbic	920			$20.99 | $20.99
2492475	978-1-6680-5299-0	Service Ready: A Story of Love, Restaurants, and the Power of Hospitality by Molly Irani	920			$20.30 | $20.30
2489705	978-0-525-56190-3	Seven Sisters: Captives and Rebels in Revolutionary Europe's First Family by Veronica Buckley	305			$24.50 | $24.50
2492998	978-1-83851-062-6	Shocking Life: The Autobiography of Elsa Schiaparelli by Elsa Schiaparelli	920			$21.00 | $21.00
2488724	979-8-217-20783-1	Someday This Will Be a Funny Story: The Quotable Nora Ephron by Nora Ephron	153			$14.00 | $14.00
2489674	978-0-374-60978-8	Starry and Restless: Three Women Who Changed Work, Writing, and the World by Julia Cooke	920			$22.40 | $22.40
2489289	978-0-06-344519-2	Stripped Down: Unfiltered and Unapologetic by Bunnie Xo	920			$20.99 | $20.99
2488899	979-8-89565-317-3	Thirteen Perfect Fugitives: The True Story of the Mob, Murder, and the World's Largest Art Heist by Geoffrey Kelly	364			$22.75 | $22.75
2466151	978-1-3994-2474-5	This Might Surprise You: A Breast Cancer Story by Hayley Gullen	920			$12.60 | $12.60
2489837	978-0-593-73171-0	Too Precious to Lose: A Memoir of Family, Community, and Possibility by Jason G. Green	920			$21.00 | $21.00
2491046	978-1-4087-2392-0	Travels with Agatha Christie by David Suchet	920			$19.60 | $19.60
2491676	978-1-5247-3303-2	True Color: The Strange and Spectacular Quest to Define Color--from Azure to Zinc Pink by Kory Stamper	535.601			$22.40 | $22.40
2448242	978-0-06-325364-3	Truly by Lionel Richie	782.421644092			$25.20 | $25.20
2466164	978-1-63973-551-8	Truth and Consequence: Collected Writings by Daniel Ellsberg	320			$20.99 | $20.99
2464772	978-1-4549-5940-3	Unread: A Memoir Of Learning (And Loving) To Read On TikTok by Oliver James	920			$19.60 | $19.60
2469240	978-0-306-83584-1	Vagabond: A Memoir by Tim Curry	790			$22.40 | $22.40
2492451	978-1-6680-3115-5	Voice in my head is God by 2 Chainz	780			$19.60 | $19.60
2489559	978-0-306-83430-1	Wanderers: A Story of Exile, Survival, and Unexpected Love in the Shadow of World War II by Daniela Gerson	920			$21.00 | $21.00
2454248	978-1-6680-7550-0	We Did OK, Kid by Anthony Hopkins	792.02			$24.50 | $24.50
2489448	978-0-06-323488-8	Western Star: The Life and Legends of Larry McMurtry by David Streitfeld	920			$24.50 | $24.50
2469295	978-1-5387-6498-5	What Debt Demands: Family, Betrayal, and Precarity in a Broken System by Kristin Collier	378.3			$21.00 | $21.00
2464606	978-0-06-336010-5	What Mattered Most: A Memoir by Ty Herndon	780			$20.99 | $20.99
2489781	978-0-593-70216-1	When We're Born We Forget Everything: A Memoir by Alicia Jo Rabins	920			$21.00 | $21.00
2492179	978-1-63973-499-3	Why Fly: Seeking Awe, Healing, and Our True Selves in the Sky by Caroline Paul	796			$19.59 | $19.59
2489742	978-0-593-47270-5	Woman's Work: Reclaiming the Radical History of Mothering by Elinor Cleghorn	305			$22.40 | $22.40

Item#	ISBN	Title/Author	Dewey	Price	Qty	Subtotal
2487968	978-1-9848-8199-1	World Appears: A Journey into Consciousness by Michael Pollan	153			$22.40 1 $22.40
2489598	978-0-316-59492-9	You with the Sad Eyes: A Memoir by Christina Applegate	920			$22.40 1 $22.40

Total quantity	99 Titles(99 Books)
Subtotal	$2,137.59
Processing Options Total	$326.70
Shipping & Handling	$42.75
Shipping Discount	-$42.75
Tax	$252.59
Grand Total	$2,716.88

Item #21.A.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Syserco Energy Solutions- Energy Assessment Review

City Manager's Recommendation:

Receive, file, and provide direction.

Administrative Action:

Submitted by:

Julian A. Miranda, City Manager

Prepared by:

Iris Espino, Assistant to the City Manager

Reviewed by:

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager

Background and Analysis:

On October 6, 2025, the city council unanimously approved the city's entry into a Non-Binding Letter of Intent (LOI) with CIOproUSA-GreenRock-Syserco (SES) for an Energy Services Agreement under California Government Code § 4217, and a Notice to Proceed for a NO-COST Investment-Grade Audit.

Over the past few months, SES has worked with city staff to identify specific energy conservation measures, cost savings, and potential funding mechanisms. Following completion of their walk-through, audit, and analysis of city facilities, SES has identified areas and equipment for energy-efficiency measures.

SES is here tonight to present their findings to the council, and staff seeks direction following the council's discussion.

Fiscal Impact:

There is no fiscal impact at this time. Any future implementation of energy efficiency measures would be brought back to the City Council for separate review and approval.

Attachments:

None

Item #21.B.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Theresa Olivares, Assistant City Manager

Issue: Building Plan Check Fee Waiver Request by Saint Cyril of Alexandria Coptic Orthodox Church

City Manager's Recommendation:

That the Irwindale City Council discuss the options presented and provide direction to staff regarding the Saint Cyril of Alexandria Coptic Orthodox Church's Building Plan Check Fee Waiver Request:

OPTION 1. Deny Saint Cyril of Alexandria Coptic Orthodox Church building plan check fee waiver request; or

OPTION 2. **Adopt Resolution No. 2026-11-3722** entitled, "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE, FINDING THAT A PUBLIC PURPOSE WOULD BE SERVED BY APPROVING A FEE WAIVER TO SAINT CYRIL OF ALEXANDRIA COPTIC ORTHODOX CHURCH FOR BUILDING PLAN CHECK FEES OF $15,925.82", or

OPTION 3. Provide alternative direction to staff.

Administrative Action:

Submitted/Prepared by:

Theresa Olivares, Assistant City Manager

Reviewed by:

Adrian R. Guerra, City Attorney

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager



Background and Analysis:

On February 11, 2026, staff presented Father Bishoy Brownfield of Saint Cyril of Alexandria Coptic Orthodox Church's ("Applicant"), located at 5116 Irwindale Avenue, Irwindale, CA ("Property"), Application for Fee Adjustment of City building plan check fees. The City Council directed staff to provide additional information relating to building plan check fees and / or building permit fees previously waived by the City Council.

Based on staff's research, the following fee waivers were approved by the City Council (these fee waivers do not include Special Event Permit Fee Waivers or Use of City Facilities Fee Waivers):

Description	**Fee Waiver Requested**	**Fee Waiver Approved**
Cory's Kitchen - Conditional Use Permit	$1,136.70	$1,136.70
Kare Youth League - Plan Check and Building Permit Fee for street signage and backstops	$4,164.50	$2,082.50
Parents' Place - Conditional Use Permit	$1,184.70	$1,184.70
Dan Diaz - Tentative Parcel Map and Variance	$1,862.00	$1,862.00
David Martinez - Tentative Parcel Map	$1,500.00	$1,500.00
Gregoria Perez - Tentative Parcel Map	$3,000.00	$3,000.00
Our Lady of Guadalupe Church - Building/Plan Check Permit Fee Waiver for a church sign	$316.43	$316.43

Staff has verified that the applicant's fee waiver request meets the criteria identified in the City of Irwindale Fee Adjustment Policy.

Options:
The Irwindale City Council may consider the following options:

OPTION 1. Deny Saint Cyril of Alexandria Coptic Orthodox Church building plan check fee waiver request; or

OPTION 2. Adopt Resolution No. 2026-11-3722 entitled, "A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE FINDING THAT A PUBLIC PURPOSE WOULD BE SERVED BY APPROVING A FEE WAIVER TO SAINT CYRIL OF ALEXANDRIA COPTIC ORTHODOX CHURCH FOR BUILDING PLAN CHECK

FEES OF $15,925.82", or

OPTION 3. Provide alternative direction to staff.

Fiscal Impact:

Should the Council approve this fee waiver request, the City is foregoing its portion of the building plan check fee it would have received for a total of $15,925.82.

Attachments:

1.	Resolution No. 2026-11-3722
2.	Saint Cyril of Alexandria Coptic Orthodox Church Request
3.	Fee Adjustment Policy

RESOLUTION 2026-11-3722

A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE, FINDING THAT A PUBLIC PURPOSE WOULD BE SERVED BY APPROVING A FEE WAIVER TO SAINT CYRIL OF ALEXANDRIA COPTIC ORTHODOX CHURCH FOR BUILDING PLAN CHECK FEES OF $15,925.82

WHEREAS, on June 20, 2005, the City Council of the City of Irwindale approved a Fee Adjustment Policy ("Policy") to provide financial relief for some of the City fees and encourage individuals to improve their properties; and

WHEREAS, on February 2, 2026, the City Manager's office received an application for fee adjustment from Saint Cyril of Alexandria Coptic Church ("Applicant"), property owner of 5116 Irwindale Avenue, Irwindale, CA 91706 ("Property");

WHEREAS, the building on the Property is more than 120 years old and requires a new roof and seismic retrofit of the building to ensure the structural integrity of the building; and

WHEREAS, the Applicant's request meets the criteria established in the Policy; and

WHEREAS, the Owner has provided a copy of the invoice for the Building Plan check Fees of $15,925.82; and

WHEREAS, the City Council of the City of Irwindale finds that the $15,925.82 fee waiver to the Applicant serves a valid public purpose of providing a benefit to the community by improvement of property within the City, consistent with the City's Fee Adjustment Policy.

NOW, THEREFORE, THE CITY COUNCIL OF THE CITY OF IRWINDALE DOES HEREBY RESOLVE, DETERMINE, AND ORDER AS FOLLOWS:

SECTION 1. The City Council hereby finds the Recitals above true and correct and incorporates them herein by this reference.

SECTION 2. The City Council hereby finds that that the building plan check fee waiver of $15,925.82 to Saint Cyril of Alexandria Coptic Orthodox Church serves a valid public purpose of providing a benefit to the community by improvement of property within the City, consistent with the City's Fee Adjustment Policy, by assisting with the physical preservation of a local landmark in the City of Irwindale and local region.

SECTION 3. If any section, subsection, sentence, clause, phase, or portion of this Resolution, or the application thereof to any person or circumstances, is, for any reason, held invalid or unconstitutional by any court of competent jurisdiction, such invalidity or unconstitutionality shall not affect the application of any other section, subsection, sentence, clause, phrase, or portion of this Resolution, and to this end the invalid or unconstitutional section, subsection, sentence, clause, phrase of this Resolution are declared to be severable. The City Council hereby declares that it would have adopted this Resolution and each section, subsection, sentence, clause, phrase, part or portion thereof, irrespective of the fact that any

one or more sections, subsections, sentences, clauses, phrases, parts or portions thereof be declared invalid or unconstitutional.

SECTION 4. This Resolution shall take effect immediately and the Chief Deputy City Clerk shall attest to the adoption of this Resolution.

PASSED, APPROVED, and ADOPTED this 11th day of February 2026

_____
H. Manuel Ortiz, Mayor

ATTEST:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

STATE OF CALIFORNIA }
COUNTY OF LOS ANGELES } ss.
CITY OF IRWINDALE }

I, Laura M. Nieto, Chief Deputy City Clerk of the City of Irwindale, do hereby certify that the foregoing Resolution No. 2026-11-3722 was adopted at a regular meeting of the Irwindale City Council held on the 11th day of February 2026, by the following vote of the Council:

AYES: Councilmembers:

NOES: Councilmembers:

ABSENT: Councilmembers:

ABSTAIN: Councilmembers:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk



SAINT CYRIL OF ALEXANDRIA COPTIC ORTHODOX CHURCH

RECEIVED

FEB 0 2 2026

CITY OF IRWINDALE
OFFICE OF CITY MANAGER

PILLAR OF FAITH

Dear Mr. Miranda:

We write to you with joyful anticipation as we enter the next phase of the preservation, renovation, and adornment of our church building. This venerable and historic church, which was built by the hands of families who form the fabric of the City of Irwindale, has been an iconic monument in the City for more than 120 years. Our humble community, which is part of the ancient tradition of Orthodox Christianity in Egypt, has found a most appropriate home in this historic edifice.

Over the last several years, the community of St. Cyril of Alexandria Coptic Orthodox Church has pursued the challenging, but necessary, work to bring this structure into compliance with current building codes, specifically as it relates to earthquake retrofitting. These efforts aim to ensure this iconic church remains a strong and beautiful monument in the City of Irwindale for years to come. In furtherance of this goal, we have worked tirelessly with engineers, architects, and other professionals to address the challenges inherent in preserving this historic building.

As of December 16, 2025, we have finally submitted our plans to the City and are hopeful for a positive response and eventual approval. However, we are a small community funded exclusively through the generosity of our parishioners. As such, we ask and hope that the City will consider granting us a waiver of city permitting costs including the building plan check and building permits, which will ensure that we are able to responsibly allocate our limited resources to ever increasing construction costs. The City's consideration of this matter will allow us to focus even more on the quality of the final result both in terms of labor and materials.

We are grateful to be a part of the community of the City of Irwindale and strive to honor the legacy of those who built this beautiful church. Thank you for the opportunity to allow us to further ensure the fruit of their hard work remains a beacon of light in the community for years to come.

Sincerely,

Fr Bishoy Brownfield

Father Bishoy Brownfield

5116 IRWINDALE AVE, IRWINDALE, CA 91706

P.O. BOX 2146, IRWINDALE, CA 91706

RECEIVED

FEB 0 2 2026

CITY OF IRWINDALE
OFFICE OF CITY MANAGER

City of Irwindale
Application for Fee Adjustment

Property Owner St. Cyril of Alexandria Coptic Orthodox Church

Address 5116 Irwindale Ave. Irwindale, CA 91706

Phone (626) 235-3574

Location of property to be improved/developed: 5116 Irwindale Ave. Irwindale, CA 91706

Name and description of organization (if applicable):

St. Cyril of Alexandria Coptic Orthodox Church

Improvement or development to the property:

Earthquake retrofitting and renovation of historic building.

Fee(s) requesting to be waived:

Building plan check and building permits.

Public purpose served by improvement or development (attach documents that establish the benefit to the community or the promotion of the public health, safety, and welfare, or the public service that will be provided):

Please see attached letter.

INTERNAL REVENUE SERVICE
P. O. BOX 2508
CINCINNATI, OH 45201

DEPARTMENT OF THE TREASURY

Date: SEP 18 2014

SAINT CYRIL OF ALEXANDRIA COPTIC
ORTHODOX CHURCH
PO BOX 4960
DIAMOND BAR, CA 91765

Employer Identification Number:
14-1883388
DLN:
17053112345044
Contact Person:
CUSTOMER SERVICE ID# 31954
Contact Telephone Number:
(877) 829-5500
Accounting Period Ending:
December 31
Public Charity Status:
170(b)(1)(A)(i)
Form 990 Required:
No
Effective Date of Exemption:
May 22, 2003
Contribution Deductibility:
Yes
Addendum Applies:
No

Dear Applicant:

We are pleased to inform you that upon review of your application for tax exempt status we have determined that you are exempt from Federal income tax under section 501(c)(3) of the Internal Revenue Code. Contributions to you are deductible under section 170 of the Code. You are also qualified to receive tax deductible bequests, devises, transfers or gifts under section 2055, 2106 or 2522 of the Code. Because this letter could help resolve any questions regarding your exempt status, you should keep it in your permanent records.

Organizations exempt under section 501(c)(3) of the Code are further classified as either public charities or private foundations. We determined that you are a public charity under the Code section(s) listed in the heading of this letter.

For important information about your responsibilities as a tax-exempt organization, go to www.irs.gov/charities. Enter "4221-PC" in the search bar to view Publication 4221-PC, Compliance Guide for 501(c)(3) Public Charities, which describes your recordkeeping, reporting, and disclosure requirements.

Sincerely,

Tamera Ripperda

Director, Exempt Organizations

Letter 947

Transaction Receipt -
City of Irwindale - Building and Safety
5050 N. Irwindale Ave.
Irwindale, CA 91706
(626) 430-2203

Address: 5116 IRWINDALE AVE
Work Authorized: Building, Planning
Improvements: Alteration
Type of Project: TENANT IMPROVEMENT

Permit #: 2026-004
Application Date: 01/12/2026
Date Issued:
Permit Status: Plan Check

Owner: **SAINT CYRIL OF ALEXANDRIA COPTIC ORTHODOX CHURCH**
5116 IRWINDALE AVE
IRWINDALE, CA 91706

Contractor: **NA**
NA
NA NA
NA, CA NA
Lic. #: NA Class: NA

description	qty	amount
01-00-000-34250-0000 Plan Check		
Building Plan Check		$15,925.82
Plan Check Total:		$15,925.82

Total Fees: $15,925.82

Amount Due: $15,925.82

Recent Transactions

date	valuation	receipt #	amount	payee name	method of payment
01/12/2026	$750,000.00	00386			

Date: _____ **By:** _____ **Receipt #:** 00386 **Page: 1 of 1**

COUNCIL AGENDA
ITEM 10C
JUN 15 2005

AGENDA REPORT

Date: *June 20, 2005*

To: *Mayor and Council Members*

From: *Steve Blancarte, City Manager*

Issue: *Fee Waiver Policy*

City Manager's Recommendation:

Adopt the Fee Waiver Policy.

Analysis:

It is necessary for the City to have a policy on fee waivers. As such, the City Attorney has prepared the attached policy for City Council consideration.

Fiscal Impact: _____ (Initial of CFO)

Legal Impact: _____ (Initial of Legal Counsel)

Prepared By/Contact Person: Steve Blancarte, City Manager
Phone: 430-2202

6-15-5

Steve Blancarte, City Manager

Attachment

City of Irwindale
Fee Adjustment Policy

The City of Irwindale would like to encourage investment in community events, as well as development and improvements to facilities used by local, not-for-profit or charitable organizations which cater to the residents and businesses of the City. To achieve this goal, the City is implementing this Fee Adjustment Policy to provide cost reduction for those non-profit organization applicants, which are taking action to improve and develop their properties and/or the community. Additionally, the City would like to encourage individuals to improve their residential properties and acknowledges that certain incentives may be necessary to accomplish certain improvements, such as adjustments to applicable permit fees. This policy is based on the premise that, in exchange for improvements to property, the community and structures within the City, the City may provide relief from some of the costs associated with building improvements, developments and community events occurring in the City.

I. ADJUSTMENTS ARE AVAILABLE FOR THE FOLLOWING FEES

To achieve the City's goal of encouraging community events, building improvements and development in the City, the following fees are available for waiver or reduction in an amount deemed appropriate by the City Council pursuant to the criteria in this Policy:

A. Building permits
B. Plan check fees
C. Conditional use permit
D. Development permits
E. Electric permit
F. Plumbing permit
G. Grading permit
H. Any other fee the City may deem necessary to achieve the stated goals of this Policy

II. CRITERIA FOR CONSIDERATION

The City Council may grant fee waivers or reductions of fees for applicants who directly or indirectly invest money in the City, when such waiver or reduction would serve a public purpose. The following criteria must be established to qualify for a fee waiver or fee reduction:

1. Applicants for fee waivers or reductions must be:
   a. Recognized by the Internal Revenue Service as a not-for-profit organization or charitable organization, or
   b. Property owners or prospective owners within the City.

2. Fee waivers or reductions may be granted for improvements or developments within City limits that can be shown, through documentary proof, to meet the criteria of subsection 2.a or 2.b below:

a. Benefit the community. This includes, but is not limited to, circumstances where the applicant:

   i. Supports civic or community programs for the City's residents, or businesses;
   ii. Provides financial assistance to the City's residents or businesses; or
   iii. Improves the condition of property or availability of affordable housing within the City.

b. Provide a public service or otherwise promote the public health, safety and welfare. This includes, but is not limited to, circumstances where the individual or entity provides needed donations or other assistance to residents and businesses of the City in areas such as:

   i. health care;
   ii. counseling services;
   iii. abatement of dangerous or unhealthful living or working conditions, including but not limited to those constituting violations of the Irwindale Municipal Code;
   iv. affordable housing;
   v. transportation needs of residents or employees; or
   vi. nutrition needs of residents.

III. PROCESS FOR CONSIDERATION

An individual or organization wishing to be considered for a fee waiver or adjustment should complete a fee adjustment application and submit it to the Deputy City Clerk. The City Manager will review the request and, if it meets the criteria of this Policy, agendize the item for City Council review and consideration under the guidelines of this Policy. If the City Council finds that all the requirements have been met, the waiver will be granted and processed along with the permit application. Alternatively, the City Council may reduce such fee in an amount it deems appropriate based upon its assessment of the level by which the proposed activity meets the criteria outlined in this Policy. The decision of the City Council on any fee waiver or reduction shall be final.

City of Irwindale
Application for Fee Adjustment

Property Owner_____

Address_____

Phone_____

Location of property to be improved/developed: _____

_____

Name and description of organization (if applicable):

_____

_____

Improvement or development to the property:

_____

_____

_____

Fee(s) requesting to be waived:

_____

_____

Public purpose served by improvement or development (attach documents that establish the benefit to the community or the promotion of the public health, safety, and welfare, or the public service that will be provided):

_____

_____

_____

Item #21.C.

City of IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: 1st Reading of Ordinance No. 815 - Reorganization of the City Council

City Manager's Recommendation:

Introduce for first reading Ordinance No. 815 entitled, "AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF IRWINDALE AMENDING SECTION 2.04.050 OF THE CITY OF IRWINDALE MUNICIPAL CODE TO UPDATE THE OCCASIONS OF THE CITY COUNCIL REORGANIZATION" reading by title only and waiving further reading thereof.

Administrative Action:

Submitted by:

Theresa Olivares, Assistant City Manager

Prepared by:

Laura Nieto, Chief Deputy City Clerk

Reviewed by:

Adrian R. Guerra, City Attorney

Approved by:

Julian A. Miranda, City Manager

Background and Analysis:

The Irwindale Municipal Code (IMC) has been updated over time to identify the occasions for City Council reorganization.

On October 22, 2025 during discussion of the reorganization, the City Council expressed its intent that the annual reorganization occur at the first meeting held in December. Consistent with that direction, the proposed ordinance provides that the reorganization will occur at a meeting held in December. This wording preserves the Council's intent that the reorganization take place in December while allowing flexibility to accommodate the City's meeting schedule, which may include multiple meetings in December or cancellations, without requiring future code amendments.

It would now be appropriate for the City Council to introduce the proposed ordinance for first reading. Second reading and adoption will be scheduled for the March 11, 2026 meeting.

Fiscal Impact:

None

Attachments:

1.	Ordinance No. 815 Reorganization

ORDINANCE NO. 815

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF IRWINDALE AMENDING SECTION 2.04.050 OF THE CITY OF IRWINDALE MUNICIPAL CODE TO UPDATE THE OCCASIONS OF THE CITY COUNCIL REORGANIZATION

A. RECITALS

WHEREAS, Ordinance No. 164 was adopted on May 18, 1965, thereby adding Section 2104 to the Irwindale Municipal Code, establishing the occasions for City Council Reorganization.

WHEREAS, Ordinance No. 484 was adopted on February 10, 1994, thereby amending section 2.04.050 of Chapter 2.04 of Title 2 of the Irwindale Municipal Code pertaining to election of Mayor and Mayor Pro Tempore;

WHEREAS, Ordinance No. 711 was adopted on March 8, 2017 directing that the General Municipal Elections of the City of Irwindale be held on the first Tuesday after the first Monday in November of even-numbered years, beginning in November 2018; and

WHEREAS, Ordinance No. 746 was adopted on February 12, 2020, thereby amending Section 2.04.050 of Chapter 2.04 of Title 2 of the Irwindale Municipal Code pertaining to the election of Mayor and Mayor Pro Tempore; and

WHEREAS, at the regular City Council meeting held October 22, 2025, the City Council expressed its desire to designate the first meeting in December for the annual re-organization of the City Council; and

WHEREAS, it is now necessary for the Irwindale Municipal Code to be updated to reflect these changes; and

WHEREAS, all legal prerequisites to the adoption of this ordinance have occurred.

B. ORDINANCE

NOW, THEREFORE, the City Council of the City of Irwindale does hereby ordain as follows:

Section 1. The City Council finds that the above recitals are true and correct and are incorporated herein by this reference.

Section 2. Section 2.04.050 of Chapter 2.04 of Title 2 of the Irwindale Municipal Code is hereby amended and shall now read as follows (deleted text, if any, is shown in ~~strikethrough~~; new text, if any, is shown in ***bold & italics***:

2.04.050 Election of Mayor and Mayor Pro-Tempore

The City Council shall elect one of its members to be Mayor and one of its members to be Mayor Pro-Tempore as specified below:

A. ***At a meeting of the council held in December, or at a meeting of the council at which the results of a municipal election are canvassed or certified***. ~~In even-numbered years, at the regular council meeting at which the canvass of the results of the general municipal election shall be conducted~~;

~~B. In odd-numbered years, at the first regular meeting of the council held in November;~~

~~C.~~ ***B.*** At such other times as a majority of the council shall so order.

Section 3. The City Council hereby authorizes and directs the Mayor and the City Clerk to execute this Ordinance on behalf of the City of Irwindale forthwith upon its adoption.

Section 4. The Chief Deputy City Clerk shall certify as to the passage of this Ordinance and shall cause the same to be published and/or posted at the designated locations in the City of Irwindale.

PASSED, APPROVED, AND ADOPTED this _____ day of _____, 2026.

_____
H. Manuel Ortiz, Mayor

ATTEST:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

State of California }
County of Los Angeles } ss.
City of Irwindale }

I, Laura M. Nieto, Chief Deputy City Clerk of the City of Irwindale, California, do hereby certify that the foregoing Ordinance No. 815 was duly introduced at a regular City Council meeting held on the _____day of _____ 2026, and adopted at a regular meeting of the City Council held on the _____ day of _____ 2026, by the following roll call vote:

AYES: Councilmembers:

NOES: Councilmembers:

ABSENT: Councilmembers:

ABSTAIN: Councilmembers:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

AFFIDAVIT OF POSTING

I, Laura Nieto, Chief Deputy City Clerk, certify that I caused a copy of Ordinance No. 815, adopted by the City Council of the City of Irwindale at its regular meeting held _____, 2026 to be posted at the City Hall, Library, and Post Office on_____.

_____ Dated: _____
Laura M. Nieto, MMC
Chief Deputy City Clerk

Item #21.D.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Discussion and Direction on Proposed Invocation Policy

City Manager's Recommendation:

Review and discuss the proposed Invocation Policy, and provide direction to staff.

Administrative Action:

Submitted by:
Theresa Olivares, Assistant City Manager

Prepared by:

Laura Nieto, Chief Deputy City Clerk

Reviewed by:

Adrian R. Guerra, City Attorney

Approved by:

Julian A. Miranda, City Manager

Background and Analysis:

Meetings of the Irwindale City Council, and Council-appointed Boards and Commissions customarily begin with an invocation intended to solemnize the proceedings and invite reflection prior to the conduct of public business. Historically, invocations have been offered by members of the City Council, Board, or Commission, or the City's designated chaplain.

From time to time, the City receives requests from outside individuals or organizations seeking to offer

or submit an invocation for a public meeting. While the City has an established customary practice, it does not currently have a formal, written policy addressing how such requests should be processed.

In the absence of a written policy, requests for invocations are addressed on a case-by-case basis, which may lead to uncertainty or inconsistency. To provide clarity, consistency, and transparency, staff has prepared a draft Invocation Policy for Public Meetings for City Council review and input.

The proposed policy is intended to formalize existing practices while providing a clear framework for responding to requests to offer invocations at City Council, Board, and Commission meetings.

It is now recommended that the City Council review the proposed policy, give comments to staff, and, if desired, provide direction to staff to bring forward a formal resolution for Council consideration.

Fiscal Impact:

None

Attachments:

1.	DRAFT Invocation Policy

City of Irwindale

Invocation Policy for Public Meetings

_____, 2026

I. PURPOSE

The purpose of an invocation is to solemnize meetings of the City Council and its appointed Boards and Commissions and invite reflection prior to the conduct of public business. Participation in the invocation is voluntary. The City does not affiliate itself with or endorse any particular religious, spiritual, or non-religious belief. The City also does not preclude any religion/belief system from being part of an invocation.

II. CUSTOMARY PRACTICE

Invocations at public meetings are customarily offered by a member of the City Council, a member of a Board or Commission, or the City's designated chaplain. Nothing in this policy is intended to require the scheduling of an invocation for any meeting or to establish a standing or recurring invocation program.

III. REQUESTS TO OFFER AN INVOCATION

From time to time, the City may receive requests from individuals or organizations to offer an invocation at a City Council, Board or Commission meeting. Requests shall be submitted by email to cityclerk@irwindaleca.gov and must be received at least ten (10) business days prior to the convening of the meeting in order to be considered. Late requests may be considered at the discretion of the City Manager, or his/her designee.

Such requests shall be submitted to the City Clerk and may be accommodated in one of the following ways, at the discretion of the City Manager or his or her designee:

a. Guest Speaker – The requesting individual may be permitted to deliver the invocation in person; or
b. Read on Behalf of – A written invocation may be read by a member of the City Council, Board or Commission, or the City's designated chaplain on behalf of the requesting individual or organization.

Approval, scheduling, and the method of delivery of any invocation shall be administered in a viewpoint-neutral manner and remain within the discretion of the City Manager or his/her designee. Nothing in this policy creates a right or entitlement to offer an invocation, nor does it require the scheduling of an invocation for any meeting.

DRAFT

IV. CONTENT GUIDANCE

The City does not review, approve, or edit invocation content. However, the individuals offering invocations, or submitting invocations, to be read on their behalf, are requested to ensure that invocations:

- Are solemn and respectful in tone;
- Are directed to the City Council, Board, or Commission
- Are not used to proselytize or disparage any religion, belief, or non-belief;
- Do not advance any one religion over others; and
- Do not exceed three (3) minutes in length.

V. PARTICIPATION

Members of the City Council, Board, or Commission, City staff, and the public are not required to participate in the invocation and may remain seated or otherwise refrain from participation.

VI. NON-ENDORSEMENT

The views expressed in any invocation are those of the individual offering the invocation and do not reflect endorsement by the City, the City Council, Board, or Commission, or City staff.

VII. ADMINISTRATION

The City Manager, or his/her designee is authorized to administer this policy, receive and process requests, determine the method of delivery of invocations, schedule invocations, and ensure consistent application of this policy.

In administering this policy, the City Manager or his/her designee may consult with the Mayor or Chair of the applicable Board or Commission, as appropriate.

DRAFT

Item #21.E.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Mid-Year Financial Review and Adjustments to the FY 2025-2026 Budget

City Manager's Recommendation:

It is recommended that the City Council adopt Resolution No. 2026-15-3726 entitled: "**A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE APPROVING ADJUSTMENTS TO THE BUDGET AND AUTHORIZING BUDGET AMENDMENT TO THE FY 2025-2026 ADOPTED BUDGET BY APPROPRIATING ADDITIONAL $424,170 FROM THE GENERAL FUND RESERVE FOR THE PROPOSED MID-YEAR EXPENDITURES."**

Administrative Action:

Submitted / Prepared / Reviewed by:

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager

Background and Analysis:

In June 2025, the City Council formally adopted the FY 2025–2026 Budget. Typically, there are additional appropriations approved by the Council for unanticipated items during the fiscal year. The Finance Department has conducted an analysis of the current fiscal years' revenues and expenditures, and evaluated the year-to-date numbers against the approved budget to determine how this year's financial activities are tracking.

Revenues

The City's adopted General Fund Revenues Budget includes $27,582,491 in operating revenues, and $1,755,000 in capital/one-time revenues, for a total of $29,337,491 at the start of the fiscal year. During the mid-year financial review, all revenues were analyzed for any changes in trends from what was originally budgeted, and no adjustment is being proposed for mid-year.

The City's General Fund Revenue Budget also included $1,755,000 in capital/one-time revenues related to building permits and plan checks for several developments currently progressing in the City. The financial analysis conducted confirmed that some of the development projects originally estimated, especially in the building permit revenue category, may not be on track to be realized in FY 2025–2026. To better assess the situation, the Director of Engineering/Building Official plans to meet with the developers to better understand their projects, assess their timelines, and reevaluate the fees and the timing in which the City should anticipate their collection. With that, no changes to initial estimates are being proposed to these capital/one-time revenues, and if later adjustments are needed, they would be reflected in the City Manager's proposed FY 2026-2027 operating and capital improvement budget.

Expenditures

The City's adopted General Fund Expenditure Budget includes $29,051,910 in operating expenditures and $200,000 in transfers to the Capital Projects for FY 2025-2026.

City Departments conducted an in-depth analysis of all their year-to-date expenditures, and calculated projections through the end of the fiscal year to identify any expenditures that were tracking higher or lower than originally budgeted.

The following table lists the City Manager's approved and proposed operating expenditure budget requests for the City Council's consideration.

Dept. / Div.	Account Description	Request	Comments
Library	Salaries & Benefits	$104,170	Library Technician Position
Public Services Maintenance	Animal Control	$20,000	The increase is due to L.A. County Dept. of Animal Care & Control Services' rising prices.
Public Services Maintenance	Vehicles	$300,000	Replace 22-year-old Chevrolet El Dorado Bus
Overall Expenditures Budget Adjustments		**$424,170**	

- **Library Technician**

During the FY 2025-2026 budget presentation, the Library Division laid out their work plan for the new Library's grand opening and the additional staffing needed to assist with acquisitions and cataloging endeavors. The total salaries and benefits costs presented for this new classification will be $104,170. Upon the City Council's approval, recruitment for this position will begin immediately and, depending on the time of hire, the pro rata share of this amount will be used for this fiscal year and reset to full amount for the FY 2026-2027, based on that year's approved salary schedule.

- **Animal Control**

Due to the rising costs of the Los Angeles County Department of Animal Care and Control Service, which includes a special intake/quarantine fee that was implemented during FY 2025-2026, a budget increase of $20,000 is requested to cover the costs for the remainder of the fiscal year.

- **Vehicles**

For the safety of our residents and due to recurring and major mechanical and electrical failures, the 22-year-old Chevrolet El Dorado Bus has been decommissioned from service. After a thorough review of the options, the features, the availability, and costs involved, staff is requesting to transition to a 32-passanger shuttle bus which aligns with our standard 31 participant capacity for field trips needed, as also previously suggested by the City Council too. This investment represents a necessary shift from reactive maintenance of an unsafe asset to a proactive solution for the City's growing recreation needs. Staff is currently estimating the cost to be around $300,000 based on initial research conducted for Mid-Year purposes. The City Council will be presented with all details along with actual costs at a later time when staff brings forth a report for purchase.

Capital Improvement Program

The FY 2025-2026 adopted budget includes CIP Project No. 45100-8103, called City Wide ADA Sidewalk Survey. Staff is requesting to change the name of this project to "City Hall ADA and Access Control Entrance Upgrade", for clarity, accuracy, and to also match the description provided for use of CDBG funding previously approved by the City Council. The approval of this name change also requires the project number to be changed from 45100-8103 (sidewalk improvement) to 45200-8253 (building & other improvement) since the scope of work has shifted from original plans.

Fiscal Impact:

Approval of Resolution No. 2026-15-3726 authorizes the Finance Director to amend the FY 2025-2026 adopted budget by appropriating $424,170 from the General Fund reserves and also make all other approved budget adjustments as presented.

The table below summarizes the updated FY 2025-2026 Budget for the General Fund including Mid-Year Budget Adjustments. This summary shows that the General Fund is now anticipated to end the year with a budgetary deficit of ($338,589), instead of the original $85,581 surplus amount shown at the time of budget adoption.

Fund		Description	FY 2025-26 Revenues	FY 2025-26 Expenditures	Surplus (Deficit) FY 2025-26
General Fund					
01	General Fund	On-Going Budget	$ 27,582,491	$ (29,051,910)	$ (1,469,419)
		Capital/One-Time Items	$ 1,755,000	$ -	$ 1,755,000
		Capital Projects Transfers	$ -	$ (200,000)	$ (200,000)
		TOTAL GENERAL FUND	$ 29,337,491	$ (29,251,910)	$ 85,581
		Mid-Year Budget Adjustments / Requests	$ -	$ (424,170)	$ (424,170)
			$ 29,337,491	$ (29,676,080)	$ (338,589)

Attachments:

1.	Resolution No. 2026-15-3726
2.	Exhibit A

RESOLUTION NO. 2026-15-3726

A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE APPROVING ADJUSTMENTS TO THE BUDGET AND AUTHORIZING BUDGET AMENDMENT TO THE FY 2025-2026 ADOPTED BUDGET BY APPROPRIATING ADDITIONAL $424,170 FROM THE GENERAL FUND RESERVE FOR THE PROPOSED MID-YEAR EXPENDITURES

WHEREAS, the City Council of the City of Irwindale adopted its FY 2025-2026 Budget on June 25, 2025 pursuant to Ordinance No. 798; and

WHEREAS, the City Council of the City of Irwindale have completed the review of the revenues and expenditures at the midterm of the fiscal year and desire to approve the recommended budget adjustments and amendment of the FY 2025-2026 adopted budget by appropriating an additional $424,170 from the General Fund reserves as well as authorizing the name and project number change in the Capital Improvement Fund as itemized on Exhibit A attached hereto ("Proposed Budget Adjustments").

NOW, THEREFORE, **THE CITY COUNCIL OF THE CITY OF IRWINDALE RESOLVE, DETERMINE AND ORDER AS FOLLOWS:**

SECTION 1. The foregoing recitals are true and correct and incorporated herein by this reference.

SECTION 2. The City Council herby approves the proposed budget adjustments and authorize a budget amendment to the FY 2025-2026 adopted budget by appropriating an additional $424,170 from the General Fund reserves as well as authorizing the name and project number change in the Capital Improvement Fund as itemized on Exhibit A attached hereto ("Proposed Budget Adjustments").

SECTION 3. The Chief Deputy City Clerk shall certify to the adoption of this Resolution, which shall in turn, have immediate effect.

.**PASSED, APPROVED AND ADOPTED** on this 25th day of February 2026.

_____
H. Manuel Ortiz, Mayor

ATTEST:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

STATE OF CALIFORNIA }
COUNTY OF LOS ANGELES } ss.
CITY OF IRWINDALE }

I, Laura M. Nieto, Chief Deputy City Clerk of the City of Irwindale do hereby certify that the foregoing Resolution No. 2026-15-3726 was duly and regularly passed and adopted by the City Council of the City of Irwindale at the regular meeting held on the 25th day of February 2026, by the following vote:

AYES: Councilmembers:

NOES: Councilmembers:

ABSENT: Councilmembers:

ABSTAIN: Councilmembers:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

Exhibit A

City of Irwindale
FY 2025-2026
Budget Summary

Fund	Description		FY 2025-26 Revenues	FY 2025-26 Expenditures	Surplus (Deficit) FY 2025-26
General Fund					
01	General Fund	On-Going Budget	$ 27,582,491	$ (29,051,910)	$ (1,469,419)
		Capital/One-Time Items	$ 1,755,000	$ -	$ 1,755,000
		Capital Projects Transfers	$ -	$ (200,000)	$ (200,000)
		Mid-Year Budget Adjustments / Requests	$ -	$ (424,170)	$ (424,170)
		TOTAL GENERAL FUND	$ 29,337,491	$ (29,676,080)	$ (338,589)
Housing Authority Funds					
11	Irwindale Housing Authority		$ 400	$ (7,330)	$ (6,930)
12	Low & Moderate Income Housing Asset Fund		$ 25,000	$ (655,596)	$ (630,596)
		TOTAL HOUSING AUTHORITY FUNDS	$ 25,400	$ (662,926)	$ (637,526)
Mining Impact Fund					
13	Mining Impact Fund	On-Going Budget	$ 4,425,000	$ (5,984,910)	$ (1,559,910)
		Capital/One-Time Items	$ -	$ (20,000)	$ (20,000)
		Capital Project Transfers	$ -	$ (14,450)	$ (14,450)
		TOTAL MINING IMPACT FUND	$ 4,425,000	$ (6,019,360)	$ (1,594,360)
Reclamation Authority Funds					
14	Reclamation		$ 20,000	$ (14,450)	$ 5,550
19	Olive Pit Royalty		$ 2,024,500	$ (2,000,000)	$ 24,500
		TOTAL RECLAMATION AUTHORITY FUNDS	$ 2,044,500	$ (2,014,450)	$ 30,050
Special Revenue & Grant Funds					
15	AB939 Recycling		$ 363,550	$ (464,620)	$ (101,070)
21	State Gas Tax		$ 88,809	$ (182,139)	$ (93,330)
22	Air Quality Management District		$ 750	$ (750)	$ -
25	Proposition A		$ 38,825	$ (38,825)	$ -
26	Proposition C		$ 32,163	$ (32,163)	$ -
27	Measure R		$ 24,122	$ (24,122)	$ -
28	TDA Article 3		$ 5,000	$ (5,000)	$ -
29	Measure M		$ 27,339	$ (27,339)	$ -
30	Measure W		$ 448,000	$ (448,000)	$ -
32	Community Development Block Grant		$ 6,800	$ (6,800)	$ -
		TOTAL SPECIAL REVENUE & GRANT FUNDS	$ 1,035,358	$ (1,229,758)	$ (194,400)
Assessment Districts Funds					
44	IBC Street Lighting & Maintenance District		$ 17,040	$ (17,040)	$ -
45	IBC Sewer Maintenance District		$ 125,480	$ (50,480)	$ 75,000
		TOTAL ASSESSMENT DISTRICTS FUNDS	$ 142,520	$ (67,520)	$ 75,000
Capital Projects Funds					
47	Development Impact Fees		$ 1,490,058	$ -	$ 1,490,058
48	Capital Improvement Projects		$ 708,063	$ (639,100)	$ 68,963
		TOTAL CAPITAL PROJECTS FUNDS	$ 2,198,121	$ (639,100)	$ 1,559,021
TOTAL BUDGET - ALL FUNDS:			**$ 39,208,390**	**$ (40,309,194)**	**$ (1,100,804)**

Item #22.A.

City of
IRWINDALE
AGENDA REPORT

Date: February 25, 2026

To: Honorable Mayor and Members of the City Council

From: Julian A. Miranda, City Manager

Issue: Public Hearing and 2nd Reading and Adoption of Ordinance No. 817

City Manager's Recommendation:

That the City Council: 1) conduct the duly noticed public hearing; 2) Direct the City Attorney to read the title of **Ordinance No. 817** amending Title 15 of Irwindale Municipal Code by adding Chapter 15.05 – Existing Building Code and adopting by reference the 2026 Los Angeles County Building, Electrical, Plumbing, Mechanical, Residential, Green Building standards and Existing Building, Codes with County and City Amendments, waive further reading and adopt the ordinance on a roll call vote; and 3) direct the Engineering Department to file the adopted ordinance with the City amendments along with the findings and justification with the State Buildng Standards Commission.

Administrative Action:

Submitted/Prepared by:

Eddie Chan, Director of Engineering/ Building Official

Reviewed by:

Adrian R. Guerra, City Attorney

Kambiz Borhani, Finance Director / City Treasurer

Approved by:

Julian A. Miranda, City Manager

Background and Analysis:

The State's Health and Safety Code requires Cities and Counties to adopt the most recent editions of the State Building Standards related to building construction. Most recently, the State of California adopted the 2025 California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards and Existing Building Codes.

Title 15 of the Irwindale Municipal Codes (IMC) contains administrative and technical requirements for building construction. The City's current building code was last adopted in May 2023 by Ordinance 769.

On November 4, 2025, the Los Angeles County Board of Supervisors added and set forth provisions and regulations for the enforcement of Title 33 – Existing Building Code and adopted by reference, the 2025 State of California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes, with 2025 Los Angeles County Amendments.

Consistent with past practice, the City will adopt, by reference, the California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes with county amendments in order to bring the City into compliance with the California Health and Safety Code.

Based on staff review of the 2026 Los Angeles County Building Code and the County's amendments, as well as the ongoing mining and reclamation operations within the City, the Public Works Department - Building Safety Division proposes amendments to Appendix "J" (Grading Section) of the Los Angeles County Building Code.

This proposed City amendment to the County's Appendix "J" would continue the use of the City's 2023 Building Code Appendix "J" as it carries forward revisions from the 2008 Appendix "J" that pertain to the administrative and technical standards for backfilling of open-pit mines using either inert debris fill or soil fill. This appendix will include the City's four technical guidelines and backfill settlement evaluation techniques addressing mining and reclamation of open-pit mines as a mandated requirement for mining operations within the City. It also incorporates technical bulletins prepared by the Irwindale Technical Advisory Committee as a supplement to the City's four technical guidelines.

Section 17958 of the California Health and Safety Code requires that, when proposing amendments to the County Code, the City make findings that the current and proposed technical changes are reasonably necessary due to local climatic, geological, or topographical conditions. The City's 2023 Appendix "J" is derived from the City's 2008 Appendix "J," as these technical amendments specifically address the administrative and technical standards for the backfilling of open-pit mines. These provisions must be included in each Building Code update

to ensure proper regulation of mining and backfilling activities.

The proposed adoption of this ordinance is exempt under the provision of the California Environmental Quality Act pursuant to State Guidelines 15061(B)(3) and 15378 (b)(c). Adoption of the proposed ordinance is covered by the general rule that CEQA applies only to projects that have the potential for causing a significant effect on the environment. Adoption of the proposed ordinance does not have such potential insofar as the changes are mandated to be adopted by State law and any local changes are needed to assure proper measures are taken to address the City's local needs, especially to properly backfill open-pit mines to avoid seismic hazards when they are reclaimed.

Upon adoption of the 2026 Los Angeles County Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes with County and City Amendments, staff will file the adopted ordinance with the California Building Standards Commission.

Copies of the 2026 Los Angeles County Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes with County and City amendments, along with the Findings of Fact, are available for public inspection at the Building and Safety Division and the City Clerk's Office.

Fiscal Impact:

None.

Attachments:

1.	Ordinance No. 817 - FINAL
2.	02-25-2026 Building Code Adoption First Reading Ordinance - APPENDIX J (2023 Edition)
3.	2026 LA County Building Codes Ordinances (Adopted)
4.	Link to Los Angeles County Building Code 2026 Edition

ORDINANCE NO. 817

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF IRWINDALE AMENDING TITLE 15 OF THE IRWINDALE MUNICIPAL CODE BY ADDING CHAPTER 15.05 – EXISTING BUILDING CODE AND ADOPTING BY REFERENCE THE LOS ANGELES COUNTY BUILDING CODE (2026 EDITION) WITH IRWINDALE AMENDMENTS, LOS ANGELES COUNTY ELECTRICAL CODE (2026 EDITION), LOS ANGELES COUNTY PLUMBING CODE (2026 EDITION), LOS ANGELES COUNTY MECHANICAL CODE (2026 EDITION), LOS ANGELES COUNTY GREEN BUILDING STANDARDS CODE (2026 EDITION), LOS ANGELES COUNTY RESIDENTIAL CODE (2026 EDITION), EXISTING BUILDING CODE (2026 EDITION), AND ADOPTING LOCAL AMENDMENTS THERETO REPEALING ALL OTHER ORDINANCES OR PORTIONS OF ORDINANCES IN CONFLICT THEREWITH, PURSUANT TO GOVERNMENT CODE SECTION 50022.2 ET SEQ.

RECITALS

A. Government Code section 50022.2 *et seq.* authorizes the adoption by reference of California codes and codes that adopt the California codes, including the Codes of the County of Los Angeles, which adopts the California Building, Existing Building, Residential, Green Building Standards, Plumbing, Electrical and Mechanical Codes, as amended.

B. Section 17958.5 of the Health and Safety Code expressly authorizes cities to make changes in the California Building Code, Existing Building Code, Residential Code, Green Building Standards Code, Plumbing Code, Electrical Code and Mechanical Code, as reasonably necessary due to local conditions.

C. The Los Angeles County Building Code, Existing Building Code, Residential Code, Green Building Standards Code, Electrical Code, Plumbing Code and Mechanical Code incorporate appropriate findings related to local climatic, geological, or topographical conditions of Los Angeles County, as specified under the provisions of the California Health & Safety Code.

D. On February 11, 2026, the City Council considered Ordinance 817 and accepted staff's recommendation to amend Appendix "J" of the County grading section to include Backfilling Standards of Open-Pit Mines and the requirement of a grading permit for the backfilling of open-pit mines using either inert debris fill or soil fill.

E. On February 25, 2026, the City Council of the City of Irwindale, pursuant to a notice duly issued under Government Code section 50022.3, conducted a public hearing to consider this ordinance adopting the 2026 Edition

of the Los Angeles Building Code, Existing Building Code, Residential Code, Green Building Standards Code, Plumbing Code, Electrical Code and Mechanical Code with the City's amendment of Appendix "J" of the County Building Codes.

THE CITY COUNCIL OF THE CITY OF IRWINDALE DOES ORDAIN AS FOLLOWS:

BUILDING CODE

SECTION 1: Recitals. The City Council finds that the above recitals are true and correct and are incorporated herein by reference.

SECTION 2: Chapter 15.04.10 of the Irwindale Municipal Code is hereby amended to read as follows (deleted text, if any, is shown in ~~strikethrough~~; new text, if any, is shown in ***bold italics***):

Section 15.04.010. Adoption of code.

A. There is hereby adopted, as the city building code, except as provided in this chapter, that certain building code known and designated as the Los Angeles County Building Code, ~~2023~~ ***2026*** Edition (Title 26 of the Los Angeles County Code), which incorporates and amends the ~~2022~~ ***2025*** California Building Code, including all appendixes thereto and changes made by the County of Los Angeles and by the ~~city~~ ***City*** of Irwindale, and such code shall be and become the building code of the city, regulating and controlling the design, construction, quality of materials, grading, use, occupancy, location and maintenance of all buildings or structures and prescribing conditions under which such work may be carried on within the city and providing for the issuance of permits and the collection of fees therefor.

B. Los Angeles County Ordinance No. ~~2022-0051~~ ***2025-0047***, as adopted by county of Los Angeles, is adopted in its entirety and incorporated herein by this reference, with ~~city's~~ ***City's*** Amendments to Appendix "J".

SECTION 3: The City Council hereby finds that the County of Los Angeles, in adopting its Ordinance No. 2025-0047, has made all appropriate findings related to local climatic, geological, or topographical conditions, as specified under the provisions of the California Health & Safety Code. The City Council hereby incorporates the findings summarized in the Los Angeles County Ordinance No. 2025-0047. The City Council further finds that the County's grading section Appendix "J" as revised to include the requirement of a grading permit for the backfilling of open-pit mines using either inert debris fill or soil fill, is necessary to address and remediate existing geological conditions as a result of mining and backfilling activities in the City of Irwindale.

EXISTING BUILDING CODE

SECTION 4: Chapter 15.05.010 of the Irwindale Municipal Code is hereby adopted to read as follows:

Section 15.05.010. Adoption of code.

A. There is hereby adopted, as the city's existing building code, except as provided in this chapter, that certain existing building code known and designated as the Los Angeles County Existing Building Code, 2026 Edition (Title 33 of the Los Angeles County Code), which incorporates and amends the 2025California Existing Building Code, including all appendixes thereto and changes made by the County of Los Angeles and by the City of Irwindale, and such code shall be and become the existing building code of the city, regulating and controlling the ability to provide flexibility to permit the use of alternative approaches to achieve compliance with minimum requirements to safeguard the public health, safety, and welfare insofar as they are affected by the repair, alteration, change of occupancy, addition, and relocation of existing buildings or structures and prescribing conditions under which such work may be carried on within the city and providing for the issuance of permits and the collection of fees therefor.

B. Los Angeles County Ordinance No. 2025-0053, as adopted by the County of Los Angeles, is adopted in its entirety.

SECTION 5: Chapter 15.05.020 of the Irwindale Municipal Code is hereby adopted to read as follows:

Section 15.05.020. Copies filed. Three copies of the Los Angeles County Existing Building Code, referred to in Section 15.05.10 of this chapter, have been deposited in the office of the city clerk and shall be at all times maintained by said clerk for use and examination by the public.

SECTION 6: Chapter 15.05.030 of the Irwindale Municipal Code is hereby adopted to read as follows:

Section 15.05.030. Terms defined. Whenever any of the following names or terms are used in the Los Angeles County Existing Building Code, each such name or term shall be deemed and construed to have the meaning ascribed to it in this section as follows:

"Board of appeals" means the board of appeals established by the Los Angeles County Building Code.

"Board of supervisors" means the city council.

"Building department" means the building and safety division of the department of public works, acting for the city.

"Building code," "uniform building" or "Los Angeles County Building Code" means Chapter 15.04 of this code;

"Building official" means the director of public works or his or her designee.

"City" means the city of Irwindale.

"County," "county of Los Angeles" or "unincorporated territory of the county of Los Angeles" means the city.

"County engineer" means the director of public works of the county of Los Angeles.

"Electrical code" means Chapter 15.08 of this code.

“Existing building code” means Chapter 15.05 of this code.

"Fire code" means Chapter 15.12 of this code.

"Fire zone" means the fire zone or zones adopted by an ordinance creating and establishing fire zones.

"General fund" means the city treasury.

"Health code" or "Los Angeles County Health Code" means Chapter 8.04 of this code.

"Health officer" means the health officer of the city.

"Mechanical code" means Chapter 15.20 of this code.

"Plumbing code" means Chapter 15.16 of this code.

“Green Building Standards code” means Chapter 15.10 of this code.

SECTION 7: Chapter 15.05.40 of the Irwindale Municipal Code is hereby adopted to read as follows:

Section 15.05.040. Fee schedule – Modification by Resolution. The fee schedules adopted by Section 15.05.10 of this title may be amended by resolution adopted by the city council.

SECTION 8: The City Council hereby finds that the County of Los Angeles, in adopting its Ordinance No. 2025-0053 has made all appropriate findings related to administrative matters. The City Council hereby incorporates the findings summarized in the Los Angeles County Ordinance No. 2025-0053.

RESIDENTIAL CODE

SECTION 9: Chapter 15.06.010 of the Irwindale Municipal Code is hereby amended to read as follows (deleted text, if any, is shown in ~~strikethrough~~; new text, if any, is shown in ***bold italics***):

Section 15.06.010. Adoption of code.

A. There is hereby adopted, as the city's residential code, except as provided in this chapter, that certain residential code known and designated as the Los Angeles County Residential Code, ~~2023~~ ***2026*** Edition (Title 30 of the Los Angeles County Code), which incorporates and amends the ~~2022~~ ***2025*** California Residential Code, including all appendixes thereto and changes made by the County of Los Angeles and by the ~~city~~ ***City*** of Irwindale, and such code shall be and become the building code of the city, regulating and controlling the design, construction, quality of materials, grading, use, occupancy, location and maintenance of all buildings or structures and prescribing conditions under which such work may be carried on within the city and providing for the issuance of permits and the collection of fees therefor.

B. Los Angeles County Ordinance No. ~~2022-0055~~ ***2025-0051***, as adopted by the county of Los Angeles, is adopted in its entirety

SECTION 10: The City Council hereby finds that the County of Los Angeles, in adopting its Ordinance No. 2025-0051 has made all appropriate findings related to administrative matters. The City Council hereby incorporates the findings summarized in the Los Angeles County Ordinance No. 2025-0051.

ELECTRICAL CODE

SECTION 11: Chapter 15.08.010 of the Irwindale Municipal Code is hereby amended to read as follows (deleted text, if any, is shown in ~~strikethrough~~; new text, if any, is shown in ***bold italics***):

Section 15.08.010. Adoption of code.

A. There is hereby adopted as the city's electrical code, except as provided in this chapter, that certain electrical code known and designated as the Los Angeles County Electrical Code, ~~2023~~ ***2026*** Edition (Title 27 of the Los Angeles County Code), which incorporates and amends the California Electrical Code, ~~2022~~ ***2025*** Edition, including all appendixes thereto and changes made by the county of Los Angeles, and such code shall be and become the electrical code of the city regulating and controlling the design, construction, installation, quality of materials, operation and maintenance of electrical systems, wiring and appliances and providing for the issuance of permits and the collection of fees therefor.

B. Los Angeles County Ordinance No. ~~2022-0052~~ ***2025-0048***, as adopted by the county of Los Angeles, is adopted in its entirety.

SECTION 12: The City Council hereby finds that the County of Los Angeles, in adopting its Ordinance No. 2025-0048 has made all appropriate findings related to administrative matters. The City Council hereby incorporates the findings summarized in the Los Angeles County Ordinance No. 2025-0048.

GREEN BUILDING STANDARDS CODE

SECTION 13: Chapter 15.10.010 of the Irwindale Municipal Code is hereby amended to read as follows (deleted text, if any, is shown in ~~strikethrough~~; new text, if any, is shown in ***bold italics***):

Section 15.10.010. Adoption of code.

A. There is hereby adopted, as the city's green building standards code, except as provided in this chapter, that certain green building standards code known and designated as the Los Angeles County Green Building Standards Code, ~~2023~~ ***2026*** Edition (Title 31 of the Los Angeles County Code), which incorporates and amends the ~~2022~~ ***2025*** California Green Building Standards Code, including all appendixes thereto and changes made by the County of Los Angeles and by the City of Irwindale, and such code shall be and become the building code of the city, regulating and controlling the design, construction, quality of materials, grading, use, occupancy, location and maintenance of all buildings or structures and prescribing conditions under which such work may be carried on within the city and providing for the issuance of permits and the collection of fees therefor.

B. Los Angeles County Ordinance No. ~~2022-0056~~ ***2025-0052***, as adopted by the county of Los Angeles, is adopted in its entirety.

SECTION 14: The City Council hereby finds that the County of Los Angeles, in adopting its Ordinance No. 2025-0052 has made all appropriate findings related to administrative matters. The City Council hereby incorporates the findings summarized in the Los Angeles County Ordinance No. 2025-0052.

PLUMBING CODE

SECTION 15: Chapter 15.16.010 of the Irwindale Municipal Code is hereby amended to read as follows:

Section 15.16.010. Adoption of codes.

A. There is hereby adopted as city plumbing code, except as provided in this chapter, that certain plumbing code known and designated as the Los Angeles County Plumbing Code, ~~2023~~ ***2026*** Edition (Title 28 of the Los Angeles

County Code), which incorporates and amends the California Plumbing Code, ~~2022~~ ***2025*** Edition, including all appendixes thereto and changes made by the county of Los Angeles, and such code shall be and become the plumbing code of the city regulating and controlling plumbing and drainage systems, house sewers, private sewage disposal systems and prescribing conditions under which such work may be carried on within the city and providing for the issuance of permits and the collection of fees therefor.

B. Los Angeles County Ordinance No. ~~2022-0053~~ ***2025-0049***, as adopted by the county of Los Angeles, is adopted in its entirety.

SECTION 16: The City Council hereby finds that the County of Los Angeles, in adopting its Ordinance No. 2025-0049 has made all appropriate findings related to local climatic, geological, or topographical conditions, as specified under the provisions of the California Health & Safety Code. The City Council hereby incorporates the findings summarized in the Los Angeles County Ordinance No. 2025-0049.

MECHANICAL CODE

SECTION 17: Chapter 15.20.010 of the Irwindale Municipal Code is hereby amended to read as follows (deleted text, if any, is shown in ~~strikethrough~~; new text, if any, is shown in ***bold italics***):

Section 15.20.010. Adoption of codes.

A. There is hereby adopted as the city's mechanical code, except as provided in this chapter, that certain mechanical code known and designated as the Los Angeles County Mechanical Code, ~~2022~~ ***2026*** Edition (Title 29 of the Los Angeles County Code), which incorporates and amends the California Mechanical Code, ~~2022~~ ***2025*** Edition, including all appendixes thereto and changes made by the county of Los Angeles, and such code shall be and become the mechanical code of the city regulating and controlling the design, construction, installation, quality of materials, operation and maintenance of heating, ventilating, cooling, refrigeration systems, incinerators and other miscellaneous heat-producing appliances and providing for the issuance of permits and the collection of fees therefor.

B. Los Angeles County Ordinance No. ~~2022-0054~~ ***2025-0050*** as adopted by the county of Los Angeles, is adopted in its entirety.

SECTION 18: The City Council hereby finds that the County of Los Angeles, in adopting its Ordinance No. 2025-0050 has made all appropriate findings related to administrative matters. The City Council hereby incorporates the findings summarized in the Los Angeles County Ordinance No. 2025-0050.

SECTION 19: All violations of the provisions of the Los Angeles County Building Code (2026 Edition), Los Angeles County Residential Code (2026 Edition), Los Angeles

County Green Building Standards Code (2026 Edition), Los Angeles County Electrical Code (2026 Edition), Los Angeles County Plumbing Code (2026 Edition), and Los Angeles County Mechanical Code (2026 Edition), adopted by the City, shall be a misdemeanor and subject to the penalty provisions contained in Chapter 1.12 (Penalties, Civil Remedies and Severability) of the Irwindale Municipal Code.

SECTION 20: Full Force and Effect. Except as expressly amended herein, all other subsections of Chapter 15 of the Irwindale Municipal Code shall be unchanged and in full force and effect.

SECTION 21: Severability. If any section, subsection, sentence, clause, phrase, or portion of this Ordinance is, for any reason, held to be invalid or unconstitutional by the decision of any court of competent jurisdiction, such decision shall not affect the validity of the remaining portions of this Ordinance. The City Council of the City of Irwindale hereby declares that it would have adopted this Ordinance and each section, subsection, sentence, clause, phrase, or portion thereof, irrespective of the fact that any one or more sections, subsections, sentences, clauses, phrases, or portions thereof may be declared invalid or unconstitutional due to the writs of mandate issued by the Court.

SECTION 22: Effective Date. The City Clerk shall certify this Ordinance on behalf of the City of Irwindale and shall, within 15 days after its final passage, cause the same to be published once in a newspaper of general circulation in the City of Irwindale, and this Ordinance shall take effect 30 days after its passage.

PASSED, APPROVED AND ADOPTED by the City Council of the City of Irwindale at a regular meeting held on the 11th day of February 2026.

_____
H. Manuel, Mayor

ATTEST:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

STATE OF CALIFORNIA)
COUNTY OF LOS ANGELES) ss.
CITY OF IRWINDALE)

I, Laura M. Nieto, Chief Deputy City Clerk of the City of Irwindale, California, do hereby certify that the foregoing Ordinance No. 817 was introduced for first reading at a regular meeting of the City Council of the City of Irwindale held on February 11, 2026, and adopted on second reading at a regular meeting of the City Council of the City of Irwindale held on February 25, 2026, and was carried by the following-roll call vote:

AYES: Councilmembers:

NOES: Councilmembers:

ABSENT: Councilmembers:

ABSTAIN: Councilmembers:

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

AFFIDAVIT OF POSTING

I, Laura M. Nieto, Chief Deputy City Clerk, certify that I caused a copy of Ordinance No. 817, adopted by the City Council of the City of Irwindale at its regular meeting held February 25, 2026 to be posted at the City Hall, Library, and Post Office on February 26, 2026.

_____ Dated: _____
Laura M. Nieto, MMC
Chief Deputy City Clerk

APPENDIX J GRADING

(2023 Edition)

SECTION J101 GENERAL

J101.1 Scope.

The provisions of this Appendix apply to grading, excavation, and earthwork construction, including fills and embankments, and the control of runoff from graded sites, including erosion sediments and construction-related pollutants. This scope includes inert debris engineered fills placed under the auspices of Title 14 Section 17388 of the California Code of Regulations. The purpose of this Appendix is to safeguard life, limb, property, and the public welfare by regulating grading on property subject to this Code.

(Ord. 2019-0056 § 79, 2019.)

J101.2 Flood hazard areas.

Unless the applicant has submitted a hydrology and hydraulic analysis, prepared in accordance with standard engineering practice by a California licensed civil engineer, that demonstrates the proposed work will not result in any increase in the level of the base flood, grading, excavation and earthwork construction, including fills and embankments, shall not be permitted in floodways designated in Chapter 11.60 of Title 11 - Health and Safety - of the Los Angeles County Code, or in floodways that are in flood hazard areas established in Section 1612.3, or in flood hazard areas where design flood elevations are specified but floodways have not been designated.

(Ord. 2019-0056 § 79, 2019.)

J101.3 General hazards.

Whenever the Building Official determines that any existing excavation, embankment, or fill on property subject to this Code has become a hazard to life and limb, or endangers property, or adversely affects the safety, use, or stability of a public way or drainage channel, the Building Official may give written notice thereof to the owner of the property upon which the excavation, embankment, or fill is located, or other person or agent in control of said property. Upon receipt of said notice, the owner or other person or agent in control of the property shall repair or eliminate such excavation, embankment, or fill so as to eliminate the hazard, in conformance with the requirements of this Code, within the period specified in said notice.

(Ord. 2019-0056 § 79, 2019.)

J101.4 Safety precautions.

If at any stage of the work the Building Official determines by inspection that further grading as authorized is likely to endanger any public or private property, or result in the deposition of debris on any public way, or interfere with any existing drainage course, the Building Official may order the work stopped by notice in writing served on any persons engaged in doing or causing such work to be done, and any such person shall immediately stop such work. The Building Official may authorize the work to proceed if the Building Official finds that adequate safety

precautions can be taken or corrective measures incorporated in the work to avoid likelihood of such danger, deposition, or interference.

If the grading work as done has created or resulted in a hazardous condition, the Building Official shall give written notice requiring correction thereof as specified in Section J101 of this Code.

(Ord. 2019-0056 § 79, 2019.)

J101.5 Protection of utilities.

Both the permittee and the owner of the property on which the grading is performed shall be responsible for the prevention of damage to any public and/or private utilities or services.

(Ord. 2019-0056 § 79, 2019.)

J101.6 Protection of adjacent property.

Both the permittee and owner of the property on which the grading is performed shall be responsible for the prevention of damage to adjacent property. No person shall excavate on land sufficiently close to the property line to endanger any adjoining public street, sidewalk, alley, or other public or private property without taking adequate measures to support and protect such property from settling, cracking, or other damage that might result from the proposed work. Any person performing any grading that involves imported or exported materials shall take special precautions, as approved by the Building Official, to prevent such materials from being deposited on adjacent properties, any public way, and/or any drainage course.

(Ord. 2019-0056 § 79, 2019.)

J101.7 Storm water control measures.

Both the permittee and the owner of the property on which the grading is performed shall put into effect and maintain all precautionary measures necessary to protect adjacent water courses and public or private property from damage by erosion, flooding, and deposition of mud, debris, and construction-related pollutants originating from the site during grading and related construction activities.

(Ord. 2019-0056 § 79, 2019.)

J101.8 Maintenance of protective devices and rodent control.

All drainage structures and other protective devices and all burrowing rodent control measures, as shown on the grading plans approved by the Building Official, shall be maintained in a good condition and, when necessary, promptly repaired by the permittee or the owner of the property on which grading has been performed or by any other person or agent in control of such property.

(Ord. 2019-0056 § 79, 2019.)

J101.9 Correlation with other sections.

The provisions of this Appendix are independent of the provisions of Chapter 99 of this Code relating to building and property rehabilitation. This Section may be applied even though the same facts have been used to determine that there is substandard property subject to the provisions of Chapter 99.

(Ord. 2019-0056 § 79, 2019.)

J101.10 Conditions of approval.

In granting any permit under this Code, the Building Official may include such conditions as may be reasonably necessary to prevent creation of a nuisance or hazard to public or private property. Such conditions may include, but shall not be limited to:

1. Improvement of any existing grading to comply with the standards of this Code.
2. Requirements for fencing of excavations or fills that would otherwise be hazardous.
3. Requirements for temporary excavations and shoring to be shown on plans.

(Ord. 2019-0056 § 79, 2019.)

J102.1 Definitions.

For the purposes of this Appendix, the terms, phrases, and words listed in this Section and their derivatives shall have the indicated meanings.

ABOVE-WATER INERT DEBRIS ENGINEERED FILL. A fill that contains inert debris and is placed above the groundwater table.

APPROVAL. When the proposed work or completed work conforms to this Appendix, as determined by and to the satisfaction of the Building Official.

AS-BUILT. See Section J105.12.

BACKFILL. Fill placed in a zone that had previously been excavated.

BEDROCK. The relatively solid, undisturbed rock in place either at the ground surface or beneath superficial deposits of alluvium, colluvium, and/or soil.

BENCH. A relatively level step excavated into earth material on which fill is to be placed.

BEST MANAGEMENT PRACTICE (BMP). Practices, prohibitions of practices, or other activities to reduce or eliminate the discharge of pollutants to surface waters. BMPs include structural and nonstructural controls, management practices, operation and maintenance procedures, and system, design, and engineering methods that are required to be employed in order to comply with the requirements of the National Pollution Discharge Elimination System (NPDES) permit issued to the County of Los Angeles (see Section 106.4.3 and Title 31 - Green Building Standards Code - of the Los Angeles County Code).

BORROW. Earth material acquired from an off-site location for use in grading on a site.

CIVIL ENGINEER. A professional engineer licensed in the State of California to practice in the field of civil works.

CIVIL ENGINEERING. The application of the knowledge of the forces of nature, principles of mechanics, and the properties of materials to the evaluation, design, and construction of civil works.

COMPACTION. The densification of a fill by mechanical means.

CUT. See "Excavation."

DESILTING BASINS. Physical structures, constructed for the removal of sediments from surface water runoff.

DESIGN ENGINEER. The Civil Engineer responsible for the preparation of the grading plans for the site grading work.

DOWN DRAIN. A device for collecting water from a swale or ditch located on or above a slope, and safely delivering it to an approved drainage facility.

EARTH MATERIAL. Any rock, natural soil, or fill, or any combination thereof.

ENGINEERING GEOLOGIST. A geologist experienced and knowledgeable in engineering geology, holding a license as a geologist in the specialty of engineering geology issued by the State of California under the applicable provisions of the Geologist and Geophysicist Act of the Business and Professions Code.

ENGINEERING GEOLOGY. The application of geologic knowledge and principles in the investigation and evaluation of naturally occurring rock and soil for use in the design of civil works.

EROSION. The wearing away of the ground surface as a result of the movement of wind, water, or ice.

EXCAVATION. The removal of earth material by artificial means, also referred to as a cut.

FIELD ENGINEER. The Civil Engineer responsible for performing the functions as set forth in Section J105.3.

FILL. Deposition of earth materials by artificial means.

FILL AND OPERATIONS PLAN. Combined engineering plans and geotechnical reports representing the overall conceptual and general planning for the initiation through completion of reclamation of open-pit mines for both underwater and above-water backfills.

GEOTECHNICAL ENGINEER. See "Soils Engineer".

GEOTECHNICAL HAZARD. An adverse condition due to landslide, settlement, and/or slippage. These hazards include, but are not limited to, loose debris, slopewash, and mud flows from natural or graded slopes.

GRADE. The vertical location of the ground surface.

GRADE, EXISTING. The grade prior to grading.

GRADE, FINAL. See Section J105.7.

GRADE, FINISHED. The grade of the site at the conclusion of all grading efforts.

GRADE, INITIAL. See Section J105.7.

GRADE, ROUGH. See Section J105.7.

GRADING. An excavation or fill or combination thereof.

GRADING PERMIT FOR MINE RECLAMATION BACKFILL. A permit, issued to backfills of open-pit mines for all active SMARA pits.

INERT DEBRIS ENGINEERED FILL. An engineered fill that contains concrete, broken concrete, tile, masonry brick or block, concrete block, rock, sand, gravel, stone, clay, clay products, ceramics, soils, stucco, fine silt wet or dry, and materials encased in concrete, asphaltic concrete, crushed glass, and other similar materials. These fill materials are typically generated as waste products from construction and demolition operations.

KEY. A compacted fill placed in a trench excavated in earth material beneath the toe of a slope.

LANDSCAPE ARCHITECT. A person who holds a certificate to practice landscape architecture in the State of California under the applicable landscape architecture provisions of Division 3, Chapter 3.5, of the Business and Professions Code.

LINE. The horizontal location of the ground surface.

MINE RECLAMATION BACKFILL. A backfill placed in a former open-pit mine for the purpose of reclaiming the site to support future structures.

MINING. The operations associated with the excavation and processing of natural soil and rock and permitted under the California Surface Mining and Reclamation Act of 1975(SMARA).

PERMITTEE. See Section J105.6.

PRIVATE SEWAGE DISPOSAL SYSTEM. A septic tank with effluent discharging into a subsurface disposal field, into one or more seepage pits, or into a combination of a subsurface disposal field and a seepage pit or of such other facilities as may be permitted in accordance with the procedures and requirements set forth in Title 28 - Plumbing Code - of the Los Angeles County Code and as required by the Los Angeles County Department of Public Health.

PROJECT CONSULTANTS. The professional consultants required by this Code, which may consist of the Design Engineer, Field Engineer, Soils Engineer, Engineering Geologist, and Landscape Architect as applicable to this Appendix.

PROFESSIONAL INSPECTION. The inspection required by this Code to be performed by the Project Consultants. Such inspections shall be sufficient to form an opinion relating to the conduct of the work.

QSD. Qualified SWPPP Developer as defined in the California State Construction General Permit.

QSP. Qualified SWPPP Practitioner as defined in the California State Construction General Permit.

SETTLEMENT BULLETIN. Irwindale Mining Bulletin No.1, Settlement of Mine Backfills, November 22, 2022

SMARA. California Surface Mining And Reclamation Act of 1975.

SITE. A lot or parcel of land or contiguous combination thereof, under the same ownership, where grading is performed or permitted.

SLOPE. An inclined surface, the inclination of which is expressed as a ratio of horizontal distance to vertical distance.

SOIL. Naturally occurring superficial deposits overlying parent bedrock.

SOILS ENGINEER (GEOTECHNICAL ENGINEER). A licensed civil engineer experienced and knowledgeable in the practice of soils engineering.

SOILS ENGINEERING (GEOTECHNICAL ENGINEERING). The application of the principles of soils mechanics in the investigation, evaluation, and design of civil works involving the use of earth materials and the inspection or testing of construction thereof.

STOCKPILING. Placement of fill for temporary storage purposes.

STORM DRAIN SYSTEM. A conveyance or system of conveyances, including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, and man-made channels, designed or used for collecting and conveying storm water.

STORM WATER POLLUTION PREVENTION PLAN (SWPPP). A site drawing with details, notes, and related documents that identify the measures proposed by the permittee to: (1) control erosion and prevent sediment and construction-related pollutants from being carried offsite by storm water, and (2) prevent non-storm-water discharges from entering the storm drain system.

SURFACE DRAINAGE. Flows over the ground surface.

SOIL TESTING AGENCY. An agency regularly engaged in the testing of soils and rock under the direction of a Civil Engineer experienced in soil testing.

TERRACE. A relatively level step constructed in the face of a graded slope for drainage and maintenance purposes.

UNDERWATER ENGINEERED FILL: An engineered fill placed below the free water level, such as in a groundwater lake located at the bottom of an open-pit mine.

(Ord. 2019-0056 § 80, 2019.)

SECTION J103 PERMITS REQUIRED

J103.1 Permits required.

Except as exempted in Section J103.2, grading shall not be performed without first having obtained a permit from the Building Official. A grading permit does not include the construction of retaining walls or other structures. A separate permit shall be obtained for each site and may cover both excavations and fills. Any engineered grading as described in Section J104.2.3 shall be performed by a contractor licensed by the State of California to perform the work described hereon. Regular grading less than 5,000 cubic yards may require a licensed contractor if the Building Official determines that special conditions or hazards exist.

Mine reclamation backfills shall be permitted under the special provisions of a mine reclamation backfill permit. The plan check and permit fee for this grading permit for mine reclamation fills will be subject to a fee schedule adopted and approved by the City Council.

(Ord. 2019-0056 § 81, 2019.)

J103.2 Exemptions.

A grading permit shall not be required for the following:

1. When approved by the Building Official, grading in an isolated, self-contained area, provided that the public is not endangered and that such grading will not adversely affect adjoining properties or public rights of way.
2. Excavation for construction of a structure permitted under this code.
3. Cemetery graves.
4. Refuse disposal sites, controlled by other regulations.5. Excavations for wells, or trenches for utilities.
6. Mining, quarrying, excavating, processing or stockpiling rock, sand, gravel, aggregate, or clay, and related mining operations, provided such operations are conducted under the auspices of an approved conditional use permit and reclamation plan issued by the City of Irwindale.
7. Exploratory excavations performed under the direction of a Geotechnical Engineer or Engineering Geologist. This shall not exempt grading of access roads or pads created for exploratory excavations. Exploratory excavations must not create a hazardous condition to adjacent properties or the public in accordance with Section J101.3. A restoration plan must be provided and approved by the Building Official for all grading of access roads or pads. Restoration shall be completed within 90 days after the completion of soils testing unless otherwise approved by the Building Official.
8. An excavation that does not exceed 50 cubic yards (38.3 m^3) and complies with one of the following conditions and as shown in Figure J103.2:
   (a) Is less than 2 feet (0.6 m) in depth.

(b) Does not create a cut slope greater than 5 feet (1.5 m) measured vertically upward from the cut surface to the surface of the natural grade and is not steeper than 2 units horizontal to 1 unit vertical (50 percent slope).

9. A fill not intended to support a structure that does not obstruct a drainage course and complies with one of the following conditions and as shown in Figure J103.2:

(a) Is less than 1 foot (0.3 m) in depth and is placed on natural terrain with a slope flatter than 5 units horizontal to 1 unit vertical (20 percent slope).

(b) Is less than 3 feet (0.9 m) in depth at its deepest point measured vertically upward from natural grade to the surface of the fill, does not exceed 50 cubic yards, and creates a fill slope no steeper than 2 units horizontal to 1 unit vertical (50 percent slope).

(c) Is less than 5 feet (1.5 m) in depth at its deepest point measured vertically upward from natural grade to the surface of the fill, does not exceed 20 cubic yards, and creates a fill slope no steeper than 2 units horizontal to 1 unit vertical (50 percent slope).

Exemption from the permit requirements of this Appendix shall not be deemed to grant authorization for any work to be done in any manner in violation of the provisions of this Code or any other laws or ordinances of this jurisdiction.

(Ord. 2019-0056 § 81, 2019.)

J103.3 Unpermitted grading.

A person shall not own, use, occupy, or maintain any site containing unpermitted grading. For the purposes of this Code, unpermitted grading shall be defined as either of the following:

(1) Grading that was performed, at any point in time, without the required permit(s) having first been obtained from the Building Official, pursuant to Section J103.1; or

(2) Grading for which a permit was obtained pursuant to this Section, but which was not completed, pursuant to Section J105, prior to the expiration of the permit, pursuant to Section 106.5.4.

Any fill placed without a grading permit, including those exempted by Section J103.2, is considered to be uncertified and not suitable for structural support. No building permits will be issued for structures on such fills, and such fills cannot subsequently be accepted under Sections 104.2.7, 104.2.8, or J112 of this Code. All such fills must be removed and recompacted or otherwise remediated under the auspices of a grading permit before any building permits can be issued.

Exception: The Building Official may accept unpermitted fills that consist entirely of hydraulically-placed waste materials generated from an aggregate processing operation if the Permittee submits a geotechnical investigation that assesses the extent and engineering characteristics of such a fill, along with a remediation plan

(Ord. 2019-0056 § 81, 2019.)

J103.4 Availability of permit at site.

No person shall perform any grading that requires a permit under this Appendix unless a copy of the grading permit and approved grading plans are in the possession of a responsible person and available at the site for the Building Official's reference.

(Ord. 2019-0056 § 81, 2019.)

J103.5 Grading fees.

Fees shall be assessed in accordance with the provisions of this Section. The amount of the fees shall be as specified in Section 107.

1. Plan Review Fees. When a plan or other data are required to be submitted, a plan review fee shall be paid at the time of submitting plans and specifications for review. Separate plan review fees shall apply to retaining walls or major drainage structures as required elsewhere in this Code. For excavation and fill on the same site, the fee shall be based on the volume of excavation or fill, whichever is greater.
2. Permit Fees. A fee for each grading permit shall be paid to the Building Official at the time of issuance of the permit. Separate permits and fees shall apply to retaining walls or major drainage structures as required elsewhere in this Code.
3. Site Inspection Fee. When the Building Official finds that a visual inspection of the site is necessary to establish drainage requirements for the protection of property, existing buildings, or the proposed construction, a site inspection shall be made during plan check of grading plans. A fee for such inspection shall be paid to the Building Official at the time of submitting plans and specifications for review.

(Ord. 2019-0056 § 81, 2019.)

J103.6 Compliance with zoning code.

The Building Official may refuse to issue a grading permit for work on a site if either the proposed grading or the proposed land use for the site shown on the grading plan application does not comply with the provisions of Title 17 of the City of Irwindale Municipal Code.

(Ord. 2019-0056 § 81, 2019.)

J103.7 Grading security.

J103.7.1 Scope and purpose.

The Building Official may require a permittee or the owner(s) of the property on which the grading is proposed to occur to provide security, as a condition of the issuance of a grading permit for any grading involving more than 1,000 cubic yards (764.6 m^3). Where unusual conditions or special hazards exist, the Building Official may require security for grading involving less than 1,000 cubic yards (764.6 m^3). The purpose of the security shall be to guarantee the permittee's obligation to mitigate any hazardous conditions, including flood and geotechnical hazards, that may be created if the grading is not completed in accordance with the approved plans and specifications, and to complete any work that the Building Official determines is necessary to bring the property into compliance with this Appendix.

Security required by this Section may include incidental off-site grading on property contiguous with the site to be developed, provided written consent of the owner of such contiguous property is filed with the Building Official.

The Building Official may waive the requirements for security for the following:

1. Grading being done by or for a governmental agency.

2. Grading necessary to remove a geotechnical hazard, where such work is covered by an agreement and security is posted pursuant to the City of Irwindale "Subdivision Ordinance" or to the provisions of Title 21 - Subdivisions - of the Los Angeles County Code.
3. Grading on a site, not exceeding a slope of three units horizontal to one unit vertical, provided such grading as determined by the Building Official will not affect drainage from or to adjacent properties.
4. Filling of holes or depressions, provided such grading will not affect the drainage from or to adjacent properties.
5. Mine reclamation backfills placed under the auspices of a Reclamation Plan approved by the City of Irwindale, providing that there is sufficient SMARA approved financial assurances posted for such reclamation.

(Ord. 2019-0056 § 81, 2019.)

J103.7.2 Form of security.

The security referred to in Section J103.7.1 shall be in one of the following forms:

1. A bond furnished by a corporate surety authorized to do business in this state.
2. Cash.
3. Savings and loan certificates or shares deposited and assigned to the City of Irwindale or to the County as provided in Chapter 4.36 of Title 4 - Revenue and Finance - of the Los Angeles County Code, if the County of Los Angeles is acting as the authorized representative of the City of Irwindale.
4. An instrument of credit from a financial institution subject to regulation by the state or federal government and pledging that funds in the amount required by the Building Official are on deposit and guaranteed for payment, or a letter of credit is issued by such a financial institution.

(Ord. 2019-0056 § 81, 2019.)

J103.7.3 Amount of security.

The amount of security shall be based on the number of cubic yards of material in either excavation or fill, whichever is greater, and the cost of all drainage or other protective devices or work necessary to eliminate potential flooding and geotechnical hazards. That portion of the security valuation based on the volume of material in either excavation or fill shall be computed as follows:

100,000 cubic yards or less - 50 percent of the estimated cost of grading work.

Over 100,000 cubic yards - 50 percent of the cost of the first 100,000 cubic yards plus 25 percent of the estimated cost of that portion in excess of 100,000 cubic yards.

When the rough grading has been completed in conformance with the requirements of this Code, the Building Official may, at his or her discretion, consent to a proportionate reduction of the security to an amount estimated to be adequate to ensure completion of the grading work, site development, or planting remaining to be performed. The costs referred to in this Section shall be as estimated by the Building Official.

(Ord. 2019-0056 § 81, 2019.)

J103.7.4 Conditions.

All security shall include the conditions that the principal shall:

1. Comply with all of the provisions of this Code, applicable laws, and ordinances;
2. Comply with all of the terms and conditions of the grading permit, and
3. Complete all of the work authorized by the permit.

(Ord. 2019-0056 § 81, 2019.)

J103.7.5 Term of security.

The term of each security shall begin upon the filing with the Building Official, and the security shall remain in effect until the work authorized by the grading permit is completed and approved by the Building Official.

(Ord. 2019-0056 § 81, 2019.)

J103.7.6 Default procedures.

In the event any grading for which a permit has been issued is not completed in accordance with the approved plans and specifications for said work or with all terms and conditions of the grading permit, the Building Official may declare that a default has occurred. The Building Official shall give notice thereof to the principal and surety or financial institution executing the security, or to the owner in the case of a cash bond or assignment.

The Building Official may thereafter determine the work that is necessary to mitigate any hazardous or unsafe conditions on the site and cause such work to be performed.

Where the security consists of a bond or instrument of credit, the surety or financial institution executing the security shall be responsible for the payment of all costs and expenses incurred by the Building Official in causing such work to be performed, up to the full amount of the security. In the case of cash security or assignment, the Building Official may pay all costs and expenses incurred in causing such work to be performed from the funds deposited and return any unused portion of such deposit or funds to the person making said deposit or assignment.

(Ord. 2019-0056 § 81, 2019.)

J103.7.7 Right of entry.

The Building Official or the authorized representative of any surety company or financial institution furnishing the security shall have access to the premises described in the permit for the purpose of inspecting the work.

In the event of default, as described in Section J103.7.6, the surety or financial institution furnishing the security, or the Building Official, or any person employed or engaged on the behalf of any of these parties, shall have the right to go upon the premises to perform the mitigation work, as described in Section J103.7.6.

Neither the permittee, owner, or any other person shall interfere with or obstruct the ingress into or egress from any such premises of any authorized representative of the surety or financial institution executing the security or the Building Official engaged to perform the mitigation work, as described in Section J103.7.6.

(Ord. 2019-0056 § 81, 2019.)

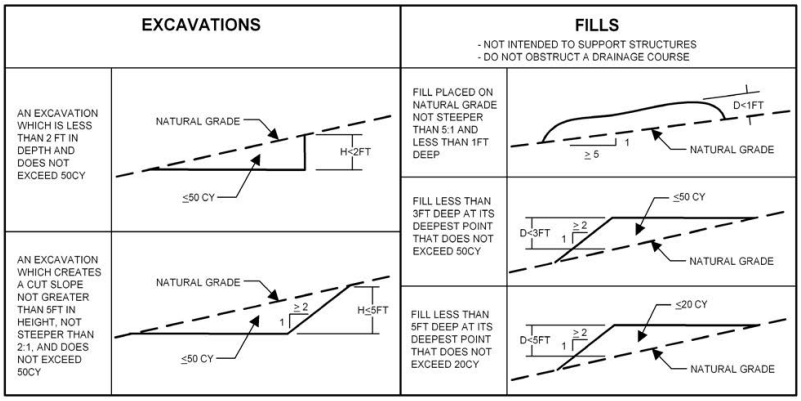


FIGURE J103.2
GRADING EXEMPTION CASES

(Ord. 2019-0056 § 82, 2019.)

SECTION J104 PERMIT APPLICATION AND SUBMITTALS

J104.1 Submittal requirements.

In addition to the provisions of Section 106.4, the applicant shall state the following:

1. The estimated quantities of excavation, fill, borrow, removal, or combination thereof.
2. The proposed land use for the site on which the grading is to be performed.

(Ord. 2019-0056 § 83, 2019.)

J104.2 Site plan requirements.

In addition to the provisions of Section 106, a grading plan shall show the existing grade and finished grade in contour intervals of sufficient clarity to indicate the nature and extent of the work and show in detail that it complies with the requirements of this Code. The plans shall show the existing grade on adjoining properties in sufficient detail to identify how grade changes will conform to the requirements of this Code.

As with the Grading Permit for Mine Reclamation Fills, the applicant shall prepare a Backfilling and Operation Plan for the both Underwater and/or Above-Water Fill operations in accordance with the City's Guidelines for each respective fill operations. Also required as part of this Backfilling and Operation Plan submittal package is a complete site specific geotechnical evaluation report prepared in accordance with City's Guidelines For Above-water Backfilling of Open Pit Mines or the Guidelines for Underwater Backfilling For Open-Pit Mines.

(Ord. 2019-0056 § 83, 2019.)

J104.2.1 Grading designation.

1. Grading above the groundwater table of natural soils involving less than 5,000 cubic yards (3825 m^3) and that will not support any structure shall be designated "regular grading" unless the permittee chooses to have the grading be designated as engineered grading, or the Building Official determines that, due to the existence of special conditions or unusual hazards, the grading should be designated as engineered

grading.

2. Grading above the groundwater table using natural soils in excess of 5,000 cubic yards (3825 m^3) or that involving less than 5,000 cubic yards (3825 m^3) which is proposed to support any structure shall be designated as "engineered grading." All engineered grading shall be performed in accordance with an approved grading plan and specifications prepared by a civil engineer, unless otherwise required by the Building Official.
3. Grading involving placement of inert debris fill above the groundwater table shall be designated as an "above-water inert debris engineered fill". These include, but are not limited to, all above-water inert debris engineered fills placed under the auspices of Title 14, Section 17388 of the California Code of Regulations.

4. Grading involving placement of fill below the groundwater table using any materials shall be designated as an "underwater engineered fill". These include, but are not limited to, all underwater inert debris engineered fills placed under the auspices of Title 14, Section 17388 of the California Code of Regulations. .

(Ord. 2019-0056 § 83, 2019.)

J104.2.2 Regular grading requirements.

In addition to the provisions of Sections 106 and J104.2, an application for a regular grading permit shall be accompanied by plans of sufficient clarity to indicate the nature and extent of the work. The plans shall give the location of the work, the name of the owner, and the name of the person who prepared the plan. The plan shall include the following information:

1. General vicinity of the proposed site.
2. Limits and depths of cut and fill.
3. Location of any buildings or structures where work is to be performed, and the location of any buildings or structures within 15 feet (4.6 m) of the proposed grading.
4. Contours, flow areas, elevations, or slopes that define existing and proposed drainage patterns.
5. Storm water mitigation measures in accordance with the requirements of Section 106.4.3 of this Code. See Section J110.8 for specific requirements.
6. Location of existing and proposed utilities, drainage facilities, and recorded public and private easements and restricted use areas.
7. Location of all recorded floodways as established by Chapter 11.60 of Title 11 - Health and Safety - of the Los Angeles County Code.
8. Location of all Special Flood Hazard Areas as designated and defined in Title 44 of the Code of Federal Regulations.

(Ord. 2019-0056 § 83, 2019.)

J104.2.3 Engineered grading requirements.

In addition to the provisions of Sections 106 and J104.2, an application for a permit for engineered grading shall be accompanied by plans and specifications, and supporting data consisting of a geotechnical report and engineering geology report.

Specifications shall contain information covering construction and material requirements. Plans shall be drawn to scale on paper and shall be of sufficient clarity to indicate the nature and extent of the work proposed

and shall show in detail that the proposed work will conform to the provisions of this Code and all relevant laws, ordinances, rules, and regulations. The first sheet of the plans shall depict the location of the proposed work, the name and address of the owner, and the person by whom they were prepared.

The plans shall include or be accompanied by the following information:

1. General vicinity of the proposed site.
2. Property limits and accurate contours of existing ground and details of terrain and area drainage.
3. Limiting dimensions, elevations, or finish contours to be achieved by the grading, proposed drainage channels, and related construction.
4. Detailed plans of all surface and subsurface drainage devices, walls, cribbing, dams, and other protective devices to be constructed with, or as a part of, the proposed work. A map showing the drainage area and the estimated runoff of the area served by any drains shall also be provided.
5. Location of any existing or proposed buildings or structures located on the property on which the work is to be performed and the location of any buildings or structures on adjacent properties that are within 15 feet (4.6 m) of the property or that may be affected by the proposed grading operations.
6. Recommendations in the geotechnical report and the engineering geology report shall be incorporated into the grading plans or specifications. When approved by the Building Official, specific recommendations contained in the soils engineering report and the engineering geology report, that are applicable to grading, may be included by reference.
7. The dates of the geotechnical and engineering geology reports together with the names, addresses, and phone numbers of the firms or individuals who prepared the reports.
8. A statement of the quantities of material to be excavated and/or filled. Earthwork quantities shall include quantities for geotechnical and geological remediation. In addition, a statement of the quantities of material to be imported or exported from the site.
9. A statement of the estimated starting and completion dates for proposed work.
10. A statement signed by the owner, acknowledging that a Design Engineer, Field Engineer, Geotechnical Engineer, and Engineering Geologist, when appropriate, will be employed to perform the services required by this Code, when the Building Official requires that such professional persons be so employed. These acknowledgments shall be on a form furnished by the Building Official.
11. Storm water mitigation measures are required to be shown on the grading plan in accordance with the requirement of Section 106.4.3 of this Code. See Section J110.8 for specific requirements.
12. A drainage plan for those portions of property proposed to be utilized as a building site (building pad), including elevations of floors with respect to finish site grade and locations of proposed stoops, slabs, and fences that may affect drainage.
13. Location and type of any proposed private sewage disposal system, including the location of the expansion area.
14. Location of existing and proposed utilities, drainage facilities, and recorded public and private easements and restricted use areas.
15. Location of all recorded floodways as established by Chapter 11.60 of Title 11 - Health and Safety - of the Los Angeles County Code.
16. Location of all Special Flood Hazard Areas as designated and defined in Title 44 of the Code of Federal Regulations.

(Ord. 2019-0056 § 83, 2019.)

J104.2.4 Above-Water Inert Debris Engineered Fill Requirements.

All above-water inert debris engineered fills shall be designed, permitted, and constructed in accordance with the *Guidelines for Above-Water Backfilling of Open Pit Mines, Irwindale, California, and* Irwindale Mining Bulletin No.1, Settlement of Mine Backfills. If specific provisions of these Guidelines conflict with any other provisions of this Appendix, the Guidelines shall govern.

J104.2.5 Underwater Engineered Fill Requirements.

All underwater fills shall be designed, permitted, and constructed in accordance with the *Guidelines for Underwater Backfilling of Open Pit Mines, Irwindale, California, and* Irwindale Mining Bulletin No.1, Settlement of Mine Backfills. If specific provisions of these Guidelines conflict with any other provisions of this Appendix, the Guidelines shall govern.

J104.3 Geotechnical and engineering geology reports.

The geotechnical report required by Section J104.2.3 shall include data regarding the nature, distribution, and strength of existing soils, conclusions, and recommendations for grading procedures and design criteria for corrective measures, including buttress fills, when necessary, and an opinion on the adequacy for the intended use of sites to be developed by the proposed grading as affected by geotechnical factors, including the stability of slopes. All reports shall conform with the requirements of Section 111 and shall be subject to review by the Building Official. Supplemental reports and data may be required as the Building Official may deem necessary. Recommendations included in the reports and approved by the Building Official shall be incorporated in the grading plan or specifications.

The engineering geology report required by Section J104.2.3 shall include an adequate description of the geology of the site, conclusions, and recommendations regarding the effect of geologic conditions on the proposed development, and an opinion on the adequacy for the intended use of sites to be developed by the proposed grading, as affected by geologic factors. The engineering geology report shall include a geologic map and cross sections utilizing the most recent grading plan as a base. All reports shall conform with the requirements of Section 111 and shall be subject to review by the Building Official. Supplemental reports and data may be required as the Building Official may deem necessary. Recommendations included in the reports and approved by the Building Official shall be incorporated in the grading plan or specifications.

Exception: A geotechnical or engineering geology report is not required where the Building Official determines that the nature of the work applied for is such that a report is not necessary.

(Ord. 2019-0056 § 83, 2019.)

J104.4 Liquefaction study.

For sites with mapped maximum considered earthquake spectral response accelerations at short periods (S_s) greater than 0.5g as determined by Section 1613, a study of the liquefaction potential of the site shall be provided and the recommendations incorporated in the plans. A geotechnical investigation will be required when the proposed work is a "Project" as defined in California Public Resources Code section 2693, and is located in an area designated as a "Seismic Hazard Zone" as defined in section 3722 of Title 14 of the California Code of Regulations and on Seismic Hazard Zone Maps issued by the State Geologist under Public Resources Code section 2696.

Exception: A liquefaction study is not required where the Building Official determines from established local data that the liquefaction potential is low.

(Ord. 2019-0056 § 83, 2019.)

SECTION J105 INSPECTIONS

J105.1 General.

Grading inspections shall be governed by Section 108 and as indicated herein. Grading operations for which a permit is required shall be subject to inspection by the Building Official. In addition, professional inspection of grading operations shall be performed by the Field Engineer, the Geotechnical Engineer, and the Engineering Geologist retained to provide such services in accordance with this Section for engineered grading and as required by the Building Official for regular grading.

Grading inspections for above-water inert debris engineered fills and underwater engineered fills shall be in accordance with the *Guidelines for Above-Water Backfilling of Open-Pit Mines, Irwindale, California*, or the *Guidelines for Underwater Backfilling of Open-Pit Mines, Irwindale, California*, respectively.

(Ord. 2019-0056 § 84, 2019.)

J105.2 Special and supplemental inspections.

The special inspection requirements of Section 1705.6 shall apply to work performed under a grading permit where required by the Building Official. In addition to the called inspections specified in Section J105.7, the Building Official may make such other inspections as may be deemed necessary to determine that the work is being performed in conformance with the requirements of this Code. The Building Official may require investigations and reports by an approved soil testing agency, Geotechnical Engineer and/or Engineering Geologist, and Field Engineer. Inspection reports shall be provided when requested in writing by the Building Official.

The Building Official may require continuous inspection of drainage devices by the Field Engineer in accordance with this Section when the Building Official determines that the drainage devices are necessary for the protection of the structures in accordance with Section 110.

(Ord. 2019-0056 § 84, 2019.)

J105.3 Field engineer.

The Field Engineer shall provide professional inspection of those parts of the grading project within such engineer's area of technical specialty, oversee and coordinate all field surveys, set grade stakes, and provide site inspections during grading operations to ensure the site is graded in accordance with the approved grading plan and the appropriate requirements of this Code. During site grading, and at the completion of both rough grading and final grading, the Field Engineer shall submit statements and reports as required by Sections J105.11 and J105.12. If revised grading plans are required during the course of the work, they shall be prepared by a Civil Engineer and approved by the Building Official.

(Ord. 2019-0056 § 84, 2019.)

J105.4 Geotechnical engineer.

The Geotechnical Engineer shall provide professional inspection of those parts of the grading project within such engineer's area of technical specialty, which shall include observation during grading and testing for required compaction. The Geotechnical Engineer shall provide sufficient observation during the preparation of the natural ground and placement and compaction of the fill to verify that such work is being performed in accordance with the conditions of the approved plan and the appropriate requirements of this Appendix. If conditions differing

from the approved geotechnical engineering and engineering geology reports are encountered during grading, the Geotechnical Engineer shall provide revised recommendations to the permittee, the Building Official, and the Field Engineer.

(Ord. 2019-0056 § 84, 2019.)

J105.5 Engineering geologist.

The Engineering Geologist shall provide professional inspection of those parts of the grading project within such engineer's area of technical specialty, which shall include professional inspection of the bedrock excavation to determine if conditions encountered are in conformance with the approved report. If conditions differing from the approved engineering geology report are encountered, the Engineering Geologist shall provide revised recommendations to the Geotechnical Engineer.

(Ord. 2019-0056 § 84, 2019.)

J105.6 Permittee.

The permittee shall be responsible for ensuring that the grading is performed in accordance with the approved plans and specifications and in conformance with the provisions of this Code. The permittee shall engage project consultants, if required under the provisions of this Code, to provide professional inspections on a timely basis. The permittee shall act as a coordinator between the project consultants, the contractor, and the Building Official. In the event of changed conditions, the permittee shall be responsible for informing the Building Official of such change and shall provide revised plans for approval.

(Ord. 2019-0056 § 84, 2019.)

J105.7 Required inspections.

The permittee shall call for an inspection by the Building Official at the following various stages of work and shall obtain the approval of the Building Official prior to proceeding to the next stage of work:

Pre-grade. Before any construction or grading activities occur at the site. Permittee shall schedule a pre-grade inspection with the Building Official. The permittee shall ensure that all project consultants are present at the pre-grade inspection.

Initial grade. When the site has been cleared of vegetation and unapproved fill, and has been scarified, benched, or otherwise prepared for fill. No fill shall have been placed prior to this inspection.

Rough grade. When approximate final elevations have been established, drainage terraces, swales, and other drainage devices necessary for the protection of the building sites from flooding have been installed, berms have been installed at the top of the slopes, and the statements required by Section J105.12 have been received.

Final grade. When grading has been completed, all drainage devices necessary to drain the building pad have been installed, slope planting has been established, irrigation systems have been installed, and the as-built plans and required statements and reports have been submitted.

(Ord. 2019-0056 § 84, 2019.)

J105.8 Notification of noncompliance.

If, in the course of fulfilling their respective duties under this Appendix, the Field Engineer, the Geotechnical Engineer, or the Engineering Geologist determines that the work is not being done in conformance with this Appendix or the approved grading plans, the Field Engineer, the Geotechnical Engineer, or the Engineering Geologist shall immediately report, in writing, the discrepancies and the recommended corrective measures to the permittee and to the Building Official.

(Ord. 2019-0056 § 84, 2019.)

J105.9 Transfer of responsibility.

If the Field Engineer, the Geotechnical Engineer, or the Engineering Geologist of record is changed at any time after the grading plans required pursuant to Section J104.2.2 or J104.2.3 have been approved by the Building Official, the permittee shall immediately provide written notice of such change to the Building Official. The Building Official may stop the grading from commencing or continuing until the permittee has identified a replacement and the replacement has agreed in writing to assume responsibility for those parts of the grading project that are within the replacement's area of technical competence.

For mine reclamation backfills, if the Field Engineer, the Geotechnical Engineer, or the Engineering Geologist of record is changed at any time after the grading has commenced, the Permittee shall stop grading and notify the Building Official in writing within 48 hours. The Permittee shall not commence any grading until a replacement has been approved by the Building Official and the replacement has agreed in writing to assume responsibility,

(Ord. 2019-0056 § 84, 2019.)

J105.10 Non-inspected grading.

No person shall own, use, occupy, or maintain any non-inspected grading. For the purposes of this Code, non-inspected grading shall be defined as any grading for which a grading permit was first obtained, pursuant to Section J103, above, but which has progressed beyond any point requiring inspection and approval by the Building Official without such inspection and approval having been obtained.

(Ord. 2019-0056 § 84, 2019.)

J105.11 Routine field inspections and reports.

Unless otherwise directed by the Building Official, the Field Engineer for all engineered grading projects shall prepare routine inspection reports and shall file these reports with the Building Official as follows:

1. Bi-weekly during all times when grading of 400 cubic yards or more per week is occurring on the site;
2. Monthly, at all other times; and
3. At any time when requested in writing by the Building Official.

Such reports shall certify to the Building Official that the Field Engineer has inspected the grading site and related activities and has found them in compliance with the approved grading plans and specifications, this Code, all grading permit conditions, and all other applicable ordinances and requirements. The reports shall conform to a standard "Report of Grading Activities" form, which shall be provided by the Building Official.

(Ord. 2019-0056 § 84, 2019.)

J105.11.1 Above-Water Inert Debris Fills and Underwater Fills.

Unless otherwise directed by the Building Official, reports for above-water inert debris fills and for underwater fills shall be in accordance with the Guidelines for Above-Water Backfilling of Open-Pit Mines, Irwindale, California, or the Guidelines for Underwater Backfilling of Open-Pit Mines, Irwindale, California, respectively.

J105.12 Completion of work.

Upon completion of the rough grading work and at the final completion of the work, the following reports and drawings and supplements thereto are required for engineered grading or when professional inspection is otherwise required by the Building Official:

1. An "as-built" grading plan prepared by the Field Engineer retained to provide such services in accordance with Section J105.3 showing all plan revisions as approved by the Building Official. This shall include original ground surface elevations, as-built ground surface elevations, lot drainage patterns, and the locations and elevations of surface drainage facilities and the outlets of subsurface drains. As-built locations, elevations, and details of subsurface drains shall be shown as reported by the Geotechnical Engineer.

   The as-built grading plan shall be accompanied by a certification by the Field Engineer that to the best of his or her knowledge, the work within the Field Engineer's area of responsibility was done in accordance with the final approved grading plan.

2. A report prepared by the Geotechnical Engineer retained to provide such services in accordance with Section J105.4, including locations and elevations of field density tests, summaries of field and laboratory tests, other substantiating data, and comments on any changes made during grading and their effect on the recommendations made in the approved geotechnical engineering investigation report. The report shall include a certification by the Geotechnical Engineer that, to the best of his or her knowledge, the work within the Geotechnical Engineer's area of responsibility is in accordance with the approved geotechnical engineering report and applicable provisions of this Appendix. The report shall contain a finding regarding the safety of the completed grading and any proposed structures against hazard from landslide, settlement, or slippage.

3. A report prepared by the Engineering Geologist retained to provide such services in accordance with Section J105.5, including a final description of the geology of the site and any new information disclosed during the grading and the effect of such new information, if any, on the recommendations incorporated in the approved grading plan. The report shall contain a certification by the Engineering Geologist that, to the best of his or her knowledge, the work within the Engineering Geologist's area of responsibility is in accordance with the approved engineering geology report and applicable provisions of this Appendix. The report shall contain a finding regarding the safety of the completed grading and any proposed structures against hazard from landslide, settlement, or slippage. The report shall contain a final as-built geologic map and cross-sections depicting all the information collected prior to and during grading.

4. The grading contractor shall certify, on a form prescribed by the Building Official, that the grading conforms to said as-built plan and the approved specifications.

5. When a landscape permit is required by Section 490.1 of the California Department of Water Resources Model Water Efficient Landscape Ordinance, the Landscape Architect shall certify on a form prescribed by the Building Official that the landscaping conforms to approved landscape plans and specifications.

(Ord. 2019-0056 § 84, 2019.)

J105.13 Notification of completion.

The permittee shall notify the Building Official when the grading operation is ready for final inspection. Final approval shall not be given until all work, including installation of all drainage facilities and their protective devices, and all erosion-control measures, have been completed in accordance with the final approved grading plan, and all required reports have been submitted and approved.

Upon completion of the requirements of Section J105.12 and J105.13 to the satisfaction of the Building Official, all fills placed during the permitted grading are considered to be certified.

(Ord. 2019-0056 § 84, 2019.)

J105.14 Change of ownership.

Unless otherwise required by the Building Official, when a grading permit has been issued on a site and the owner sells the property prior to final grading approval, the new property owner shall be required to obtain a new grading permit.

(Ord. 2019-0056 § 84, 2019.)

SECTION J106 EXCAVATIONS

J106.1 Maximum cut slope.

The slope of cut surfaces shall be no steeper than is safe for the intended use, and shall be not more than one unit vertical in two units horizontal (50 percent slope) unless the owner or the owner's authorized agent furnishes a geotechnical or an engineering geology report, or both, justifying a steeper slope. The reports must contain a statement by the Geotechnical Engineer or Engineering Geologist that the site was investigated and an opinion that a steeper slope will be stable and will not create a hazard to public or private property, in conformance with the requirements of Section 111. The Building Official may require the slope of the cut surfaces to be flatter in slope than 2 units horizontal to 1 unit vertical if the Building Official finds it necessary for the stability and safety of the slope.

Exception: A cut surface shall be permitted to be at a slope of 1.5 units horizontal to one unit vertical (67 percent slope) provided that all of the following are met:

1. It is not intended to support structures or surcharges.
2. It is adequately protected against erosion.
3. It is no more than 8 feet (2438 mm) in height.
4. It is approved by the Building Official.
5. Ground water is not encountered.

(Ord. 2019-0056 § 85, 2019.)

SECTION J107 FILLS

J107.1 General.

Unless otherwise recommended in the geotechnical report, fills shall comply with the provisions of this Section.

Exception:

1. The Building Official may permit a deviation from the provisions of this Appendix for minor fills not intended to support structures, where no geotechnical report has been prepared.

2. Above-water inert debris engineered fills and underwater engineered fills are exempt from the provisions of Section J107 and shall be placed as described in the *Guidelines for Above-Water Backfilling of Open-Pit Mines, Irwindale, California*, or the *Guidelines for Underwater Backfilling of Open-Pit Mines, Irwindale, California*, respectively.

(Ord. 2019-0056 § 86, 2019.)

J107.2 Surface Preparation.

Fill slopes shall not be constructed on natural slopes steeper than 2 units horizontal to 1 unit vertical (50 percent slope). The ground surface shall be prepared to receive fill by removing vegetation, topsoil, and other unsuitable materials (including any existing fill that does not meet the requirements of this Appendix), and scarifying the ground to provide a bond with the fill material.

Subdrains shall be provided under all fills placed in natural drainage courses and in other locations where seepage is evident, except where the Geotechnical Engineer or Engineering Geologist recommends otherwise. Such sub-drainage systems shall be of a material and design approved by the Geotechnical Engineer and acceptable to the Building Official. The Geotechnical Engineer shall provide continuous inspection during the process of subdrain installations. The location of the subdrains shall be shown on a plan prepared by the Geotechnical Engineer. Excavations for the subdrains shall be inspected by the Engineering Geologist when such subdrains are included in the recommendations of the Engineering Geologist.

(Ord. 2019-0056 § 86, 2019.)

J107.3 Benching.

Where existing grade is at a slope steeper than one unit vertical in five units horizontal (20 percent slope) and the depth of the fill exceeds 5 feet (1524 mm), benching shall be provided into sound bedrock or other competent material as determined by the Geotechnical Engineer in accordance with Figure J107.3, or as determined by the Geotechnical Engineer. When fill is to be placed over a cut, a key shall be provided that is not less than 10 feet (3048 mm) in width and 2 feet (610 mm) in depth. The area beyond the toe of fill shall be sloped for sheet overflow or a paved drain shall be constructed thereon. The Geotechnical Engineer or Engineering Geologist, or both, shall inspect and approve the cut as being suitable for the foundation and placement of fill material before any fill material is placed on the excavation.

(Ord. 2019-0056 § 86, 2019.)

J107.4 Fill material.

Fill material shall not include organic, frozen, or other deleterious materials. Rock or similar irreducible material greater than 12 inches (305 mm) in any dimension shall not be included in fills.

Exception: The Building Official may permit placement of larger rock when the Geotechnical Engineer properly devises and recommends a method of placement, and continuously inspects the placement and approves the fill stability. The following requirements shall also apply:

1. Prior to issuance of the grading permit, potential rock disposal areas shall be delineated on the grading plan.
2. Rock sizes greater than 12 inches (0.3 m) in maximum dimension shall be 10 feet (3.0 m) or more below grade, measured vertically.
3. Rocks shall be placed so as to assure filling of all voids with well-graded soil.
4. The reports submitted by the Geotechnical Engineer shall acknowledge the placement of the oversized material and whether the work was performed in accordance with the engineer's recommendations and the approved plans.
5. The location of oversized rock dispersal areas shall be shown on the as-built plan.

(Ord. 2019-0056 § 86, 2019.)

J107.5 Compaction.

All fill material shall be compacted to a minimum of 90 percent of maximum density as determined by ASTM D1557, Modified Proctor, in lifts not exceeding 12 inches (305 mm) in depth within 40 feet (12.2 m) below finished grade and 93 percent of maximum dry density deeper than 40 feet (12.2 m) below finished grade, unless a lower relative compaction (not less than 90 percent of maximum dry density) is justified by the Geotechnical Engineer and approved by the Building Official. Where ASTM D1557, Modified Proctor, is not applicable, a test acceptable to the Building Official shall be used.

Field density shall be determined by a method acceptable to the Building Official. However, not less than ten percent of the required density tests, uniformly distributed, shall be obtained by the Sand Cone Method.

Fill slopes steeper than 2 units horizontal to 1 unit vertical (50-percent slope) shall be constructed by the placement of soil a sufficient distance beyond the proposed finish slope to allow compaction equipment to operate at the outer surface limits of the final slope surface. The excess fill is to be removed prior to completion or rough grading. Other construction procedures may be utilized when it is first shown to the satisfaction of the Building Official that the angle of slope, construction method, and other factors will comply with the intent of this Section.

(Ord. 2019-0056 § 86, 2019.)

J107.6 Maximum slope.

The slope of fill surfaces shall be not steeper than is safe for the intended use. Fill slopes steeper than one unit vertical in two units horizontal (50-percent slope) shall be justified by geotechnical reports conforming to the requirements of Section 111, containing a statement by the Geotechnical Engineer that the site has been investigated and an opinion that a steeper fill slope will be stable and will not create a hazard to public or private property. Substantiating calculations and supporting data may be required where the Building Official determines that such information is necessary to verify the stability and safety of the proposed slope. The Building Official may require the fill slope to be constructed with a face flatter in slope than 2 units horizontal to 1 unit vertical (50-percent slope) if the Building Official finds it necessary for stability and safety of the slope.

(Ord. 2019-0056 § 86, 2019.)

J107.7 Slopes to receive fill.

Where fill is to be placed above the top of an existing slope steeper than 3 units horizontal to 1 unit vertical (33-percent slope), the toe of the fill shall be set back from the top edge of the existing slope a minimum distance of 6 feet (1.8 m) measured horizontally or such other distance as may be specifically recommended by a Geotechnical Engineer or Engineering Geologist and approved by the Building Official.

(Ord. 2019-0056 § 86, 2019.)

J107.8 Inspection of fill.

For engineered grading, the Geotechnical Engineer shall provide sufficient inspections during the preparation of the natural ground and the placement and compaction of the fill to ensure that the work is performed in accordance with the conditions of plan approval and the appropriate requirements of this Appendix. In addition to the above, the Geotechnical Engineer shall provide continuous inspection during the entire fill placement and compaction of fills that will exceed a vertical height or depth of 30 feet (9.1 m) or result in a slope surface steeper than 2 units horizontal to 1 unit vertical (50-percent slope).

(Ord. 2019-0056 § 86, 2019.)

J107.9 Testing of fills.

Sufficient tests of the fill soils shall be made to determine the density and to verify compliance of the soil properties with the design requirements. This includes soil types and shear strengths in accordance with Section J111 Referenced Standards.

(Ord. 2019-0056 § 86, 2019.)

SECTION J108 SETBACKS

J108.1 General.

Cut and fill slopes shall be set back from the property lines in accordance with this Section. Setback dimensions shall be measured perpendicular to the property line and shall be as shown in Figure J108.1, unless substantiating data is submitted justifying reduced setbacks and reduced setbacks are recommended in a geotechnical engineering and engineering geology report approved by the Building Official.

(Ord. 2019-0056 § 87, 2019.)

J108.2 Top of slope.

The setback at the top of a cut slope shall be not less than that shown in Figure J108.1, or than is required to accommodate any required interceptor drains, whichever is greater. For graded slopes, the property line between adjacent lots shall be at the apex of the berm at the top of the slope. Property lines between adjacent lots shall not be located on a graded slope steeper than 5 units horizontal to 1 unit vertical (20- percent slope).

(Ord. 2019-0056 § 87, 2019.)

J108.3 Toe of fill slope protection.

The setback from the toe of a fill slope shall not be less than that shown by Figure J108.1. Where required to protect adjacent properties at the toe of a slope from adverse effects of the grading, additional protection, approved by the Building Official, shall be included. Examples of such protection may include but shall not be limited to:

1. Setbacks greater than those required by Figure J108.1.
2. Provisions for retaining walls or similar construction.
3. Erosion protection of the fill slopes.
4. Provision for the control of surface waters.

(Ord. 2019-0056 § 87, 2019.)

J108.4 Alternate setbacks.

The Building Official may approve alternate setbacks if he or she determines that no hazard to life or property will be created or increased. The Building Official may require an investigation and recommendation by a qualified engineer or Engineering Geologist to justify any proposed alternate setback.

(Ord. 2019-0056 § 87, 2019.)

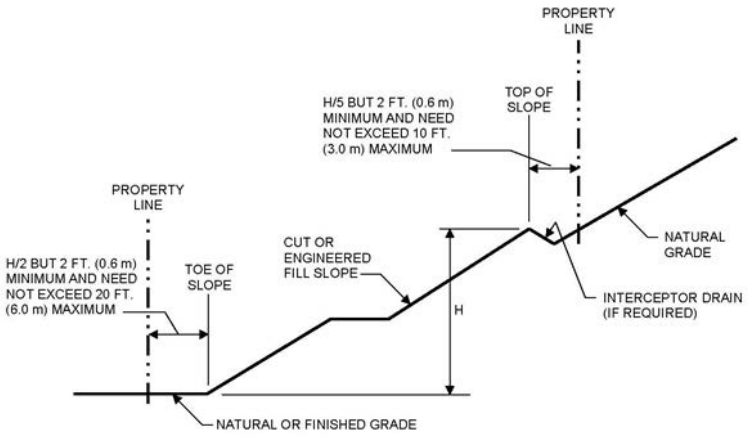


FIGURE J108.1
SETBACK DIMENSIONS

(Ord. 2019-0056 § 88, 2019.)

SECTION J109 DRAINAGE AND TERRACING

J109.1 General.

Unless otherwise recommended by a licensed Civil Engineer and approved by the Building Official, drainage facilities and terracing shall be provided in accordance with the requirements of Section J109.2 for all cut and fill slopes 3 units horizontal to 1 unit vertical (33-percent slope) and steeper.

For slopes flatter than 3 units horizontal to 1 unit vertical (33-percent slope) and steeper than 5 units horizontal to 1 unit vertical (20-percent slope), a paved swale or ditch shall be installed at 30 foot (9.1 m) vertical intervals to control surface drainage and debris. Swales shall be sized based on contributory area and have adequate capacity to convey intercepted waters to the point of disposal as defined in Section J109.5. Swales must be paved with reinforced concrete not less than 3 inches (0.08 m) in thickness, reinforced with 6-inch (0.2 m) by 6-inch (0.2 m) No. 10 by No. 10 welded wire fabric or equivalent reinforcing centered in the concrete slab or an equivalent approved by the Building Official. Swales must have a minimum flow line depth of 1 foot (0.3 m) and a minimum paved width of 18 inches (0.5 m). Swales shall have a minimum gradient of not less than 5 percent. There shall be no reduction in grade along the direction of flow unless the velocity of flow is such that slope debris will remain in suspension on the reduced grade.

Exception: Mine sites covered by a conditional use permit and reclamation plan shall use drainage and terracing that conforms to the *Guidelines for Drainage and Erosion Control for Open-Pit Mines, Irwindale, California* in lieu of the requirements outlined in Section J109.

(Ord. 2019-0056 § 89, 2019.)

J109.2 Drainage terraces.

Drainage terraces not less than 8 feet (2.4 m) in width shall be established at not more than 30-foot (9144 mm) vertical intervals on all cut or fill slopes to control surface drainage and debris. When only one terrace is required, it shall be at mid-height. For cut or fill slopes greater than 100 feet (30.5 m) and up to 120 feet (36.6 m) in vertical height, one terrace at approximately mid-height shall be 20 feet (6.1 m) in width. Terrace widths and spacing for cut and fill slopes greater than 120 feet (36.6 m) in height shall be designed by the Civil Engineer and approved by the Building Official. Suitable access shall be provided to permit proper cleaning and maintenance.

Drainage swales on terraces shall have a longitudinal grade of not less than 5 percent nor more than 12 percent and a minimum depth of 1 foot (0.3 m) at the flow line. There shall be no reduction in grade along the direction of flow unless the velocity of flow is such that slope debris will remain in suspension on the reduced grade. Drainage swales must be paved with reinforced concrete not less than 3 inches (0.8 m) in thickness, reinforced with 6-inch (0.2 m) by 6-inch (0.2 m) No. 10 by No. 10 welded wire fabric or equivalent reinforcing centered in the concrete slab or an approved equal paving. Drainage swales shall have a minimum depth at the deepest point of 1 foot (0.3 m) and a minimum paved width of 5 feet (1.5 m). Drainage swales on terraces shall be sized based on contributory area and have adequate capacity to convey intercepted waters to the point of disposal as defined in Section J109.5. Downdrains or drainage outlets shall be provided at approximately 300 foot (91.4 m) intervals along the drainage terrace or at equivalent locations. Down drains and drainage outlets shall be of approved materials and of adequate capacity to convey the intercepted waters to the point of disposal as defined in Section J109.5.

(Ord. 2019-0056 § 89, 2019.)

J109.3 Interceptor drains and overflow protection.

Berms, interceptor drains, swales, or other devices shall be installed along the top of cut slopes to prevent surface waters from overflowing onto and damaging the face of a slope. Berms used for slope protection shall not be less than 12 inches (0.3 m) above the level of the pad and shall slope back at least 4 feet (1.2 m) from the top of the slope.

Interceptor drains shall be installed along the top of graded slopes greater than 5 feet in height receiving drainage from a slope with a tributary width greater than 30 feet (9.1 m), measured horizontally. They shall have a minimum depth of 1 foot (305 mm) and a minimum width of 3 feet (915 mm). The slope shall be approved by the

Building Official, but shall be not less than one unit vertical in 50 units horizontal (2-percent slope). The drain shall be paved with concrete not less than 3 inches (76mm) in thickness, or by other materials suitable to the application, and reinforced as required for drainage terraces. Discharge from the drain shall be accomplished in a manner to prevent erosion and shall be approved by the Building Official.

(Ord. 2019-0056 § 89, 2019.)**J109.4 Drainage Across Property Lines.**

Drainage across property lines shall not exceed that which existed prior to grading. Excess or concentrated drainage shall be contained on site or directed to an approved drainage facility. Erosion of the ground in the area of discharge shall be prevented by installation of nonerosive down drains or other devices.

(Ord. 2019-0056 § 89, 2019.)

J109.5 Disposal.

All drainage facilities shall be designed to convey waters to the nearest- practicable street, storm drain, or natural watercourse or drainage way approved by the Building Official or other appropriate governmental agency, provided that the discharge of such waters at that location will not create or increase a hazard to life or property. Erosion of the ground in the area of discharge shall be prevented by installation of non-erosive down drains or other devices. Desilting basins, filter barriers, or other methods, as approved by the Building Official, shall be utilized to remove sediments from surface waters before such waters are allowed to enter streets, storm drains, or natural watercourses. If the drainage device discharges onto natural ground, riprap or a similar energy dissipator may be required.

Building pads shall have a minimum drainage gradient of 2 percent toward an approved drainage facility or a public street unless otherwise directed by the Building Official. A lesser slope may be approved by the Building Official for sites graded in relatively flat terrain, or where special drainage provisions are made, when the Building Official finds such modification will not result in a hazard to life or property.

(Ord. 2019-0056 § 89, 2019.)

SECTION J110 SLOPE PLANTING AND EROSION CONTROL

J110.1 General.

The faces of cut and fill slopes shall be prepared and maintained to control erosion. This control shall consist of effective planting, erosion control blankets, soil stabilizers, or other means as approved by the Building Official.

Exception:

1. Erosion control measures need not be provided on cut slopes not subject to erosion due to the erosion-resistant character of the materials, as approved by the Project Consultants to the satisfaction of the Building Official.

2. Mine sites covered by a conditional use permit and reclamation plan shall use the slope planting and erosion control measures that conforms to the *Guidelines for Drainage and Erosion Control for Open-Pit Mines, Irwindale, California* in lieu of the requirements outlined in Section J110.

Erosion control for the slopes shall be installed as soon as practicable and prior to calling for final inspection.(Ord. 2019-0056 § 90, 2019.)J110.2 Other Devices.

Where necessary, check dams, cribbing, riprap or other devices or methods shall be employed to control erosion and provide safety.

(Ord. 2019-0056 § 90, 2019.)

J110.3 Planting.

The surface of all cut slopes more than 5 feet (1.5 m) in height and fill slopes more than 3 feet (0.9 m) in height shall be protected against damage from erosion by planting with grass or ground cover plants. Slopes exceeding 15 feet (4.6 m) in vertical height shall also be planted with shrubs, spaced at not to exceed 10 feet (3 m) on center, or trees, spaced at not to exceed 20 feet (6.1 m) on center; or a combination of shrubs and trees at an equivalent spacing, in addition to the grass or ground cover plants. The plants selected and planting methods used shall be suitable for the soil and climatic conditions of the site.

Plant material shall be selected that will produce a coverage of permanent planting to effectively control erosion. Consideration shall be given to deep-rooted plant material needing limited watering, maintenance, high root to shoot ratio, wind susceptibility, and fire-retardant characteristics. All plant materials must be approved by the Building Official.

Planting may be modified for the site if specific recommendations are provided by both the Geotechnical Engineer and a Landscape Architect. Specific recommendations must consider soils and climatic conditions, irrigation requirements, planting methods, fire-retardant characteristics, water efficiency, maintenance needs, and other regulatory requirements. Recommendations must include a finding that the alternative planting will provide a permanent and effective method of erosion control. Modifications to planting must be approved by the Building Official prior to installation.

(Ord. 2019-0056 § 90, 2019.)

J110.4 Irrigation.

Slopes required to be planted by Section J110.3 shall be provided with an approved system of irrigation that is designed to cover all portions of the slope. Irrigation system plans shall be submitted to and approved by the Building Official prior to installation. A functional test of the system may be required.

For slopes less than 20 feet (6.1 m) in vertical height, hose bibs to permit hand watering will be acceptable if such hose bibs are installed at conveniently accessible locations where a hose no longer than 50 feet (15.2 m) is necessary for irrigation.

Irrigation requirements may be modified for the site if specific recommendations are provided by both the Geotechnical Engineer and a Landscape Architect. Specific recommendations must consider soils and climatic conditions, plant types, planting methods, fire-retardant characteristics, water efficiency, maintenance needs, and other regulatory requirements. Recommendations must include a finding that the alternative irrigation method will sustain the proposed planting and provide a permanent and effective method of erosion control. Modifications for irrigation systems must be approved by the Building Official prior to installation.

(Ord. 2019-0056 § 90, 2019.)

J110.5 Plans and specifications.

Planting and irrigation plans shall be submitted for slopes that are required to be planted and irrigated pursuant to Sections J110.3 and J110.4. Except as otherwise required by the Building Official for minor grading, the plans for slopes 20 feet (6.1 m) or more in vertical height shall be prepared and signed by a Civil Engineer or Landscape Architect. If requested by the Building Official, planting and irrigation details shall be included on the grading plan.

(Ord. 2019-0056 § 90, 2019.)

J110.6 Rodent control.

Fill slopes shall be protected from potential slope damage by a preventative program of rodent control.

(Ord. 2019-0056 § 90, 2019.)

J110.7 Release of security.

The planting and irrigation systems required by this Section shall be installed as soon as practical after rough grading. Prior to final approval of grading and before the release of the grading security, the planting shall be well established and growing on the slopes and there shall be evidence of an effective rodent control program.

(Ord. 2019-0056 § 90, 2019.)

J110.8 National Pollutant Discharge Elimination System (NPDES) compliance.

J110.8.1 General.

All grading plans and permits and the owner of any property on which such grading is performed shall comply with the provisions of this Section for NPDES compliance.

All best management practices shall be installed before grading begins or as instructed in writing by the Building Official for unpermitted grading as defined by Section J103.3. As grading progresses, all best management practices shall be updated as necessary to prevent erosion and to control construction-related pollutants from discharging from the site. All best management practices shall be maintained in good working order to the satisfaction of the Building Official until final grading approval has been granted by the Building Official and all permanent drainage and erosion control systems, if required, are in place. Failure to comply with this Section is subject to "Noncompliance Penalties" pursuant to Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

(Ord. 2019-0056 § 90, 2019.)

J110.8.2 Storm Water Pollution Prevention Plan (SWPPP).

The Building Official may require a SWPPP. The SWPPP shall contain details of best management practices, including desilting basins or other temporary drainage or control measures, or both, as may be necessary to control construction-related pollutants that originate from the site as a result of construction-related activities. When the Building Official requires a SWPPP, no grading permit shall be issued until the SWPPP has been submitted to and approved by the Building Official.

For unpermitted grading as defined by Section J103.3 upon written request, a SWPPP in compliance with the provisions of this Section and Section 106.4.3 for NPDES compliance shall be submitted to the Building Official. Failure to comply with this Section is subject to "Noncompliance Penalties" per Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

(Ord. 2019-0056 § 90, 2019.)

J110.8.3 Erosion and Sediment Control Plans (ESCP).

Where a grading permit is issued and the Building Official determines that the grading will not be completed prior to November 1, the owner of the site on which the grading is being performed shall, on or before October 1, file or cause to be filed with the Building Official an ESCP. The ESCP shall include specific best management practices to minimize the transport of sediment and protect public and private property from the effects of erosion, flooding, or the deposition of mud, debris, or construction-related pollutants. The best management practices shown on the ESCP shall be installed on or before October 15. The plans shall be revised annually or as required by the Building Official to reflect the current site conditions.

The ESCP shall be accompanied by an application for plan checking services and plan-checking fees in an amount determined by the Building Official, up to but not exceeding 10 percent of the original grading permit fee.

Failure to comply with this Section is subject to "Noncompliance Penalties" pursuant to Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

(Ord. 2019-0056 § 90, 2019.)

J110.8.4 Storm Water Pollution Prevention Plan (SWPPP), effect of noncompliance.

Should the owner fail to submit the SWPPP or the ESCP as required by Section J110.8, or fail to install the best management practices, it shall be deemed that a default has occurred under the conditions of the grading permit security. The Building Official may thereafter enter the property for the purpose of installing, by County forces or by other means, the drainage, erosion control, and other devices shown on the approved plans, or if there are no approved plans, as the Building Official may deem necessary to protect adjoining property from the effects of erosion, flooding, or the deposition of mud, debris, or constructed-related pollutants.

The Building Official shall also have the authority to impose and collect the penalties imposed by Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

(Ord. 2019-0056 § 90, 2019.)

J110.8.5 Noncompliance penalties.

The amount of the penalties shall be as follows:

1. If a SWPPP or an ESCP is not submitted as prescribed in Sections J110.8.2 and J110.8.3:

Grading Permit Volume	Penalty
1-10,000 cubic yards (1-7645.5 m^3)	$50.00 per day
10,001-100,000 cubic yards (7646.3-76455 m^3)	$250.00 per day
More than 100,000 cubic yards (76455 m^3)	$500.00 per day

2. If the best management practices for storm water pollution prevention and wet weather erosion control, as approved by the Building Official, are not installed as prescribed in this Section J110.8:

Grading Permit Volume	Penalty
1-10,000 cubic yards (1-7645.5 m^3)	$100.00 per day
10,001-100,000 cubic yards (7646.3-76455 m^3)	$250.00 per day

More than 100,000 cubic yards (76455 m^3)	$500.00 per day

NOTE: See Section 108 for inspection request requirements.

(Ord. 2019-0056 § 90, 2019.)

SECTION J111 REFERENCED STANDARDS

These regulations establish minimum standards and are not intended to prevent the use of alternate materials, methods, or means of conforming to such standards, provided such alternate has been approved by the Building Official.

The Building Official shall approve such an alternate provided they determine that the alternate is, for the purpose intended, at least the equivalent of that prescribed in this Code in quality, strength, effectiveness, durability, and safety.

The Building Official shall require that sufficient evidence or proof be submitted to substantiate any claims regarding the alternate.

The standards listed below are recognized standards. Compliance with these recognized standards shall be prima facie evidence of compliance with the standards set forth in Sections J104 and J107.

ASTM D 1557 - Latest Revision	Laboratory Characteristics Compaction of Soil Using Modified Effort	J107.5
ASTM D 1556 - Latest Revision	Density and Unit Weight of Soils In Place by the Sand Cone Method	J104.2.3, J104.3 and J107.9
ASTM D 2167 - Latest Revision	Density and Unit Weight of Soils In Place by the Rubber Balloon Method	J104.2.3, J104.3 and J107.9
ASTM D 2937 - Latest Revision	Density of Soils in Place by the Drive Cylinder Method	J104.2.3, J104.3 and J107.9
ASTM D 2922 - Latest Revision	Density of Soil and Soil Aggregate In Place by Nuclear Methods	J104.2.3, J104.3 and J107.9
ASTM D 3017 - Latest Revision	Water Content of Soil and Rock in Place by Nuclear Methods	J104.2.3, J104.3 and J107.9

Guidelines for Above-Water Backfilling of Open Pit Mines, Irwindale, California, Irwindale Drainage and Erosion Control Committee, November 23, 2005

Guidelines for Drainage and Erosion Control for Open Pit Mines, Irwindale, California, Irwindale Drainage and Erosion Control Committee, July 6, 2004

Guidelines for Underwater Backfilling of Open Pit Mines, Irwindale, California, Irwindale Drainage and Erosion Control Committee, May 20, 2005

Guidelines for Stability Analyses of Open-Pit Mine Slopes, Irwindale, California, Irwindale Slope Stability Committee, December 24, 2003

Irwindale Mining Bulletin No.1, Settlement of Mine Backfills, November 22, 2022

(Ord. 2019-0056 § 91, 2019.)

COUNTY OF LOS ANGELES

DEPARTMENT OF PUBLIC WORKS

"To Enrich Lives Through Effective and Caring Service"

MARK PESTRELLA, Director

900 SOUTH FREMONT AVENUE
ALHAMBRA, CALIFORNIA 91803-1331
Telephone: (626) 458-5100
http://dpw.lacounty.gov

ADDRESS ALL CORRESPONDENCE TO:
P.O. BOX 1460
ALHAMBRA, CALIFORNIA 91802-1460

ADOPTED
BOARD OF SUPERVISORS
COUNTY OF LOS ANGELES

IN REPLY PLEASE
REFER TO FILE:

November 4, 2025

40 November 4, 2025

EDWARD YEN
EXECUTIVE OFFICER

The Honorable Board of Supervisors
County of Los Angeles
383 Kenneth Hahn Hall of Administration
500 West Temple Street
Los Angeles, California 90012

SET: November 25, 2025 at 9:30 a.m.

Dear Supervisors:

MUNICIPAL SERVICES CORE SERVICE AREA
PROPOSED ORDINANCES - 2026 LOS ANGELES COUNTY
BUILDING, ELECTRICAL, PLUMBING, MECHANICAL, RESIDENTIAL,
GREEN BUILDING STANDARDS, AND EXISTING BUILDING CODES
(ALL SUPERVISORIAL DISTRICTS)
(3-VOTES)

SUBJECT

Public Works is seeking Board approval of proposed ordinances to amend the Los Angeles County Code and adopt the California Building Standards Codes, with amendments, as required by State law, for the enforcement of: Title 26 - Building Code; Title 27 - Electrical Code; Title 28 - Plumbing Code; Title 29 - Mechanical Code; Title 30 - Residential Code; Title 31 - Green Building Standards Code; and Title 33 - Existing Building Code.

IT IS RECOMMENDED THAT THE BOARD:

1. Find that the proposed ordinances are exempt from the provisions of the California Environmental Quality Act for the reasons stated in this letter Board letter and in the record of the project.

2. Introduce, waive reading, and place the ordinances amending the Los Angeles County Codes on the November 25, 2025, public hearing agenda to adopt by reference the 2025 California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes.

AFTER THE PUBLIC HEARING, IT IS RECOMMENDED THAT THE BOARD:

3. Find that the proposed changes and modifications to building standards contained in the Los Angeles County Codes by reference to the 2025 California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes are reasonably necessary due to local climatic, geological, and/or topographical conditions, as detailed in the seven respective ordinances; find that the proposed changes and modifications are substantially equivalent to changes and modifications that were previously filed with the California Building Standards Commission, which were in effect as of September 30, 2025, or that the changes and modifications relate to home hardening, as detailed in the ordinances, in compliance with the California Health and Safety Code; and find that adoption of the emergency housing appendices in Titles 26 and 30 are necessary because strict compliance with State and local standards and laws would prevent, hinder, or delay the mitigation of the effects of a declared shelter crisis or other emergency.

4. Approve the ordinances and establish their effective date as January 1, 2026.

5. Instruct the Director of Public Works or his designee to file the adopted ordinances containing the Board of Supervisors' findings with the California Building Standards Commission, along with other State agencies as required by law.

PURPOSE/JUSTIFICATION OF RECOMMENDED ACTION

The purpose of the recommended actions is to find that the proposed ordinances are exempt from the provisions of the California Environmental Quality Act (CEQA) and to adopt the enclosed ordinances, as required by State law, to add, update, and set forth provisions and regulations for the enforcement of the Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes within the unincorporated areas of the County of Los Angeles and the contract cities served by the County that elect to adopt the same ordinances by reference.

Implementation of Strategic Plan Goals

These recommendations support the County Strategic Plan: North Star 2, Foster Vibrant and Resilient Communities, Focus Area Goal D, Sustainability, by providing services to the public that have a wide-reaching positive effect on the entire community. The adoption of the County's building codes provides minimum construction and property maintenance standards that promote carbon-neutrality and climate resilience in structures, as well as the health and welfare of the general public throughout the

unincorporated areas of the County. By incorporating the most up-to-date building and safety standards, the County will be able to ensure that its Strategic Goals are fully addressed.

FISCAL IMPACT/FINANCING

There will be minimal impact on expenditures for Public Works to train appropriate personnel. All associated costs, including training costs and the procurement of the new code books, are included in the Public Works General Fund (A01, Services and Supplies) Fiscal Year 2025-26 Budget.

FACTS AND PROVISIONS/LEGAL REQUIREMENTS

The State recently adopted the 2025 Edition of the California Building Standards Code, which includes the 2025 California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes.

The California Health and Safety Code requires that the County adopt ordinances that impose the same building standards as contained in the 2025 California Building Standards Code, with the exception that the County may make amendments to these building standards that are more restrictive and are reasonably necessary due to local climatic, geological, and/or topographical conditions. The proposed changes in the ordinances are consistent with Assembly Bill 130, enacted on June 30, 2025, which prohibits most local modifications to the California Building Standards Codes for residential units. The proposed modifications to the California Building Standards Codes in these ordinances are consistent with Assembly Bill 130 because the proposed changes are substantially equivalent to the County's Building Codes that were in effect on September 30, 2025, or relate to home hardening.

The enclosed ordinances incorporate, by reference, the building standards contained in the 2025 California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes, together with critical and necessary County amendments. In accordance with Sections 17958.5 and 17958.7 of the California Health and Safety Code, the Board must determine and expressly find that these proposed amendments are needed due to local climatic, geological, and/or topographical conditions.

Section 8698.4 of the California Government Code permits local jurisdictions, upon declaration of a shelter crisis, to suspend health and safety standards for homeless shelters, provided those local jurisdictions have adopted reasonable local standards that at a minimum meet the standards provided in the emergency housing appendices of Title 30 - Residential Code (Appendix CJ) and Title 26 - Building Code (Appendix Q). In addition, at the time of the ordinance adoption, the local jurisdiction must determine

that strict compliance with existing State and local standards or laws would in any way prevent, hinder, or delay the mitigation of the effects of the shelter crisis.

The applicable finding(s) for each proposed amendment to the California Building Standards Code are clearly delineated in a chart, which is set forth in each of the proposed ordinances. The ordinances also contain various administrative changes that do not require special local findings. The last County update to the California Building Standards Code was approved by the Board on November 15, 2022.

In its continued efforts to provide consistency within the Los Angeles Basin and to provide the public with locally applicable and efficient codes, Public Works has, again, joined efforts with a majority of the cities within the County to undergo thorough examination of previous and proposed amendments to the building standards published by the State. Many of the proposed local amendments to the California Building Standards Code are based on the model language generated by the International Code Council Los Angeles Basin Chapter which has the support of many local jurisdictions. These local jurisdiction amendments are structured to be consistent with the 2025 Edition of the California Building Standards Code provisions. The goal of these multijurisdictional groups is to minimize differences in code language and interpretation within the region, thereby assisting the local construction industry by unifying and streamlining the permitting process.

California Health and Safety Code Sections 17958 and 18941.5 require that all amendments, together with the unamended portions of the California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes, become effective 180 days after the publication of the California Building Standards Code. The State has established the effective date to be January 1, 2026. Accordingly, it is recommended that the Board establish the operative date of the amendments, together with the unamended portions of the California Building Standards Code, to be January 1, 2026. The proposed amendments will then become operative when the Board's findings are filed with the California Building Standards Commission.

In accordance with the requirements of California Government Code Section 50022.3, the Board must schedule a public hearing after the first reading of the title of the adopting ordinances. Notice of the hearing is required to be published pursuant to California Government Code Section 6066. A copy of the California Building, Electrical, Plumbing, Mechanical, Residential, Green Building Standards, and Existing Building Codes are on file with the Executive Office of the Board and are available for public inspection and also available at the following website link: https://www.dgs.ca.gov/BSC/Codes.

A sample notice is submitted herewith.

ENVIRONMENTAL DOCUMENTATION

Adoption of these ordinances is exempt from CEQA in that it can be seen with certainty that there is no possibility that the ordinances may have a significant effect on the environment pursuant to CEQA Guidelines Section 15061(b)(3). Adoption of the proposed ordinances is covered by the general rule that CEQA applies only to projects that have the potential to cause a significant effect on the environment. Adoption of the proposed ordinances does not have such potential.

IMPACT ON CURRENT SERVICES (OR PROJECTS)

Other departments embarking on construction projects will be required to comply with the provisions of these ordinances if applications for permits to begin construction are submitted on or after the operative date of these ordinances.

Copies of the proposed code changes were circulated to professional associations within the design and construction communities for review and comments. No comments were received by Public Works, and changes to the proposed code changes were not necessary.

CONCLUSION

Upon approval of the enclosed ordinances, please return one adopted copy of this Board letter and one adopted copy of the ordinances to Public Works, Building and Safety Division.

Respectfully submitted,



MARK PESTRELLA, PE
Director of Public Works

MP:JM:el

Enclosures

c: Chief Executive Office (Christine Frias)
County Counsel
Executive Office, Board of Supervisors
Fire
Regional Planning

ANALYSIS

This ordinance repeals those provisions of Title 26 – Building Code – of the Los Angeles County Code that incorporated by reference portions of the 2022 Edition of the California Building Code, and the ordinance replaces them with provisions incorporating by reference portions of the 2025 California Building Code, as published by the California Building Standards Commission, with certain changes and modifications.

State law requires that the County's Building Code contain the same requirements as are contained in the building standards published in the most recent edition of the California Building Code. State law allows the County to change or modify these requirements in compliance with section 17958 of the California Health and Safety Code, based upon express findings, contained in the ordinance, that such changes are reasonably necessary due to local climatic, geological, or topographical conditions. These changes and modifications are substantially equivalent to changes or modifications previously filed with the California Building Standards Commission by the County of Los Angeles, which were in effect as of September 30, 2025, or that relate to home hardening, in compliance with recent changes to section 17958 of the California Health and Safety Code.

This ordinance also makes certain modifications to the administrative provisions of Title 26.

DAWYN R. HARRISON
County Counsel

By
MARGARET F. AMBROSE
Principal Deputy County Counsel

MFA/CBS:bc

Requested: 08/20/25
Revised: 10/22/25

HOA.105556295.10

ORDINANCE NO. _____

An ordinance amending Title 26 – Building Code – of the Los Angeles County Code, to adopt and incorporate by reference the 2025 California Building Code, with certain changes and modifications, and to make other revisions thereto.

The Board of Supervisors of the County of Los Angeles ordains as follows:

SECTION 1. Sections 119.1.2 through 119.1.14 of Chapter 1, Chapters 2 through 35, and Appendices C, H, I, J, and P, of the Los Angeles County Code, which incorporate by reference and modify portions of the 2022 California Building Code, are hereby repealed notwithstanding the Governor of the State of California's Executive Order N-29-25.

SECTION 2. Section 100 is hereby amended to read as follows:

100 ADOPTION AND INCORPORATION BY REFERENCE

Except as hereinafter changed or modified, Sections 1.2 through 1.14 of Chapter 1 of Division I of that certain building code known and designated as the ~~2022~~2025 California Building Code, as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 26 of the Los Angeles County Code as if fully set forth below, and shall be known as Sections 119.1.2 through 119.1.14, respectively, of Chapter 1 of Title 26 of the Los Angeles County Code.

Except as hereinafter changed or modified, Chapters 2 through 35, and Appendices C, H, I, J, ~~and~~ P, and Q, of that certain building code known and designated as the ~~2022~~2025 California Building Code, as published by the California Building

Standards Commission, are adopted and incorporated by reference into this Title 26 of the Los Angeles County Code as if fully set forth below, and shall be known as Chapters 2 through 35, and Appendices C, H, I, J, ~~and~~ P, and Q, of Title 26 of the Los Angeles County Code.

Projects to repair, restore, demolish, or replace residential structures or facilities substantially damaged or destroyed as a result of the 2025 Eaton and Palisades wildfires may comply with the 2022 Building Standards Code, as adopted by Los Angeles County, provided that the plans and specifications for the project comply with the 2025 fire and public safety requirements and minimum elevation requirements for the National Flood Insurance Program, consistent with the Governor's Executive Order N-29-25, or subsequent applicable legal authorities.

A copy of said California Building Code, hereinafter referred to as the CBC, including the above-designated appendices, shall be at all times maintained by the Building Official for use and examination by the public.

. . .

SECTION 3. Section 103 is hereby amended to read as follows:

SECTION 103 VIOLATIONS AND PENALTIES

103.1 Compliance with Code.

It shall be unlawful for a person to erect, construct, enlarge, alter, extend, repair, move, improve, remove, connect, convert, demolish, equip, or perform any other work on any building or structure or portion thereof, or perform any grading within a property subject to this Code as defined in Section 101.3, or cause the same to be done,

contrary to, or in violation of, any of the provisions of this Code.

SECTION 4. Section 104 is hereby amended to read as follows:

SECTION 104 ORGANIZATION AND ENFORCEMENT

. . .

104.2.1 General.

The Building Official is hereby authorized and directed to enforce all the provisions of this Code, including the Electrical Code, the Plumbing Code, the Mechanical Code, the Residential Code, the Existing Building Code, ~~and~~ the Green Building Standards Code, and any other codes as indicated in this Code, and to make all inspections pursuant to the provisions of each such Code. For such purposes, the Building Official shall have the powers of a law enforcement officer.

. . .

104.2.8 Alternate Materials, Designs and Methods of Construction.

. . .

104.2.8.1 Reports.

Supporting data, where necessary to assist in the approval of any material, appliance, installation, device, arrangement, design, or method of construction not specifically provided for in this Code, shall comply with Sections 104.2.8.1.1 and 104.2.8.1.2.

104.2.8.1.1 Evaluation reports.

Evaluation reports shall be issued by an approved agency as defined in Chapter 2, and use of the evaluation report shall require approval by the Building Official for the installation. The alternate material, appliance, installation, device, arrangement, design or method of construction shall be within the scope of the Building Official's recognition of the approved agency's expertise. Criteria used for the evaluation shall be identified within the report and, where required, provided to the Building Official.

104.2.8.1.2 Other reports.

Reports not complying with Section 104.2.8.1 shall describe criteria, including, but not limited to, any referenced testing or analysis, used to determine compliance with code intent and justify code equivalence. The report shall be prepared by a qualified engineer, specialist, laboratory or specialty organization acceptable to the Building Official. The Building Official is authorized to require design submittals to be prepared by, and bear the stamp of, a registered design professional.

104.2.8.2 Peer review.

In addition to the evaluation report, the Building Official is authorized to require submittal of a peer review report in conjunction with a request to use an alternative material, appliance, installation, device, arrangement, design or method of construction, prepared by a qualified peer reviewer that is approved by the Building Official.

SECTION 5. Section 106 is hereby amended to read as follows:

SECTION 106 PERMITS

. . .

106.3 Work Exempted.

. . .

Exemption from the permit requirements of this Code shall not be deemed to grant authorization for any work to be done in any manner in violation of the provisions of this Code, other laws, ordinances, or regulations, or required approvals from other County Departments and State and federal agencies. Structures shall still be regulated by Chapter 5 of the California Wildland Urban Interface Code, despite exemption from permits.

. . .

106.5.7 Combined swimming pool permit.

A combined swimming pool permit, which includes all building, electrical, plumbing, heating, and excavation work, may be issued for ~~a new~~construction, addition, alteration, or repair work of a swimming pool, spa or hot tub. ~~which will include all building, electrical, plumbing, heating, and excavation work.~~ The combined swimming pool permit shall be subject to the requirements of this Code, the Residential Code, the Existing Building Code, the Green Building Standards Code, the Electrical Code, the Plumbing Code and the Mechanical Code, except that the fee for the combined swimming pool permit shall be as provided in Section 107.1 of this Code.

SECTION 6. Table 1-A is hereby amended to read as follows:

TABLE 1-A
BUILDING PERMIT FEES*[1,2,3]

TOTAL VALUATION	FEE
$0 to and including $700	$63.21
More than $700 to and including $25,000 plus for each additional $1,000 or fraction thereof in excess of $1,000	$94.87 $24.44
$25,001 to and including $50,000 plus for each additional $1,000 or fraction thereof in excess of $25,000	$682.83 $18.77
$50,001 to and including $100,000 plus for each additional $1,000 or fraction thereof in excess of $50,000	$1,159.71 $14.22
More than $100,000 plus for each additional $1,000 or fraction thereof	$1,867.20 $9.66

* For additional permit issuance fee, see Section 107.1.

[1] The building permit fee specified in the table above shall be increased by a surcharge of 0.013 percent of the total valuation of a Group R Occupancy or by 0.028 percent of the total valuation of all other occupancies or $0.50, whichever amount is higher, pursuant to Section 2705, Chapter 8, Division 2 of the Public Resources Code of the State of California (State Strong-Motion Instrumentation Program). This surcharge shall not be included in the building permit fee for the purpose of determining the plan check fee.

[2] The permit fee specified in the table above shall be increased by 10 percent for all construction work required to comply with the rules and regulations adopted by the ~~Energy Resources Conservation and Development Commission of the State of California~~California Energy Commission. This increase in fee shall be included in the building permit fee for the purpose of determining the plan checking fee.

[3] The permit fee specified in the table above shall be increased by 5 percent for all construction work required to comply with Title 24, California Code of Regulations, Section 101, et seq., the State's disabled access and adaptability requirements. The increase in fee shall be included in the building permit fee for the purpose of determining the plan check fee.

107.14 Noncompliance Fee.

. . .

107.14.1.

In accordance with Health and Safety Code 17973, where noncompliance occurs in a project related to exterior elevated elements, the Building Official may assess a civil penalty of not less than $100 nor more than $500 per day until the repairs are completed, unless an extension of time is granted by the Building Official.

SECTION 7. Section 108 is hereby amended to read as follows:

SECTION 108 INSPECTIONS

. . .

108.4 Required Inspections.

. . .

108.4.8 Types IV-A, IV-B and IV-C connection protection inspection.

In buildings of Types IV-A, IV-B and IV-C construction, where connection fire-resistance ratings are provided by wood cover calculated to meet the requirements of Section 2304.10.1, the Building Official shall inspect the wood cover after the cover is installed, but before any other coverings or finishes are installed.

108.4.9 Weather-exposed balcony and walking surface waterproofing.

Where balconies or other elevated walking surfaces have weather-exposed surfaces, and the structural framing is protected by an impervious moisture barrier, all elements of the impervious moisture barrier system shall not be concealed until inspected and approved by the Building Official.

Exception: Where special inspections are provided in accordance with Section 1705.1.1, Item 3.

108.4.~~8~~10 Final inspection.

. . .

108.9 Approval required.

Work shall not be done beyond the point indicated in each successive inspection without first obtaining the approval of the Building Official. The Building Official, upon notification, shall make the requested inspections and shall either indicate the portion of the construction that is satisfactory and approved, or notify the permit holder or the permit holder's agent wherein the same fails to comply with this Code. Any portions that do not comply shall be corrected and such portion shall not be covered or concealed until authorized by the Building Official.

108.~~9~~10 Reinspections.

. . .

SECTION 8. Section 109 is hereby amended to read as follows:

SECTION 109 USE AND OCCUPANCY

109.3 Certificate Issued.

. . .

7. The edition of this Code under which the permit was issued.

8. The type of construction as defined in Chapter 6.

9. The design occupant load.

10. Where an automatic sprinkler system is provided, whether the sprinkler system is required.

11. Any special stipulations and conditions of the building permit.

SECTION 9. Section 113 is hereby amended to read as follows:

SECTION 113 EARTHQUAKE FAULTS

113.5 Construction Limitations.

. . .

~~The Building Official may waive the requirements for an active earthquake fault investigation for additions to existing one- or two-family dwelling units when all of the following conditions are met:~~

~~1. There is no increase in the number of bedrooms or bedroom equivalent rooms in the dwelling unit;~~

~~2. The addition does not increase the permitted gross floor area of the structure by more than 20 percent as it existed on January 1, 2017, or 400 square feet, whichever is less;~~

~~3. The Building Official has determined that the addition is not located over or upon the trace of a known active earthquake fault as shown on the aforementioned maps; and~~

~~4. The owner shall record in the office of the Department of Registrar-Recorder a statement acknowledging that the owner is aware that the records of the Building Official indicate that the property is potentially subject to a hazard from a known active earthquake fault. The owner shall also record in the office of the Department of Registrar-Recorder an agreement relieving the County and all officers and employees thereof of any liability for any damage or loss which may result from the issuance of such a permit. This agreement shall provide that it is binding on all successors in interest of the owner and shall continue in effect until the Building Official records in the office of the Department of Registrar-Recorder a statement that the Building Official has determined that a hazard from a known active earthquake fault no longer exists.~~

. . .

113.5.1 Additions to One- or Two-Family Dwellings.

The Building Official may waive the requirements for an active earthquake fault investigation for additions to existing one- or two-family dwelling units when all of the following conditions are met:

1. There is no increase in the number of bedrooms or bedroom equivalent rooms in the dwelling unit;

2. The addition does not increase the permitted gross floor area of the structure by more than 20 percent as it existed on January 1, 2017, or 400 square feet, whichever is less;

3. The Building Official has determined that the addition is not located over or upon the trace of a known active earthquake fault as shown on the aforementioned maps; and

4. The owner shall record in the office of the Department of Registrar-Recorder a statement acknowledging that the owner is aware that the records of the Building Official indicate that the property is potentially subject to a hazard from a known active earthquake fault. The owner shall also record in the office of the Department of Registrar-Recorder an agreement relieving the County and all officers and employees thereof of any liability for any damage or loss that may result from the issuance of such a permit. This agreement shall provide that it is binding on all successors in interest of the owner and shall continue in effect until the Building Official records in the office of the Department of Registrar-Recorder a statement that the Building Official has determined that a hazard from a known active earthquake fault no longer exists.

113.5.2 Repair of single-family dwellings, their accessory dwelling units, or accessory structures destroyed by the wildfires.

The Building Official may waive the requirements for an active earthquake fault investigation for the repair of a single-family dwelling, its accessory dwelling units, or accessory structures that were damaged or destroyed by wildfires as expressly

designated by the Los Angeles County Board of Supervisors through a proclaimed local emergency motion or resolution, when all of the following conditions are met:

1. The structure is a wood-frame or steel-frame structure not exceeding two stories and a basement.

2. The structure is not part of a development of four or more dwellings.

3. The permit applicant is the owner of the property at the time of the loss, the owner's immediate heir(s), or their authorized representative.

4. The application for a permit is filed no later than ten (10) years following the date of the loss.

5. The repaired structure does not exceed the area of the previously existing, permitted structure, plus 10 percent.

6. The owner shall record in the office of the Department of Registrar-Recorder a statement acknowledging that the owner is aware that the records of the Building Official indicate that the property is potentially subject to a hazard from a known active earthquake fault. The owner shall also record in the office of the Department of Registrar-Recorder an agreement relieving the County and all officers and employees thereof of any liability for any damage or loss that may result from the issuance of such a permit. This agreement shall provide that it is binding on all successors in interest of the owner and shall continue in effect until the Building Official records in the office of the Department of Registrar-Recorder a statement that the Building Official has determined that a hazard from a known active earthquake fault no longer exists.

7. In this section, repair shall be defined as the reconstruction, replacement, or renewal of any part or the whole of an existing building for the purpose of either maintenance related to the fire or to correct damage caused by the fire.

113.5.2.1. In addition to the work allowed under 113.5.2, the Building Official may permit the construction of a new accessory dwelling unit on a property where a single-family dwelling was destroyed by wildfires as part of a project permitted under 113.5.2.

113.5.2.2. The provisions of this Section may also apply to other disasters as expressly designated by the Los Angeles County Board of Supervisors through a proclaimed local emergency motion or resolution.

SECTION 10. Section 114 is hereby added to read as follows:

SECTION 114 SERVICE UTILITIES

114.1. Connection of service utilities.

A person shall not make connections from a utility, a source of energy, fuel, or power, or a water system or sewer system to any building or system that is regulated by this Code for which a permit is required, until approved by the Building Official.

114.2. Temporary connection.

The Building Official shall have the authority to allow the temporary connection of a building or system to a utility, a source of energy, fuel, or power, or a water or sewer system for the purpose of testing systems or for use under a temporary approval. The Building Official shall approve the duration of the temporary timeframe.

114.3. Authority to disconnect service utilities.

The Building Official shall have the authority to disconnect utility services to a building, structure or system regulated by this Code in case of emergency where necessary to eliminate an immediate hazard to life or property or where such utility connection has been made without the approval required by Section 114.1 or 114.2. The Building Official shall notify the serving utility, and wherever possible the owner or the owner's authorized agent and occupant of the building, structure or service system of the decision to disconnect prior to taking such action. If not notified prior to disconnecting, the owner or the owner's authorized agent or occupant of the building, structure or service system shall be notified in writing, as soon as practical thereafter.

Sections 115 through 118 are hereby reserved.

SECTION 11. Section 701A is hereby added to read as follows:

701A. MODIFICATIONS TO THE CALIFORNIA WILDLAND-URBAN INTERFACE CODE.

Chapter 5 of the California Wildland-Urban Interface Code shall be modified as indicated in Sections 701A.1 through 701A.7 and shall apply to all buildings and structures as provided in this section.

SECTION 12. Section 701A.1 is hereby added to read as follows:

701A.1 California Wildland-Urban Interface Code, Section 501.1.

Modify the California Wildland-Urban Interface Code Section 501.1 to read as follows:

501.1 Scope and Application.

New b~~B~~uildings and structures in a wildland-urban interface area shall be constructed in accordance with the ~~California~~ Building Code and this Code. Additions, alterations, or repairs made to existing buildings erected, constructed, or moved within a Fire Hazard Severity Zone or Wildland-Urban Interface area shall be constructed in accordance with the Building Code and this Code. New buildings for which an application for a building permit is submitted on or after July 1, 2008, and any additions, alterations, or repairs made to existing buildings for which an application for a building permit is submitted on or after January 1, 2026, located in any Fire Hazard Severity Zone or Wildland-Urban Interface area shall comply with all sections of the Building Code and this Code.

Exceptions:

1. Group U accessory structures not exceeding 120 square feet (11m^2) in floor area where located not less than 50 feet (15 240 mm) from applicable buildings.

2. Group U agricultural buildings not less than 50 feet (15 240 mm) from applicable buildings.

501.1.1 Alternates for materials, design, tests, and methods of construction.

The Building Official is permitted to modify the provisions of this Chapter for site-specific conditions in accordance with Chapter 1, Section 104.2.2.

SECTION 13. Section 701A.2 is hereby added to read as follows:

701A.2 California Wildland-Urban Interface Code, Section 503.1

Modify the California Wildland-Urban Interface Code Section 503.1 to read as follows:

503.1 General.

Buildings and structures hereafter constructed, modified or relocated into or within wildland-urban interface areas shall meet the construction requirements in accordance with Chapter 5. Materials required to be ignition-resistant building materials shall comply with the requirements of Section 503.2.

Exceptions:

1. New accessory buildings and miscellaneous structures complying with Section 504.11.

2. ~~Additions to and remodels of buildings originally constructed prior to July 1, 2008.~~Reserved.

3. Group C occupancy special buildings conforming to the limitations specified in Section 450.4.1 of the ~~California~~ Building Code.

SECTION 14. Section 701A.3 is hereby added to read as follows:

701A.3 California Wildland-Urban Interface Code, Section 503.2.3.

Modify the California Wildland-Urban Interface Code Section 503.2.3 to read as follows:

503.2.3 ~~Fire-retardant-treated wood roof coverings.~~

~~Roof assemblies containing fire-retardant-treated wood shingles and shakes shall comply with the requirements of Section 1505.6 of the California Building Code and shall be classified as Class A roof assemblies as required in Section 1505.2 of the California Building Code.~~**Reserved.**

SECTION 15. Section 701A.4 is hereby added to read as follows:

701A.4 California Wildland-Urban Interface Code, Section 503.3.1.

Modify the California Wildland-Urban Interface Code Section 503.3.1 to read as follows:

503.3.1 Qualification by testing.

Material and material assemblies tested in accordance with the requirements of Section 503 shall be accepted for use when the results and conditions of those tests are met. Product evaluation testing of material and material assemblies shall be approved or listed by the State Fire Marshal, the Building Official, or identified in a current report issued by an approved agency.

SECTION 16. Section 701A.5 is hereby added to read as follows:

701A.5 California Wildland-Urban Interface Code, Section 503.3.4.

Modify the California Wildland-Urban Interface Code Section 503.3.4 to read as follows:

503.3.4 ~~Fire-retardant-treated wood shingles and shakes.~~Reserved.

~~Fire-retardant-treated wood shingles and shakes shall be approved and listed by the State Fire Marshal in accordance with Section 208(c), Title 19 California Code of Regulations.~~

SECTION 17. Section 701A.6 is hereby added to read as follows:

701A.6 California Wildland-Urban Interface Code, Section 504.2.1.

Modify the California Wildland-Urban Interface Code Section 504.2.1 to read as follows:

504.2.1 Roof covering voids.

Where there is a void under the roof covering it shall comply with Section 504.2.1.1 or 504.2.1.2. Roof coverings shall be Class A as specified in the Building Code. Wood shingles and wood shakes are prohibited in any Fire Hazard Severity Zone regardless of classification.

SECTION 18. Section 701A.7 is hereby added to read as follows:

701A.7 California Wildland-Urban Interface Code, Section 504.5.2.

Modify the California Wildland-Urban Interface Code Section 504.5.2 to read as follows:

504.5.2 Exterior wall coverings.

Exterior wall coverings shall comply with one or more of the following requirements:

1. Noncombustible material.

2. Ignition-resistant building material labeled for exterior use.

3. Fire-retardant treated wood labeled for exterior use and complying with the requirements of Section 2303.2 of the ~~California~~ Building Code.

4. ~~Fire-retardant-treated wood shingles and shakes which have been qualified in accordance with Section 1505.6 of the California Building Code for use as "Class B" roof covering shall be an acceptable alternative wall covering material where installed over solid sheathing.~~Reserved.

Exception:

Exterior wall coverings which are a component of an approved wall assembly complying with Section 504.5.

SECTION 19. Section 1031.2.1 is hereby amended to read as follows:

1031.2.1 Operational constraints and opening control devices.

. . .

Where security bars (burglar bars) are installed on emergency egress and rescue windows or doors, ~~on or after July 1, 2000,~~ such devices shall comply with California Building Standards Code, Part 12, Chapter 12-3 and other applicable provisions of Part 2.

. . .

SECTION 20. Table 1507.3.7 is hereby amended to read as follows:

TABLE 1507.3.7
CLAY AND CONCRETE TILE ATTACHMENT [a, b, c]

GENERAL – CLAY OR CONCRETE ROOF TILE				
Maximum Allowable Stress Design Wind Speed, V_{asd}[f] (mph)	**Mean roof height (feet)**	**Roof slope <3:12**	**Roof slope 3:12 and over**	
85	0 - 60	*Minimum slope: 2.5:12* ~~One fastener per tile. Flat tile without vertical laps,~~ Ttwo fasteners per tile.	Two fasteners per tile. ~~Only one fastener on slopes of 7:12 and less for tiles with installed weight exceeding 7.5 lbs/sq. ft. having a width no greater than 16 inches.~~	
100	0 - 40			
. . .	. . .	. . .		
INTERLOCKING CLAY OR CONCRETE ROOF TILE WITH PROJECTING ANCHOR LUGS [d, e] (Installations on ~~spaced/~~solid sheathing with battens ~~or spaced sheathing~~)				
Maximum Allowable Stress Design Wind Speed, V_{asd}[f] (mph)	**Mean roof height (feet)**	**Roof slope <5:12**	**Roof slope 5:12<12:12**	**Roof slope 12:12 and over**
85	0 - 60	~~Fasteners are not required. Tiles with installed weight less than 9 lbs/sq. ft. require not fewer than~~Minimum slope is 4:12. Oone fastener per tile.	One fastener per tile ~~every other row. Perimeter tiles require one fastener~~. Tiles with installed weight less than 9 lbs/sq.ft. require not fewer than one fastener per tile.	One fastener required for every tile. Tiles with installed weight less than 9 lbs./sq. ft. require not fewer than one fastener per tile.
100	0 - 40			
. . .	. . .	. . .		
INTERLOCKING CLAY OR CONCRETE ROOF TILE WITH PROJECTING ANCHOR LUGS (Installations on solid sheathing without battens)				
Maximum Allowable Stress Design Wind Speed, V_{asd}[f] (mph)	**Mean roof height (feet)**	**~~All~~ Minimum roof slopes 4 units vertical in 12 units horizontal** **Maximum slope 7 units vertical in 12 units horizontal**		
. . .	. . .	. . .		

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 mile per hour = 0.447 m/s, 1 pound per square foot = 4.882 kg/m^2.

[a]Minimum fastener size. Hot dipped galvanized ring shank or other ~~C~~corrosion-resistant nails not less than No. 11 gage with $^5/_{16}$-inch head. Fasteners shall be long enough to penetrate into the sheathing ¾ inch or through the thickness of the sheathing,

whichever is less. Attaching wire for clay and concrete tile shall not be smaller than 0.083 inch and shall be copper, brass, or stainless steel.

. . .

SECTION 21. Section 1613.8 is hereby added to read as follows:

1613.8 Modifications to ASCE 7.

The text of ASCE 7 shall be modified as indicated in Sections 1613.8.1 through 1613.8.3.

1613.8.1 ASCE 7, 12.2.3.1, Exception 3.

Modify ASCE 7, Section 12.2.3.1, Exception 3, to read as follows:

3. Detached one- and two-family dwellings up to two stories in height of light frame construction.

1613.8.2 ASCE 7, Section 12.11.2.2.3.

Modify ASCE 7, Section 12.11.2.2.3, to read as follows:

12.11.2.2.3 Wood diaphragms.

The anchorage of concrete or masonry structural walls to wood diaphragms shall be in accordance with AWC SDPWS 4.1.5.1 and this ~~s~~Section. Continuous ties required by this ~~s~~Section shall be in addition to the diaphragm sheathing. Anchorage shall not be accomplished by use of toenails or nails subject to withdrawal, nor shall wood ledgers or framing be used in cross-grain bending or cross-grain tension. The diaphragm sheathing shall not be considered effective as providing ties or struts required by this Section.

For structures assigned to Seismic Design Category D, E, or F, wood diaphragms supporting concrete or masonry walls shall comply with the following:

1. The spacing of continuous ties shall not exceed 40 feet. Added chords of diaphragms may be used to form subdiaphragms to transmit the anchorage forces to the main continuous crossties.

2. The maximum diaphragm shear used to determine the depth of the subdiaphragm shall not exceed 75 percent of the maximum diaphragm shear.

1613.8.3 ASCE 7, 12.12.3.

Modify ASCE 7, Section 12.12.2, to read as follows:

All portions of the structure shall be designed and constructed to act as an integral unit in resisting seismic forces unless separated structurally by a distance sufficient to avoid damaging contact as set forth in this section.

Separations shall allow for the Maximum Design Earthquake Displacements, δMDE, as determined in accordance with ~~Section 12.8.6~~Equation 12.12-1:

$$\delta_{MDE} = C_d \delta_e + \delta_{di}$$

(Equation 12.12-1)

SECTION 22. Section 1613.9 is hereby added to read as follows:

1613.9 Seismic design provisions for hillside buildings.

1613.9.1 Purpose.

The purpose of this Section is to establish minimum regulations for the design and construction of new buildings and additions to existing buildings when constructing such buildings on or into slopes steeper than one unit vertical in three units horizontal (33.3 percent). These regulations establish minimum standards for seismic force resistance to reduce the risk of injury or loss of life in the event of earthquakes.

1613.9.2 Scope.

The provisions of this Section shall apply to the design of the lateral-force-resisting system for hillside buildings at and below the base level diaphragm. The design of the lateral-force-resisting system above the base level diaphragm shall be in accordance with the provisions for seismic and wind design as required elsewhere in this Chapter.

Exceptions:

1. Non-habitable accessory buildings and decks not supporting or supported from the main building are exempt from these regulations.

2. Additions to existing buildings that do not exceed 10 percent of the existing floor area provided that the addition is being supported completely by the existing foundation.

1613.9.3 Definitions.

For the purposes of this Section certain terms are defined as follows:

BASE LEVEL DIAPHRAGM is the floor at, or closest to, the top of the highest level of the foundation.

DIAPHRAGM ANCHORS are assemblies that connect a diaphragm to the adjacent foundation at the uphill diaphragm edge.

DOWNHILL DIRECTION is the descending direction of the slope approximately perpendicular to the slope contours.

FOUNDATION is concrete or masonry that supports a building, including footings, stem walls, retaining walls, and grade beams.

FOUNDATION EXTENDING IN THE DOWNHILL DIRECTION is a foundation running downhill and approximately perpendicular to the uphill foundation.

HILLSIDE BUILDING is any building or portion thereof constructed on or into a slope steeper than one unit vertical in three units horizontal (33.3 percent). If only a portion of the building is supported on or into the slope, these regulations apply to the entire building.

PRIMARY ANCHORS are diaphragm anchors designed for and providing a direct connection as described in Sections 1613.9.5 and 1613.9.7.3 between the diaphragm and the uphill foundation.

SECONDARY ANCHORS are diaphragm anchors designed for and providing a redundant diaphragm to foundation connection, as described in Sections 1613.9.6 and 1613.9.7.4.

UPHILL DIAPHRAGM EDGE is the edge of the diaphragm adjacent and closest to the highest ground level at the perimeter of the diaphragm.

UPHILL FOUNDATION is the foundation parallel and closest to the uphill diaphragm edge.

1613.9.4 Analysis and design.

1613.9.4.1 General.

Every hillside building within the scope of this Section shall be analyzed, designed, and constructed in accordance with the provisions of this Chapter. When the code-prescribed wind design produces greater effects, the wind design shall govern, but detailing requirements and limitations prescribed in this Section and all referenced

Sections shall be followed.

1613.9.4.2 Base level diaphragm-downhill direction.

The following provisions shall apply to the seismic analysis and design of the connections for the base level diaphragm in the downhill direction.

1613.9.4.2.1 Base for lateral force design defined.

For seismic forces acting in the downhill direction, the base of the building shall be the floor at, or closest to, the top of the highest level of the foundation.

1613.9.4.2.2 Base shear.

In developing the base shear for seismic design, the response modification coefficient (R) shall not exceed 5 for bearing wall and building frame systems. The total base shear shall include the forces tributary to the base level diaphragm, including forces from the base level diaphragm.

1613.9.5 Base shear resistance for primary anchors.

1613.9.5.1 General.

The base shear in the downhill direction shall be resisted through primary anchors from diaphragm struts provided in the base level diaphragm to the foundation.

1613.9.5.2 Location of primary anchors.

A primary anchor and diaphragm strut shall be provided in line with each foundation extending in the downhill direction. Primary anchors and diaphragm struts shall also be provided where interior vertical lateral-force-resisting elements occur above and in contact with the base level diaphragm. The spacing of primary anchors and diaphragm struts or collectors shall in no case exceed 30 feet (9,144 mm).

1613.9.5.3 Design of primary anchors and diaphragm struts.

Primary anchors and diaphragm struts shall be designed in accordance with the requirements of Section 1613.9.8.

1613.9.5.4 Limitations.

The following lateral-force-resisting elements shall not be designed to resist seismic forces below the base level diaphragm in the downhill direction:

1. Wood structural panel wall sheathing;
2. Cement plaster and lath;
3. Gypsum wallboard; and
4. Tension-only braced frames.

Braced frames designed in accordance with the requirements of Section 2205.2.2 may be used to transfer forces from the primary anchors and diaphragm struts to the foundation provided lateral forces do not induce flexural stresses in any member of the frame or in the diaphragm struts. Deflections of frames shall account for the variation in slope of diagonal members when the frame is not rectangular.

1613.9.6 Base shear resistance for secondary anchors.

1613.9.6.1 General.

In addition to the primary anchors required by Section 1613.9.5, the base shear in the downhill direction shall be resisted through secondary anchors in the uphill foundation connected to diaphragm struts in the base level diaphragm.

Exception: Secondary anchors are not required where foundations extending in the downhill direction spaced at not more than 30 feet (9,144 mm) on center extend up to and are directly connected to the base level diaphragm for at least 70 percent of the diaphragm depth.

1613.9.6.2 Secondary anchor capacity and spacing.

Secondary anchors at the base level diaphragm shall be designed for a minimum force equal to the base shear, including forces tributary to the base level diaphragm, but not less than 600 pounds per lineal foot (8.76 kN/m). The secondary anchors shall be uniformly distributed along the uphill diaphragm edge and shall be spaced at a maximum of four feet (1,219 mm) on center.

1613.9.6.3 Design.

Secondary anchors and diaphragm struts shall be designed in accordance with Section 1613.9.8.

1613.9.7 Diaphragms below the base level for downhill direction.

The following provisions shall apply to the lateral analysis and design of the connections for all diaphragms below the base level diaphragm in the downhill direction.

1613.9.7.1 Diaphragm defined.

Every floor level below the base level diaphragm shall be designed as a diaphragm.

1613.9.7.2 Design force.

Each diaphragm below the base level diaphragm shall be designed for all tributary loads at that level using a minimum seismic force factor not less than the base shear coefficient.

1613.9.7.3 Design force-resistance for primary anchors.

The design force described in Section 1613.9.7.2 shall be resisted through primary anchors from diaphragm struts provided in each diaphragm to the foundation. Primary anchors shall be provided and designed in accordance with the requirements and limitations of Section 1613.5.5.

1613.9.7.4 Design force-resistance for secondary anchors.

1613.9.7.4.1 General.

In addition to the primary anchors required in Section 1613.9.7.3, the design force in the downhill direction shall be resisted through secondary anchors in the uphill foundation connected to diaphragm struts in each diaphragm below the base level.

Exception: Secondary anchors are not required where foundations extending in the downhill direction, spaced at not more than 30 feet (9,144 mm) on center, extend up to and are directly connected to each diaphragm below the base level for at least 70 percent of the diaphragm depth.

1613.9.7.4.2 Secondary anchor capacity.

Secondary anchors at each diaphragm below the base level diaphragm shall be designed for a minimum force equal to the design force but not less than 300 pounds per lineal foot (4.38 kN/m). The secondary anchors shall be uniformly distributed along the uphill diaphragm edge and shall be spaced at a maximum of four feet (1,219 mm) on center.

1613.9.7.4.3 Design.

Secondary anchors and diaphragm struts shall be designed in accordance with Section 1613.9.8.

1613.9.8 Primary and secondary anchorage and diaphragm strut design.

Primary and secondary anchors and diaphragm struts shall be designed in accordance with the following provisions:

1. Fasteners. All bolted fasteners used to develop connections to wood members shall be provided with square plate washers at all bolt heads and nuts. Washers shall be minimum 0.229 inch by 3 inches by 3 inches (5.82 mm by 76 mm by 76 mm) in size. Nuts shall be tightened to finger tight plus one-half (1/2) wrench turn prior to covering the framing.

2. Fastening. The diaphragm to foundation anchorage shall not be accomplished by the use of toenailing, nails subject to withdrawal, or wood in cross-grain bending or cross-grain tension.

3. Size of Wood Members. Wood diaphragm struts, collectors, and other wood members connected to primary anchors shall not be less than three-inch (76 mm) nominal width. The effects of eccentricity on wood members shall be evaluated as required per Item 9.

4. Design. Primary and secondary anchorage, including diaphragm struts, splices, and collectors shall be designed for 125 percent of the tributary force.

5. Allowable Stress Increase. The one-third allowable stress increase permitted under Section 1605.2 shall not be taken when the working (allowable) stress design method is used.

6. Steel Element of Structural Wall Anchorage System. The strength design forces for steel elements of the structural wall anchorage system, with the exception of anchor bolts and reinforcing steel, shall be increased by 1.4 times the forces otherwise required.

7. Primary Anchors. The load path for primary anchors and diaphragm struts shall be fully developed into the diaphragm and into the foundation. The foundation must be shown to be adequate to resist the concentrated loads from the primary anchors.

8. Secondary Anchors. The load path for secondary anchors and diaphragm struts shall be fully developed in the diaphragm but need not be developed beyond the connection to the foundation.

9. Symmetry. All lateral force foundation anchorage and diaphragm strut connections shall be symmetrical. Eccentric connections may be permitted when demonstrated by calculation or tests that all components of force have been provided for in the structural analysis or tests.

10. Wood Ledgers. Wood ledgers shall not be used to resist cross-grain bending or cross-grain tension.

1613.9.9 Lateral-force-resisting elements normal to the downhill direction.

1613.9.9.1 General.

In the direction normal to the downhill direction, lateral-force-resisting elements shall be designed in accordance with the requirements of this Section.

1613.9.9.2 Base shear.

In developing the base shear for seismic design, the response modification coefficient (R) shall not exceed 5 for bearing wall and building frame systems.

1613.9.9.3 Vertical distribution of seismic forces.

For seismic forces acting normal to the downhill direction the distribution of seismic forces over the height of the building using Section 12.8.3 of ASCE 7 shall be determined using the height measured from the top of the lowest level of the building foundation.

1613.9.9.4 Drift limitations.

The story drift below the base level diaphragm shall not exceed 0.007 times the story height at strength design force level. The total drift from the base level diaphragm to the top of the foundation shall not exceed 3/4 inch (19 mm). Where the story height or the height from the base level diaphragm to the top of the foundation varies because of a stepped footing or story offset, the height shall be measured from the average height of the top of the foundation. The story drift shall not be reduced by the effect of horizontal diaphragm stiffness.

1613.9.9.5 Distribution of lateral forces.

1613.9.9.5.1 General.

The design lateral force shall be distributed to lateral-force-resisting elements of varying heights in accordance with the stiffness of each individual element.

1613.9.9.5.2 Wood structural panel sheathed walls.

The stiffness of a stepped wood structural panel shear wall may be determined by dividing the wall into adjacent rectangular elements, subject to the same top of wall deflection. Deflections of shear walls may be estimated by AWC SDPWS Section 4.3.2. Sheathing and fastening requirements for the stiffest section shall be used for the entire wall. Each section of wall shall be anchored for shear and uplift at each step. The minimum horizontal length of a step shall be 8 feet (2438 mm) and the maximum vertical height of a step shall be 2 feet, 8 inches (813 mm).

1613.9.9.5.3 Reinforced concrete or masonry shear walls.

Reinforced concrete or masonry shear walls shall have forces distributed in proportion to the rigidity of each section of the wall.

1613.9.9.6 Limitations.

The following lateral force-resisting-elements shall not be designed to resist lateral forces below the base level diaphragm in the direction normal to the downhill direction:

1. Cement plaster and lath;
2. Gypsum wallboard; and
3. Tension-only braced frames.

Braced frames designed in accordance with the requirements of Section 2202.2.1.2 of this Code may be designed as lateral-force-resisting elements in the direction normal to the downhill direction, provided lateral forces do not induce flexural stresses in any member of the frame. Deflections of frames shall account for the variation in slope of diagonal members when the frame is not rectangular.

1613.9.10 Specific design provisions.

1613.9.10.1 Footings and grade beams.

All footings and grade beams shall comply with the following:

1. Grade beams shall extend at least 12 inches (305 mm) below the lowest adjacent grade and provide a minimum 24-inch (610 mm) distance horizontally from the bottom outside face of the grade beam to the face of the descending slope.

2. Continuous footings shall be reinforced with at least two No. 4 reinforcing bars at the top and two No. 4 reinforcing bars at the bottom.

3. All main footing and grade beam reinforcement steel shall be bent into the intersecting footing and fully developed around each corner and intersection.

4. All concrete stem walls shall extend from the foundation and be reinforced as required for concrete or masonry walls.

1613.9.10.2 Protection against decay and termites.

All wood to earth separation shall comply with the following:

1. Where a footing or grade beam extends across a descending slope, the stem wall, grade beam, or footing shall extend up to a minimum 18 inches (457 mm) above the highest adjacent grade.

Exception: At paved garage and doorway entrances to the building, the stem wall need only extend to the finished concrete slab, provided the wood framing is protected with a moisture proof barrier.

2. Wood ledgers supporting a vertical load of more than 100 pounds per lineal foot (1.46 kN/m) based on Allowable Stress Design (ASD) levels and located within 48 inches (1219 mm) of adjacent grade are prohibited. Galvanized steel ledgers and anchor bolts, with or without wood nailers, or treated or decay resistant sill plates supported on a concrete or masonry seat, may be used.

1613.9.10.3 Sill plates.

All sill plates and anchorage shall comply with the following:

1. All wood framed walls, including nonbearing walls, when resting on a footing, foundation, or grade beam stem wall, shall be supported on wood sill plates bearing on a level surface.

2. Power-driven fasteners shall not be used to anchor sill plates except at interior nonbearing walls not designed as shear walls.

1613.9.10.4 Column base plate anchorage.

The base of isolated wood posts (not framed into a stud wall) supporting a vertical load of 4,000 pounds (17.8 kN) or more based on ASD levels, and the base plate for a steel column shall comply with the following:

1. When the post or column is supported on a pedestal extending above the top of a footing or grade beam, the pedestal shall be designed and reinforced as required for concrete or masonry columns. The pedestal shall be reinforced with a minimum of four No. 4 bars extending to the bottom of the footing or grade beam. The top of exterior pedestals shall be sloped for positive drainage.

2. The base plate anchor bolts or the embedded portion of the post base, and the vertical reinforcing bars for the pedestal, shall be confined with two No. 4 or three No. 3 ties within the top 5 inches (127 mm) of the concrete or masonry pedestal. The base plate anchor bolts shall be embedded a minimum of 20 bolt diameters into the concrete or masonry pedestal. The base plate anchor bolts and post bases shall be galvanized and each anchor bolt shall have at least two galvanized nuts above the base plate.

1613.9.10.5 Steel beam to column supports.

All steel beam to column supports shall be positively braced in each direction. Steel beams shall have stiffener plates installed on each side of the beam web at the column. The stiffener plates shall be welded to each beam flange and the beam web. Each brace connection or structural member shall consist of at least two 5/8 inch (15.9 mm) diameter machine bolts.

SECTION 23. Section 1613.10 is hereby added to read as follows:

1613.10 Suspended ceilings.

Minimum design and installation standards for suspended ceilings shall be determined in accordance with the requirements of Section 2506.2.1 and this Section.

1613.10.1 Scope.

This part contains special requirements for suspended ceilings and lighting systems. Provisions of Section 13.5.6 of ASCE 7 shall apply except as modified herein.

1613.10.2 General.

The suspended ceilings and lighting systems shall be limited to 6 feet (1828 mm) below the structural deck unless the lateral bracing is designed by a licensed engineer or architect.

1613.10.3 Sprinkler heads.

All sprinkler heads (drops) except fire-resistance-rated floor/ceiling or roof/ceiling assemblies, shall be designed to allow for free movement of the sprinkler pipes with oversize rings, sleeves or adaptors through the ceiling tile. Sprinkler heads and other penetrations shall have a 2-inch (50mm) oversize ring, sleeve, or adapter through the

ceiling tile to allow for free movement of at least 1 inch (25mm) in all horizontal directions. Alternatively, a swing joint that can accommodate 1 inch (25 mm) of ceiling movement in all horizontal directions is permitted to be provided at the top of the sprinkler head extension.

Sprinkler heads penetrating fire-resistance-rated floor/ceiling or roof/ceiling assemblies shall comply with Section 714.

1613.10.4 Special requirements for means of egress.

Suspended ceiling assemblies located along means of egress serving an occupant load of 30 or more and at lobbies accessory to Group A Occupancies shall comply with the following provisions.

1613.10.4.1 General.

Ceiling suspension systems shall be connected and braced with vertical hangers attached directly to the structural deck along the means of egress serving an occupant load of 30 or more and at lobbies accessory to Group A Occupancies. Spacing of vertical hangers shall not exceed 2 feet (610 mm) on center along the entire length of the suspended ceiling assembly located along the means of egress or at the lobby.

1613.10.4.2 Assembly device.

All lay-in panels shall be secured to the suspension ceiling assembly with two hold-down clips minimum for each tile within a 4-foot (1219 mm) radius of the exit lights and exit signs.

1613.10.4.3 Emergency systems.

Independent supports and braces shall be provided for light fixtures required for exit illumination. Power supply for exit illumination shall comply with the requirements of Section 1008.2.4 of this Code.

1613.10.4.4 Supports for appendages.

Separate support from the structural deck shall be provided for all appendages such as light fixtures, air diffusers, exit signs, and similar elements.

SECTION 24. Section 1704.2.3 is hereby amended to read as follows:

1704.2.3 Statement of special inspections.

The applicant shall submit a statement of special inspections in accordance with Section 106.4~~107.1~~ as a condition for permit issuance. This statement shall be in accordance with Section 1704.3.

. . .

SECTION 25. Section 1704.6 is hereby amended to read as follows:

1704.6 Structural observations.

Where required by the provisions of Section 1704.6.1 the owner or the owner's authorized agent shall employ a ~~registered design professional~~structural observer to perform structural observations. The structural observer shall visually observe representative locations of structural systems, details and load paths for general conformance to the approved construction documents. Structural observation does not include or waive the responsibility for the inspections in Section ~~110~~108 or the special inspections in Section 1705 or other sections of this ~~c~~Code. The structural observer

shall be one of the following individuals:

1. The registered design professional responsible for the structural design, or

2. A registered design professional designated by the registered design professional responsible for the structural design.

Prior to the commencement of observations, the structural observer shall submit to the ~~b~~Building ~~o~~Official a written statement identifying the frequency and extent of structural observations.

~~At the conclusion of the work included in the permit, the structural observer shall submit to the building official a written statement that the site visits have been made and identify any reported deficiencies that, to the best of the structural observer's knowledge, have not been resolved.~~

The owner or owner's authorized agent shall coordinate and call a preconstruction meeting between the structural observer, contractors, affected subcontractors, and special inspectors. The structural observer shall preside over the meeting. The purpose of the meeting shall be to identify the major structural elements and connections that affect the vertical and lateral load resisting systems of the structure and to review scheduling of the required observations. A record of the meeting shall be included in the report submitted to the Building Official.

Observed deficiencies shall be reported in writing to the owner or owner's authorized agent, special inspector, contractor, and the Building Official. Upon the form prescribed by the Building Official, the structural observer shall submit to the Building Official a written statement at each significant construction stage stating that the site

visits have been made and identifying any reported deficiencies that, to the best of the structural observer's knowledge, have not been resolved. A final report by the structural observer, which states that all observed deficiencies have been resolved, is required before acceptance of the work by the Building Official.

SECTION 26. Section 1704.6.1 is hereby amended to read as follows:

1704.6.1 Structural observations for structures.

. . .

3. ~~The structure is assigned to Seismic Design Category E, and is greater than two stories above the grade plane~~A lateral design is required for the structure or portion thereof.

Exception: One-story wood framed Group R-3 and Group U Occupancies less than 2,000 square feet in area, provided the adjacent grade is not steeper than 1 unit vertical in 10 units horizontal (10 percent sloped), assigned to Seismic Design Category D.

. . .

SECTION 27. Section 1705.3 is hereby amended to read as follows:

1705.3 Concrete Construction.

Special inspections and tests of concrete construction shall be performed in accordance with this section and Table 1705.3.

Exception: Special inspections and tests shall not be required for:

1. Isolated spread concrete footings of buildings three stories or less above grade plane that are fully supported on earth or rock where the structural design of the footing is based on a specified compressive strength (f'c) not greater than 2,500 pounds per square inch (psi) (17.2 Mpa) regardless of the compressive strength specified in the construction documents or used in the footing construction.

. . .

~~4. Concrete foundation walls constructed in accordance with Table 1807.1.6.2.~~

~~5~~4. Concrete patios, ~~driveways~~ and sidewalks, on grade.

SECTION 28. Section 1705.13 is hereby amended to read as follows:

1705.13 Special inspections for seismic resistance.

. . .

Exception: The special inspections specified in Sections 1705.13.1 through 1705.13.9 are not required for structures designed and constructed in accordance with one of the following:

. . .

3. The structure is a detached one- or two-family dwelling not exceeding two stories above grade plane, provided the structure is not assigned to Seismic Design Category D, E, or F and does not have any of the following horizontal or vertical irregularities in accordance with Section 12.3 of ASCE 7:

. . .

SECTION 29. Section 1807.1.4 is hereby amended to read as follows:

1807.1.4 Permanent wood foundations systems.

Permanent wood foundation systems shall be designed and installed in accordance with AWC PWF. Lumber and plywood shall be preservative treated in accordance with AWPA U1 (Commodity Specification A, Special Requirement 4.2), and shall be identified in accordance with Section 2303.1.9.1. Permanent wood foundation systems shall not be used for structures assigned to Seismic Design Category D, E, or F.

SECTION 30. Section 1807.1.6 is hereby amended to read as follows:

1807.1.6 Prescriptive design of concrete and masonry foundation walls.

Concrete and masonry foundation walls that are laterally supported at the top and bottom shall be permitted to be designed and constructed in accordance with this section. Prescriptive design of foundation walls shall not be used for structures assigned to Seismic Design Category D, E, or F.

SECTION 31. Section 1807.2 is hereby amended to read as follows:

1807.2 Retaining walls.

Retaining walls shall be designed in accordance with Section 1807.2.1 through 1807.2.4. Retaining walls assigned to Seismic Design Category D, E, or F shall not be partially or wholly constructed of wood.

SECTION 32. Section 1807.3.1 is hereby amended to read as follows:

1807.3.1 Limitations.

The design procedures outlined in this section are subject to the following limitations:

1. The frictional resistance for structural walls and slabs on silts and clays shall be limited to one-half of the normal force imposed on the soils by the weight of the footing or slab.

2. Posts embedded in earth shall not be used to provide lateral support for structural or nonstructural materials such as plaster, masonry or concrete unless bracing is provided that develops the limited deflection required.

Wood poles shall be treated in accordance with AWPA U1 for sawn timber posts (Commodity Specification A, Use Category 4B) and for round timber posts (Commodity Specification B, Use Category 4B). Wood poles and posts embedded in direct contact with soil shall not be used for structures assigned to Seismic Design Category D, E, or F.

Wood poles and posts embedded in accordance with Methods 2 and 3 of Section 1807.3.3 shall not be permitted for structures assigned to Seismic Design Category D, E, or F, except when used to support nonhabitable, nonoccupiable structures such as fences when approved by the Building Official.

SECTION 33. Section 1809.3 is hereby amended to read as follows:

1809.3 Stepped footings.

. . .

For structures assigned to Seismic Design Category D, E, or F, the stepping requirement shall also apply to the top surface of continuous footings supporting walls. Footings shall be reinforced with four No. 4 reinforcing bars. Two bars shall be located at the top and bottom of the footings as shown in Figure 1809.3.

SECTION 34. Figure 1809.3 is hereby added to read as follows:

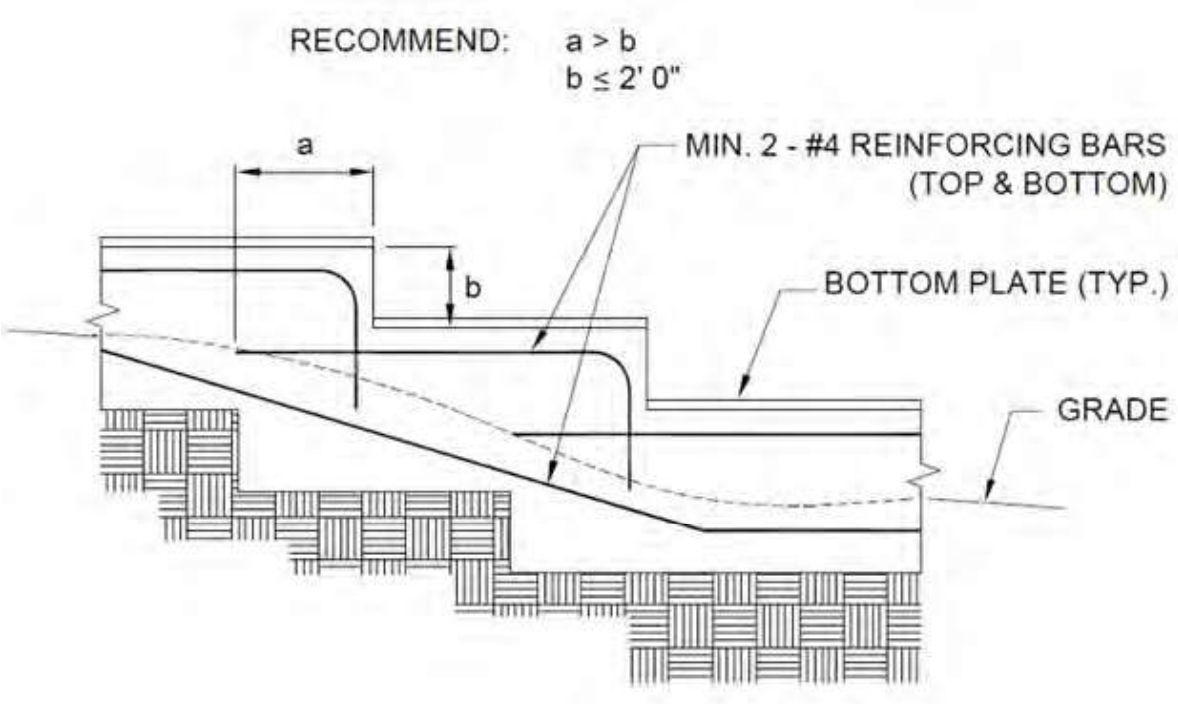


FIGURE 1809.3

STEPPED FOOTING

SECTION 35. Section 1809.7 is hereby amended to read as follows:

1809.7 Prescriptive footings for light-frame construction.

Where a specific design is not provided, concrete or masonry-unit footings supporting walls of light-frame construction shall be permitted to be designed in accordance with Table 1809.7. Prescriptive footings in accordance with Table 1809.7 shall not be used to support structures that exceed one story above grade plane and are assigned to Seismic Design Category D, E, or F.

SECTION 36. Table 1809.7 is hereby amended to read as follows:

TABLE 1809.7

PRESCRIPTIVE FOOTINGS SUPPORTING WALLS OF LIGHT-FRAME CONSTRUCTION [a, b, c, d, e]

NUMBER OF FLOORS SUPPORTED BY THE FOOTING[f]	WIDTH OF FOOTING (inches)	THICKNESS OF FOOTING (inches)
1	12	6
2	15	6
3	18	8[g]

. . .

c. ~~Interior stud-bearing walls shall be permitted to be supported by isolated footings. The footing width and length shall be twice the width shown in this table, and footings shall be spaced not more than 6 feet on center.~~[Reserved].

. . .

g. ~~Plain concrete footings for Group R-3 occupancies shall be permitted to be 6 inches thick~~[Deleted].

SECTION 37. Section 1809.12 is hereby amended to read as follows:

1809.12 Timber footings.

Timber footings shall be permitted for buildings of Type V construction and as otherwise approved by the ~~b~~Building ~~o~~Official. Such footings shall be treated in accordance with AWPA U1 (Commodity Specification A, Use Category 4B). Treated timbers are not required where placed entirely below permanent water level, or where used as capping for wood piles that project above the water level over submerged or marsh lands. The compressive stresses perpendicular to grain in untreated timber footings supported upon treated piles shall not exceed 70 percent of the allowable stresses for the species and grade of timber as specified in the ANSI/AWC NDS. Timber footings shall not be used in structures assigned to Seismic Design Category D, E, or F.

SECTION 38. Section 1810.3.2.4 is hereby amended to read as follows:

1810.3.2.4 Timber.

Timber deep foundation elements shall be designed as piles or poles in accordance with ANSI/AWC NDS. Round timber elements shall conform to ASTM D25. Sawn timber elements shall conform to DOC PS-20. Timber shall not be used in structures assigned to Seismic Design Category D, E, or F.

SECTION 39. Section 1905.1 is hereby amended to read as follows:

1905.1 General.

In addition to the provisions of ACI 318, structural concrete shall comply with the requirements of Section 1905. The text of ACI 318 shall be modified as indicated in Sections 1905.8 through 1905.10.

SECTION 40. Section 1905.6.2 is hereby amended to read as follows:

1905.6.2 Seismic Design Categories C, D, E, and F.

Structures assigned to Seismic Design Category C, D, E or F shall not have elements of structural plain concrete, except as follows:

1. ~~Structural plain concrete basement, foundation or other walls below the base as defined in ASCE/SEI 7 are permitted in detached one- and two-family dwellings three stories or less in height constructed with stud-bearing walls. In dwellings assigned to Seismic Design Category D or E, the height of the wall shall not exceed 8 feet (2438 mm), the thickness shall not be less than 7½ inches (190 mm), and the wall shall retain no more than 4 feet (1219 mm) of unbalanced fill. Walls shall have reinforcement in accordance with 14.6.1 of ACI318.~~Concrete used for fill with a minimum cement content of 2 sacks of Portland cement or cementious material per cubic yard.

2. Isolated footings of plain concrete supporting pedestals or columns are permitted, provided that the projection of the footing beyond the face of the supported member does not exceed the footing thickness.

~~Exception: In detached one- and two-family dwellings three stories or less in height, the projection of the footing beyond the face of the supported member is~~

~~permitted to exceed the footing thickness.~~

3. Plain concrete footings supporting walls are permitted, provided that the footings have at least two continuous longitudinal reinforcing bars. Bars shall not be smaller than No. 4 and shall have a total area of not less than 0.002 times the gross cross-sectional area of the footing. ~~For footings that exceed 8 inches (203 mm) in thickness,n~~Not fewer than one bar shall be provided at the top and bottom of the footing. Continuity of reinforcement shall be provided at corners and intersections.

~~Exceptions:~~

~~1. Where assigned to Seismic Design Category C, d~~Detached one- and two-family dwellings three stories or less in height and constructed with stud-bearing walls are permitted to have plain concrete footings ~~without longitudinal reinforcement~~with at least two continuous longitudinal reinforcing bars not smaller than No. 4 and a total area of less than 0.002 times the gross cross-sectional area of the footing.

~~2. For foundation systems consisting of a plain concrete footing and a plain concrete stemwall, not fewer than one bar shall be provided at the top of the stemwall and at the bottom of the footing.~~

~~3. Footings cast monolithically with a slab-on-ground shall have not fewer than one No. 4 bar at the top and bottom of the footing or one No. 5 bar or two No. 4 bars in the middle third of the footing depth.~~

SECTION 41. Section 1905.7 is hereby amended to read as follows:

1905.7 Design requirements for anchors.

For the design requirements for anchors, Sections 1905.7.1 and 1905.7.2 provide exceptions that are permitted to ACI 318. <u>These requirements shall be applicable to all buildings.</u>

. . .

SECTION 42. Section 1905.8 is hereby added to read as follows:

<u>1905.8 ACI 318, Section 18.7.5.</u>

Modify ACI 318, Section 18.7.5, by adding Sections 18.7.5.8 and 18.7.5.9 as follows:

18.7.5.8 Where the calculated point of contraflexure is not within the middle half of the member clear height, provide transverse reinforcement as specified in ACI 318, Section 18.7.5.1, Items (a) through (c), over the full height of the member.

18.7.5.9 At any section where the design strength, φP_n, of the column is less than the sum of the shears V_e computed in accordance with ACI 318, Sections 18.7.6.1 and 18.6.5.1, for all the beams framing into the column above the level under consideration, transverse reinforcement as specified in ACI 318, Sections 18.7.5.1 through 18.7.5.3, shall be provided. For beams framing into opposite sides of the column, the moment components may be assumed to be of opposite sign. For the determination of the design strength, φP_n, of the column, these moments may be assumed to result from the deformation of the frame in any one principal axis.

SECTION 43. Section 1905.9 is hereby added to read as follows:

1905.9 ACI 318, Section 18.10.4.

Modify ACI 318, Section 18.10.4, by adding Section 18.10.4.7 as follows:

18.10.4.7 Walls and portions of walls with $P_u > 0.35P_o$ shall not be considered to contribute to the calculated shear strength of the structure for resisting earthquake-induced forces. Such walls shall conform to the requirements of ACI 318, Section 18.14.

SECTION 44. Section 1905.10 is hereby added to read as follows:

1905.10 ACI 318, Section 18.12.6.

Modify ACI 318, by adding Section 18.12.6.2, as follows:

18.12.6.2 Collector and boundary elements in topping slabs placed over precast floor and roof elements shall not be less than 3 inches (76 mm) or 6 d_b in thickness, where d_b is the diameter of the largest reinforcement in the topping slab.

SECTION 45. Section 2304.10.2 is hereby amended to read as follows:

2304.10.2 Fastener requirements.

Connections for wood members shall be designed in accordance with the appropriate methodology in Section 2302.1. The number and size of fasteners connecting wood members shall not be less than that set forth in Table 2304.10.2. Staple fasteners in Table 2304.10.2 shall not be used to resist or transfer seismic forces in structures assigned to Seismic Design Category D, E, or F.

Exception: Staples may be used to resist or transfer seismic forces when the allowable shear values are substantiated by cyclic testing and approved by the Building Official.

SECTION 46. Table 2304.10.2 is hereby amended to read as follows:

TABLE 2304.10.2

FASTENING SCHEDULE[h]

. . .

h. Staples shall not be used to resist or transfer seismic forces in structures assigned to Seismic Design Category D, E, or F.

SECTION 47. Section 2304.10.3.1 is hereby added to read as follows:

2304.10.3.1 Quality of nails.

In Seismic Design Category D, E, or F, mechanically-driven nails used in wood structural panel shear walls shall meet the same dimensions as that required for hand-driven nails, including diameter, minimum length, and minimum head diameter. Clipped head or box nails are not permitted in new construction. The allowable design value for clipped head nails in existing construction may be taken at no more than the nail-head-area ratio of that of the same size hand-driven nails.

SECTION 48. Section 2304.12.2.8 is hereby amended to read as follows:

2304.12.2.8 Wood used in retaining walls and cribs.

Wood installed in retaining or crib walls shall be preservative treated in accordance with AWPA U1 for soil and freshwater use. Wood shall not be used in retaining or crib walls for structures assigned to Seismic Design Category D, E, or F.

SECTION 49. Section 2305.4 is hereby added to read as follows:

2305.4 Hold-down connectors.

In Seismic Design Category D, E, or F, hold-down connectors shall be designed to resist shear wall overturning moments using 75 percent of the allowable seismic load values. Such values shall be established in a valid research report from approved sources or by accepted engineering practice and the provisions of this Code.

Exception: Values established by specialized cyclic and dynamic testing may be used when approved by the Building Official in accordance with Section 104.2.8.

Connector bolts into wood framing shall require steel plate washers on the post on the opposite side of the anchorage device. Plate size shall be a minimum of 0.229 inches by 3 inches by 3 inches (5.82 mm by 76 mm by 76 mm) in size. Hold-down connectors shall be tightened to finger tight plus one-half (1/2) wrench turn just prior to covering the wall framing.

SECTION 50. Section 2306.2 is hereby amended to read as follows:

2306.2 Wood-frame diaphragms.

Wood-frame diaphragms shall be designed and constructed in accordance with AWC SDPWS. Where panels are fastened to framing members with staples, requirements and limitations of AWC SDPWS shall be met and the allowable shear values set forth in Table 2306.2(1) or 2306.2(2) shall only be permitted for structures assigned to Seismic Design Category A, B, or C.

Exception: Allowable shear values where panels are fastened to framing members with staples may be used if such values are substantiated by cyclic testing and approved by the Building Official.

The allowable shear values in Tables 2306.2(1) and 2306.2(2) are permitted to be increased 40 percent for wind design.

Wood structural panel diaphragms used to resist seismic forces in structures assigned to Seismic Design Category D, E, or F shall be applied directly to the framing members.

Exception: Wood structural panel diaphragms are permitted to be fastened over solid lumber planking or laminated decking, provided the panel joints and lumber planking or laminated decking joints do not coincide.

SECTION 51. Section 2306.3 is hereby amended to read as follows:

2306.3 Wood-frame shear walls.

Wood-frame shear walls shall be designed and constructed in accordance with AWC SDPWS. For structures assigned to Seismic Design Category D, E, or F, application of Tables 4.3A and 4.3B of AWC SDPWS shall include the following:

1. Wood structural panel thickness for shear walls shall not be less than 3/8 inch thick and studs shall not be spaced at more than 16 inches on center.

2. The maximum nominal unit shear capacities for 3/8 inch wood structural panels resisting seismic forces in structures assigned to Seismic Design Category D, E, or F is 560 pounds per linear foot (plf).

Exception: Other nominal unit shear capacities may be permitted if such values are substantiated by cyclic testing and approved by the Building Official.

3. Nails shall be placed not less than 1/2 inch from the panel edges and not less than 3/8 inch from the edge of the connecting members for shears greater than 350 plf using ASD or 500 plf using LRFD. Nails shall be placed not less than 3/8 inch from panel edges and not less than 1/4 inch from the edge of the connecting members for shears of 350 plf or less using ASD or 500 plf or less using LRFD.

For structures assigned to Seismic Design Category D, E, or F, application of Table 4.3B of ANSI/AWC SDPWS shall not be allowed.

For structures assigned to Seismic Design Category D, E, or F, application of Table 4.3C of ANSI/AWC SDPWS shall not be used below the top level in a multi-level building.

Where panels are fastened to framing members with staples, requirements and limitations of AWC SDPWS shall be met and the allowable shear values set forth in Table 2306.3(1), 2306.3(2) or 2306.3(3) shall only be permitted for structures assigned to Seismic Design Category A, B, or C.

Exception: Allowable shear values where panels are fastened to framing members with staples may be used if such values are substantiated by cyclic testing and approved by the Building Official.

The allowable shear values in Tables 2306.3(1) and 2306.3(2) are permitted to be increased 40 percent for wind design. Panels complying with ANSI/APA PRP-210 shall be permitted to use design values for Plywood Siding in the AWC SDPWS.

Wood structural panel shear walls used to resist seismic forces in structures assigned to Seismic Design Category D, E, or F shall be applied directly to the framing members.


SECTION 52. Section 2307.2 is hereby added to read as follows:

2307.2 Wood-frame panel shear walls.

Wood-frame shear walls shall be designed and constructed in accordance with Section 2306.3 as applicable.

SECTION 53. Table 2308.10.1 is hereby amended to read as follows:

TABLE 2308.10.1
WALL BRACING REQUIREMENTS

SEISMIC DESIGN CATEGORY	STORY CONDITION (SEE SECTION 2308.2)	MAXIMUM SPACING OF BRACED WALL LINES	BRACED PANEL LOCATION, SPACING (O.C.) AND MINIMUM PERCENTAGE (X)			MAXIMUM DISTANCE OF BRACED WALL PANELS FROM EACH END OF BRACED WALL LINE
			Bracing method[b]			
			LIB	DWB, WSP	SFB, PBS, PCP, HPS, GB[c,d]	
A and B		35′- 0″	Each end and ≤ 25′- 0″ o.c.	Each end and ≤ 25′- 0″ o.c.	Each end and ≤ 25′- 0″ o.c.	12′- 6″
		35′- 0″	Each end and ≤ 25′- 0″ o.c.	Each end and ≤ 25′- 0″ o.c.	Each end and ≤ 25′- 0″ o.c.	12′- 6″
		35′- 0″	NP	Each end and ≤ 25′- 0″ o.c.	Each end and ≤ 25′- 0″ o.c.	12′- 6″
C		35′- 0″	NP	Each end and ≤ 25′- 0″ o.c.	Each end and ≤ 25′- 0″ o.c.	12′- 6″
		35′- 0″	NP	Each end and ≤ 25′- 0″ o.c. (minimum 25% of wall length)[e]	Each end and ≤ 25′- 0″ o.c. (minimum 25% of wall length)[e]	12′- 6″
D and E[f, g, h]		25′- 0″	NP	$S_{DS} < 0.50$: Each end and ≤ 25′- 0″ o.c. (minimum 21% of wall length)[e]	$S_{DS} < 0.50$: Each end and ≤ 25′- 0″ o.c. (minimum 43% of wall length)[e]	8′- 0″
				$0.5 \le S_{DS} < 0.75$: Each end and ≤ 25′- 0″ o.c. (minimum 32% of wall length)[e]	$0.5 \le S_{DS} < 0.75$: Each end and ≤ 25′- 0″ o.c. (minimum 59% of wall length)[e]	
				$0.75 \le S_{DS} \le 1.00$: Each end and ≤ 25′- 0″ o.c. (minimum 37% of wall length)[e]	$0.75 \le S_{DS} \le 1.00$: Each end and ≤ 25′- 0″ o.c. (minimum 75% of wall length)	
				$S_{DS} > 1.00$: Each end and ≤ 25′- 0″ o.c. (minimum 48% of wall length)[e]	$S_{DS} > 1.00$: Each end and ≤ 25′- 0″ o.c. (minimum 100% of wall length)[e]	

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

NP = Not Permitted.

a. This table specifies minimum requirements for braced wall panels along interior or exterior braced wall lines.

b. See Section 2308.6.3 for full description of bracing methods.

c. For Method GB, gypsum wallboard applied to framing supports that are spaced at 16 inches on center.

d. The required lengths shall be doubled for gypsum board applied to only one face of a braced wall panel.

e. Percentage shown represents the minimum amount of bracing required along the building length (or wall length if the structure has an irregular shape).

f. DWB, SFB, PBS, and HPS wall braces are not permitted in Seismic Design Catergories D or E.

g. Minimum length of panel bracing of one face of the wall for WSP sheathing shall be at least 4'-0" long or both faces of the wall for GB or PCP sheathing shall be at least 8'-0" long: h/w ratio shall not exceed 2:1. Wall framing to which sheathing used for bracing is applied shall be nominal 2 inch wide factual 1 1/2 inch (38 mm) or larger members and spaced a maximum of 16 inches on center. Braced wall panel construction types shall not be mixed within a braced wall line.

h. WSP sheathing shall be a minimum of 15/32" thick nailed with 8d common placed 3/8 inches from panel edges and spaced not more than 6 inches on center and 12 inches on center along intermediate framing members.

SECTION 54. Section 2308.10.5.1 is hereby amended to read as follows:


2308.10.5.1 Alternate braced wall (ABW).

An ABW shall be constructed in accordance with this section and Figure 2308.6.5.1. In one-story buildings, each panel shall have a length of not less than 2 feet 8 inches (813 mm) and a height of not more than 10 feet (3048 mm). Each panel shall be sheathed on one face with 3/8-inch (3.2 mm) minimum-thickness wood structural panel sheathing nailed with 8d common or galvanized box nails in accordance with Table 2304.10.2 and blocked at wood structural panel edges. For structures assigned to Seismic Design Category D or E, each panel shall be sheathed on one face with 15/32-inch minimum-thickness (11.9 mm) wood structural panel sheathing nailed with 8d common nails spaced 3 inches on panel edges, 3 inches at intermediate supports. Two anchor bolts installed in accordance with Section 2308.7.1 shall be provided in each panel. Anchor bolts shall be placed at each panel outside quarter points. Each panel end stud shall have a hold-down device fastened to the foundation, capable of providing an approved uplift capacity of not less than 1,800 pounds (8006 N). The hold-down device shall be installed in accordance with the manufacturer's recommendations. The ABW shall be supported directly on a foundation or on floor framing supported directly on a foundation that is continuous across the entire length of the braced wall line. This foundation shall be reinforced with not less than one No. 4 bar top and bottom. Where the continuous foundation is required to have a depth greater than 12 inches (305 mm), a minimum 12-inch by 12-inch (305 mm by 305 mm) continuous footing ~~or turned-down slab edge~~ is permitted at door openings in the braced

wall line. This continuous footing ~~or turned-down slab edge~~ shall be reinforced with not less than one No. 4 bar top and bottom. This reinforcement shall be lapped ~~15~~24 inches (~~381~~610 mm) with the reinforcement required in the continuous foundation located directly under the braced wall line.

. . .

SECTION 55. Figure 2308.10.5.1 is hereby amended to read as follows:

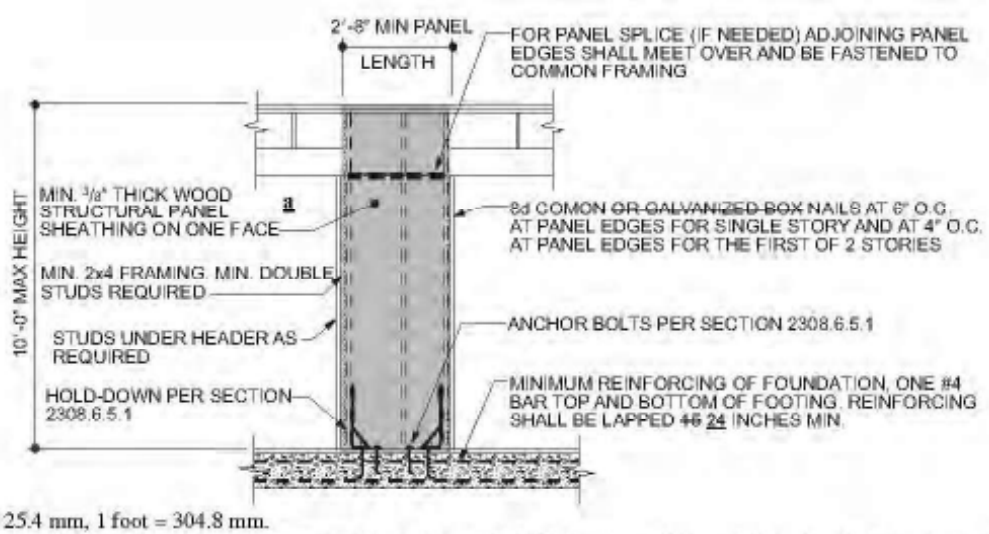

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

a. For structures assigned to Seismic Design Category D or E, sheathed on one face with 15/32-inch-minimum-thickness (11.9 mm) wood structural panel sheathing.

FIGURE 2308.10.5.1
ALTERNATE BRACED WALL PANEL (ABW)

SECTION 56. Section 2308.10.5.2 is hereby amended to read as follows:

2308.10.5.2 Portal frame with hold-downs (PFH).

A PFH shall be constructed in accordance with this section and Figure 2308.10.5.2. The adjacent door or window opening shall have a full-length header.

In one-story buildings, each panel shall have a length of not less than 16 inches (406 mm) and a height of not more than 10 feet (3048 mm). Each panel shall be sheathed on one face with a single layer of 3/8-inch (9.5 mm) minimum-thickness wood


structural panel sheathing nailed with 8d common or galvanized box nails in accordance with Figure 2308.10.5.2. For structures assigned to Seismic Design Category D or E, each panel shall be sheathed on one face with 15/32-inch minimum-thickness (11.9 mm) wood structural panel sheathing nailed with 8d common nails spaced 3 inches on panel edges, 3 inches at intermediate supports and in accordance with Figure 2308.10.5.2. The wood structural panel sheathing shall extend up over the solid sawn or glued-laminated header and shall be nailed in accordance with Figure 2308.10.5.2. A built-up header consisting of at least two 2-inch by 12-inch (51 mm by 305 mm) boards, fastened in accordance with Item 24 of Table 2304.10.1 shall be permitted to be used. A spacer, if used, shall be placed on the side of the built-up beam opposite the wood structural panel sheathing. The header shall extend between the inside faces of the first full-length outer studs of each panel. The clear span of the header between the inner studs of each panel shall be not less than 6 feet (1829 mm) and not more than 18 feet (5486 mm) in length. A strap with an uplift capacity of not less than 1,000 pounds (4,400 N) shall fasten the header to the inner studs opposite the sheathing. One anchor bolt not less than 5/8 inch (15.9 mm) diameter and installed in accordance with Section 2308.3.1 shall be provided in the center of each sill plate. The studs at each end of the panel shall have a hold-down device fastened to the foundation with an uplift capacity of not less than 3,500 pounds (15 570 N).

Where a panel is located on one side of the opening, the header shall extend between the inside face of the first full-length stud of the panel and the bearing studs at the other end of the opening. A strap with an uplift capacity of not less than

1,000 pounds (4400 N) shall fasten the header to the bearing studs. The bearing studs shall also have a hold-down device fastened to the foundation with an uplift capacity of not less than 1,000 pounds (4400 N). The hold-down devices shall be an embedded strap type, installed in accordance with the manufacturer's recommendations. The PFH panels shall be supported directly on a foundation that is continuous across the entire length of the braced wall line. This foundation shall be reinforced with not less than one No. 4 bar top and bottom. Where the continuous foundation is required to have a depth greater than 12 inches (305 mm), a minimum 12-inch by 12-inch (305 mm by 305 mm) continuous footing ~~or turned-down slab edge~~ is permitted at door openings in the braced wall line. This continuous footing ~~or turned-down slab edge~~ shall be reinforced with not less than one No. 4 bar top and bottom. This reinforcement shall be lapped not less than ~~15~~24 inches (~~381~~610 mm) with the reinforcement required in the continuous foundation located directly under the braced wall line.

. . .

SECTION 57. Figure 2308.10.5.2 is hereby amended to read as follows:

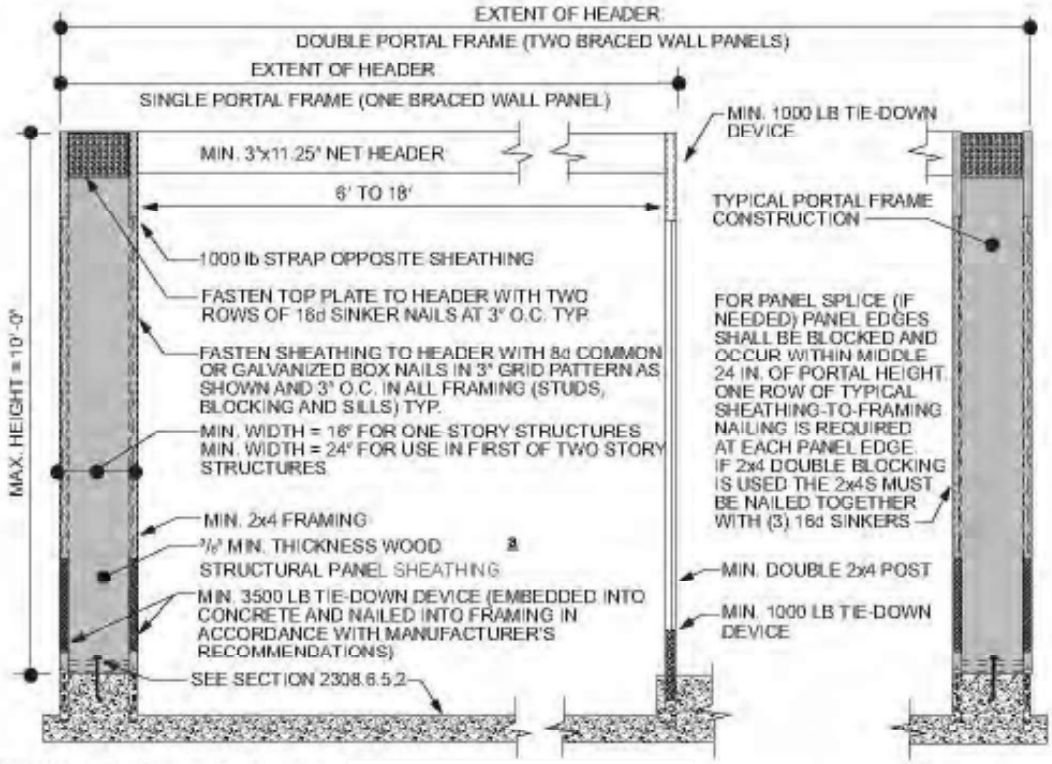

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 p**FIGURE 2308.10.5.2**

a. For structures assigned to Seismic Design Category D or E, sheathed on one face with 15/32-inch-minimum-thickness (11.9 mm) wood structural panel sheathing.

FIGURE 2308.6.5.2
PORTAL FRAME WITH HOLD-DOWNS (PFH)

SECTION 58. Section 2308.10.8.1 is hereby amended to read as follows:

2308.10.8.1 Foundation requirements.

. . .

Exception: For structures with a maximum plan dimension not more than 50 feet (15 240 mm), continuous foundations are required at exterior walls only for structures assigned to Seismic Design Category A, B, or C.

For structures in Seismic Design Categories D and E, exterior braced wall panels shall be in the same plane vertically with the foundation or the portion of the structure

containing the offset shall be designed in accordance with accepted engineering practice and Section 2308.3.

~~**Exceptions:**~~

~~1. Exterior braced wall panels shall be permitted to be located not more than 4 feet (1219 mm) from the foundation below where supported by a floor constructed in accordance with all of the following:~~

~~1.1. Cantilevers or setbacks shall not exceed four times the nominal depth of the floor joists.~~

~~1.2. Floor joists shall be 2 inches by 10 inches (51 mm by 254 mm) or larger and spaced not more than 16 inches (406 mm) on center.~~

~~1.3. The ratio of the back span to the cantilever shall be not less than 2 to 1.~~

~~1.4. Floor joists at ends of braced wall panels shall be doubled.~~

~~1.5. A continuous rim joist shall be connected to the ends of cantilevered joists. The rim joist is permitted to be spliced using a metal tie not less than 0.058 inch (1.47 mm) (16 galvanized gage) and 11/2 inches (38 mm) in width fastened with six 16d common nails on each side. The metal tie shall have a yield stress not less than 33,000 psi (227 MPa).~~

~~1.6. Joists at setbacks or the end of cantilevered joists shall not carry gravity loads from more than a single story having uniform wall and roof loads nor carry the reactions from headers having a span of 8 feet (2438 mm) or more.~~

~~2. The end of a required braced wall panel shall be allowed to extend not~~

~~more than 1 foot (305 mm) over an opening in the wall below. This requirement is applicable to braced wall panels offset in plane and braced wall panels offset out of plane as permitted by Exception 1. Braced wall panels are permitted to extend over an opening not more than 8 feet (2438 mm) in width where the header is a 4-inch by 12-inch (102 mm by 305 mm) or larger member.~~

SECTION 59. Section 2308.10.9 is hereby amended to read as follows:

2308.10.9 Attachment of sheathing.

Fastening of braced wall panel sheathing shall not be less than that prescribed in Tables 2308.10.1 or 2304.10.2. Wall sheathing shall not be attached to framing members by adhesives. Staple fasteners in Table 2304.10.2 shall not be used to resist or transfer seismic forces in structures assigned to Seismic Design Category D, E, or F.

Exception: Staples may be used to resist or transfer seismic forces when the allowable shear values are substantiated by cyclic testing and approved by the Building Official.

All braced wall panels shall extend to the roof sheathing and shall be attached to parallel roof rafters or blocking above with framing clips (18 gauge minimum) spaced at maximum 24 inches (6096 mm) on center with four 8d nails per leg (total eight 8d nails per clip). Braced wall panels shall be laterally braced at each top corner and at maximum 24-inch (6096 mm) intervals along the top plate of discontinuous vertical framing.

SECTION 60. Section 3114 is hereby amended to read as follows:

SECTION 3114 INTERMODAL SHIPPING CONTAINERS

3114.1 General.

. . .

Exceptions:

. . .

6. Single-unit stand-alone intermodal shipping containers used as temporary storage or construction trailer on active construction sites. Construction support facilities for uses and activities not directly associated with the actual processes of construction, including, but not limited to, offices, meeting rooms, plan rooms, other administrative or support functions shall not be exempt from Section 3114.

. . .

3114.8.4 Detailed structural design procedure.

A structural analysis meeting the requirements of this Section shall be provided to the building official to demonstrate the structural adequacy of the intermodal shipping containers.

3114.8.4.2 Seismic design parameters.

The seismic force-resisting system shall be designed and detailed in accordance with ASCE 7 and one of the following:

. . .

3. Where all or portions of the profiled steel panel elements are retained and integrated into a seismic force-resisting system other than as permitted by Section 3114.8.4.2, Item 1, seismic design parameters shall be developed from testing and analysis in accordance with Section 104.2.~~3~~9 and ASCE 7, Section 12.2.1.1 or 12.2.1.2.

. . .

3114.8.5.2 Structural design assumptions.

Where permitted by Section 3114.8.5.1, single-unit, stand-alone intermodal shipping containers shall be designed using the following assumptions for the profiled steel panel ~~lateral-force resisting system~~ side walls and end walls:

1. The appropriate detailing requirements contained in Chapters 16 through 23.

2. Response modification coefficient, R = 2,

3. Over strength factor, Ω0 = 2.5,

4. Deflection amplification factor, Cd = 2, and

5. Limits on structural height, hn = 9.5 feet (2900 mm).

3114.8.5.3 Allowable shear.

The allowable shear for the profiled steel panel side walls (longitudinal) and end walls (transverse) for wind design and seismic design using the coefficients of Section 3114.8.5.2 shall be in accordance with Table 3114.8.5.3, provided that all of the following conditions are met:

. . .

3. All side walls or end walls used as part of the lateral force-resisting system shall have an existing or new boundary element on all sides to form a continuous load path, or paths, with adequate strength and stiffness to transfer all forces from the point of application to the final point of resistance, as shown in Figure 3114.8.5.3(3). The existing door interlocking mechanism shall not be considered as a component of the required load path.

. . .

SECTION 61. Chapter 99 is hereby amended to read as follows:

SECTION 9903 DEFINITION OF SUBSTANDARD BUILDING

9903.1

Any building or structure or portion thereof, regardless of zoning designation or approved uses of the building, including any dwelling unit, guestroom or suite of rooms, or the premises on which the same is located, in which there exists any of the conditions listed in Section 9904 to an extent that creates a public nuisance and endangers the life, limb, health, property, safety or welfare of the occupants of the building, nearby residents, or the public, shall be deemed and hereby is declared to be a substandard building.

SECTION 9904 SUBSTANDARD CONDITIONS

9904.1 Inadequate sanitation

. . .

9904.1.5

Lack of electrical lighting as required by this Code.

9904.1.6

Infestation of insects, vermin, or rodents as determined by a health officer or, if an agreement does not exist with an agency that has a health officer, the infestation can be determined by an appropriate code enforcement officer.

9904.1.7

Visible mold growth, as determined by a health officer or a code enforcement officer, excluding the presence of mold that is minor and found on surfaces that can accumulate moisture as part of their properly functioning and intended use.

9904.1.8

Lack of connection to required sewage disposal system, as required by the Los Angeles County Plumbing Code.

9904.1.9

Lack of adequate garbage and rubbish storage and removal facilities, as determined by a health officer or, if an agreement does not exist with an agency that has a health officer, the lack of adequate garbage and rubbish removal facilities can be determined by an appropriate code enforcement officer.

. . .

9904.2 Structural Hazards

. . .

9904.2.5

Defective, damaged or inadequately constructed or sized fireplaces or chimneys.

. . .

9904.2.6

Inadequate structural resistance to horizontal forces.

. . .

9904.3 Inadequate or Hazardous Wiring.

9904.3.1

All wiring except that which conformed with all applicable laws in effect at the time of installation and which has been maintained in good and safe condition and is working properly and being used in a safe manner.

9904.4 Inadequate or Faulty Plumbing.

. . .

9904.4.2

All plumbing except that which conformed with all applicable laws in effect at the time of installation and which has been maintained in good condition and which is free of cross connections and siphonage between fixtures.

9904.5 Inadequate or Faulty Mechanical Equipment.

9904.5.1

Lack of safe, adequate heating facilities ~~in a dwelling~~.

. . .

9904.6 Faulty Weather Protection.

. . .

9904.6.2

Lack of a sound and effective exterior wall covering or weather protection for exterior wall covering.

. . .

9904.6.4

Deteriorated or ineffective waterproofing of exterior walls, roofs, foundations, foundation walls or floor, including broken windows or doors.

. . .

9904.9 Hazardous Buildings.

. . .

9904.13 Any Nuisance.

Those premises on which contains anything which is injurious to health, including, but not limited to, the illegal sale of controlled substances, or is indecent or offensive to the senses, or an obstruction to the free use of property, so as to interfere with the comfortable enjoyment of life or property, or unlawfully obstructs the free passage or use, in the customary manner, of any navigable public space.

SECTION 62. Section H103.1 is hereby amended to read as follows:

H103.1 Location restrictions.

Signs shall not be erected, constructed, or maintained so as to obstruct any fire escape or any window or door or opening used as part of a means of egress or as part of the accessible route, except as permitted by Chapters 10, 11A, and 11B, or so as to prevent free passage from one part of a roof to any other part thereof. A sign shall not

be attached in any form, shape or manner to a fire escape, nor be placed in such manner as to interfere with any opening required for ventilation.

SECTION 63. Section H103.2 is hereby added as follows:

H103.2 Projections and clearances.

Signs extending beyond the exterior wall of the building shall comply with Section 705.2 and the following requirements.

Signs may project over a public street, public sidewalk or building line in accordance with Section 3202 and a distance as determined by the clearance of the bottoms thereof above the level of the sidewalk or grade immediately below, whichever is more restrictive, as follows:

Clearance less than 8 feet (2438 mm) shall be prohibited.

Clearance 8 feet (2438 mm) and above, a 1-foot (305 mm) projection is permitted; and for each additional 2-foot clearance (610 mm), an additional 1-foot (305 mm) projection is permitted.

No structure shall have a projection of more than 5 feet (1524 mm). A projecting sign built above and in connection with a marquee may have such a projection of 5 feet (1524 mm) without clearance between sign and marquee. No structure shall project beyond the curb line, regardless of clearance above grade.

Signs projecting more than 6 inches (152 mm) from the face of building over private property used or intended to be used by the general public shall have a minimum clearance of 8 feet (2438 mm) above said sidewalk or grade.

No sign shall project into any alley whatsoever below a height of 14 feet (4267 mm) above grade, and no sign shall project into any alley by more than 6 inches (152 mm) when its height is 14 feet (4267 mm) or more above grade.

SECTION 64. Section H104.1 is hereby amended to read as follows:

H104.1 Identification.

Every ~~outdoor advertising display~~ sign other than wall signs hereafter erected, constructed or maintained, for which a permit is required, shall be plainly marked with the name of the person, firm or corporation erecting and maintaining such sign, and the weight of the sign, and shall have affixed on the front thereof the permit number issued for said sign or other method of identification approved by the ~~b~~Building ~~o~~Official.

SECTION 65. Section H105.1 is hereby amended to read as follows:

H105.1 General requirements.

Signs shall be designed and constructed to comply with the provisions of this ~~c~~Code for use of materials, loads and stresses. Glass panels used in signs shall comply with the requirements of Chapter 24.

SECTION 66. Section H106.1 is hereby amended to read as follows:

H106.1 Illumination.

A sign shall not be illuminated by other than electrical means, and electrical devices and wiring shall be installed in accordance with the requirements of the ~~California~~ Electrical Code (Title 27) of the Los Angeles County Code, and a separate electrical permit shall be obtained. Any open spark or flame shall not be used for display purposes unless specifically approved.

SECTION 67. Section H106.2 is hereby amended to read as follows:

H106.2 Electrical service.

Signs that require electrical service shall comply with ~~NFPA 70~~the Electrical Code (Title 27) of the Los Angeles County Code.

SECTION 68. Section H110.1 is hereby amended to read as follows:

H110.1 General.

Roof signs shall be constructed entirely of metal or other approved noncombustible material except as provided for in Sections H106.1.1 and H107.1. Provisions shall be made for electric grounding of metallic parts. Where combustible materials are permitted in letters or other ornamental features, wiring and tubing shall be kept free and insulated therefrom. Roof signs shall be so constructed as to leave a clear space of not less than 6 feet (1829 mm) between the roof level and the lowest part of the sign and shall have not less than 5 feet (11524 mm) clearance between the vertical supports thereof. Roof sign structures shall not project beyond an exterior wall.

Exception: Signs on flat roofs with every part of the roof accessible shall not be required to provide clear space between the roof level and the lowest part of the sign.

Blocks, angles, or supports fastened to the roof shall be located so as not to interfere with the drainage of the roof and, where necessary, flashing or counter flashing shall be placed.

SECTION 69. Section H116 is hereby deleted in its entirety:

~~**SECTION H116 REFERENCED STANDARDS**~~

~~**H.116.1 General.** See Table H116.1 for standards that are referenced in various sections of this appendix. Standards are listed by the standard definition with the effective date, standard title, and the section or sections of this appendix that reference the standard.~~

~~TABLE H116.1~~

~~REFERENCED STANDARDS~~

~~ASTM D635-18~~	~~Test Method for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position~~	~~H107.1.1~~
~~CEC - 25~~	~~California Electrical Code~~	~~H106.1, H106.2~~
~~NFPA 701-23~~	~~Methods of Fire Test for Flame Propagation of Textiles and Films~~	~~H106.1.1~~

SECTION 70. Section J101 is hereby amended to read as follows:

J101 GENERAL

J101.1 Scope.

The provisions of this ~~chapter~~Appendix apply to grading, excavation, and earthwork construction, including fills and embankments, and the control of runoff from graded sites, including erosion sediments and construction-related pollutants. ~~Where conflicts occur between the technical requirements of this chapter and the geotechnical report, the geotechnical report shall govern~~ The purpose of this Appendix is to

safeguard life, limb, property, and the public welfare by regulating grading on property subject to this Code.

J101.2 Flood hazard areas.

Unless the applicant has submitted ~~an engineering analysis~~a hydrology and hydraulic analysis, prepared in accordance with standard engineering practice by a ~~registered design professional~~California licensed civil engineer, that demonstrates the proposed work will not result in any increase in the level of the base flood, grading, excavation and earthwork construction, including fills and embankments, shall not be permitted in floodways designated in Chapter 11.60 of Title 11 – Health and Safety – of the Los Angeles County Code, or in floodways that are in flood hazard areas established in Section 1612.3 or in flood hazard areas where design flood elevations are specified but floodways have not been designated.

J101.3 General hazards.

Whenever the Building Official determines that any existing excavation, embankment, or fill on property subject to this Code has become a hazard to life and limb, or endangers property, or adversely affects the safety, use, or stability of a public way or drainage channel, the Building Official may give written notice thereof to the owner of the property upon which the excavation, embankment, or fill is located, or other person or agent in control of said property. Upon receipt of said notice, the owner or other person or agent in control of the property shall repair, eliminate, or secure such excavation, embankment, or fill so as to eliminate the hazard, in conformance with the requirements of this Code, within the period specified in said notice.

J101.4 Safety precautions.

If at any stage of the work the Building Official determines by inspection that unpermitted grading or grading work pursuant to a grading permit is likely to endanger any public or private property, or result in the deposition of debris on any public way, or interfere with any existing drainage course, the Building Official may order the work stopped by notice in writing served on any persons engaged in doing such work or causing such work to be done, and any such person shall immediately stop such work. The Building Official may authorize the work to proceed if the Building Official finds that adequate safety precautions can be taken or corrective measures incorporated in the work to avoid likelihood of such danger, deposition, or interference.

If the grading work as done was performed without a grading permit or has created or resulted in a hazardous condition, the Building Official shall give written notice requiring correction thereof as specified in Section J103 and Section J101 of this Code.

J101.5 Protection of utilities.

Both the permittee and the owner of the property on which the grading is performed shall be responsible for the prevention of damage to any public and/or private utilities or services.

J101.6 Protection of adjacent property.

Both the permittee and owner of the property on which the grading is performed shall be responsible for the prevention of damage to adjacent property. No person shall excavate on land sufficiently close to the property line to endanger any adjoining public street, sidewalk, alley, or other public or private property without taking adequate measures to support and protect such property from settling, cracking, or other damage that might result from the proposed work. Any person performing any grading that involves imported or exported materials shall take special precautions, as approved by the Building Official, to prevent such materials from being deposited on adjacent properties, any public way, and/or any drainage course.

J101.7 Storm water control measures.

Both the permittee and the owner of the property on which the grading is performed shall put into effect and maintain all precautionary measures necessary to protect adjacent water courses and public or private property from damage by erosion, flooding, and deposition of mud, debris, and construction-related pollutants originating from the site during grading and related construction activities.

J101.8 Maintenance of protective devices and rodent control.

All drainage structures and other protective devices and all burrowing rodent control measures, as shown on the grading plans approved by the Building Official, shall be maintained in a good condition and, when necessary, promptly repaired by the permittee or the owner of the property on which grading has been performed or by any other person or agent in control of such property.

J101.9 Correlation with other sections.

The provisions of this Appendix are independent of the provisions of Chapter 99 – Building and Property Rehabilitation – of Title 26 of this Code. This Section may be applied even though the same facts have been used to determine that there is a building, structure, or substandard property subject to the provisions of Chapter 99.

J101.10 Conditions of approval.

In granting any permit under this Code, the Building Official may include such conditions as may be reasonably necessary to prevent the creation of a nuisance or hazard to public or private property. Such conditions may include, but shall not be limited to:

1. Improvement of any existing grading to comply with the standards of this Code.

2. Requirements for securing of excavations or fills that would otherwise be hazardous.

3. Requirements for temporary excavations and shoring that are to be implemented on site and shown on the plans.

4. Requirements for mitigating, stabilizing, or eliminating unpermitted grading conducted on site.

SECTION 71. Section J102.1 is hereby amended to read as follows:

J102.1 Definitions.

~~The following words and terms shall, for the purposes of this appendix, have the meanings shown herein. Refer to Chapter 2 of this code for general definitions~~For the purposes of this Appendix, the terms, phrases, and words listed in this Section and their derivatives shall have the indicated meanings.

APPROVAL. When the proposed work or completed work conforms to this Appendix, as determined by and to the satisfaction of the Building Official.

AS-BUILT. See Section J105.12.

BEDROCK. The relatively solid, undisturbed rock in place either at the ground surface or beneath superficial deposits of alluvium, colluvium, and/or soil.

BENCH. A relatively level step excavated into earth material on which fill is to be placed.

BEST MANAGEMENT PRACTICE (BMP). Practices, prohibitions of practices, or other activities to reduce or eliminate the discharge of pollutants to surface waters. BMPs include structural and nonstructural controls, management practices, operation and maintenance procedures, and system, design, and engineering methods that are required to be employed in order to comply with the requirements of the National Pollution Discharge Elimination System (NPDES) permit issued to the County of Los Angeles (see Section 106.4.3 and Title 31 – Green Building Standards Code – of the Los Angeles County Code).

BORROW. Earth material acquired from an off-site location for use in grading on a site.

CIVIL ENGINEER. A professional engineer licensed in the State of California to practice in the field of civil works.

CIVIL ENGINEERING. The application of the knowledge of the forces of nature, principles of mechanics, and the properties of materials to the evaluation, design, and construction of civil works.

COMPACTION. The densification of a fill by mechanical means.

CUT. See "Excavation."

DESILTING BASINS. Physical structures, constructed for the removal of sediments from surface water runoff.

DESIGN ENGINEER. The Civil Engineer responsible for the preparation of the grading plans for the site grading work.

DOWN DRAIN. A device for collecting water from a swale or ditch located on or above a slope, and safely delivering it to an approved drainage facility.

EARTH MATERIAL. Any rock, natural soil, or fill, or any combination thereof.

ENGINEERING GEOLOGIST. A geologist experienced and knowledgeable in engineering geology, holding a license as a geologist in the specialty of engineering geology issued by the State of California under the applicable provisions of the Geologist and Geophysicist Act of the Business and Professions Code.

ENGINEERING GEOLOGY. The application of geologic knowledge and principles in the investigation and evaluation of naturally occurring rock and soil for use in the design of civil works.

EROSION. The wearing away of the ground surface as a result of the movement of wind, water, or ice.

EXCAVATION. The removal of earth material by artificial means, also referred to as a cut.

FIELD ENGINEER. The Civil Engineer responsible for performing the functions as set forth in Section J105.3.

FILL. Deposition of earth materials by artificial means.

GEOTECHNICAL ENGINEER. See "Soils Engineer."

GEOTECHNICAL HAZARD. An adverse condition due to landslide, settlement, and/or slippage. These hazards include, but are not limited to, loose debris, slopewash, and mud flows from natural or graded slopes.

GRADE. The vertical location of the ground surface.

GRADE, EXISTING. The grade prior to grading.

GRADE, FINAL. See Section J105.7.

GRADE, FINISHED. The grade of the site at the conclusion of all grading efforts.

GRADE, INITIAL. See Section J105.7.

GRADE, ROUGH. See Section J105.7.

GRADING. An excavation or fill or combination thereof.

KEY. A compacted fill placed in a trench excavated in earth material beneath the toe of a slope.

LANDSCAPE ARCHITECT. A person who holds a certificate to practice landscape architecture in the State of California under the applicable landscape architecture provisions of Division 3, Chapter 3.5, of the Business and Professions Code.

LINE. The horizontal location of the ground surface.

PERMITTEE. See Section J105.6.

PRIVATE SEWAGE DISPOSAL SYSTEM. A septic tank with effluent discharging into a subsurface disposal field, into one or more seepage pits, or into a combination of a subsurface disposal field and a seepage pit or of such other facilities as may be permitted in accordance with the procedures and requirements set forth in Title 28 – Plumbing Code – of the Los Angeles County Code and as required by the Los Angeles County Department of Public Health.

PROJECT CONSULTANTS. The professional consultants required by this Code, which may consist of the Design Engineer, Field Engineer, Soils Engineer, Engineering Geologist, and Landscape Architect as applicable to this Appendix.

PROFESSIONAL INSPECTION. The inspection required by this Code to be performed by the Project Consultants. Such inspections shall be sufficient to form an opinion relating to the conduct of the work.

QSD. Qualified SWPPP Developer as defined in the California State Construction General Permit.

QSP. Qualified SWPPP Practitioner as defined in the California State Construction General Permit.

SITE. A lot or parcel of land or contiguous combination thereof, under the same ownership, where grading is performed or permitted.

SLOPE. An inclined surface, the inclination of which is expressed as a ratio of horizontal distance to vertical distance.

SOIL. Naturally occurring superficial deposits overlying parent bedrock.

SOILS ENGINEER (GEOTECHNICAL ENGINEER). A licensed civil engineer experienced and knowledgeable in the practice of soils engineering.

SOILS ENGINEERING (GEOTECHNICAL ENGINEERING). The application of the principles of soils mechanics in the investigation, evaluation, and design of civil works involving the use of earth materials and the inspection or testing of construction thereof.

STORM DRAIN SYSTEM. A conveyance or system of conveyances, including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, and man-made channels, designed or used for collecting and conveying storm water.

STORM WATER POLLUTION PREVENTION PLAN (SWPPP). A site drawing with details, notes, and related documents that identify the measures proposed by the permittee to: (1) control erosion and prevent sediment and construction-related pollutants from being carried offsite by storm water, and (2) prevent non-storm-water discharges from entering the storm drain system.

SURFACE DRAINAGE. Flows over the ground surface.

SOIL TESTING AGENCY. An agency regularly engaged in the testing of soils and rock under the direction of a Civil Engineer experienced in soil testing.

TERRACE. A relatively level step constructed in the face of a graded slope for drainage and maintenance purposes.

SECTION 72. Section J103 is hereby amended to read as follows:

SECTION J103 PERMITS REQUIRED

J103.1 Permits required.

Except as exempted in Section J103.2, grading shall not be performed without first having obtained a permit ~~therefor~~ from the ~~b~~Building ~~o~~Official. A grading permit does not include the construction of retaining walls or other structures. A separate permit shall be obtained for each site and may cover both excavations and fills. Any engineered grading as described in Section J104.2.3 shall be performed by a contractor licensed by the State of California to perform the work described hereon. Regular grading less than 5,000 cubic yards may require a licensed contractor if the Building Official determines that special conditions or hazards exist.

J103.2 Exemptions.

A grading permit shall not be required for the following:

1. When approved by the Building Official, ~~G~~grading in an isolated, self-contained area, provided that the public is not endangered and that such grading will not adversely affect adjoining properties or public rights of way.

. . .

7. Exploratory excavations performed under the direction of a ~~registered design professional~~Geotechnical Engineer or Engineering Geologist. This shall not exempt grading of access roads or pads created for exploratory excavations. Exploratory excavations must not create a hazardous condition to adjacent properties or the public in accordance with Section J101.3. A restoration plan must be provided and approved by the Building Official for all grading of access roads or pads. Restoration shall be completed within 90 days after the completion of soils testing unless otherwise approved by the Building Official.

8. An excavation that does not exceed 50 cubic yards (38.3 m^3) and complies with one of the following conditions and as shown in Figure J103.2:

(a) Is less than 2 feet (0.6 m) in depth.

(b) Does not create a cut slope greater than 5 feet (1.5 m) measured vertically upward from the cut surface to the surface of the natural grade and is not steeper than 2 units horizontal to 1 unit vertical (50 percent slope).

9. A fill not intended to support a structure that does not obstruct a drainage course and complies with one of the following conditions and as shown in Figure J103.2:

(a) Is less than 1 foot (0.3 m) in depth and is placed on natural terrain with a slope flatter than 5 units horizontal to 1 unit vertical (20 percent slope).

(b) Is less than 3 feet (0.9 m) in depth at its deepest point measured vertically upward from natural grade to the surface of the fill, does not exceed 50 cubic yards, and creates a fill slope no steeper than 2 units horizontal to 1 unit vertical (50 percent slope).

(c) Is less than 5 feet (1.5 m) in depth at its deepest point measured vertically upward from natural grade to the surface of the fill, does not exceed 20 cubic yards, and creates a fill slope no steeper than 2 units horizontal to 1 unit vertical (50 percent slope).

Exemption from the permit requirements of this ~~a~~Appendix shall not be deemed to grant authorization for any work to be done in any manner in violation of the provisions of this ~~c~~Code or any other laws or ordinances of this jurisdiction.

J103.3 Unpermitted grading.

A person shall not own, use, occupy, or maintain any site containing unpermitted grading. For the purposes of this Code, unpermitted grading shall be defined as either of the following:

(1) Grading that was performed, at any point in time, without the required permit(s) having first been obtained from the Building Official, pursuant to Section J103.1;

(2) Grading for which a permit was obtained pursuant to this Section, but which was not completed, pursuant to Section J105, prior to the expiration of the permit, pursuant to Section 106.5.4, or

(3) Grading for which a permit was obtained pursuant to this Section, but where grading was performed outside the scope of the permit, pursuant to Section J105.

If the Building Official has determined that unpermitted grading was performed or has created or resulted in a hazardous condition, the Building Official shall give written notice requiring correction thereof as specified in Section 103, and in accordance with J101 of this Code.

The Building Official may require such conditions as may be reasonably necessary to prevent creation of a nuisance or hazard to public or private property. Such conditions may include, but shall not be limited to, conditions set forth in Section J101.10.

J103.4 Availability of permit at site.

No person shall perform any grading that requires a permit under this Appendix unless a copy of the grading permit and approved grading plans are in the possession of a responsible person and available at the site for the Building Official's reference.

J103.5 Grading fees.

Fees shall be assessed in accordance with the provisions of this Section. The amount of the fees shall be as specified in Section 107.

1. Plan Review Fees. When a plan or other data are required to be submitted, a plan review fee shall be paid at the time of submitting plans and specifications for review. Separate plan review fees shall apply to retaining walls or major drainage structures as required elsewhere in this Code. For excavation and fill on the same site, the fee shall be based on the volume of excavation or fill, whichever is

greater.

2. Permit Fees. A fee for each grading permit shall be paid to the Building Official at the time of issuance of the permit. Separate permits and fees shall apply to retaining walls or major drainage structures as required elsewhere in this Code.

3. Site Inspection Fee. When the Building Official finds that a visual inspection of the site is necessary to establish drainage requirements for the protection of property, existing buildings, or the proposed construction, a site inspection shall be made during plan check of grading plans. A fee for such inspection shall be paid to the Building Official at the time of submitting plans and specifications for review.

J103.6 Compliance with zoning code.

The Building Official may refuse to issue a grading permit for work on a site if either the proposed grading or the proposed land use for the site shown on the grading plan application does not comply with the provisions of Title 22 – Planning and Zoning – of the Los Angeles County Code.

J103.7 Grading security.

J103.7.1 Scope and purpose.

The Building Official may require a permittee or the owner(s) of the property on which the grading is proposed to occur to provide security as a condition of the issuance of a grading permit for any grading involving more than 1,000 cubic yards (764.6 m^3). Where unusual conditions or special hazards exist, the Building Official may require security for grading involving less than 1,000 cubic yards (764.6 m^3). The purpose of the security shall be to guarantee the permittee's obligation to mitigate any hazardous

conditions, including flood and geotechnical hazards, that may be created if the grading is not completed in accordance with the approved plans and specifications, and to complete any work that the Building Official determines is necessary to bring the property into compliance with this Appendix.

Security required by this Section may include incidental off-site grading on property contiguous with the site to be developed, provided written consent of the owner of such contiguous property is filed with the Building Official.

The Building Official may waive the requirements for security for the following:

1. Grading being done by or for a governmental agency.

2. Grading necessary to remove a geotechnical hazard, where such work is covered by an agreement and security is posted pursuant to the provisions of Title 21 – Subdivisions – of the Los Angeles County Code.

3. Grading on a site, not exceeding a slope of 3 units horizontal to 1 unit vertical, provided such grading as determined by the Building Official will not affect drainage from or to adjacent properties.

4. Filling of holes or depressions, provided such grading will not affect the drainage from or to adjacent properties.

J103.7.2 Form of security.

The security referred to in Section J103.7.1 shall be in one of the following forms:

1. A bond furnished by a corporate surety authorized to do business in this state.

2. Cash.

3. Savings and loan certificates or shares deposited and assigned to the County as provided in Chapter 4.36 of Title 4 – Revenue and Finance – of the Los Angeles County Code.

4. An instrument of credit from a financial institution subject to regulation by the State or federal government and pledging that funds in the amount required by the Building Official are on deposit and guaranteed for payment, or a letter of credit is issued by such a financial institution.

J103.7.3 Amount of security.

The amount of security shall be based on the number of cubic yards of material in either excavation or fill, whichever is greater, and the cost of all drainage or other protective devices or work necessary to eliminate potential flooding and geotechnical hazards. That portion of the security valuation based on the volume of material in either excavation or fill shall be computed as follows:

100,000 cubic yards or less – 50 percent of the estimated cost of grading work.

Over 100,000 cubic yards – 50 percent of the estimated cost of the first 100,000 cubic yards plus 25 percent of the estimated cost of that portion in excess of 100,000 cubic yards.

When the rough grading has been completed in conformance with the requirements of this Code, the Building Official may, at his or her discretion, consent to a proportionate reduction of the security to an amount estimated to be adequate to ensure completion of the grading work, site development, or planting remaining to be performed. The costs referred to in this Section shall be as estimated by the Building

Official.

J103.7.4 Conditions.

All security shall include conditions that the principal shall:

1. Comply with all of the provisions of this Code, applicable laws, and ordinances;

2. Comply with all of the terms and conditions of the grading permit; and

3. Complete all of the work authorized by the permit.

J103.7.5 Term of security.

The term of each security shall begin upon the filing with the Building Official, and the security shall remain in effect until the work authorized by the grading permit is completed and approved by the Building Official.

J103.7.6 Default procedures.

In the event any grading for which a permit has been issued is not completed in accordance with the approved plans and specifications for said work or with all terms and conditions of the grading permit, the Building Official may declare that a default has occurred. The Building Official shall give notice thereof to the principal and surety or financial institution executing the security, or to the owner in the case of a cash bond or assignment.

The Building Official may thereafter determine the work that is necessary to mitigate any hazardous or unsafe conditions on the site and cause such work to be performed.

Where the security consists of a bond or instrument of credit, the surety or financial institution executing the security shall be responsible for the payment of all costs and expenses incurred by the Building Official in causing such work to be performed, up to the full amount of the security. In the case of cash security or assignment, the Building Official may pay all costs and expenses incurred in causing such work to be performed from the funds deposited and return any unused portion of such deposit or funds to the person making said deposit or assignment.

J103.7.7 Right of entry.

The Building Official or the authorized representative of any surety company or financial institution furnishing the security shall have access to the premises described in the permit for the purpose of inspecting the work.

In the event of default, as described in Section J103.7.6, the surety or financial institution furnishing the security, or the Building Official, or any person employed or engaged on the behalf of any of these parties, shall have the right to go upon the premises to perform the mitigation work, as described in Section J103.7.6.

Neither the permittee, owner, or any other person shall interfere with or obstruct the ingress into or egress from any such premises of any authorized representative of the surety or financial institution executing the security or the Building Official engaged to perform the mitigation work, as described in Section J103.7.6.

SECTION 73. Figure J103.2 is hereby added to read as follows:

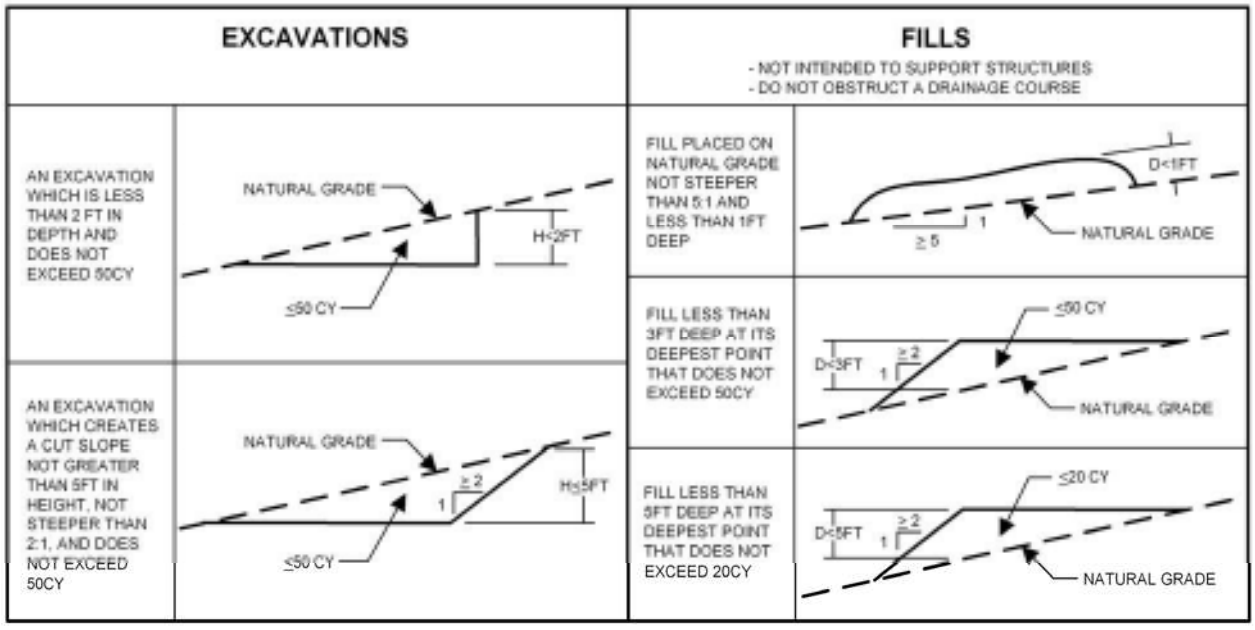


FIGURE J103.2

GRADING EXEMPTION CASES

SECTION 74. Section J104 is hereby amended to read as follows:

SECTION J104 PERMIT APPLICATION AND SUBMITTALS

J104.1 Submittal requirements.

In addition to the provisions of Section ~~105.3 and 1.8.4, as applicable~~106.4, the applicant shall state the ~~estimated quantities of excavation and fill~~following:

1. The estimated quantities of excavation, fill, borrow, removal, or combination thereof.

2. The proposed land use for the site on which the grading is to be performed.

J104.2 Site plan requirements.

In addition to the provisions of Section ~~107~~106, a grading plan shall show the existing grade and finished grade in contour intervals of sufficient clarity to indicate the nature and extent of the work and show in detail that it complies with the requirements of this ~~c~~Code. The plans shall show the existing grade on adjoining properties in sufficient detail to identify how grade changes will conform to the requirements of this ~~c~~Code.

J104.2.1 Grading designation.

Grading in excess of 5,000 cubic yards (3,825 m^3), or that is proposed to support any structure, shall be designated as "engineered grading." All engineered grading shall be performed in accordance with an approved grading plan and specifications prepared by a Civil Engineer, unless otherwise required by the Building Official.

Grading involving less than 5,000 cubic yards (3,825 m^3), and that will not support any structure, shall be designated "regular grading" unless the permittee chooses to have the grading be designated as engineered grading, or the Building Official determines that, due to the existence of special conditions or unusual hazards, the grading should be designated as engineered grading.

J104.2.2 Regular grading requirements.

In addition to the provisions of Sections 106 and J104.2, an application for a regular grading permit shall be accompanied by plans of sufficient clarity to indicate the nature and extent of the work. The plans shall give the location of the work, the name of the owner, and the name of the person who prepared the plan. The plan shall

include the following information:

1. General vicinity of the proposed site.

2. Limits and depths of cut and fill.

3. Location of any buildings or structures where work is to be performed, and the location of any buildings or structures within 15 feet (4.6 m) of the proposed grading.

4. Contours, flow areas, elevations, or slopes that define existing and proposed drainage patterns.

5. Storm water mitigation measures in accordance with the requirements of Section 106.4.3 of this Code. See Section J110.8 for specific requirements.

6. Location of existing and proposed utilities, drainage facilities, and recorded public and private easements and restricted use areas.

7. Location of all recorded floodways as established by Chapter 11.60 of Title 11 – Health and Safety – of the Los Angeles County Code.

8. Location of all Special Flood Hazard Areas as designated and defined in Title 44 of the Code of Federal Regulations.

J104.2.3 Engineered grading requirements.

In addition to the provisions of Sections 106 and J104.2, an application for a permit for engineered grading shall be accompanied by plans and specifications and supporting data consisting of a geotechnical report and engineering geology report.

Specifications shall contain information covering construction and material requirements. Plans shall be drawn to scale on paper and shall be of sufficient clarity to indicate the nature and extent of the work proposed and shall show in detail that the proposed work will conform to the provisions of this Code and all relevant laws, ordinances, rules, and regulations. The first sheet of the plans shall depict the location of the proposed work, the name and address of the owner, and the name and address of the person who prepared the plans.

The plans shall include or be accompanied by the following information:

1. General vicinity of the proposed site.

2. Property limits and accurate contours of existing ground and details of terrain and area drainage.

3. Limiting dimensions, elevations, or finish contours to be achieved by the grading, proposed drainage channels, and related construction.

4. Detailed plans of all surface and subsurface drainage devices, walls, cribbing, dams, and other protective devices to be constructed with, or as a part of, the proposed work. In addition, a map showing the drainage area and the estimated runoff of the area served by any drains.

5. Location of any existing or proposed buildings or structures located on the property on which the work is to be performed and the location of any buildings or structures on adjacent properties that are within 15 feet (4.6 m) of the property or that may be affected by the proposed grading operations.

6. Recommendations in the geotechnical report and the engineering geology report shall be incorporated into the grading plans or specifications. When approved by the Building Official, specific recommendations contained in the soils engineering report and the engineering geology report, that are applicable to grading, may be included by reference.

7. The dates of the geotechnical and engineering geology reports together with the names, addresses, and phone numbers of the firms or individuals who prepared the reports.

8. A statement of the quantities of material to be excavated and/or filled. Earthwork quantities shall include quantities for geotechnical and geological remediation. In addition, a statement of the quantities of material to be imported or exported from the site.

9. A statement of the estimated starting and completion dates for proposed work.

10. A statement signed by the owner, acknowledging that a Design Engineer, Field Engineer, Geotechnical Engineer, and Engineering Geologist, when appropriate, will be employed to perform the services required by this Code, when the Building Official requires that such professional persons be so employed. These acknowledgments shall be on a form furnished by the Building Official.

11. Storm water mitigation measures are required to be shown on the grading plan in accordance with the requirement of Section 106.4.3 of this Code. See Section J110.8 for specific requirements.

12. A drainage plan for those portions of property proposed to be utilized as a building site (building pad), including elevations of floors with respect to finish site grade and locations of proposed stoops, slabs, and fences that may affect drainage.

13. Location and type of any proposed private sewage disposal system, including the location of the expansion area.

14. Location of existing and proposed utilities, drainage facilities, and recorded public and private easements and restricted use areas.

15. Location of all recorded floodways as established by Chapter 11.60 of Title 11 – Health and Safety – of the Los Angeles County Code.

16. Location of all Special Flood Hazard Areas as designated and defined in Title 44 of the Code of Federal Regulations.

J104.3 Geotechnical and engineering geology reports.

~~A geotechnical report prepared by registered design professionals shall be provided. The report shall contain not less than the following:~~

~~1. The nature and distribution of existing soils.~~

~~2. Conclusions and recommendations for grading procedures.~~

~~3. Soil design criteria for any structures or embankments required to accomplish the proposed grading.~~

~~4. Where necessary, slope stability studies, and recommendations and conclusions regarding site geology.~~

The geotechnical report required by Section J104.2.3 shall include data regarding the nature, distribution, and strength of existing soils, conclusions, and

recommendations for grading procedures and design criteria for corrective measures, including buttress fills, when necessary, and an opinion on the adequacy for the intended use of sites to be developed by the proposed grading as affected by geotechnical factors, including the stability of slopes. All reports shall conform with the requirements of Section 111 and shall be subject to review by the Building Official. Supplemental reports and data may be required as the Building Official may deem necessary. Recommendations included in the reports and approved by the Building Official shall be incorporated in the grading plan or specifications.

The engineering geology report required by Section J104.2.3 shall include an adequate description of the geology of the site, conclusions, and recommendations regarding the effect of geologic conditions on the proposed development, and an opinion on the adequacy for the intended use of sites to be developed by the proposed grading, as affected by geologic factors. The engineering geology report shall include a geologic map and cross sections utilizing the most recent grading plan as a base. All reports shall conform with the requirements of Section 111 and shall be subject to review by the Building Official. Supplemental reports and data may be required as the Building Official may deem necessary. Recommendations included in the reports and approved by the Building Official shall be incorporated in the grading plan or specifications.

Exception: A geotechnical or engineering geology report is not required where the ~~b~~Building ~~code o~~Official determines that the nature of the work applied for is such that a report is not necessary.

J104.4 Liquefaction study.

For sites with maximum considered earthquake spectral response accelerations at short periods (S_s) greater than 0.5g as determined by Chapter 11 of ASCE 7, a study of the liquefaction potential of the site shall be provided and the recommendations incorporated in the plans. A geotechnical investigation will be required when the proposed work is a "Project" as defined in Public Resources Code section 2693, and is located in an area designated as a "Seismic Hazard Zone" as defined in section 3722 of Title 14 of the Code of Regulations and on Seismic Hazard Zone Maps issued by the State Geologist under Public Resources Code section 2696.

Exception: A liquefaction study is not required where the ~~b~~Building ~~o~~Official determines from established local data that the liquefaction potential is low.

SECTION 75. Section J105 is hereby amended to read as follows:

SECTION J105 INSPECTIONS

J105.1 General.

Grading ~~I~~inspections shall be governed by Section ~~110, Chapter 1, Division II~~108 and as indicated herein. Grading operations for which a permit is required shall be subject to inspection by the Building Official. In addition, professional inspection of grading operations shall be performed by the Field Engineer, the Geotechnical Engineer, and the Engineering Geologist retained to provide such services in accordance with this Section for engineered grading and as required by the Building Official for regular grading.

J105.2 Special and supplemental inspections.

The special inspection requirements of Section 1705.6 shall apply to work performed under a grading permit where required by the ~~b~~Building ~~o~~Official. In addition to the called inspections specified in Section J105.7, the Building Official may make such other inspections as may be deemed necessary to determine that the work is being performed in conformance with the requirements of this Code. The Building Official may require investigations and reports by an approved soil testing agency, Geotechnical Engineer and/or Engineering Geologist, and Field Engineer. Inspection reports shall be provided when requested in writing by the Building Official.

The Building Official may require continuous inspection of drainage devices by the Field Engineer in accordance with this Section when the Building Official determines that the drainage devices are necessary for the protection of the structures in accordance with Section 110.

J105.3 Field engineer.

The Field Engineer shall provide professional inspection of those parts of the grading project within such engineer's area of technical specialty, oversee and coordinate all field surveys, including setting grade stakes, and provide site inspections during grading operations to ensure the site is graded in accordance with the approved grading plan and the appropriate requirements of this Code. During site grading, and at the completion of both rough grading and final grading, the Field Engineer shall submit statements and reports as required by Sections J105.11 and J105.12. If revised grading plans are required during the course of the work, they shall be prepared by a

Civil Engineer and approved by the Building Official.

J105.4 Geotechnical engineer.

The Geotechnical Engineer shall provide professional inspection of those parts of the grading project within such engineer's area of technical specialty, which shall include observation during grading and testing for required compaction. The Geotechnical Engineer shall provide sufficient observation during the preparation of the natural ground and placement and compaction of the fill to verify that such work is being performed in accordance with the conditions of the approved plan and the appropriate requirements of this Appendix. If conditions differing from the approved geotechnical engineering and engineering geology reports are encountered during grading, the Geotechnical Engineer shall provide revised recommendations to the permittee, the Building Official, and the Field Engineer.

J105.5 Engineering geologist.

The Engineering Geologist shall provide professional inspection of those parts of the grading project within such engineer's area of technical specialty, which shall include professional inspection of the bedrock excavation to determine if conditions encountered are in conformance with the approved report. If conditions differing from the approved engineering geology report are encountered, the Engineering Geologist shall provide revised recommendations to the Geotechnical Engineer.

J105.6 Permittee.

The permittee shall be responsible for ensuring that the grading is performed in accordance with the approved plans and specifications and in conformance with the provisions of this Code. The permittee shall engage project consultants, if required under the provisions of this Code, to provide professional inspections on a timely basis. The permittee shall act as a coordinator between the project consultants, the contractor, and the Building Official. In the event of changed conditions, the permittee shall be responsible for informing the Building Official of such change and shall provide revised plans for approval.

J105.7 Required inspections.

The permittee shall call for and schedule an inspection by the Building Official at the following various stages of work and shall obtain the approval of the Building Official prior to proceeding to the next stage of work:

Pre-grade – Before any construction or grading activities occur at the site. The permittee shall ensure that all project consultants are present at the pre-grade inspection.

Initial grade – When the site has been cleared of vegetation and unapproved fill, and has been scarified, benched, or otherwise prepared for fill. No fill shall have been placed prior to this inspection.

Rough grade – When approximate final elevations have been established, drainage terraces, swales, and other drainage devices necessary for the protection of the building sites from flooding have been installed, berms have been installed at the

top of the slopes, and the statements required by Section J105.12 have been received.

Final grade – When grading has been completed, all drainage devices necessary to drain the building pad have been installed, slope planting has been established, irrigation systems have been installed, and the as-built plans and required statements and reports have been submitted.

J105.8 Notification of noncompliance.

If, in the course of fulfilling their respective duties under this Appendix, the Field Engineer, the Geotechnical Engineer, or the Engineering Geologist determines that the work is not being done in conformance with this Appendix or the approved grading plans, the Field Engineer, the Geotechnical Engineer, or the Engineering Geologist shall immediately report, in writing, the discrepancies and the recommended corrective measures to the permittee and to the Building Official.

J105.9 Transfer of responsibility.

If the Field Engineer, the Geotechnical Engineer, or the Engineering Geologist of record is changed at any time after the grading plans required pursuant to Section J104.2.2 or J104.2.3 have been approved by the Building Official, the permittee shall immediately provide written notice of such change to the Building Official. The Building Official may stop the grading from commencing or continuing until the permittee has identified a replacement and the replacement has agreed in writing to assume responsibility for those parts of the grading project that are within the replacement's area of technical competence.

J105.10 Non-inspected grading.

No person shall own, use, occupy, or maintain any non-inspected grading. For the purposes of this Code, non-inspected grading shall be defined as any grading for which a grading permit was first obtained, pursuant to Section J103, above, but which has progressed beyond any point requiring inspection and approval by the Building Official without such inspection and approval having been obtained.

J105.11 Routine field inspections and reports.

Unless otherwise directed by the Building Official, the Field Engineer for all engineered grading projects shall prepare routine inspection reports and shall file these reports with the Building Official as follows:

1. Bi-weekly during all times when grading of 400 cubic yards or more per week is occurring on the site;

2. Monthly, at all other times; and

3. At any time when requested in writing by the Building Official.

Such reports shall certify to the Building Official that the Field Engineer has inspected the grading site and related activities and has found them in compliance with the approved grading plans and specifications, this Code, all grading permit conditions, and all other applicable ordinances and requirements. The reports shall conform to a standard "Report of Grading Activities" form, which shall be provided by the Building Official.

J105.12 Completion of work.

Upon completion of the rough grading work and at the final completion of the work, the following reports and drawings and supplements thereto are required for engineered grading or when professional inspection is otherwise required by the Building Official:

1. An "as-built" grading plan prepared by the Field Engineer retained to provide such services in accordance with Section J105.3 showing all plan revisions as approved by the Building Official. This shall include original ground surface elevations, as-built ground surface elevations, lot drainage patterns, and the locations and elevations of surface drainage facilities and the outlets of subsurface drains. As-built locations, elevations, and details of subsurface drains shall be shown as reported by the Geotechnical Engineer.

The as-built grading plan shall be accompanied by a certification by the Field Engineer that to the best of his or her knowledge, the work within the Field Engineer's area of responsibility was done in accordance with the final approved grading plan.

2. A report prepared by the Geotechnical Engineer retained to provide such services in accordance with Section J105.4, including locations and elevations of field density tests, summaries of field and laboratory tests, other substantiating data, and comments on any changes made during grading and their effect on the recommendations made in the approved geotechnical engineering investigation report. The report shall include a certification by the Geotechnical Engineer that, to the best of his or her knowledge, the work within the Geotechnical Engineer's area of responsibility

is in accordance with the approved geotechnical engineering report and applicable provisions of this Appendix. The report shall contain a finding regarding the safety of the completed grading and any proposed structures against hazard from landslide, settlement, or slippage.

3. A report prepared by the Engineering Geologist retained to provide such services in accordance with Section J105.5, including a final description of the geology of the site and any new information disclosed during the grading and the effect of such new information, if any, on the recommendations incorporated in the approved grading plan. The report shall contain a certification by the Engineering Geologist that, to the best of his or her knowledge, the work within the Engineering Geologist's area of responsibility is in accordance with the approved engineering geology report and applicable provisions of this Appendix. The report shall contain a finding regarding the safety of the completed grading and any proposed structures against hazard from landslide, settlement, or slippage. The report shall contain a final as-built geologic map and cross-sections depicting all the information collected prior to and during grading.

4. The grading contractor shall certify, on a form prescribed by the Building Official, that the grading conforms to said as-built plan and the approved specifications.

5. When a landscape permit is required by Section 490.1 of the California Department of Water Resources Model Water Efficient Landscape Ordinance, the Landscape Architect shall certify on a form prescribed by the Building Official that the landscaping conforms to approved landscape plans and specifications.

J105.13 Notification of completion.

The permittee shall notify the Building Official when the grading operation is ready for final inspection. Final approval shall not be given until all work, including installation of all drainage facilities and their protective devices, and all erosion-control measures, have been completed in accordance with the final approved grading plan, and all required reports have been submitted and approved.

J105.14 Change of ownership.

Unless otherwise required by the Building Official, when a grading permit has been issued on a site and the owner sells the property prior to final grading approval, the new property owner shall be required to obtain a new grading permit.

SECTION 76. Section J106.1 is hereby amended to read as follows:

J106.1 Maximum cut slope.

The slope of cut surfaces shall be not steeper than is safe for the intended use, and shall be not more than one unit vertical in two units horizontal (50-percent slope) unless the owner or the owner's authorized agent furnishes a geotechnical or an engineering geology report, or both, justifying a steeper slope. The reports must contain a statement by the Geotechnical Engineer or Engineering Geologist that the site was investigated and an opinion that a steeper slope will be stable and will not create a hazard to public or private property, in conformance with the requirements of Section 111. The Building Official may require the slope of the cut surfaces to be flatter in slope than 2 units horizontal to 1 unit vertical (50-percent slope) if the Building Official finds it necessary for the stability and safety of the slope.

Exceptions:

~~1.~~ ~~A cut surface shall be permitted to be at a slope of 1.5 units horizontal to one unit vertical (67-percent slope) provided that all of the following are met:~~

~~1.~~1. It is not intended to support structures or surcharges.

~~1.~~2. It is adequately protected against erosion.

~~1.~~3. It is no more than 8 feet (2438 mm) in height.

~~1.~~4. It is approved by the ~~b~~Building ~~code o~~Official.

~~1.~~5. Ground water is not encountered.

~~2. A cut surface in bedrock shall be permitted to be at a slope of 1 unit horizontal to 1 unit vertical (100 percent slope).~~

SECTION 77. Section J107 is hereby amended to read as follows:

SECTION J107 FILLS

J107.1 General.

Unless otherwise recommended in the geotechnical report, fills shall comply with the provisions of this ~~s~~Section.

Exception: The Building Official may permit a deviation from the provisions of this Appendix for minor fills not intended to support structures, where no geotechnical report has been prepared.

J107.2 Surface Preparation.

Fill slopes shall not be constructed on natural slopes steeper than 2 units horizontal to 1 unit vertical (50 percent slope). The ground surface shall be prepared to receive fill by removing vegetation, topsoil, and other unsuitable materials (including any existing fill that does not meet the requirements of this Appendix), and scarifying the ground to provide a bond with the fill material.

Subdrains shall be provided under all fills placed in natural drainage courses and in other locations where seepage is evident, except where the Geotechnical Engineer or Engineering Geologist recommends otherwise. Such sub-drainage systems shall be of a material and design approved by the Geotechnical Engineer and acceptable to the Building Official. The Geotechnical Engineer shall provide continuous inspection during the process of subdrain installations. The location of the subdrains shall be shown on a plan prepared by the Geotechnical Engineer. Excavations for the subdrains shall be inspected by the Engineering Geologist when such subdrains are included in the recommendations of the Engineering Geologist.

J107.3 Benching.

Where existing grade is at a slope steeper than one unit vertical in five units horizontal (20-percent slope) and the depth of the fill exceeds 5 feet (1524 mm), benching shall be provided into sound bedrock or other competent material as determined by the Geotechnical Engineer in accordance with Figure J107.3, or as determined by the Geotechnical Engineer. When fill is to be placed over a cut, ~~A~~a key shall be provided that is not less than 10 feet (3048 mm) in width and 2 feet (610 mm) in

depth. The area beyond the toe of fill shall be sloped for sheet overflow or a paved drain shall be constructed thereon. The Geotechnical Engineer or Engineering Geologist, or both, shall inspect and approve the cut as being suitable for the foundation and placement of fill material before any fill material is placed on the excavation.

. . .

J107.4 Fill material.

Fill material shall not include organic, frozen, or other deleterious materials. Rock or similar irreducible material greater than 12 inches (305 mm) in any dimension shall not be included in fills.

Exception: The Building Official may permit placement of larger rock when the Geotechnical Engineer properly devises and recommends a method of placement, and continuously inspects the placement and approves the fill stability. The following requirements shall also apply:

1. Prior to issuance of the grading permit, potential rock disposal areas shall be delineated on the grading plan.

2. Rock sizes greater than 12 inches (0.3 m) in maximum dimension shall be 10 feet (3.0 m) or more below grade, measured vertically.

3. Rocks shall be placed so as to assure filling of all voids with well-graded soil.

4. The reports submitted by the Geotechnical Engineer shall acknowledge the placement of the oversized material and whether the work was performed in accordance with the engineer's recommendations and the approved plans.

5. The location of oversized rock dispersal areas shall be shown on the as-built plan.

J107.5 Compaction.

All fill material shall be compacted to a minimum of 90 percent of maximum density as determined by ASTM D1557, Modified Proctor, in lifts not exceeding 12 inches (305 mm) in depth within 40 feet (12.2 m) below finished grade and 93 percent of maximum dry density deeper than 40 feet (12.2 m) below finished grade, unless a lower relative compaction (not less than 90 percent of maximum dry density) is justified by the Geotechnical Engineer and approved by the Building Official. Where ASTM D1557, Modified Proctor, is not applicable, a test acceptable to the Building Official shall be used.

Field density shall be determined by a method acceptable to the Building Official. However, not less than ten percent of the required density tests, uniformly distributed, shall be obtained by the Sand Cone Method.

Fill slopes steeper than 2 units horizontal to 1 unit vertical (50-percent slope) shall be constructed by the placement of soil a sufficient distance beyond the proposed finish slope to allow compaction equipment to operate at the outer surface limits of the final slope surface. The excess fill is to be removed prior to completion or rough grading. Other construction procedures may be utilized when it is first shown to the

satisfaction of the Building Official that the angle of slope, construction method, and other factors will comply with the intent of this Section.

J107.6 Maximum slope.

The slope of fill surfaces shall be not steeper than is safe for the intended use. Fill slopes steeper than one unit vertical in two units horizontal (50-percent slope) shall be justified by ~~a~~ geotechnical reports ~~or engineering data~~conforming to the requirements of Section 111, containing a statement by the Geotechnical Engineer that the site has been investigated and an opinion that a steeper fill slope will be stable and will not create a hazard to public or private property. Substantiating calculations and supporting data may be required where the Building Official determines that such information is necessary to verify the stability and safety of the proposed slope. The Building Official may require the fill slope to be constructed with a face flatter in slope than 2 units horizontal to 1 unit vertical (50-percent slope) if the Building Official finds it necessary for stability and safety of the slope.

J107.7 Slopes to receive fill.

Where fill is to be placed above the top of an existing slope steeper than 3 units horizontal to 1 unit vertical (33-percent slope), the toe of the fill shall be set back from the top edge of the existing slope a minimum distance of 6 feet (1.8 m) measured horizontally or such other distance as may be specifically recommended by a Geotechnical Engineer or Engineering Geologist and approved by the Building Official.

J107.8 Inspection of fill.

For engineered grading, the Geotechnical Engineer shall provide sufficient inspections during the preparation of the natural ground and the placement and compaction of the fill to ensure that the work is performed in accordance with the conditions of plan approval and the appropriate requirements of this Appendix. In addition to the above, the Geotechnical Engineer shall provide continuous inspection during the entire fill placement and compaction of fills that will exceed a vertical height or depth of 30 feet (9.1 m) or result in a slope surface steeper than 2 units horizontal to 1 unit vertical (50-percent slope).

J107.9 Testing of fills.

Sufficient tests of the fill soils shall be made to determine the density and to verify compliance of the soil properties with the design requirements. This includes soil types and shear strengths in accordance with Section J111 Referenced Standards.

SECTION 78. Section J108 is hereby amended to read as follows:

SECTION J108 SETBACKS

J108.1 General.

Cut and fill slopes shall be set back from the property lines in accordance with this ~~s~~Section. Setback dimensions shall be measured perpendicular to the property line and shall be as shown in Figure J108.1, unless substantiating data is submitted justifying reduced setbacks, and reduced setbacks are recommended in a geotechnical engineering and engineering geology report approved by the Building Official.

J108.2 Top of slope

The setback at the top of a cut slope shall be not less than that shown in Figure J108.1, or than is required to accommodate any required interceptor drains, whichever is greater. For graded slopes, the property line between adjacent lots shall be at the apex of the berm at the top of the slope. Property lines between adjacent lots shall not be located on a graded slope steeper than 5 units horizontal to 1 unit vertical (20-percent slope).

J108.3 Toe of fill ~~S~~slope protection.

The setback from the toe of a fill slope shall not be less than that shown by Figure J108.1. Where required to protect adjacent properties at the toe of a slope from adverse effects of the grading, additional protection, approved by the ~~b~~Building ~~o~~Official, shall be included. Examples of such protection may include but shall not be limited to:

1. Setbacks greater than those required by Figure J108.1.
2. Provisions for retaining walls or similar construction.
3. Erosion protection of the fill slopes.
4. Provision for the control of surface waters.

J108.4 Alternate setbacks.

The Building Official may approve alternate setbacks if he or she determines that no hazard to life or property will be created or increased. The Building Official may require an investigation and recommendation by a qualified engineer or Engineering Geologist to justify any proposed alternate setback.

SECTION 79. Figure J108.1 is hereby amended to read as follows:

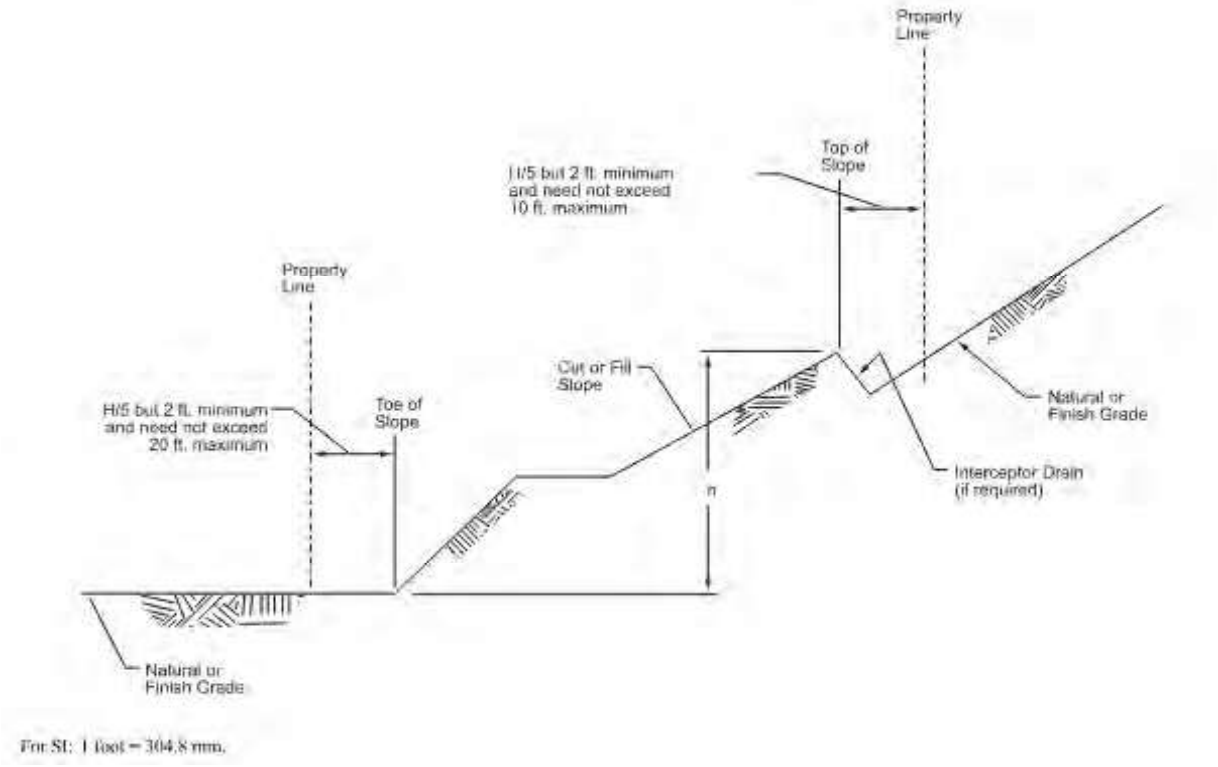


FIGURE J108.1
~~DRAINAGE~~SETBACK DIMENSIONS

SECTION 80. Section J109 is hereby amended to read as follows:

SECTION J109 DRAINAGE AND TERRACING

J109.1 General.

Unless otherwise recommended by a ~~registered design professional~~licensed Civil Engineer and approved by the Building Official, drainage facilities and terracing shall be provided in accordance with the requirements of ~~this s~~Section J109.2 for all cut and fill slopes 3 units horizontal to 1 unit vertical (33-percent slope) and steeper.

~~**EXCEPTION:** Drainage facilities and terracing need not be provided where the ground slope is not steeper than one unit vertical in three units horizontal (33-percent slope).~~

For slopes flatter than 3 units horizontal to 1 unit vertical (33-percent slope) and steeper than 5 units horizontal to 1 unit vertical (20-percent slope), a paved swale or ditch shall be installed at 30-foot (9.1 m) vertical intervals to control surface drainage and debris. Swales shall be sized based on contributory area and have adequate capacity to convey intercepted waters to the point of disposal as defined in Section J109.5. Swales must be paved with reinforced concrete not less than 3 inches (0.08 m) in thickness, reinforced with 6-inch (0.2 m) by 6-inch (0.2 m) No. 10 by No. 10 welded wire fabric or equivalent reinforcing centered in the concrete slab or an equivalent approved by the Building Official. Swales must have a minimum flow line depth of 1 foot (0.3 m) and a minimum paved width of 18 inches (0.5 m). Swales shall have a minimum gradient of not less than 5 percent. There shall be no reduction in grade along the direction of flow unless the velocity of flow is such that slope debris will remain in suspension on the reduced grade.

J109.2 Drainage ~~T~~terraces.

Drainage ~~T~~terraces not less than ~~6 feet (1829 mm)~~8 feet (2.4 m) in width shall be established at not more than 30-foot (9144 mm) vertical intervals on all cut or fill slopes to control surface drainage and debris. ~~Suitable access shall be provided to allow for cleaning and maintenance.~~

~~Where more than two terraces are required, one terrace, located at~~

~~approximately mid-height, shall be at least 12 feet (3658 mm) in width.~~

~~Swales or ditches shall be provided on terraces. They shall have a minimum gradient of one unit vertical in 20 units horizontal (5-percent slope) and shall be paved with concrete not less than 3 inches (76 mm) in thickness, or with other materials suitable to the application. They shall have a depth not less than 12 inches (305 mm) and a width not less than 5 feet (1524 mm).~~

~~A single run of swale or ditch shall not collect runoff from a tributary area exceeding 13,500 square feet (1256 m2) (projected) without discharging into a down drain~~When only one terrace is required, it shall be at mid-height. For cut or fill slopes greater than 100 feet (30.5 m) and up to 120 feet (36.6 m) in vertical height, one terrace at approximately mid-height shall be 20 feet (6.1 m) in width. Terrace widths and spacing for cut and fill slopes greater than 120 feet (36.6 m) in height shall be designed by the Civil Engineer and approved by the Building Official. Suitable access shall be provided to permit proper cleaning and maintenance.

Drainage swales on terraces shall have a longitudinal grade of not less than 5 percent nor more than 12 percent and a minimum depth of 1 foot (0.3 m) at the flow line. There shall be no reduction in grade along the direction of flow unless the velocity of flow is such that slope debris will remain in suspension on the reduced grade. Drainage swales must be paved with reinforced concrete not less than 3 inches (0.8 m) in thickness, reinforced with 6-inch (0.2 m) by 6-inch (0.2 m) No. 10 by No. 10 welded wire fabric or equivalent reinforcing centered in the concrete slab or an approved equal paving. Drainage swales shall have a minimum depth at the deepest point of 1 foot

(0.3 m) and a minimum paved width of 5 feet (1.5 m). Drainage swales on terraces shall be sized based on contributory area and have adequate capacity to convey intercepted waters to the point of disposal as defined in Section J109.5. Downdrains or drainage outlets shall be provided at approximately 300 foot (91.4 m) intervals along the drainage terrace or at equivalent locations. Down drains and drainage outlets shall be of approved materials and of adequate capacity to convey the intercepted waters to the point of disposal as defined in Section J109.5.

J109.3 Interceptor drains and overflow protection.

Berms, ~~I~~interceptor drains, swales, or other devices shall be installed along the top of cut slopes ~~receiving drainage from a tributary width greater than 40 feet (12 192 mm), measured horizontally~~to prevent surface waters from overflowing onto and damaging the face of a slope. Berms used for slope protection shall not be less than 12 inches (0.3 m) above the level of the pad and shall slope back at least 4 feet (1.2 m) from the top of the slope.

Interceptor drains shall be installed along the top of graded slopes greater than 5 feet in height receiving drainage from a slope with a tributary width greater than 30 feet (9.1 m), measured horizontally. They shall have a minimum depth of 1 foot (305 mm) and a minimum width of 3 feet (915 mm). The slope shall be approved by the ~~b~~Building ~~o~~Official, but shall be not less than one unit vertical in 50 units horizontal (2-percent slope). The drain shall be paved with concrete not less than 3 inches (76mm) in thickness, or by other materials suitable to the application, and reinforced as required for drainage terraces. Discharge from the drain shall be accomplished in a manner to

prevent erosion and shall be approved by the ~~b~~Building ~~o~~Official.

. . .

J109.5 Disposal.

All drainage facilities shall be designed to convey waters to the nearest-practicable street, storm drain, or natural watercourse or drainage way approved by the Building Official or other appropriate governmental agency, provided that the discharge of such waters at that location will not create or increase a hazard to life or property. Erosion of the ground in the area of discharge shall be prevented by installation of non-erosive down drains or other devices. Desilting basins, filter barriers, or other methods, as approved by the Building Official, shall be utilized to remove sediments from surface waters before such waters are allowed to enter streets, storm drains, or natural watercourses. If the drainage device discharges onto natural ground, riprap or a similar energy dissipator may be required.

Building pads shall have a minimum drainage gradient of 2 percent toward an approved drainage facility or a public street unless otherwise directed by the Building Official. A lesser slope may be approved by the Building Official for sites graded in relatively flat terrain, or where special drainage provisions are made, when the Building Official finds such modification will not result in a hazard to life or property.

SECTION 81. Section J110 is hereby amended to read as follows:

SECTION J110 SLOPE PLANTING AND EROSION CONTROL

J110.1 General.

The faces of cut and fill slopes shall be prepared and maintained to control erosion. This control shall ~~be permitted to~~ consist of effective planting, erosion control blankets, soil stabilizers, or other means as approved by the Building Official.

Exception: Erosion control measures need not be provided on cut slopes not subject to erosion due to the erosion-resistant character of the materials, as approved by the Project Consultants to the satisfaction of the Building Official.

. . .

J110.3 Planting.

The surface of all cut slopes more than 5 feet (1.5 m) in height and fill slopes more than 3 feet (0.9 m) in height shall be protected against damage from erosion by planting with grass or ground cover plants. Slopes exceeding 15 feet (4.6 m) in vertical height shall also be planted with shrubs, spaced at not to exceed 10 feet (3 m) on center, or trees, spaced at not to exceed 20 feet (6.1 m) on center; or a combination of shrubs and trees at an equivalent spacing, in addition to grass or ground cover plants. The plants selected and planting methods used shall be suitable for the soil and climatic conditions of the site.

Plant material shall be selected that will produce a coverage of permanent planting to effectively control erosion. Consideration shall be given to deep-rooted plant material needing limited watering, maintenance, high root to shoot ratio, wind

susceptibility, and fire-retardant characteristics. All plant materials must be approved by the Building Official.

Planting may be modified for the site if specific recommendations are provided by both the Geotechnical Engineer and a Landscape Architect. Specific recommendations must consider soils and climatic conditions, irrigation requirements, planting methods, fire-retardant characteristics, water efficiency, maintenance needs, and other regulatory requirements. Recommendations must include a finding that the alternative planting will provide a permanent and effective method of erosion control. Modifications to planting must be approved by the Building Official prior to installation.

J110.4 Irrigation.

Slopes required to be planted by Section J110.3 shall be provided with an approved system of irrigation that is designed to cover all portions of the slope. Irrigation system plans shall be submitted to and approved by the Building Official prior to installation. A functional test of the system may be required.

For slopes less than 20 feet (6.1 m) in vertical height, hose bibs to permit hand watering will be acceptable if such hose bibs are installed at conveniently accessible locations where a hose no longer than 50 feet (15.2 m) is necessary for irrigation.

Irrigation requirements may be modified for the site if specific recommendations are provided by both the Geotechnical Engineer and a Landscape Architect. Specific recommendations must consider soils and climatic conditions, plant types, planting methods, fire-retardant characteristics, water efficiency, maintenance needs, and other regulatory requirements. Recommendations must include a finding that the alternative

irrigation method will sustain the proposed planting and provide a permanent and effective method of erosion control. Modifications for irrigation systems must be approved by the Building Official prior to installation.

J110.5 Plans and specifications.

Planting and irrigation plans shall be submitted for slopes that are required to be planted and irrigated pursuant to Sections J110.3 and J110.4. Except as otherwise required by the Building Official for minor grading, the plans for slopes 20 feet (6.1 m) or more in vertical height shall be prepared and signed by a Civil Engineer or Landscape Architect. If requested by the Building Official, planting and irrigation details shall be included on the grading plan.

J110.6 Rodent control.

Fill slopes shall be protected from potential slope damage by a preventative program of rodent control.

J110.7 Release of security.

The planting and irrigation systems required by this Section shall be installed as soon as practical after rough grading. Prior to final approval of grading and before the release of the grading security, the planting shall be well established and growing on the slopes, and there shall be evidence of an effective rodent control program.

J110.8 National Pollutant Discharge Elimination System (NPDES) compliance.

J110.8.1 General.

All grading plans and permits and the owner of any property on which such grading is performed shall comply with the provisions of this Section for NPDES compliance.

All best management practices shall be installed before grading begins or as instructed in writing by the Building Official for unpermitted grading as defined by Section J103.3. As grading progresses, all best management practices shall be updated as necessary to prevent erosion and to control construction-related pollutants from discharging from the site. All best management practices shall be maintained in good working order to the satisfaction of the Building Official until final grading approval has been granted by the Building Official and all permanent drainage and erosion control systems, if required, are in place. Failure to comply with this Section is subject to "Noncompliance Penalties" pursuant to Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

J110.8.2 Storm Water Pollution Prevention Plan (SWPPP).

The Building Official may require a SWPPP. The SWPPP shall contain details of best management practices, including desilting basins or other temporary drainage or control measures, or both, as may be necessary to control construction-related pollutants that originate from the site as a result of construction-related activities. When

the Building Official requires a SWPPP, no grading permit shall be issued until the SWPPP has been submitted to and approved by the Building Official.

For unpermitted grading as defined by Section J103.3, upon written request, a SWPPP in compliance with the provisions of this Section and Section 106.4.3 for NPDES compliance shall be submitted to the Building Official. Failure to comply with this Section is subject to "Noncompliance Penalties" per Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

J110.8.3 Erosion and Sediment Control Plans (ESCP).

Where a grading permit is issued and the Building Official determines that the grading will not be completed prior to November 1, the owner of the site on which the grading is being performed shall, on or before October 1, file or cause to be filed with the Building Official an ESCP. The ESCP shall include specific best management practices to minimize the transport of sediment and protect public and private property from the effects of erosion, flooding, or the deposition of mud, debris, or construction-related pollutants. The best management practices shown on the ESCP shall be installed on or before October 15. The plans shall be revised annually or as required by the Building Official to reflect the current site conditions.

The ESCP shall be accompanied by an application for plan checking services and plan-checking fees in an amount determined by the Building Official, up to but not exceeding 10 percent of the original grading permit fee.

Failure to comply with this Section is subject to "Noncompliance Penalties" pursuant to Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

J110.8.4 Storm Water Pollution Prevention Plan (SWPPP), effect of noncompliance.

Should the owner fail to submit the SWPPP or the ESCP as required by Section J110.8, or fail to install the best management practices, it shall be deemed that a default has occurred under the conditions of the grading permit security. The Building Official may thereafter enter the property for the purpose of installing, by County forces or by other means, the drainage, erosion control, and other devices shown on the approved plans, or if there are no approved plans, as the Building Official may deem necessary to protect adjoining property from the effects of erosion, flooding, or the deposition of mud, debris, or constructed-related pollutants.

The Building Official shall also have the authority to impose and collect the penalties imposed by Section J110.8.5. Payment of a penalty shall not relieve any persons from fully complying with the requirements of this Code in the execution of the work.

J110.8.5 Noncompliance penalties.

The amount of the penalties shall be as follows:

1. If a SWPPP or an ESCP is not submitted as prescribed in Sections J110.8.2 and J110.8.3:

Grading Permit Volume	Penalty
1-10,000 cubic yards (1-7645.5 m^3)	$50.00 per day
10,001-100,000 cubic yards (7646.3-76455 m^3)	$250.00 per day
More than 100,000 cubic yards (76455 m^3)	$500.00 per day

2. If the best management practices for storm water pollution prevention and wet weather erosion control, as approved by the Building Official, are not installed as prescribed in this Section J110.8:

Grading Permit Volume	Penalty
1-10,000 cubic yards (1-7645.5 m^3)	$100.00 per day
10,001-100,000 cubic yards (7646.3-76455 m^3)	$250.00 per day
More than 100,000 cubic yards (76455 m^3)	$500.00 per day

NOTE: See Section 108 for inspection request requirements.

SECTION 82. Section J111 is hereby amended to read as follows:

SECTION J111 REFERENCED STANDARDS

~~**J111.1 General.** See Table J111.1 for standards that are referenced in various sections of this appendix. Standards are listed by the standard identification with the effective date, standard title, and the section or sections of this appendix that reference the standard.~~

~~**TABLE J111.1 – REFERENCED STANDARDS**~~

~~ASTM D1557-12E1~~	~~Test Method for Laboratory Compaction Characteristics of Soil Using Modified Effort [56,000 ft-lb/ft^3 (2,700kN-m/m^3)].~~	~~J 107.5~~
~~ASCE/SEI 7-22~~	~~Minimum Design Loads and Associated Criteria for Buildings and Other Structures~~	~~J104.4~~

These regulations establish minimum standards and are not intended to prevent the use of alternate materials, methods, or means of conforming to such standards, provided such alternate has been approved by the Building Official.

The Building Official shall approve such an alternate provided they determine that the alternate is, for the purpose intended, at least the equivalent of that prescribed in this Code in quality, strength, effectiveness, durability, and safety.

The Building Official shall require that sufficient evidence or proof be submitted to substantiate any claims regarding the alternate.

The standards listed below are recognized standards. Compliance with these recognized standards shall be prima facie evidence of compliance with the standards set forth in Sections J104 and J107.

ASTM D 1557 – Latest Revision	Laboratory Characteristics Compaction of Soil Using Modified Effort	J107.5
ASTM D 1556 – Latest Revision	Density and Unit Weight of Soils In Place by the Sand Cone Method	J104.2.3, J104.3 and J107.9
ASTM D 2167 – Latest Revision	Density and Unit Weight of Soils In Place by the Rubber Balloon Method	J104.2.3 J104.3 and J107.9
ASTM D 2937 – Latest Revision	Density of Soils in Place by the Drive Cylinder Method	J104.2.3 J104.3 and J107.9
ASTM D 2922 – Latest Revision	Density of Soil and Soil Aggregate In Place by Nuclear Methods	J104.2.3 J104.3 and J107.9
ASTM D 3017 – Latest Revision	Water Content of Soil and Rock in Place by Nuclear Methods	J104.2.3, J104.3 and J107.9

SECTION 83. Section Q101.1 is hereby amended to read as follows:

Q101.1 Scope.

This appendix ~~shall be applicable~~applies to emergency housing and emergency housing facilities, as defined in Section Q102, when and to the extent that the County of Los Angeles Board of Supervisors ("Board") finds, by motion, resolution, or otherwise, that this appendix applies to a specific state of emergency, local emergency, or declaration of shelter crisis.

SECTION 84. Section Q102.1 is hereby amended to read as follows:

Q102.1 General.

. . .

ENFORCING AGENCY. The Building Official as defined in Section 104.3 of this Code.

. . .

SECTION 85. Section Q103.1 is hereby amended to read as follows:

Q103.1 General.

Emergency sleeping cabins, emergency transportable housing units, membrane structures and tents constructed and/or assembled in accordance with this appendix, shall be occupied only during the duration of the declaration of state of emergency, local emergency, or shelter crisis.

. . .

SECTION 86. Section Q103.4 is hereby amended to read as follows:

Q103.4 Fire and life safety requirements not addressed in this appendix.

If not otherwise addressed in this appendix, fire and life safety measures, including, but not limited to, means of egress, fire separation, fire sprinklers, smoke alarms, and carbon monoxide alarms, shall be determined and enforced by the enforcing agency in consultation with the County Departments of Public Health, Fire, and other pertinent County departments, as applicable.

SECTION 87. Section Q106.1 is hereby amended to read as follows:

Q106.1 General.

. . .

Tents and membrane structures shall be provided with means of ventilation (natural and/or mechanical) allowing for adequate air replacement, as determined by the enforcing agency.

SECTION 88. Section Q107.1 is hereby amended to read as follows:

Q107.1 General.

Emergency housing shall comply with the applicable requirements in Chapter 11B and/or the US Access Board Final Guidelines for Emergency Transportable Housing as determined by the enforcing agency.

. . .

SECTION 89. Section Q110.1.1 is hereby added to read as follows:

Q110.1.1 Backflow prevention.

Backflow prevention devices shall be provided in accordance with Section 602.3 of the Plumbing Code.

SECTION 90. Section Q110.1.2 is hereby added to read as follows:

Q110.1.2 Drinking fountains.

An adequate number of drinking fountains, bottle fillers, or drinking facilities shall be provided as determined by the enforcing agency.

SECTION 91 Section Q110.3 is hereby amended to read as follows:

Q110.3 Toilet and bathing facilities.

. . .

The maximum travel distance from any sleeping and/or living area to the toilet facility shall not exceed 300 feet (91.4 m) or as determined by the enforcing agency.

SECTION 92. The provisions of this ordinance contain various changes, modifications, and additions to the 2025 California Building Code. Some of those changes are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the California Building Standards Code.

Pursuant to California Health and Safety Code sections 17958.5, 17958.7, and 18941.5, the Board of Supervisors hereby expressly finds that all of the changes and modifications to requirements contained in the building standards published in the California Building Standards Code that are contained in this ordinance are reasonably

necessary because of local climatic, geological, or topographical conditions in the County of Los Angeles due to the potential for seismic activity in the region, topographical conditions that contribute to the spread of wild fires, and climatic conditions that impact air quality and increase the risk of wild fires. In addition, the Board of Supervisors expressly finds that these changes and modifications are substantially equivalent to changes or modifications previously filed with the California Building Standards Commission by the County of Los Angeles and which were in effect as of September 30, 2025, or relate to home hardening. Without limiting the foregoing, the County makes additional findings herein:

BUILDING CODE AMENDMENTS

Code Section	Condition	Explanation of Amendment
113.5, 113.5.1, 113.5.2	Administrative	This is an administrative amendment to clarify that structures meeting the conditions specified and affected by the 2025 Eaton and Palisades fire are not required under the Alquist-Priolo Act to conduct an active fault study.
701A.1 701A.2	Climatic	Clarifies the application of Chapter 5 of the California Wildland Interface Code to harden additions, alterations, and/or relocated buildings. Many areas of the County have been designated as Fire Hazard Severity Zones due to the increased risk of fire caused by low humidity, strong winds, and dry vegetation. Additions, alterations, and/or relocated buildings have the same fire risk as new buildings.
701A.3 701A.5 701A.6	Climatic	Disallows the use of wood-shingle/wood-shake roofs due to the increased risk of fire in the County caused by low humidity, strong winds, and dry vegetation in high fire severity zones in order to further harden residential buildings against fire risk.
701A.7	Climatic	Disallows the use of Class B wood-shingle/wood-shake roofs due to the increased risk of fire in the County caused by low humidity, strong winds, and dry

Code Section	Condition	Explanation of Amendment
		vegetation in high fire severity zones in order to further harden residential buildings against fire risk.
1031.2.1	Geological	The greater Los Angeles/Long Beach region is a densely populated area having buildings constructed over and near a vast array of earthquake fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. The proposed amendment is intended to prevent occupants from being trapped in a building and to allow rescue workers to easily enter after an earthquake.
Table 1507.3.7	Geological	Table amended to require proper anchorage for clay or concrete tiles from sliding or rotating due to the increased risk of significant earthquakes in the County. This amendment incorporates the design provisions developed based on detailed study of the 1994 Northridge and the 1971 Sylmar earthquakes.
1613.8 and 1613.8.1	Geological	Observed damages to one- and two-family dwellings of light frame construction after the Northridge Earthquake may have been partially attributed to vertical irregularities common to this type of occupancy and construction. In an effort to improve quality of construction and incorporate lesson learned from studies after the Northridge Earthquake, the proposed modification to ASCE 7-22, Section 12.2.3.1, Exception 3, by limiting the number of stories and height of the structure to two stories will significantly minimize the impact of vertical irregularities and concentration of inelastic behavior from mixed structural systems. This proposed amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
1613.8.2	Geological	A joint Structural Engineers Association of Southern California (SEAOSC), Los Angeles County and Los Angeles City Task Force investigated the performance of concrete and masonry construction with flexible wood diaphragm failures after the Northridge earthquake. It was concluded at that time

Code Section	Condition	Explanation of Amendment
		that continuous ties are needed at specified spacing to control cross grain tension in the interior of the diaphragm. Additionally, there was a need to limit subdiaphragm allowable shear loads to control combined orthogonal stresses within the diaphragm. Recognizing the importance and need to continue the recommendation made by the task force while taking into consideration the improved performances and standards for diaphragm construction today, this proposal increases the continuous tie spacing limit to 40 ft in lieu of 25 ft and to use 75% of the allowable code diaphragm shear to determine the depth of the sub-diaphragm in lieu of the 300 plf and is deemed appropriate and acceptable. Due to the frequency of this type of failure during the past significant earthquakes, various jurisdictions within the Los Angeles region have taken this additional step to prevent roof or floor diaphragms from pulling away from concrete or masonry walls. This proposed amendment is a continuation of an amendment adopted during previous code adoption cycles.
1613.8.3	Geological	The inclusion of the importance factor in the referenced Section equation has the unintended consequence of reducing the minimum seismic separation distance for important facilities such as hospitals, schools, police, and fire stations from adjoining structures. The proposal to omit the importance factor from the referenced equation in Section 12.8.6 will ensure that a safe seismic separation distance is provided. This proposed amendment is a continuation of an amendment adopted during previous code adoption cycles.
1613.9	Geological Topographical	Section is added to improve seismic safety of buildings constructed on or into hillsides. Due to the local topographical and geological conditions of the sites within the greater Los Angeles/Long Beach region and their probabilities for earthquakes, this technical amendment is required to address and clarify special needs for buildings constructed on hillside locations. A SEAOSC and Los Angeles City Joint Task Force investigated the performance of

Code Section	Condition	Explanation of Amendment
		hillside building failures after the Northridge earthquake. Numerous hillside failures resulted in loss of life and millions of dollars in damage. These criteria were developed to minimize the damage to these structures and have been in use by both the City and County of Los Angeles for several years with much success. This amendment is a continuation of an amendment adopted during previous code adoption cycles.
1613.10	Geological	The greater Los Angeles/Long Beach region is a densely populated area having buildings constructed over and near a vast array of fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. The proposed modification requiring safe design and construction requirements for ceiling suspension systems to resist seismic loads is intended to minimize the amount of damage within a building and therefore needs to be incorporated into the code to assure that new buildings and additions to existing buildings are designed and constructed in accordance with the scope and objectives of the California Building Code.
1704.6	Geological Administrative	The language in section 1704.6 of the California Building Code permits the owner to employ any registered design professional to perform structural observations with minimum guidelines. However, it is important that the registered design professional responsible for the structural design has thorough knowledge of the building he/she designed. By requiring the registered design professional responsible for the structural design, or their designee, who was involved with the design to observe the construction, the quality of the observation for major structural elements and connections that affect the vertical and lateral load resisting systems of the structure will be greatly increased. Additional requirements are provided to help clarify the role and duties of the structural observer and the method of reporting and correcting observed deficiencies to the Building Official. This

Code Section	Condition	Explanation of Amendment
		amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
1704.6.1	Geological	With the higher seismic demand placed on buildings and structures in this region, the language in section 1704.6.1, Item 3, of the California Building Code would permit many low-rise buildings and structures with complex structural elements to be constructed without the benefit of a structural observation. By requiring a registered design professional to observe the construction, the quality of the observation for major structural elements and connections that affect the vertical and lateral load resisting systems of the structure will be greatly increased. An exception is provided to permit simple structures and buildings to be excluded. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
1705.3	Geological	Results from studies after the 1994 Northridge Earthquake indicated that a significant portion of the damage was attributable to lack of quality control during construction resulting in poor performance of the building or structure. Therefore, the amendment restricts the exceptions to the requirement for special inspection. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
1705.13	Geological	In Southern California, very few detached one- or two-family dwellings not exceeding two stories above grade plane are built as "box-type" structures specially for those in hillside areas and near the oceanfront. Many with steel moment frames or braced frames, and/or cantilevered columns, can still be shown as "regular" structures by calculations. With the higher seismic demand placed on buildings and structures in this region, the language in section 1705.13, Item 3, of the California Building Code would permit many detached one- or two-family

Code Section	Condition	Explanation of Amendment
		dwellings not exceeding two stories above grade plane with complex structural elements to be constructed without the benefit of special inspections. By requiring special inspections, the quality of major structural elements and connections that affect the vertical and lateral load resisting systems of the structure will be greatly increased. The exception should only be allowed for detached one- or two-family dwellings not exceeding two stories above grade plane assigned to Seismic Design Categories A, B, and C.
1807.1.4	Climatic Geological	No substantiating data has been provided to show that a wood foundation is effective in supporting buildings and structures during a seismic event while being subject to deterioration caused by the combined detrimental effect of constant moisture in the soil and wood-destroying organisms. Wood retaining walls, when they are not properly treated and protected against deterioration, have performed very poorly and have led to slope failures. Most contractors are typically accustomed to construction in dry and temperate weather in the Southern California region and are not generally familiar with the necessary precautions and treatment of wood that makes it suitable for both seismic events and wet applications. The proposed amendment takes the necessary precautionary steps to reduce or eliminate potential problems that may result by using wood foundations that experience relatively rapid decay due to the fact that the region does not experience temperatures cold enough to destroy or retard the growth and proliferation of wood-destroying organisms. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the local climate and the increased risk of significant earthquakes in the County.
1807.1.6	Geological	With the higher seismic demand placed on buildings and structures in this region, it is necessary to take precautionary steps to reduce or eliminate potential problems that may result by following prescriptive design provisions that do not take into consideration

Code Section	Condition	Explanation of Amendment
		the surrounding environment. Plain concrete performs poorly in withstanding the cyclic forces resulting from seismic events. In addition, no substantiating data has been provided to show that under-reinforced foundation walls are effective in resisting seismic loads, and may potentially lead to a higher risk of failure. It is important that the benefit and expertise of a registered design professional be obtained to properly analyze the structure and take these issues into consideration. This amendment is a continuation of an amendment adopted during previous code adoption cycles.
1807.2	Climatic, Geological	No substantiating data has been provided to show that wood foundation systems are effective in supporting buildings and structures during a seismic event while being subject to deterioration caused by the combined detrimental effects of constant moisture in the soil and wood-destroying organisms. Wood foundation systems not properly treated and protected against deterioration have performed very poorly and have led to slope failures. Most contractors are typically accustomed to construction in dry and temperate weather in the Southern California region and are not generally familiar with the necessary precautions and treatment of wood that makes it suitable for both seismic events and wet applications. The proposed amendment takes the precautionary steps to reduce or eliminate potential problems that may result in using wood foundation systems that experience relatively rapid decay due to the fact that the region does not experience temperatures cold enough to destroy or retard the growth and proliferation of wood-destroying organisms. This proposed amendment is a continuation of an amendment adopted during previous code adoption cycles.
1807.3.1	Climatic, Geological	No substantiating data has been provided to show that wood foundation systems are effective in supporting buildings and structures during a seismic event while being subject to deterioration caused by the combined detrimental effects of constant moisture

Code Section	Condition	Explanation of Amendment
		in the soil and wood-destroying organisms. Wood foundation systems not properly treated and protected against deterioration have performed very poorly and have led to slope failures. Most contractors are typically accustomed to construction in dry and temperate weather in the Southern California region and are not generally familiar with the necessary precautions and treatment of wood that makes it suitable for both seismic events and wet applications. The proposed amendment takes the precautionary steps to reduce or eliminate potential problems that may result in using wood foundation systems that experience relatively rapid decay due to the fact that the region does not experience temperatures cold enough to destroy or retard the growth and proliferation of wood-destroying organisms. This proposed amendment is a continuation of an amendment adopted during previous code adoption cycles.
1809.3 and Figure 1809.3	Geological	With the higher seismic demand placed on buildings and structures in this region, it is necessary to take precautionary steps to reduce or eliminate potential problems that may result for under-reinforced footings located on sloped surfaces. Requiring minimum reinforcement for stepped footings is intended to address the problem of poor performance of plain or under-reinforced footings during a seismic event. This amendment is a continuation of an amendment adopted during previous code adoption cycles.
1809.7 and Table 1809.7	Geological	No substantiating data has been provided to show that under-reinforced footings are effective in resisting seismic loads, and therefore they may potentially lead to a higher risk of failure. This amendment requires minimum reinforcement in continuous footings to address the problem of poor performance of plain or under-reinforced footings during a seismic event. With the higher seismic demand placed on buildings and structures in this region, it is necessary to take precautionary steps to reduce or eliminate potential problems that may result by following prescriptive design provisions for footings that do not take into

Code Section	Condition	Explanation of Amendment
		consideration the surrounding environment. It is important that the benefit and expertise of a registered design professional be obtained to properly analyze the structure and take these factors into consideration. This amendment reflects the recommendations by the SEAOSC and the Los Angeles City Joint Task Force, which investigated the performance deficiencies observed in the 1994 Northridge Earthquake. This amendment is a continuation of an amendment adopted during previous code adoption cycles.
1809.12	Climatic Geological	No substantiating data has been provided to show that timber footings are effective in supporting buildings and structures during a seismic event while being subject to deterioration caused by the combined detrimental effects of constant moisture in the soil and wood-destroying organisms. Timber footings, when they are not properly treated and protected against deterioration, have performed very poorly. Most contractors are typically accustomed to construction in dry and temperate weather in the Southern California region and are not generally familiar with the necessary precautions and treatment of wood that makes it suitable for both seismic events and wet applications. The proposed amendment takes the necessary precautionary steps to reduce or eliminate potential problems, which may result by using timber footings that experience relatively rapid decay due to the fact that the region does not experience temperatures cold enough to destroy or retard the growth and proliferation of wood-destroying organisms. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the local climate and the increased risk of significant earthquakes in the County.
1810.3.2.4	Climatic Geological	No substantiating data has been provided to show that timber footings are effective in supporting buildings and structures during a seismic event while being subject to deterioration caused by the combined detrimental effects of constant moisture in the soil and

Code Section	Condition	Explanation of Amendment
		wood-destroying organisms. Timber footings, when they are not properly treated and protected against deterioration, have performed very poorly. Most contractors are typically accustomed to construction in dry and temperate weather in the Southern California region and are not generally familiar with the necessary precautions and treatment of wood that makes it suitable for both seismic events and wet applications. The proposed amendment takes the necessary precautionary steps to reduce or eliminate potential problems that may result by using timber footings that experience relatively rapid decay due to the fact that the region does not experience temperatures cold enough to destroy or retard the growth and proliferation of wood-destroying organisms. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the local climate and the increased risk of significant earthquakes in the County.
1905.1	Geological	This amendment is intended to carry over critical provisions for the design of concrete columns in moment frames from the legacy 1997 Uniform Building Code. Increased confinement is critical to the integrity of such columns and these modifications ensure that it is provided when certain thresholds are exceeded. In addition, this amendment carries over from the legacy 1997 Uniform Building Code a critical provision for the design of concrete shear walls. It essentially limits the use of very highly gravity-loaded walls in being included in the seismic load resisting system, since their failure could have catastrophic effect on the building. Furthermore, this amendment was incorporated in the code based on observations from the 1994 Northridge Earthquake. Rebar placed in very thin concrete topping slabs have been observed in some instances to have popped out of the slab due to insufficient concrete coverage. This modification ensures that critical boundary and collector rebars are placed in sufficiently thick topping slab to prevent buckling of such reinforcements. This

Code Section	Condition	Explanation of Amendment
		proposed amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
1905.6.2	Geological	This amendment requires minimum reinforcement in continuous footings to address the problem of poor performance of plain or under-reinforced footings during a seismic event. This amendment reflects the recommendations by the SEAOSC and the Los Angeles City Joint Task Force, which investigated the poor performance observed in the 1994 Northridge Earthquake. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
1905.8 through 1905.10	Geological	These amendments are intended to carry over critical provisions for the design of concrete columns in moment frames from the Uniform Building Code (UBC). Increased confinement is critical to the integrity of such columns and these modifications ensure that it is provided when certain thresholds are exceeded. In addition, this amendment carries over from the UBC a critical provision for the design of concrete shear walls. It essentially limits the use of very highly gravity-loaded walls from being included in the seismic load resisting system, since their failure could have a catastrophic effect on the building. Furthermore, this amendment was incorporated into this Code based on observations from the 1994 Northridge Earthquake. Rebar placed in very thin concrete topping slabs has been observed in some instances to have popped out of the slab due to insufficient concrete coverage. This modification ensures that critical boundary and collector rebars are placed in sufficiently thick slabs to prevent buckling of such reinforcements. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.

Code Section	Condition	Explanation of Amendment
2304.10.2 and Table 2304.10.2	Geological	Due to the high geologic activities in the Southern California area and the expected higher level of performance on buildings and structures, this proposed local amendment limits the use of staple fasteners in resisting or transferring seismic forces. In September 2007, limited cyclic testing data was provided to the ICC, Los Angeles Chapter Structural Code Committee, showing that stapled wood structural shear panels do not exhibit the same behavior as nailed wood structural shear panels. The test results of stapled wood structural shear panels demonstrated much lower strength and drift than nailed wood structural shear panel test results. Therefore, the use of staples as fasteners to resist or transfer seismic forces shall not be permitted without being substantiated by cyclic testing. This amendment is a continuation of a similar amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
2304.10.3.1	Geological	The overdriving of nails into the structural wood panels still remains a concern when pneumatic nail guns are used for wood structural panel shear wall nailing. Box nails were observed to cause massive and multiple failures of the typical 3/8-inch thick plywood during the 1994 Northridge Earthquake. The use of clipped head nails continues to be restricted from use in wood structural panel shear walls where the minimum nail head size must be maintained in order to minimize nails from pulling through sheathing materials. Clipped or mechanically driven nails used in wood structural panel shear wall construction were found to perform much worse in previous wood structural panel shear wall testing done at the University of California Irvine. The existing test results indicated that, under cyclic loading, the wood structural panel shear walls were less energy absorbent and less ductile. The panels reached ultimate load capacity and failed at substantially less lateral deflection than those using same-size hand-driven nails. This amendment reflects the

Code Section	Condition	Explanation of Amendment
		recommendations by the SEAOSC and the Los Angeles City Joint Task Force, which investigated the poor performance observed in the 1994 Northridge Earthquake. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
2304.12.2.8	Climatic Geological	No substantiating data has been provided to show that wood used in retaining or crib walls is effective in supporting buildings and structures during a seismic event while being subject to deterioration caused by the combined detrimental effect of constant moisture in the soil and wood-destroying organisms. Wood used in retaining or crib walls, when it is not properly treated and protected against deterioration, has performed very poorly. Most contractors are typically accustomed to construction in dry and temperate weather in the Southern California region and are not generally familiar with the necessary precautions and treatment of wood that makes it suitable for both seismic events and wet applications. The proposed amendment takes the necessary precautionary steps to reduce or eliminate potential problems that may result by using wood in retaining or crib walls, which experience relatively rapid decay due to the fact that the region does not experience temperatures cold enough to destroy or retard the growth and proliferation of wood-destroying organisms. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the local climate and the increased risk of significant earthquakes in the County.
2305.4	Geological	Many of the hold-down connectors currently in use do not have any acceptance report based on dynamic testing protocols. This amendment continues to limit the allowable capacity to 75% of the acceptance report value to provide an additional factor of safety for statically tested anchorage devices. Cyclic forces imparted on buildings and structures by seismic activity cause more damage than equivalent forces that are applied in a static manner. Steel plate

Code Section	Condition	Explanation of Amendment
		washers will reduce the additional damage that can result when hold-down connectors are fastened to wood framing members. This amendment reflects the recommendations by the SEAOSC and the Los Angeles City Joint Task Force, which investigated the poor performance observed in the 1994 Northridge Earthquake. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
2306.2 2306.3 2307.2 2308.10.5.1 2308.10.5.2 Figure 2308.10.5.1 and Figure 2308.10.5.2	Geological	The SEAOSC and the Los Angeles City Joint Task Force that investigated damage to buildings and structures during the 1994 Northridge Earthquake recommended reducing allowable shear values in wood structural panel shear walls or diaphragms that were not substantiated by cyclic testing. That recommendation was consistent with a report to the Governor from the Seismic Safety Commission of the State of California recommending that code requirements be "more thoroughly substantiated with testing." The allowable shear values for wood structural panel shear walls or diaphragms fastened with staples are based on monotonic testing and do not take into consideration that earthquake forces load shear wall or diaphragm in a repeating and fully reversible manner. In September 2007, limited cyclic testing was conducted by a private engineering firm to determine if wood structural panels fastened with staples would exhibit the same behavior as wood structural panels fastened with common nails. The test result revealed that wood structural panels fastened with staples demonstrated much lower strength and stiffness than wood structural panels fastened with common nails. It was recommended that the use of staples as fasteners for wood structural panel shear walls or diaphragms not be permitted to resist seismic forces in structures assigned to Seismic Design Categories D, E, and F unless it can be substantiated by cyclic testing. Furthermore, the cities and unincorporated areas

Code Section	Condition	Explanation of Amendment
		within the greater Los Angeles/Long Beach region have taken extra measures to maintain the structural integrity of the framing of shear walls and diaphragms designed for high levels of seismic forces by requiring wood sheathing be applied directly over the framing members and prohibiting the use of panels placed over gypsum sheathing. This amendment is intended to prevent the undesirable performance of nails when gypsum board softens due to cyclic earthquake displacements and the nail ultimately does not have any engagement in a solid material within the thickness of the gypsum board. This amendment continues the previous amendment adopted during the 2007 code adoption cycle.
2308.10.8.1	Geological	With the higher seismic demand placed on buildings and structures in this region, interior walls can easily be called upon to resist over half of the seismic loading imposed on simple buildings or structures. Without a continuous foundation to support the braced wall line, seismic loads would be transferred through other elements such as non-structural concrete slab floors, wood floors, etc. The purpose of this amendment is to limit the use of the exception to structures assigned to Seismic Design Category A, B, or C where lower seismic demands are expected. Requiring interior braced walls be supported by continuous foundations is intended to reduce or eliminate the poor performance of buildings or structures. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
Table 2308.10.1	Geological	This amendment specifies minimum sheathing thickness and nail size and spacing so as to provide a uniform standard of construction for designers and buildings to follow. This is intended to improve the performance level of buildings and structures that are subject to the higher seismic demands placed on buildings or structure in this region. This proposed amendment reflects the recommendations by the SEAOSC and the Los Angeles City Joint Task Force,

Code Section	Condition	Explanation of Amendment
		which investigated the performance deficiencies observed in the 1994 Northridge Earthquake. This amendment is a continuation of an amendment adopted during previous code adoption cycles, and is necessary due to the increased risk of significant earthquakes in the County.
2308.10.9	Geological	Due to the high geologic activities in the Southern California area and the required higher level of performance of buildings and structures, this amendment limits the use of staple fasteners in resisting or transferring seismic forces. In September 2007, limited cyclic testing data was provided to the ICC, Los Angeles Chapter Structural Code Committee, showing that stapled wood structural shear panels do not exhibit the same behavior as nailed wood structural shear panels. The test results of stapled wood structural shear panels demonstrated much lower strength and drift than nailed wood structural shear panel test results. Therefore, the use of staples as fasteners to resist or transfer seismic forces shall not be permitted without being substantiated by cyclic testing. This amendment is a continuation of a similar amendment adopted during previous code adoption cycles.
3114;	Climatic, Geologic	The greater Los Angeles/Long Beach region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. The region is further impacted by construction of buildings and structures utilizing traditional construction materials that impact the amount of energy, air quality, greenhouse gas emission and construction waste in the area. The proposed amendment addresses structural design requirements specific to intermodal shipping containers, reduce environmental impact of unused and unrecycled intermodal shipping containers, and increase sustainability by reducing consumption of traditional construction materials. The proposed modification needs to be incorporated into the code to assure that new buildings and additions to existing

Code Section	Condition	Explanation of Amendment
		buildings utilizing intermodal shipping containers are designed and constructed in accordance with the scope and objectives of the California Building Code and California Green Building Standards Code
Appendix C	Climatic, Geologic, Voluntary appendix	Los Angeles County is a diverse region with both densely populated urban areas and rural areas with various agricultural and animal husbandry establishments. Many areas of the County have been designated as Fire Hazard Severity Zones due to the increased risk of fire caused by low humidity, strong winds, and dry vegetation, particularly the rural areas, which are often used for agricultural purposes. Furthermore, the greater Los Angeles/Long Beach region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. Due to the need for agricultural buildings to perform appropriately in the County due to its geology and climate, adoption of building standards for such structures is required.
Appendix H	Climatic, Geologic, Voluntary appendix	Los Angeles County is a diverse region with both densely populated urban areas and rural areas with various signs used in the County. The Los Angeles region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. In addition, weather events occur seasonally with high winds such as the Santa Ana Winds. Due to the need for signs to perform well in the County due to its climate and geology, adoption of building standards for signs is required.
H103.1	Geologic, Administrative, Voluntary appendix	Los Angeles County is a diverse region with both densely populated urban areas and rural areas with various signs used in the County. The greater Los Angeles/Long Beach region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. This provision is amended to

Code Section	Condition	Explanation of Amendment
		cross-reference to applicable legal provisions and also to ensure that signs are located in such a way as to avoid damage to adjacent structures and people given the potential for earthquakes in the County.
H103.2	Geologic, Administrative, Voluntary appendix	Los Angeles County is a diverse region with both densely populated urban areas and rural areas with various signs used in the County. The greater Los Angeles/Long Beach region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. This provision is amended to cross-reference to applicable legal provisions and also to ensure that sign projections and clearances are located in such a way as to avoid damage to adjacent structures and people given the potential for earthquakes in the County.
H104.1	Geologic, Voluntary appendix	The greater Los Angeles/Long Beach region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, similar to or exceeding the geologic activities occurring during the 1994 Northridge Earthquake. Due to the risk of geologic activities in the Southern California area, buildings and structures require a high level of performance, which is directly proportional to the weight of a structure. By adding the weight of a sign to the identification placard, it will improve the ability to provide structural verification in the event of damage or future modifications.
H105.1	Administrative, Voluntary appendix	The amendment provides a cross reference to Chapter 24 for user convenience.
H106.1, H106.2	Administrative, Voluntary appendix	This change corrects a call out from the model electrical code to the relevant local electrical code and clarifies that a separate electrical permit is required for user convenience.
H110.1	Climatic, Voluntary appendix	Due to the potential for severe local weather conditions with torrential rain, it is necessary to clarify that no portions of the roof sign and supporting members may interfere with proper roof drainage to

Code Section	Condition	Explanation of Amendment
		prevent the potential for roof collapse due to water accumulation.
H116	Climatic, Voluntary appendix	Due to the potential for severe local weather with high speed winds and hot, dry conditions, it is necessary that the most recent test standards as specified in Chapter 35 are adopted in lieu of the older test standards specified in Section H116. This ensures that the risk from fires is minimized.
J101.1 to J101.9	Geological Topographical Climatic	Sections revised to include erosion and sediment control measures to address the complex and diverse set of soil types and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J101.10	Geological Topographical Climatic	Section revised to maintain safety and integrity of public or private property adjacent to grading sites due to the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J103.1 – J103.2 and Figure J103.2	Geological Topographical Climatic	Sections revised to provide adequate control of grading operations typical to the greater Los Angeles County/Long Beach region due to the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J104.2.1 – J104.4	Geological Topographical Climatic	Sections revised or added to provide adequate control of grading operations typical to the greater Los Angeles County/Long Beach region due to the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J105.1- J105.14	Geological Topographical Climatic	Sections revised or added to provide adequate control of grading operations typical to the greater Los Angeles County/Long Beach region due to the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J106.1	Geological Topographical Climatic	Section revised to require more stringent cut slope ratios to address the complex and diverse set of soil types and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J107.1- J107.7	Geological Topographical	Sections revised to provide more stringent fill requirements for slope stability and settlement due to

Code Section	Condition	Explanation of Amendment
	Climatic	the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J107.8 – J107.9	Geological Topographical Climatic	Sections revised to provide more stringent inspection and testing requirements for fill slope stability due to the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J108.1 – J108.4	Geological Topographical Climatic	Sections revised to provide more stringent slope setback requirements to address the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J109.1 – J109.3	Geological Topographical Climatic	Sections revised to provide more stringent drainage and terracing requirements to address the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J109.5	Geological Topographical Climatic	Subsection added to provide for adequate outlet of drainage flows due to the diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J110.1 - J110.8.5	Geological Topographical Climatic	Sections revised or added to provide for State requirements of storm water pollution prevention and more stringent slope planting, and slope stability requirements to control erosion due to the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
J111	Geological Topographical Climatic	Section revised to reference additional standards for soils testing due to the complex and diverse set of soil types, climates, and geologic conditions that exist in the greater Los Angeles County/Long Beach region.
Appendix Q Q101.1, Q102.1, Q103.1, Q103.4, Q107.1	Administrative, Voluntary appendix Climatic Geologic Topographical	Adoption of this appendix is necessary because strict compliance with State and local standards and laws would prevent, hinder, or delay the mitigation of the effects of a declared shelter crisis, local emergency or state of emergency. The modifications to this appendix are administrative in nature, to provide clarification of various provisions of the language of this voluntary Appendix.

Code Section	Condition	Explanation of Amendment
Q106.1	Climatic	Los Angeles County is subject to extreme temperatures, and many of these membrane structures will be erected and occupied during severe weather events. It is necessary to include this amendment to ensure the safety, health, and comfort of the occupants is maintained during extreme heat and cold.
Q110.1.1, Q110.1.2	Administrative	These sections are a cross reference to the State Plumbing Code requirement for user convenience and is not adding a new building standard nor enacting a more restrictive requirement. To the extent findings are requested, see prefatory language in this Section.
Q110.3	Climatic, Voluntary appendix	The County may utilize mobile restroom facilities that are physically separate from the living facilities. Due to the potential for severe local weather conditions, with extreme temperatures or torrential rain, the distance to the restroom facilities required for the comfort, safety, and health of displaced people should be reduced to 300 feet or as determined by the Building Official.

SECTION 93. This ordinance shall become operative on January 1, 2026.

[TITLE26BUILDCODE2025CSCC]

ANALYSIS

This ordinance repeals those provisions of Title 27 – Electrical Code – of the Los Angeles County Code that incorporate by reference portions of the 2022 California Electrical Code and replaces them with provisions incorporating by reference portions of the 2025 California Electrical Code, as published by the California Building Standards Commission. Unless deleted or modified herein, the previously enacted provisions of Title 27 continue in effect.

The provisions of this ordinance contain additions to the 2025 California Electrical Code and are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the 2025 California Electrical Code.

DAWYN R. HARRISON
County Counsel

By
MARGARET F. AMBROSE
Senior Deputy County Counsel
Public Works Division

MFA:bc

Requested: 7/28/25
Revised: 10/8/25

HOA.105548025.13

ORDINANCE NO. _____

An ordinance amending Title 27 – Electrical Code – of the Los Angeles County Code by adopting and incorporating by reference portions of the 20~~22~~25 California Electrical Code with certain changes and modifications and making other revisions thereto.

The Board of Supervisors of the County of Los Angeles ordains as follows:

SECTION 1. Sections 89.102 through 89.114 of Article 89, Article 90, Chapters 1 through 9, and Annexes A, B, C, D, E, F, G, H, I, and J, of Title 27 of the Los Angeles County Code, which incorporate by reference and modify portions of the 20~~19~~22 California Electrical Code, are hereby repealed.

SECTION 2. Section 80-1.5 is hereby amended to read as follows:

Sec. 80-1.5. California Electrical Code (CEC) Adoption by Reference.

Except as hereinafter changed or modified, Sections 89.102 through 89.114 of Article 89, Article 90, Chapters 1 through 9, and Annexes A, B, C, D, E, F, G, H, I, ~~and~~ J, and K, of that certain Electrical Code known and designated as the ~~2022~~2025 California Electrical Code, as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 27 of the Los Angeles County Code as if fully set forth below, as Sections 89.102 through 89.114 of Article 89, Article 90, Chapters 1 through 9, and Annexes A, B, C, D, E, F, G, H, I, ~~and~~ J, and K, of Title 27 of the Los Angeles County Code.

A copy of the ~~2022~~2025 California Electrical Code, hereinafter referred to as the CEC, shall be at all times maintained by the Chief Electrical Inspector for use and examination by the public.

SECTION 3. Section 80-10 is hereby amended to read as follows:

Sec. 80-10. Annual Review of Fees

The fees in this Code shall be reviewed annually by the Director of Public Works. Beginning on July 1, 1992, and thereafter on each succeeding July 1, the amount of each fee in this Code shall be adjusted as follows: Calculate the percentage movement between March of the previous year and March of the current year in the Consumer Price Index (CPI) for all urban consumers in the Los Angeles-Long Beach-Anaheim, CA areas, as published by the United States Government Bureau of Labor Statistics, and adjust each fee by said percentage amount ~~and round off to the nearest ten (10) cents~~; provided, however, no adjustment shall decrease any fee and no fee shall exceed the reasonable cost of providing services. When it is determined that the amount reasonably necessary to recover the cost of providing services is in excess of this adjustment, the Building Official may present fee proposals to the Board of Supervisors for approval.

SECTION 4. The provisions of this ordinance contain additions to the 2025 California Electrical Code and are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the California Electrical Code.

SECTION 5. This ordinance shall become operative on January 1, 2026.

[TITLE27ELECTCODE2025CSCC]

ANALYSIS

This ordinance repeals those provisions of Title 28 – Plumbing Code – of the Los Angeles County Code, that incorporated by reference portions of the 2022 Edition of the California Plumbing Code and replaces them with provisions incorporating by reference portions of the 2025 California Plumbing Code, as published by the California Building Standards Commission, with certain changes and modifications. Unless deleted or modified herein, the previously enacted provisions of Title 28 continue in effect.

State law requires that the County's Plumbing Code impose the same requirements as are contained in the building standards published in the most recent edition of the California Plumbing Code except for changes or modifications deemed reasonably necessary by the County because of local climatic, geologic, or topographic conditions.

The changes and modifications to requirements contained in the building standards published in the 2025 California Plumbing Code that are contained in this ordinance are based upon express findings contained in the ordinance that such changes are reasonably necessary due to local climatic, geologic, or topographic conditions. These changes and modifications are substantially equivalent to changes or modifications previously filed with the California Building Standards Commission by the County of Los Angeles which were in effect as of September 30, 2025, in compliance with recent changes to section 17958 of the California Health and Safety Code.

This ordinance also makes certain modifications to the administrative provisions of Title 28.

DAWYN R. HARRISON
County Counsel

By
MARGARET AMBROSE
Principal Deputy County Counsel

MA/bc
Requested: 08/21/25
Revised: 10/10/25

HOA.105559019.8

ORDINANCE NO._____

An ordinance amending Title 28 – Plumbing Code – of the Los Angeles County Code, to adopt and incorporate by reference portions of the 2025 California Plumbing Code, with certain changes and modifications, and to make other revisions thereto.

The Board of Supervisors of the County of Los Angeles ordains as follows:

SECTION 1. Sections 119.1.2.0 through 119.1.14.0 of Chapter 1, Chapters 2 through 17, and Appendices A, B, D, H, I, and J, of the Los Angeles County Code, which incorporate by reference and modify portions of the 2022 California Plumbing Code, are hereby repealed.

SECTION 2. Chapter 1 is hereby amended to read as follows:

CHAPTER 1

ADMINISTRATION

100 ADOPTION AND INCORPORATION BY REFERENCE.

Except as hereinafter changed or modified, Sections 1.2.0 through 1.14.0 of Chapter 1, Division I, of that certain Plumbing Code known and designated as the ~~2022~~2025 California Plumbing Code, as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 28 of the Los Angeles County Code as if fully set forth below, and shall be known as Sections 119.1.2.0 through 119.1.14.0, respectively, of Chapter 1 of Title 28 of the Los Angeles County Code.

Except as hereinafter changed or modified, Chapters 2 through 17 and Appendices A, B, D, H, I, ~~and~~ J, M, and S, of that certain Plumbing Code known and

designated as the ~~2022~~2025 California Plumbing Code as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 28 of the Los Angeles County Code as if fully set forth below, and shall be known as Chapters 2 through 17, and Appendices A, B, D, H, I, ~~and~~ J, M, and S, of Title 28 of the Los Angeles County Code.

A copy of the ~~2022~~2025 California Plumbing Code shall be at all times maintained by the Chief Plumbing Inspector for use and examination by the public.

. . .

SECTION 3. Section 204.0 is hereby amended to read as follows:

204.0 – B –

. . .

Building Code. The most recent edition of Title 26 of the Los Angeles County Code.

. . .

SECTION 4. Section 206.0 is hereby amended to read as follows:

206.0 – D –

. . .

Demand Hot Water Recirculation System. A hot water recirculation system requiring manual activation and equipped with a thermostat that will automatically shut off the recirculation pump when the water temperature reaches a preset level at the point of use.

. . .

SECTION 5. Section 207.0 is hereby amended to read as follows:

207.0 – E –

. . .

Electrical Code. The most recent edition of Title 27 of the Los Angeles County Code.

. . .

SECTION 6. Section 210.0 is hereby amended to read as follows:

210.0 – H –

. . .

Hot Water Recirculation System. A hot water distribution system that reduces the time needed to deliver hot water to fixtures that are distant from the water heater, boiler, or other water heating equipment. The recirculation system is comprised of hot water supply and return piping with shutoff valves, balancing valves, and circulating pumps, and a method of controlling the circulating system.

. . .

SECTION 7. Section 215.0 is hereby amended to read as follows:

215.0 – M –

. . .

Mechanical Code. The most recent edition of Title 29 of the Los Angeles County Code.

. . .

SECTION 8. Section 301.2.2 is hereby amended to read as follows:

301.2.2 Standards. Standards listed or referred to in this ~~c~~Chapter or other chapters cover materials that will conform to the requirements of this ~~c~~Code, where used in accordance with the limitations imposed in this or other chapters thereof and their listing. Where a standard covers materials of various grades, weights, quality, or configurations, the portion of the listed standard that is applicable shall be used. Design and materials for special conditions or materials not provided for herein shall be permitted to be used only by special permission of the Authority Having Jurisdiction after the Authority Having Jurisdiction has been satisfied as to their adequacy. A list of plumbing standards that appear in specific sections of this ~~c~~Code is referenced in Table 1701.1. Standards referenced in Table 1701.1 shall be applied as indicated in the applicable referenced section. A list of additional approved standards, publications, practices, and guides that are not referenced in specific sections of this ~~c~~Code appear in Table 1701.2. Solar thermal energy systems and material standards are referenced in Tables U 18.1 and U 18.2 of Appendix U. ~~An~~IAPMO Installation Standards ~~is~~are referenced in Appendix I for the convenience of the users of this ~~c~~Code. It is not considered as a part of this ~~c~~Code unless formally adopted as such by the Authority Having Jurisdiction.

SECTION 9. Section 301.3 is hereby amended to read as follows:

301.3 Alternate Materials and Methods of Construction ~~Equivalency~~ and Modifications.

301.3.1 Alternate Materials and Methods of Construction.

Nothing in this ~~c~~Code is intended to prevent the use of systems, methods, or devices of equivalent or superior quality, strength, fire resistance, effectiveness, durability, and safety over those prescribed by this ~~c~~Code. Technical documentation shall be submitted to the Authority Having Jurisdiction to demonstrate equivalency prior to installation. The Authority Having Jurisdiction shall have the authority to approve or disapprove the system, method, or device for the intended purpose on a case-by-case basis. [HCD 1] (See Section 1.8.7).

. . .

301.3.1.1 Testing.

. . .

301.3.1.1.1 Tests.

. . .

301.3.1.~~2~~.1.2 Request by Authority Having Jurisdiction.

. . .

301.3.2 Modifications. Whenever there are practical difficulties involved in carrying out the provisions of this Code, the Authority Having Jurisdiction shall have the authority to grant modifications on a case-by-case basis, upon application of the owner or the owner's authorized agent, provided the Authority Having Jurisdiction

shall first find that a special individual reason makes the strict letter of this Code impractical, that the modification is in conformity with the spirit and purpose of this Code, and that such modification does not lessen any health, fire-protection, or other life-safety-related requirements. The details of any action granting modifications shall be recorded and entered in the files of the Authority Having Jurisdiction. Application for approval of a modification shall be in accordance with Section 103.12.2.

SECTION 10. Section 304.1 is hereby amended to read as follows:

304.1 General. Plumbing fixtures, drains, appurtenances, and appliances, used to receive or discharge liquid wastes or sewage, shall be connected properly to the drainage system of the building or premises, in accordance with the requirements of this ~~c~~Code.

Exception: *[HCD 1] Limited-density owner-built rural dwellings. Where conventional plumbing, in all or in part, is installed within the structure, it shall be installed in accordance with the provisions of this ~~c~~Code. Alternative materials and methods shall be permitted provided that the design complies with the intent of the ~~c~~Code, and that such alternatives shall perform to protect health and safety for the intended purpose.*

Dual waste piping shall be installed to permit the discharge from clothes washers, bathtubs, showers, and bathroom/restroom wash basins to be used for a graywater irrigation system. Partial connection of plumbing fixtures to the graywater system, based on accepted engineering practices and required volume of water for irrigation, shall be accepted. Graywater systems shall be designed and installed in

accordance with Chapter 15 and other parts of this Code.

Exceptions:

(1) Buildings with a graywater system, rain catchment system, or recycled water system.

(2) Sites with landscape areas not exceeding 500 square feet.

(3) Projects where graywater systems are not permitted due to geological conditions.

(4) Additions and alterations that use the existing building drain.

SECTION 11. Section 601.2.3 is hereby added to read as follows:

601.2.3 Hot Water Recirculation Systems. A hot water recirculation system shall be installed, as defined in Chapter 2, and shall not allow more than 0.6 gallons of water to be delivered to any fixture before hot water arrives. Hot water recirculation systems may include, but are not limited to, the following:

(1) Timer-initiated systems.

(2) Temperature sensor-initiated systems.

(3) Occupancy sensor-initiated systems.

(4) Smart hot water recirculation systems.

(5) Demand hot water recirculation systems.

(6) Other systems acceptable to the Authority Having Jurisdiction.

Exception: Minor additions and alterations as determined by the Authority Having Jurisdiction that use the existing water distribution pipe system and which does not contain a hot water recirculation system.

SECTION 12. Section 609.7 is hereby amended to read as follows:

609.7 Abutting Lot. Nothing contained in this ~~c~~Code shall be construed to prohibit the use of all or part of an abutting or adjacent lot or lots to:

. . .

SECTION 13. Section 721.3 is hereby added to read as follows:

721.3 Public Sewer. If the public sewer does not extend to a point from which each building on a lot or parcel of land large enough to permit future subdivision can be independently served, the property owner shall construct a public sewer as required by Title 20 – Utilities – of the Los Angeles County Code, Division 2 (Sanitary Sewer and Industrial Waste), to provide adequate sewerage for each such possible parcel.

Exception: When the Authority Having Jurisdiction finds that the character of a lot is such that no further subdivision can be reasonably anticipated, or the use is such as to preclude subdivision, or where the owner has executed a covenant stating that the lot or parcel of land, together with all improvements thereon, will be maintained as a unit and that before any subdivision is made or any portion of said lot is transferred to another owner, separate sewerage facilities as hereinbefore required in this Section will be installed, the drainage system of all buildings may be connected to a common building sewer or private sewage disposal system. The covenant shall be recorded by the owner in the office of the Registrar-Recorder as part of the conditions of ownership of said property. Such agreement shall be binding on all heirs, successors, and assigns to said property.

This exception shall apply only while the whole of such lot remains in one undivided ownership. Upon the transfer of any portion of such lot other than the whole thereof to another owner, whether such transfer is made before or after the operative date of the ordinance adding this provision, the exception shall cease and a person shall not use or maintain any building or structure except in compliance with the provisions of this Code. As used in this Section, a sale, foreclosure, or contract to sell by the terms of which the purchaser is given the right of possession shall be deemed a transfer.

SECTION 14. Section 728.0 is hereby added to read as follows:

728.0 Building Sewer Connection Requirements.

728.1 Size. That portion of the building sewer extending from the public sewer to the property line shall be not less than 4 inches (100 mm) in internal diameter.

728.2 Depth. When laid within the limits of any public thoroughfare when the public sewer is sufficiently deep, no building sewer shall be less than 6 feet (1.8 m) below grade. Whenever practicable, the alignment and grade of each building sewer shall be straight from the public sewer to the property line.

728.3 Taps and Saddles. Whenever it becomes necessary to connect a building sewer to a public sewer at a point where no branch fitting has been installed in the public sewer, such connection shall be made as required by Title 20 – Utilities – of the Los Angeles County Code, Division 2 (Sanitary Sewer and Industrial Waste).

728.4 Connection to Trunks. Whenever required, an approved-type unvented running trap shall be installed in each building sewer, which is connected directly to a trunk sewer by any means whatsoever. Each such running trap shall be installed in the building sewer between the house drain or drains and the connection to the trunk sewer. A T-type cleanout shall be installed in the building sewer immediately below the running trap. This cleanout need not be extended to grade. Every running trap and cleanout shall be located on the lot served by the building sewer.

728.5 Street Widening. Where a future street or road-widening area has been established by the master plan of highways or in any other manner, all work installed in such area shall conform to the requirements established in this or other related ordinances for work on public property.

728.6 Main Line Required. Building sewer construction shall conform to the requirements of main line sewers as set forth in Title 20 – Utilities – of the Los Angeles County Code, Division 2 (Sanitary Sewer and Industrial Waste), when either of the following conditions exists:

1. Where the Authority Having Jurisdiction requires such construction because of the character or quantity of the sewage or industrial waste to be discharged.

2. Where the sewer is designed to be, or proposed to be, dedicated to the County of Los Angeles at the present or any future time.

SECTION 15. Table H 101.8 of Appendix H is hereby amended to read as follows:

TABLE H 101.8
LOCATION OF SEWAGE DISPOSAL SYSTEM

MINIMUM HORIZONTAL DISTANCE	BUILDING SEWER	SEPTIC TANK	DISPOSAL FIELD	SEEPAGE PIT OR CESSPOOL
Building or structures[1]	2 feet	5 feet	8 feet	8 feet
Property line adjoining private property	Clear[2]	5 feet	5 feet	8 feet
Water supply wells[9]	50 feet[3]	50 feet	100 feet	150 feet
Streams and other bodies of water[9]	50 feet	50 feet	100 feet[7]	150 feet[7]
Trees[10]		10 feet		10 feet
Seepage pits or cesspools[8]		5 feet	5 feet	12 feet
Disposal field[8]		5 feet	4 feet[4]	5 feet
On-site domestic water service line	1 foot[5]	5 feet	5 feet	5 feet
Distribution box			5 feet	5 feet
Pressure public water main	10 feet[6]	10 feet	10 feet	10 feet

For SI units: 1 foot = 304.8 mm

Notes:

1 Including porches and steps, whether covered or uncovered, breezeways, roofed porte cocheres, roofed patios, carports, covered walks, covered driveways, and similar structures or appurtenances.

2 See Section 312.3.

3 Drainage piping shall clear domestic water supply wells by not less than 50 feet (15 240 mm). This distance shall be permitted to be reduced to not less than 25 feet (7620 mm) where the drainage piping is constructed of materials approved for use within a building.

4 Plus 2 feet (610 mm) for each additional 1 foot (305 mm) of depth in excess of 1 foot (305 mm) below the bottom of the drain line. (See Section H 601.0)

5 See Section 720.0.

6 For parallel construction -- For crossings, approval by the Health Department shall be required.

7 These minimum clear horizontal distances shall also apply between disposal fields, seepage pits, and the mean high-tide line.

8 Where disposal fields, seepage pits, or both are installed in sloping ground, the minimum horizontal distance between any part of the leaching system and ground surface shall be 15 feet (4572 mm).

9 Where special hazards are involved, the distance required shall be increased as may be directed by the Authority Having Jurisdiction.

10 The septic tank and seepage pit shall not be within the protected zone of an oak tree as defined by Section 22.14.150 of Title 22 – Planning and Zoning – of the Los Angeles County Code.

SECTION 16. Table H 201.1(1) of Appendix H is hereby amended to read as follows:

TABLE H 201.1(1)
CAPACITY OF SEPTIC TANKS[1, 2, 3, 4, 5]

SINGLE-FAMILY DWELLINGS - NUMBER OF BEDROOMS	MULTIPLE DWELLING UNITS OR APARTMENTS - ONE BEDROOM EACH	OTHER USES: MAXIMUM FIXTURE UNITS SERVED PER TABLE 702.1	MINIMUM SEPTIC TANK CAPACITY (gallons)
1 or 2	—	15	750
3	—	20	1000
4	2 units	25	1200
5 or 6	3	33	1500
—	4	45	2000
—	5	55	2250
—	6	60	2500
—	7	70	2750
—	8	80	3000
—	9	90	3250
—	10	100	3500

For SI units: 1 gallon = 3.785 L

Notes:

1 Extra bedroom, 150 gallons (568 L) each.
2 Extra dwelling units over 10:250 gallons (946 L) each.
3 Extra fixture units over 100: 25 gallons (94.6 L) per fixture unit.
4 Septic tank sizes in this table include sludge storage capacity and the connection of domestic food waste disposers without further volume increase.
5 Applies to mobile homes not installed in a mobile home park.

SECTION 17. Table H 201.1(2) of Appendix H is hereby amended to read as follows:

TABLE H 201.1(2)
DESIGN CRITERIA OF ~~FIVE~~SIX TYPICAL SOILS

TYPE OF SOIL	REQUIRED SQUARE FEET OF LEACHING AREA PER 100 GALLONS	MAXIMUM ABSORPTION CAPACITY IN GALLONS PER SQUARE FEET OF LEACHING AREA FOR A 24 HOUR PERIOD
Coarse sand or gravel	20	5.0
Fine sand	25	4.0
Sandy loam ~~or sandy clay~~	40	2.5
Sandy clay	60	1.66
Clay with considerable sand or gravel	90	1.1

Clay with small amount of sand or gravel	120	0.8

For SI units: 1 square foot = 0.0929 m^2, 1 gallon = 3.785 L, 1 gallon per square foot = 40.7 L/m^2

SECTION 18. Table H 201.1(3) of Appendix H is hereby amended to read as follows:

TABLE H 201.1(3)
LEACHING AREA SIZE BASED ON SEPTIC TANK CAPACITY

REQUIRED SQUARE FEET OF LEACHING AREA PER 100 GALLONS SEPTIC TANK CAPACITY (square feet per 100 gallons)	MAXIMUM SEPTIC TANK SIZE ALLOWABLE (gallons)
20-25	7500
40	5000
60	3500
90	~~3500~~3000
120	~~3000~~2500

For SI units: 1 square foot per 100 gallons = 0.000245 m^2/L, 1 gallon = 3.785 L

SECTION 19. Table H 201.1(4) of Appendix H is hereby amended to read as follows:

TABLE H 201.1(4)
ESTIMATED WASTE SEWAGE FLOW RATES[1, 2, ~~3~~]

TYPE OF OCCUPANCY	GALLONS PER DAY
Airports (per employee)	15
Airports (per passenger)	5
Auto washers – check with equipment manufacturer	-
Bowling alleys – with snack bar only (per lane)	75
Campground – with central comfort station (per person)	35
Campground – with flush toilets - no showers (per person)	25
Camps (day) – no meals served (per person)	15
Camps (summer and seasonal camps) – (per person)	50
Churches – sanctuary (per seat)	5
Churches – with kitchen waste (per seat)	7
Dance halls – (per person)	5
Factories – no showers (per employee)	25
Factories – with showers (per employee)	35
Factories – with cafeteria (per employee)	5
Hospitals – (per bed)	250
Hospitals – kitchen waste only (per bed)	25
Hospitals – laundry waste only (per bed)	40
Hotels – no kitchen waste (per bed)	60
Institutions – resident (per person)	75
Nursing home – (per person)	125
Rest home – (per person)	125

Laundries – self-service with minimum 10 hours per day (per ~~wash cycle~~machine)	300~~50~~
Laundries – commercial check with manufacturer's specification	-
Motel (per bed space)	50
Motel – with kitchen (per bed space)	60
Offices – (per employee)	20
~~Parks – mobile homes (per space)~~	~~250~~
Parks (picnic) – with toilets only (per parking space)	20
Parks (recreational vehicles) – without water hook-up (per space)	75
Parks (recreational vehicles) – with water and sewer hook-up (per space)	100
Restaurants – cafeteria (per ~~employee~~seat)	50~~20~~
~~Restaurants – with toilet waste (per customer)~~	~~7~~
~~Restaurants – with kitchen waste (per meal)~~	~~6~~
~~Restaurants – with kitchen waste disposable service (per meal)~~	~~2~~
~~Restaurants – with garbage disposal (per meal)~~	~~1~~
~~Restaurants – with cocktail lounge (per customer)~~	~~2~~
Schools staff and office (per person)	20
Schools – elementary (per student)	15
Schools – intermediate and high (per student)	20
Schools – with gym and showers (per student)	5
Schools – with cafeteria (per student)	3
Schools (boarding) – total waste (per person)	100
Service station – with toilets for 1st bay	1000
Service station – with toilets for each additional bay	500
Stores – (per employee)	20

Stores – with public restrooms (per 10 square feet of floor space)	1
Swimming pools – (per person)	10
Theaters – auditoriums (per seat)	5
Theaters – with drive-in (per space)	10

For SI units: 1 square foot = 0.0929 m^2, 1 gallon per day 3.785 L/day

Notes:

~~1 Sewage disposal systems sized using the estimated waste/sewage flow rates shall be calculated as follows:~~

~~(a) Waste/sewage flow, up to 1500 gallons per day (5678 L/day)~~
~~Flow x 1.5 = septic tank size~~

~~(b) Waste/sewage flow, over 1500 gallons per day (5678 L/day)~~
~~Flow x 0.75 + 1125 = septic tank size~~

~~(c) Secondary system shall be sized for total flow per 24 hours.~~

~~2~~1 See Section H 201.1.

~~3~~2 Because of the many variables encountered, it is not possible to set absolute values for waste/sewage flow rates for all situations. The designer should evaluate each situation and, where figures in this table need modification, they should be made with the concurrence of the Authority Having Jurisdiction.

SECTION 20. Section H 301.1 is hereby amended to read as follows:

H 301.1 General.

. . .

(3) No excavation for a leach line or leach bed shall be located within 5 feet (1524 mm) of ~~the~~groundwater ~~table~~ nor to a depth where sewage ~~is capable of contaminating~~may contaminate the underground water stratum ~~that is useable for domestic purposes~~.

Exception: ~~In areas where the records or data indicate that the groundwaters are grossly degraded, the 5 foot (1524 mm) separation requirement shall be permitted to be reduced by the Authority Having Jurisdiction~~When approved by the Authority Having Jurisdiction, this distance may be reduced to 5 feet (1524 mm) from ocean water. The applicant shall supply evidence of groundwater depth to the satisfaction of the Authority Having Jurisdiction.

(4) The minimum effective absorption area in any seepage pit shall be calculated as the excavated sidewall area below the inlet exclusive of any hardpan, rock, clay, or other impervious formations. The minimum required area of porous formation shall be provided in one or more seepage pits. No excavation shall extend within 10 feet (3048 mm) of ~~the~~groundwater ~~table~~ nor to a depth where sewage ~~is capable of contaminating~~may contaminate the underground water stratum ~~that is useable for domestic purposes~~.

Exception: ~~In areas where the records or data indicate that the groundwaters are grossly degraded, the 10 foot (3048 mm) separation requirement shall be permitted to be reduced by the Authority Having Jurisdiction~~When approved by the Authority Having Jurisdiction, this distance may be reduced to 5 feet (1524 mm) from ocean water.

. . .

SECTION 21. Section H 401.3 is hereby amended to read as follows:

H 401.3 Absorption Rates. Where a percolation test is required, the proposed system shall have the capability to absorb a quantity of clear water in a 24-hour period equal to at least five times the liquid capacity of the proposed septic tank. ~~n~~No private disposal system shall be permitted to serve a building if that test shows the absorption capacity of the soil is less than 0.83 gallons per square foot (gal/ft^2) (33.8 L/m^2) or more than 5.12 gal/ft^2 (208.6 L/m^2) of leaching area per 24 hours. Where the percolation test shows an absorption rate greater than 5.12 gal/ft^2 (208.6 L/m^2) per 24 hours, a private disposal system shall be permitted where the site does not

overlie groundwaters protected for drinking water supplies, a minimum thickness of 2 feet (610 mm) of the native soil below the entire proposed system is replaced by loamy sand, and the system design is based on percolation tests made in the loamy sand.

SECTION 22. Section H 601.5 is hereby amended to read as follows:

H 601.5 Distribution Boxes. Where two or more drain lines are installed, an approved distribution box of sufficient size to receive lateral lines shall be installed at the head of each disposal field. The inverts of outlets shall be level, and the invert of the inlet shall be not less than 1 inch (25.4 mm) above the outlets. Distribution boxes shall be designed to ensure equal flow and shall be installed on a level concrete slab in natural or compacted soil. Distribution boxes shall be coated on the inside with a bituminous coating or other approved method acceptable to the Authority Having Jurisdiction.

SECTION 23. Section H 601.8 is hereby amended to read as follows:

H 601.8 Dosing Tanks. ~~Where the quantity of sewage exceeds the amount that is permitted to be disposed in 500 lineal feet (152.4 m) of leach line, a dosing tank shall be used. Dosing tanks shall be equipped with an automatic siphon or pump that discharges the tank once every 3 or 4 hours. The tank shall have a capacity equal to 60 to 75 percent of the interior capacity of the pipe to be dosed at one time. Where the total length of pipe exceeds 1000 lineal feet (305 m), the dosing tank shall be provided with two siphons or pumps dosing alternately and each serving one-half of the leach field~~Automatic syphon or dosing tanks shall be installed when required or as

permitted by the Authority Having Jurisdiction.

SECTION 24. Section H 701.2 is hereby amended to read as follows:

H 701.2 Multiple Installations. Multiple seepage pit installations shall be served through an approved distribution box or be connected in series ~~using watertight connection laid on undisturbed or compacted soil. The outlet from the pit shall have~~. When connected in series, the effluent shall leave each pit through an approved vented leg fitting extending not less than 12 inches (305 mm) ~~below the inlet fitting~~downward into such existing pit and having its outlet flow line at least 6 inches below the inlet. All pipe between pits shall be laid with approved watertight joints.

SECTION 25. Section H 1001.1 is hereby amended to read as follows:

H 1001.1 Inspection. Inspection requirements shall comply with the following:

(1) Applicable provisions of Section ~~105.0~~104.0 of this ~~c~~Code and this ~~a~~Appendix shall be required. Plans shall be required in accordance with Section ~~103.3~~102.1 of this ~~c~~Code.

. . .

(5) Disposal fields and seepage pits shall not be installed in uncompacted fill.

SECTION 26. Section H 1101.6 is hereby added to read as follows:

H 1101.6 Excavation. No excavation for an abandoned sewer or sewage facility shall be left unattended at any time, unless the permittee shall have first provided a suitable and adequate barricade to assure public safety.

SECTION 27. Appendix M is hereby amended to be Appendix T to read as follows:

APPENDIX ~~M~~T

SWIMMING POOLS

~~M~~T 1.0 Swimming pool waste water shall be disposed of as hereinafter set forth in this Section and the type of disposal proposed shall be approved by the Authority Having Jurisdiction prior to the commencement of any work. A means of disposal of the total contents of the pool (periodic emptying) without surface runoff shall be established to the satisfaction of the Authority Having Jurisdiction.

~~M~~T 2.0 The following are legal methods of swimming pool waste water disposal.

(1) To a public sewer.

(2) On the property if the property is large enough to ensure that runoff will not encroach on abutting property.

(3) To a tank truck.

(4) In the case where none of the above can be accomplished, alternate methods of disposal acceptable to the State Regional Water Quality Control Board (SRWQCB) may be used. Prior to discharge, the swimming pool water must be tested by the owner to ~~insure~~ensure that it is within all water quality standards established by the SRWQCB. Contact Department of Public Works, Environmental Programs Division for information.

~~M~~T 3.0 No direct connection shall be made between any storm drain, sewer, drainage system, drywell or subsoil irrigation line and any line connected to a swimming pool.

~~M~~T 4.0 Waste water from any filter, scum gutter overflow, pool emptying line or similar apparatus or appurtenance when discharging to any part of a drainage system, shall be provided with a three (3) inch (76.2 mm) trap.

~~M~~T 5.0 Except as provided in Section ~~M~~T 6.0, the discharge outlet terminal from any pool or filter shall be protected from backflow by an air gap at least six (6) inches (152.4 mm) above the flood rim of the receptor.

~~M~~T 6.0 No scum gutter drain, overflow drain, backwash discharge drain, or pool emptying line shall enter any receptor below the rim unless the pool piping at its deepest point, the bottom of the filters, and the bottom of the scum gutter drain trough or overflow inlets are at least six (6) inches (152.4 mm) above the overflow rim of the receptor.

~~M~~T 7.0 A positive point of potable water supply to each swimming pool shall be established and shall be installed as required by Chapter 6 of this Code.

~~M~~T 8.0 Plans for other than private swimming pools shall be approved by the Health Officer before any water supply or waste discharge permit is issued.

Note: The forgoing applies only to outdoor swimming, bathing, or wading pools. Plans and specifications for all indoor installations shall be submitted to the Authority Having Jurisdiction for approval prior to the commencement of any work, and all piping,

equipment and construction shall be equal to the types prescribed in the Installation Requirements of this Code for indoor work.

~~M~~T 9.0 All new swimming pools constructed or installed in Fire Zone 4 or in a Very High Fire Hazard Severity Zone and having a capacity of 5000 gallons or more shall have a minimum four (4) inch diameter drain and discharge line connected to a draft hydrant, the type, location, and installation of which shall be approved by the chief of the fire department. Materials used for the discharge line shall be as approved in this Code for potable water systems except that brass, cast iron, galvanized wrought iron, and copper shall not be used. If PVC is used, it shall be a minimum of Schedule 40.

Exception: Swimming pools constructed or installed with the bottom of the pool more than 15 feet below the proposed draft hydrant connection elevation, measured vertically, need not be provided with a draft hydrant system.

To identify that pool draft system, an appropriate sign (as designated by the fire department) including the location of the swimming pool shall be posted on the pool safety fence and/or at the draft hydrant location.

~~M~~T 10.0 For one- and two-family dwellings, any new permanently installed outdoor in-ground swimming pool or spa shall be equipped with an automatic cover. For irregular-shaped pools where it is infeasible to cover 100 percent of the pool due to its irregular shape, the largest possible area of the pool (minimum 80 percent) shall be covered. For additions and alterations, non-automatic covers shall be accepted.

SECTION 28. Appendix S is hereby amended to be Appendix U and to read as follows:

APPENDIX ~~S~~U

SOLAR THERMAL ENERGY SYSTEMS

~~S~~U 1.0 General.

In addition to the requirements of this Appendix, the provisions of this Code and Title 29 – Mechanical Code – of the Los Angeles County Code shall apply to the erection, installation, alteration, relocation, replacement, addition to, use, maintenance and repair of solar thermal energy systems, including, but not limited to, equipment and appliances intended to utilize solar thermal energy for water heating and swimming pool heating.

~~S~~U 2.0 Definitions.

For the purpose of this Appendix, certain terms, words, phrases, and their derivatives shall be construed as set forth in this Section. Whenever terms are not defined, their ordinary dictionary meaning shall apply.

Absorber. That part of the solar collector that receives the incident radiation energy.

Absorptance. The collecting of heat, measured as percent of total radiation available.

Ambient Temperature. Surrounding temperature.

Anchors. See Supports.

Antifreeze. An additive used in water-based heat transfer fluids to decrease the freezing temperature of the fluids and protect hydronic systems from freezing.

Appliance. A device that utilizes an energy source to produce light, heat, power, refrigeration, or air conditioning. This definition also includes electric storage or tankless water heaters.

~~**Aperture.** The maximum projected area of a solar collector through which the unconcentrated solar radiant energy is admitted.~~

Area, Absorber. The total projected heat transfer area from which the absorbed solar irradiation heats the transfer media.

Area, Aperture. The maximum projected area of a solar collector through which the unconcentrated solar radiant energy is admitted.

Automatic. That which provides a function without the necessity of human intervention.

Auxiliary Heating System. Equipment using non-solar energy sources to supplement or back up the output provided by a solar thermal energy system.

Closed Loop System. A system where the fluid is enclosed in a piping system that is not vented to the atmosphere.

Collector. See Solar Collector.

~~**Collector Cover (Glazing).** The material covering the aperture to provide thermal and environmental protection.~~

Collector System. That section of the solar collector system that includes the collector and piping or ducts from the collector to the storage system.

Combustible Liquid. A liquid having a flash point at or above 100°F (38°C). Combustible liquids shall be divided into the following classifications:

(1) Class II liquids having a flash point above 100°F (38°C) and below 140°F (60°C).

(2) Class IIIA liquids having a flash point at or above 140°F (60°C) and below 200°F (93°C).

(3) Class IIIB liquids having a flash point at or above 200°F (93°C).

The classifications of combustible liquids do not include compressed gases or cryogenic fluids.

Concentrating Solar Collector. A solar collector that uses reflectors, lenses, or other optical elements to concentrate the radiant energy passing through the aperture onto an absorber of which the surface area is smaller than the aperture area.

Corrosion. The gradual degradation and destruction of metals and other natural and synthetic materials typically resulting from and/or electrochemical reactions with their environment including, but not limited to, weathering, dissolution, and direct photochemical attack.

Cover, Collector (Glazing). The material covering the aperture to provide thermal and environmental protection.

Design Pressure. The maximum allowable pressure for which a specific part of a system is designed.

Design Temperature. The maximum allowable continuous or intermittent temperature for which a specific part of a solar energy system is designed to operate safely and reliably.

Distribution System. That section of the solar energy system from the storage system to the point of use.

Drainback System. A closed loop system which allows gravity draining of the heat transfer fluid into lower portions of the solar loop under prescribed circumstances.

Draindown (Drainback). An active solar energy system in which the fluid in the solar collector is drained from the solar energy system under prescribed circumstances.

Energy Collector Fluid. That fluid used to transfer energy from the collector to the storage system or point of use.

Energy Storage Fluid (or Media). That fluid (or media) used in the storage container for storing collected energy.

Energy Transfer Fluid. That fluid used within a closed system either from the collector to the storage system or from the storage system to the point of use.

Essentially Nontoxic Transfer Fluid. Fluid generally recognized as safe by the Food and Drug Administration (FDA) as food grade.

External Auxiliary Heating. Auxiliary heating device located outside the storage. The heat is transferred to the storage by direct or indirect charging via a charge loop.

~~**Fail-Safe Freeze Protection.** A freeze-protection method that does not rely on the activation or continued operation of any mechanical or electrical component.~~

Flammable Liquid. Any liquid that has a flash point below 100°F (38°C), and has a vapor pressure not exceeding 40 psi (276 kPa) at 100°F (38°C). Flammable liquids shall be known as Class I liquids and shall be divided into the following classifications:

(1) Class IA liquids having a flash point below 73°F (23°C) and a boiling point below 100°F (38°C).

(2) Class IB liquids having a flash point below 73°F (23°C) and a boiling point at or above 100°F (38°C).

(3) Class IC liquids having a flash point at or above 73°F (23°C) and below 100°F (38°C).

Flash Point. The minimum temperature corrected to a pressure of 14.7 psi (101 kPa) at which a test flame causes the vapors of a portion of the sample to ignite under the conditions specified by the test procedures and apparatus. The flash point of a liquid shall be determined in accordance with ASTM D 56, ASTM D 93, or ASTM D 3278.

Freeze Protection. Any method for protecting solar thermal systems from damage due to freezing conditions where installed in locations where freezing ambient temperature conditions exist.

Freeze Protection, Fail-Safe. A freeze-protection method that does not rely on the activation or continued operation of any mechanical or electrical component.

Heat Exchanger. A device that transfers heat from one medium to another.

Heat Transfer Medium. The medium used to transfer energy from the solar collectors to the thermal storage or load.

Immersed Heat Exchanger. Heat exchanger, which is completely surrounded with the fluid in the storage tank.

Instantaneous Efficiency. The amount of energy removed by the transfer fluid per gross collector area, during a specified time period, divided by the total solar radiation incident on the collector per unit area during the same test period, under steady state or quasi-steady state.

Integral Collector Storage. A solar thermal heating system that uses a solar collector that has all or most of its heat transfer medium inside the collector.

Langelier Saturation Index. A formula used to measure water balance or mineral saturation control of pool, spa, or hot tub water. Total alkalinity, calcium hardness, pH, water temperature, and total dissolved solids are measured, given a factor, and calculated to determine whether water has a tendency to be corrosive or scale forming.

Open Loop System. A system where the fluid is enclosed in a piping system that is vented to the atmosphere.

Out-Gassing. As applied to thermal energy, the thermal process by which materials expel gas.

Passive Solar Systems. As used in these requirements, are solar energy systems that utilize elements of a building, without augmentation by mechanical components such as blowers or pumps, to provide for the collections, storage, or distribution of solar energy for heating, cooling, or both.

Rock Storage. A bin, basement, or other container filled with rock to act as an energy reservoir for a solar energy system.

Solar Collector. A device used to absorb energy from the sun.

Solar Energy System. A configuration of equipment and components to collect, convey, store, and convert the sun's energy for a purpose.

Solar Energy System Components. Any appliance, assembly, device, equipment, or piping used in the conversion of solar energy into thermal energy for service water heating, pool water heating, space heating and cooling, and electrical service.

Solar Thermal Energy System. See Solar Thermal System.

Solar Thermal System. A complete assembly of subsystems which convert solar energy into thermal energy and utilize this energy for service water heating, pool water heating, space heating and cooling purposes.

Storage Temperature. Temperature of the storage medium.

Supports. Supports, hangers, and anchors are devices for properly supporting and securing pipe, fixtures, and equipment.

Thermal Energy. The amount of sensible heat energy stored within a material or fluid. The product of the mass, specific thermal capacity, and temperature increase/decrease of the material or fluid. Also known as sensible heat energy.

Thermal Storage. A tank or vessel used in a solar thermal, hydronic, or geothermal system, in which thermal energy is stored.

Thermosiphon. The natural circulation of fluids due to temperature differential.

Total Alkalinity. The sum of all alkaline minerals in the water that is primarily in bicarbonate form, but also as sodium, calcium, magnesium, potassium carbonates, and hydroxides. It is a measure of the water's ability to resist changes in pH.

~~S~~U 3.0 Permits Required.

It shall be unlawful for a person, firm, or corporation to construct, install, alter, repair, replace, or remodel a solar thermal energy system regulated by this Code or cause the same to be done without first obtaining a separate permit for each separate system or interconnected set of systems as specified in Section 103.0 of this Code.

~~S~~U 4.0 Plans and Specifications.

Plans, engineering calculations, diagrams, and other data shall be submitted in one or more sets with each application for a permit. Where required by the Authority Having Jurisdiction, the plans, computations, diagrams, specifications, and other data shall be prepared by, and the solar thermal energy system designed by, an engineer, an architect, or both, who shall be licensed by the state to practice as such.

Exception: The submission of plans, calculations, or other data may be waived where the Authority Having Jurisdiction determines that the nature of the work applied for is such that reviewing of plans is not necessary to obtain compliance within the Code.

~~S~~U 5.0 Installation.

~~S~~U 5.1 Listed Appliances. Except as otherwise provided in this Code, the installation of appliances regulated by this Code shall be in accordance with the conditions of the listing. The appliance installer shall leave the manufacturer's installation and operating instructions attached to the appliance. Clearances of listed appliances from combustible materials shall be as specified in the listing or on the rating plate.

~~S~~U 5.2 Standards. Standards listed or referred to in this Appendix or other provisions of this Code cover materials that will conform to the requirements of this Code, where used in accordance with the limitations prescribed in this Code and their listing. Where a standard covers materials of various grades, weights, quality, or configurations, the portion of the listed standard that is applicable shall be used. Design and materials for special conditions or materials not provided for herein may be permitted as authorized by Section 301.3. A list of standards that appear in specific sections of this Appendix are referenced in Table ~~S~~U 18.1. A list of additional standards, publications, practices, and guides that are not referenced in specific sections of this Appendix appear in Table ~~S~~U 18.2. The documents indicated in Table ~~S~~U 18.2 shall be permitted in accordance with Section 301.3.

~~S~~U 6.0 Inspection and Testing.

~~S~~U 6.1 General. Solar thermal energy systems for which a permit is required by this Code shall be inspected by the Authority Having Jurisdiction. No solar thermal energy system or portion thereof shall be covered, concealed, or put into use until it first has been tested, inspected, and approved as prescribed in this Code. Neither the Authority Having Jurisdiction nor the jurisdiction shall be liable for expense entailed in the removal or replacement of material required to permit inspection. Solar thermal energy systems regulated by this Code shall not be connected to the water, the energy fuel supply, or the sewer system until authorized by the Authority Having Jurisdiction. Installation of a solar thermal energy system shall comply with other parts of this Code, including Section 104.0.

~~S~~U 6.2 Required Inspection. New solar thermal energy system work and such portions of existing systems as affected by new work, or changes, shall be inspected by the Authority Having Jurisdiction to ensure compliance with the requirements of this Code and to ensure that the installation and construction of the solar thermal energy system is in accordance with approved plans. The Authority Having Jurisdiction shall make the following inspections and other such inspections as necessary. The permittee or the permittee's authorized agent shall be responsible for the scheduling of such inspections as follows:

(1) Underground inspection shall be made after trenches or ditches are excavated and bedded, piping installed, and before backfill is put in place.

(2) Rough-in inspection shall be made prior to the installation of wall or ceiling membranes.

(3) Final inspection shall be made upon completion of the installation.

~~S~~U 6.3 Testing. Solar thermal energy systems shall be tested and approved as required by this Code or the Authority Having Jurisdiction.

~~S~~U 6.3.1 Piping. The piping of the solar thermal system shall be tested with water, air, a heat transfer medium, or as recommended by the manufacturer's instructions, except that plastic pipe shall not be tested with air. The Authority Having Jurisdiction shall be permitted to require the removal of plugs, etc., to ascertain where the pressure has reached all parts of the system.

~~S~~U 6.3.2 System Requirements. Prior to the installation of insulation and startup, a solar thermal system, including piping, collectors, heat exchangers, and other related equipment, shall be tested and proved airtight.

~~S~~U 6.3.2.1 Direct (Open Loop) Systems. Direct (open loop) systems shall be tested under a water pressure not less than one and one-half times the maximum design operating pressure or 150 pounds force per square inch (psi) (1034 kPa), whichever is more. Systems shall withstand the test without leaking for a period of not less than 15 minutes.

~~S~~U 6.3.2.2 **Indirect (Closed Loop) Systems.** Indirect (closed loop) systems shall be hydrostatically tested at one and one-half times the maximum designed operating pressure in accordance with the manufacturer's installation instructions. Systems shall withstand the test without leaking for a period of not less than 15 minutes.

~~S~~U 6.3.3 **Test Pressure for Storage Tanks.** The test pressure for storage tanks that are subject to water pressure from utility mains (with or without a pressure reducing valve) shall be two times the working pressure but not less than 300 psi (2068 kPa).

~~S~~U 6.3.3.1 **Pressure Type.** Pressure-type storage tanks exceeding 15 psi (103 kPa) shall be tested in accordance with ASME BPVC Section VIII. Pressure-type storage tanks not exceeding 15 psi (103 kPa) shall be hydrostatically tested at one and one-half times the maximum design operating pressure.

~~S~~U 6.3.3.2 **Atmospheric-Type.** Atmospheric-type thermal storage tanks shall be tested by filling with water for a period of 24 hours prior to inspection and shall withstand the test without leaking. No thermal storage tank or portion thereof shall be covered or concealed prior to approval.

~~S~~U 6.3.4 **Connection to Service Utilities.** No person shall make connections from a source of energy or fuel to a solar thermal energy system or equipment regulated by this Code and for which a permit is required until approved by the Authority Having Jurisdiction. No person shall make connection from a water-supply line nor shall they connect to a sewer system regulated by this Code and for which a

permit is required until approved by the Authority Having Jurisdiction. The Authority Having Jurisdiction shall be permitted to authorize temporary connection of the solar thermal energy system equipment to the source of energy or fuel for the purpose of testing the equipment.

~~S~~U 7.0 Water Heating Systems.

~~S~~U 7.1 Solar Water Heating System. Solar water heating systems shall be in accordance with IAPMO S1001.1 or ICC 900/SRCC 300. Where solar collectors are capable of being isolated from the remainder of the system, a suitable pressure relief valve shall be installed in the isolatable section.

~~S~~U 7.2 Auxiliary Heating System. An auxiliary heating system shall be installed in conjunction with the solar thermal system and shall be adequate to provide service in the absence of solar thermal energy input. An auxiliary heating system that utilizes electricity as the energy source shall be in accordance with Section ~~S~~U 15.0. Auxiliary heating systems that utilize solid fuel or fuel gas as the energy source shall be in accordance with Title 29 – Mechanical Code – of the Los Angeles County Code.

~~S~~U 8.0 Abandonment.

~~S~~U 8.1 General. An abandoned solar thermal energy system or part thereof shall be disconnected from remaining systems, drained, plugged, and capped in a manner satisfactory to the Authority Having Jurisdiction.

~~S~~U 8.2 Storage Tank. An underground water storage tank that has been abandoned or discontinued otherwise from use in a solar thermal energy system shall be completely drained and filled with earth, sand, gravel, concrete, or other approved material or removed in a manner satisfactory to the Authority Having Jurisdiction.

~~S~~U 9.0 Tanks.

~~S~~U 9.1 Storage Tanks.

~~S~~U 9.1.1 Plans. Plans for tanks shall be submitted to the Authority Having Jurisdiction for approval, unless listed by an approved listing agency. Such plans shall show dimensions, reinforcing, structural calculations, and such other pertinent data as required by the Authority Having Jurisdiction.

~~S~~U 9.1.2 Atmospheric Tanks. Atmospheric storage tanks shall be vented to the atmosphere and installed in accordance with the manufacturer's installation instructions.

~~S~~U 9.1.2.1 Overflow. Gravity tanks shall be installed with an overflow opening of not less than 2 inches in diameter. The openings shall be above ground and installed with a screened return bend.

~~S~~U 9.1.2.2 Makeup Water. Makeup water from a potable water system to an atmospheric tank shall be protected by an air gap.

~~S~~U 9.1.2.3 Draining. An overflow shall be provided for an atmospheric tank. The overflow shall be provided with a means of drainage in accordance with Section 303.0 of this Code. The overflow for an atmospheric tank containing nonpotable water shall be emptied into an approved container.

~~S~~U 9.1.3 Prefabricated Storage Tanks. Prefabricated tanks shall be listed by an approved agency and labeled.

~~S~~U 9.1.4 Pressure Vessels. A pressure-type storage tank exceeding an operating pressure of 15 psi (103kPa) shall be constructed in accordance with ASME BPVC Section VIII.1. Fiber-reinforced plastic storage tanks shall be constructed in accordance with ASME BPVC Section X.

~~S~~U 9.1.5 Devices. Devices attached to or within a tank shall be accessible for repair and replacement.

~~S~~U 9.1.5.1 Safety Devices. Pressure-type thermal storage tanks shall be installed with a listed combination temperature and pressure relief valve in accordance with Section ~~S~~U 14.3.1. The temperature setting shall not exceed 210°F (99°C) and the pressure setting shall not exceed 150 percent of the maximum designed operating pressure of the system, or 150 percent of the established normal operating pressure of the piping materials, or the labeled maximum operating pressure of a pressure-type storage tank, whichever is less. The pressure and temperature setting shall not exceed the pressure and temperature rating of the tank or as recommended by the tank manufacturer.

Storage tanks and bottom fed tanks connected to a water heater shall be designed to withstand vacuum induced pressure, or shall be provided with a vacuum relief in accordance with Section ~~S~~U 14.3.4. The vacuum relief valve shall be installed at the top of the tank and shall have an operating pressure not to exceed 200 psi (1379 kPa) and a temperature rating not to exceed 250°F (121°C). The size of such vacuum relief valves shall have a minimum rated capacity for the equipment served. This Section shall not apply to pressurized captive air diaphragm or bladder tanks.

~~S~~U 9.1.6 Separate Storage Tanks. For installations with separate storage tanks, a pressure relief valve and temperature relief valve or combination thereof shall be installed on both the main storage tank and auxiliary tank.

~~S~~U 9.1.6.1 Isolation Valves. Storage tanks shall be provided with isolation valves for servicing.

~~S~~U 9.1.7 Underground Storage Tanks. Tanks shall be permitted to be buried underground where designed and constructed for such installation.

~~S~~U 9.1.8 Tank Covers. Tank covers shall be structurally designed to withstand anticipated loads and pressures in accordance with the manufacturer's instructions.

~~S~~U 9.1.9 Drainage Pan. Where water heater, boiler, or other thermal storage tank is installed in an attic, attic-ceiling assembly, floor-ceiling assembly, or floor subfloor assembly where damage could result from a leaking water heater, boiler or tank, a watertight pan of corrosion-resistant materials shall be installed beneath the water

heater, boiler, or tank, with not less than 3/4 of an inch (20 mm) diameter drain to an approved location. Such pan shall be not less than 1 ½ inches (38mm) in depth.

~~S~~U 9.1.10 Storage Tank Construction and Materials.

~~S~~U 9.1.10.1 Construction. Storage tanks shall be constructed of durable materials not subject to excessive corrosion or decay and shall be watertight. Each such tank shall be structurally designed to withstand anticipated loads and pressures and shall be installed level and on a solid bed.

~~S~~U 9.1.10.2 Concrete. The walls and floor of each poured-in-place, concrete tank shall be monolithic. The exterior walls shall be double-formed so as to provide exposure of the exterior walls during the required water test. The compressive strength of a concrete tank wall, top and covers, or floor shall be not less than 2500 pounds-force per square inch (psi) (lb/in^2) (1.7236 E+04, kPa). Where required by the Authority Having Jurisdiction, the concrete shall be sulfate resistant (Type V Portland Cement).

~~S~~U 9.1.10.3 Metal Tanks. Metal tanks shall be welded, riveted and caulked, brazed, bolted, or constructed using a combination of these methods.

~~S~~U 9.1.10.4 Filler Metal. Filler metal used in brazing shall be non-ferrous metal or an alloy having a melting point above 1000°F (538°C) and below that of the metal joined.

~~S~~U 9.1.10.5 Insulation. Tank insulation shall have a thermal resistance not less than as shown in Table ~~S~~U 9.1.10.5. The temperature difference shall be calculated as the difference between the design operating temperature of the tank and the temperature of the surrounding air, or soil where the tank is installed underground. Where such data is not available, a temperature difference of 50°F (28°C) shall be used.

TABLE ~~S~~U 9.1.10.5

TEMPERATURE DIFFERENCE(°F)	THERMAL RESISTANCE (R)[°F•h•ft^2 /(Btu)]
50	6
100	12
150	18
200	24
250	30

For SI units: °C = °F(0.5555556), 1 degree Fahrenheit hour square foot per British thermal unit = [0.176 (m2•K)/W], 1 British thermal unit inch per degree Fahrenheit hour square feet = 0.1441 W/(m•K)* Based on thermal conductivity (k) of 0.20 [(Btu•inch)/(°F•h•ft^2)] (0.03 W/(m•K)

~~S~~U 9.2 Expansion Tanks.

~~S~~U 9.2.1 Where Required. An expansion tank shall be installed in a solar thermal energy system as a means for controlling increased pressure caused by thermal expansion. Expansion tanks shall be of the closed type and securely fastened to the structure. Tanks shall be rated for the pressure of the system. Supports shall be capable of carrying twice the weight of the tank filled with water without placing strain on the connecting piping.

Solar thermal energy systems incorporating hot water tanks or fluid relief columns shall be installed to prevent freezing under normal operating conditions.

Exception: An engineered fluid expansion storage system shall be permitted to incorporate fluid storage in vessels open to the atmosphere. Storage tanks and components for such systems shall be constructed of non-corrosive materials, or the system fluid shall be treated to inhibit corrosion. [See Figure U 9.2.1(2) for an example of an engineered fluid expansion storage system which incorporates fluid storage in a vessel open to the atmosphere.]

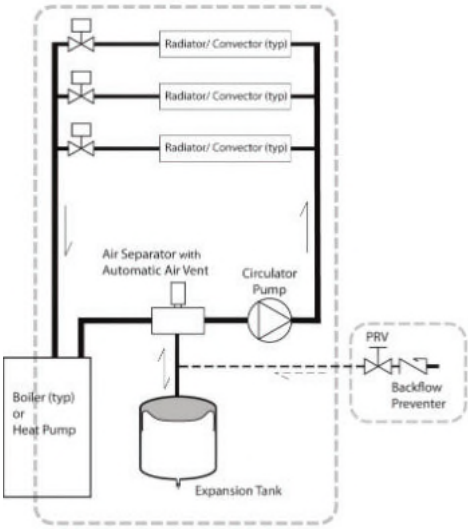


FIGURE U 9.2.1(1)[1,2]
EXAMPLE OF A CLOSED-LOOP SYSTEM WITH DIAPHRAGM TYPE EXPANSION TANK (SIMPLIFIED SCHEMATIC)
Notes:
1 This schematic does not include all system components, and configurations may vary based on design.
2 A makeup supply may be provided using any type of fluid source. The makeup supply is not considered part of the closed-loop.

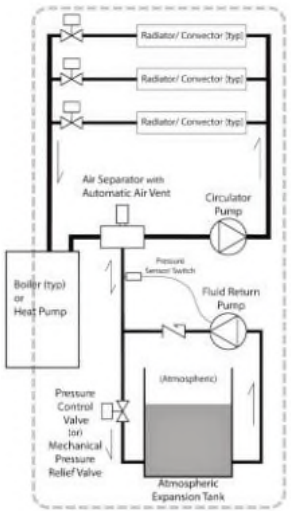


FIGURE U 9.2.1(2)[1,2]
EXAMPLE OF AN ENGINEERED FLUID EXPANSION STORAGE SYSTEM (ATMOSPHERIC)
(SIMPLIFIED SCHEMATIC)
Notes:
1 This schematic does not include all system components, and configurations may vary based on design.
2 The atmospheric expansion tank accommodates thermal expansion and, or contraction of the system fluid.

~~S~~U 9.2.2 Closed-Type Solar Thermal Energy Systems. Closed-type systems shall have an airtight tank or other approved air cushion that will be consistent with the volume and capacity of the system, and shall be designed for a hydrostatic test pressure of two and one-half times the allowable working pressure of the system. Expansion tanks for systems designed to operate at more than 30 pounds-force per square inch (psi) (207 kPa) shall comply with ASME BPVC Section VIII.1. Provisions shall be made for draining the tank without emptying the system.

~~S~~U 9.2.3 Minimum Capacity of Closed-Type Expansion Tanks.

The minimum capacity for a gravity-type hot water system expansion tank shall be in accordance with Table ~~S~~U 9.2.3(1). The minimum capacity for a forced-type hot water system expansion tank shall be in accordance with Table ~~S~~U 9.2.3(2) or Equation ~~S~~U 9.2.3(1). The minimum capacity for diaphragm tanks shall be in accordance with Table ~~S~~U 9.2.3(2) or Equation ~~S~~U 9.2.3(2).

Equation ~~S~~U 9.2.3(1)

$$Vt(\text{forced type}) = \frac{(C_1 t - C_2)V_s}{\left(\frac{P_a}{P_f} - \frac{P_a}{P_o}\right)}$$

Equation ~~S~~U 9.2.3(2)

$$Vt(\text{diaphram}) = \frac{(C_1 t - C_2)V_s}{\left(1 - \frac{P_f}{P_o}\right)}$$

Where:
C_1 = 0.00041
C_2 = 0.0466
Vt = Minimum volume of expansion tank, gallons (L)
Vs = Volume of system, not including expansion tank, gallons (L)
t = Average operating temperature, °F (°C).
Pa = Atmospheric pressure, pounds per square inch (kPa)
Pf = Fill pressure, pounds per square inch (kPa)
Po = Maximum operating pressure, pounds per square inch (kPa)
For SI units: C_1 = 0.000738, C_2 = 0.03348, 1 gallon = 3.785 L, °C = (°F-32)/1.8, 1 pound per square inch = 6.8947 kPa

TABLE ~~S~~U 9.2.3(1)
EXPANSION TANK CAPACITIES FOR GRAVITY HOT WATER SYSTEMS[1]

INSTALLED EQUIVALENT DIRECT RADIATION[2] (square feet)	TANK CAPACITY (gallons)
Up to 350	18
Up to 450	21
Up to 650	24
Up to 900	30
Up to 1100	35
Up to 1400	40
Up to 1600	2 to 30
Up to 1800	2 to 30
Up to 2000	2 to 35
Up to 2400	2 to 40

For SI units: 1 gallon = 3.785 L, 1 square foot = 0.0929 m^2

Notes:

1 Based on a two-pipe system with an average operating water temperature of 170°F (77°C), using cast-iron column radiation with a heat emission rate of 150 British thermal units per square foot hour [Btu/(ft^2•h)] (473 W/m^2) equivalent direct radiation.

2 For systems exceeding 2400 square feet (222.9 m^2) of installed equivalent direct water radiation, the required capacity of the cushion tank shall be increased on the basis of 1 gallon (4 L) tank capacity per 33 square feet (3.1 m^2) of additional equivalent direct radiation.

TABLE ~~S~~U 9.2.3(2)
EXPANSION TANK CAPACITIES FOR FORCED WATER SYSTEMS[1]

SYSTEM VOLUME[2] (gallons)	TANK CAPACITY DIAPHRAGM TYPE (gallons)	TANK CAPACITY (gallons)
100	9	15
200	17	30
300	25	45
400	33	60
500	42	75
1000	83	150
2000	165	300

For SI units: 1 gallon = 3.785 L

Notes:

1 Based on an average operating water temperature of 195°F (91°C), a fill pressure of 12 psig (83 kPa), and an operating pressure of not more than 30 psig (207 kPa).

2 Includes volume of water in boiler, radiation, and piping, not including expansion tank.

~~S~~U 10.0 Solar Collectors.

~~S~~U 10.1 General. Frames and braces exposed to the weather shall be constructed of materials for exterior locations, and protected from corrosion or deterioration, in accordance with the requirements of the Authority Having Jurisdiction.

~~S~~U 10.1.1 Construction. Collectors shall be designed and constructed to prevent interior condensation, out-gassing, or other processes that will reduce the transmission properties of the glazing, reduce the efficiency of the insulation, or otherwise adversely affect the performance of the collector.

~~S~~U 10.1.2 Flat Plate Collector Glass. Flat plate collector glass shall be tempered.

~~S~~U 10.1.3 Plastic. Plastic used in collector and other parts of the solar thermal energy system construction shall be installed in accordance with the manufacturer's installation instructions.

~~S~~U 10.1.4 Listing. Collectors that are manufactured as a complete component shall be listed or labeled by an approved listing agency in accordance with ICC 901/SRCC 100, UL 1279, or equivalent standard.

~~S~~U 10.1.5 Air Collectors. Materials exposed within air collectors shall be noncombustible or shall have a flame spread index not to exceed 25 and a smoke developed index not to exceed 50 where tested as a composite product in accordance with ASTM E 84 or UL 723.

~~S~~U 10.1.5.1 **Testing.** Materials used within an air collector shall not smoke, smolder, glow, or flame where tested in accordance with ASTM C 411 at temperatures exposed to in service. In no case shall the test temperature be less than 250°F (121°C).

~~S~~U 10.2 **Solar Collector Installation.**

~~S~~U 10.2.1 **General.** Solar collectors shall be ballasted or anchored to roof structures or other surfaces in accordance with the manufacturer's installation instructions and Title 26 – Building Code – of Los Angeles County. Collectors shall be mounted to minimize the accumulation of debris. Connecting pipes shall not be used to provide support for a solar collector.

~~S~~U 10.2.2 **Roof Installations.** Anchors secured to and through a roofing material shall be made to maintain the water integrity of the roof covering. Roof drainage shall not be impaired by the installation of collectors. Solar collectors that are not an integral part of the roofing system shall be installed to preserve the integrity of the roof surface.

U 10.2.3 **Protection Against Decay.** Wood shall not be used in the construction of collector or system mounting.

~~S~~U 10.2.~~3~~4 **Above Or On The Roof.** Collectors located above or on roofs, and functioning as building components, shall not reduce the required fire-resistance and fire-retardance classification of the roof covering materials.

Exceptions:

(1) Collectors located on one- and two-family dwellings.

(2) Collectors located on buildings not exceeding three stories in height or 9,000 square feet (836.13 m^2) total floor area, or both, provided:

(a) The collectors are noncombustible.

(b) Collectors with plastic covers have noncombustible sides and bottoms, and the total area covered and the collector shall not exceed the following:

(i) Plastic CC1 – 33 1/3 percent of the roof area;

(ii) Plastic CC2 – 25 percent of the roof area; and

(c) Collectors with plastic film covers having a thickness of not more than 0.010 of an inch (0.25 mm) shall have noncombustible sides and bottoms, and the total area covered by the collector shall not exceed 33 1/3 percent of the roof area.

~~S~~U 10.2.4~~5~~ **Ground Installations.** Solar collectors shall terminate above finished grade to avoid obstruction by vegetation, snow, or ice. The supporting columns shall extend below the frost line.

~~S~~U 10.2.5~~6~~ **Wall Mounted.** Solar collectors mounted on a wall shall be secured and fastened in accordance with Section 313.0 of this Code.

~~S~~U 10.2.6~~7~~ **Access.** Access shall be provided to collectors and components in an approved manner. A work space adjacent to collectors for maintenance and repair shall be provided in accordance with requirements of the Authority Having Jurisdiction.

~~S~~U 10.2.~~7~~8 Stagnation Condition. The collector and other parts of the solar thermal assembly shall be capable of withstanding stagnant conditions in accordance with the manufacturer's instructions where high solar flux and no flow occurs.

~~S~~U 10.2.~~8~~9 Waterproofing. Joints between structural supports and buildings or dwellings, including penetrations made by bolts or other means of fastening, shall be made watertight with approved material.

~~S~~U 10.2.~~9~~10 Fasteners. Mountings and fasteners shall be made of corrosion-resistant materials. Carbon steel mountings and fasteners shall be classified as noncorrosive in accordance with ASME SA194.

~~S~~U 10.2.~~10~~11 Combustible Materials. Solar thermal energy systems constructed with combustible materials shall not be located on or adjacent to construction required to be of noncombustible materials or in Very High Fire Hazard Severity Zone as defined in Title 32 - Fire Code – of the Los Angeles County Code, unless approved by the Authority Having Jurisdiction.

~~S~~U 10.2.~~11~~12 Orientation. Collectors shall be located and oriented in accordance with the manufacturer's installation instructions.

~~S~~U 10.3 Fire Safety Requirements.

~~S~~U 10.3.1 Building Components. Collectors that function as building components shall be in compliance with Title 26 – Building Code – of the Los Angeles County Code and Title 32 – Fire Code – of the Los Angeles County Code.

~~S~~U 11.0 Hazardous Heat Transfer Medium for Solar Thermal Energy Systems. Heat-transfer mediums that are hazardous shall not be used in solar thermal energy systems, except where approved by the Authority Having Jurisdiction.

~~S~~U 11.1 Flash Points. The flash point of a heat-transfer medium shall be 50°F (10°C) or more above the design maximum temperature.

~~S~~U 11.2 Discharge. The collector, collector manifold, and manifold relief valve shall not discharge directly or indirectly into the building or toward an open flame or other source of ignition.

~~S~~U 12.0 Heat Exchangers.

~~S~~U 12.1 General. Solar thermal energy systems utilizing heat exchangers shall protect the potable water system from being contaminated by the heat transfer medium. Systems that incorporate a single-wall heat exchanger to separate potable water from the heat transfer fluid shall meet all of the following requirements:

(1) The heat transfer medium is either potable water or contains fluids recognized as safe by the Food and Drug Administration (FDA) as food grade.

(2) A tag or label shall be securely affixed to the heat source with the word "CAUTION" and the following statements:

(a) The heat transfer medium shall be water or other nontoxic fluid recognized as safe by the FDA.

(b) The maximum operating pressure of the heat exchanger shall not exceed the maximum operating pressure of the potable water supply.

(3) The word "CAUTION" and the statements listed above shall have an uppercase height of not less than 0.120 of an inch (3.048 mm). The vertical spacing between lines of type shall be not less than 0.046 of an inch (1.168 mm). Lowercase letters shall be not less than compatible with the uppercase letter size specification.

Systems that do not comply with the requirements for a single-wall heat exchanger shall install a double-wall heat exchanger. Double-wall heat exchangers shall separate the potable water from the heat transfer medium by providing a space between the two walls vented to the atmosphere.

~~S~~U 13.0 Valves.

~~S~~U 13.1 General. Valves shall be rated for the operating temperature and pressures of the solar thermal energy system and shall be compatible with the type of heat transfer medium and piping materials. Valves shall be installed in accordance with this Section.

~~S~~U 13.2 Heat Exchanger. Shutoff valves and isolation valves shall be installed on the supply and return side of the heat exchanger.

Exception: Where a heat exchanger is an integral part of a boiler or is a part of a manufactured boiler and heat exchanger packaged unit, and is capable of being isolated from the hydronic system by supply and return valves.

~~S~~U 13.3 Pressure Vessels. Isolation valves shall be installed on connections to pressure vessels.

~~S~~U 13.4 Pressure Reducing Valves. Isolation valves shall be installed on both sides of a pressure reducing valve.

~~S~~U 13.5 **Equipment, Components, and Appliances.** Serviceable equipment, components, and appliances within the system shall have isolation valves installed upstream and downstream of such devices.

~~S~~U 13.6 **Expansion Tanks.** Isolation valves shall be installed at connections to non-diaphragm-type expansions tanks.

~~S~~U 13.7 **Flow Balancing Valves.** Where flow balancing valves are installed, such valves shall be capable of increasing or decreasing the amount of flow by means of adjustment.

~~S~~U 13.7.1 **Location.** Balancing valves shall be installed at the outlet of each group of collectors.

~~S~~U 13.8 **Control Valves.** An approved three-way valve shall be permitted to be installed for manual control systems. An approved electric control valve shall be permitted to be installed for automatic control systems. The installation and operation of automatic control valves shall comply with the manufacturer's instructions.

~~S~~U 13.8.1 **Mixing or Temperature Control Valves.** Where mixing or temperature control valves are installed, such valves shall be capable of obtaining the design water temperature and design flow requirements.

~~S~~U 13.9 **Thermosiphoning.** An approved type check valve shall be installed on liquid heat transfer piping to control thermosiphoning of heated liquids.

~~S~~U 13.10 **Air Removal Device or Air Vents.** Isolation valves shall be installed where air removal devices or automatic air vents are utilized to permit cleaning, inspection, or repair without shutting the system down.

~~S~~U 13.11 Closed Loop Systems. Closed loop systems, where hose bibbs or similar valves are used to charge or drain the system, shall be of loose key type; have valve outlets capped; or have handles removed where the system is operational.

~~S~~U 13.12 Fullway Valves. A fullway valve shall be installed in the following locations:

(1) On the water supply to a solar thermal energy system.

(2) On the water supply pipe to a gravity or pressurized water tank.

(3) On the water supply pipe to a water heater.

~~S~~U 13.13 Accessible. Required fullway or shutoff valves shall be accessible.

~~S~~U 14.0 Piping and Cross-connection Control For Solar Thermal Energy Systems.

~~S~~U 14.1 Cross Connection Control. No piping installation, or part thereof, shall be made in such a manner that it will be possible for used, unclean, polluted, or contaminated water, mixtures, or substances to enter a portion of the potable water system from a pipe, tank, receptor, or any other equipment by reason of backsiphonage, suction, or any other cause, either during normal use and operation thereof, or where such pipe, tank, receptor, or equipment is subject to pressure exceeding the operating pressure in the potable water system.

~~S~~U 14.2 Materials.

~~S~~U 14.2.1 Piping Materials. Piping, tubing, and fittings materials shall comply with Table ~~S~~U 14.2. Joining methods shall be in accordance with Section 605.0. Materials in contact with the heat transfer medium shall be approved for such use. Galvanized steel shall not be used for solar thermal piping systems containing antifreeze. Black steel shall not be used in systems with entrapped or entrained air. Unions between dissimilar metals shall comply with Sections 310.6 and 605.15. The material used shall be capable of withstanding the maximum temperature and pressure of the system.

~~S~~U 14.2.1.1 Plastic. Plastic used in the construction of a solar thermal system shall be installed in accordance with the manufacturer's installation instructions.

~~S~~U 14.2.1.2 Combustible Materials. Combustible materials shall not be located on or adjacent to construction required to be of noncombustible materials or in fire areas, unless approved by the Authority Having Jurisdiction.

~~S~~U 14.2.1.3 Adhesives. Adhesives used in a solar collector shall not vaporize at the design temperature and shall be identified and approved for the intended use.

~~S~~U 14.2.1.4 Potable Water. Materials in contact with potable water shall comply with NSF 61/ANSI/CAN 61. Piping in solar thermal systems designed to convey potable water shall be flushed and disinfected in accordance with this Code.

~~S~~U 14.2.1.5 Racks. Dissimilar metals used for racking shall be isolated to prevent galvanic corrosion. Paint shall not be used as a method of isolation.

~~S~~U 14.2.1.6 Fasteners. Mountings and fasteners shall be made of corrosion-resistant materials. Carbon steel mountings and fasteners shall be classified as noncorrosive in accordance with ASME SA194.

~~S~~U 14.2.2 Storage Tank Connectors. Flexible metallic storage tank connectors or reinforced flexible storage tank connectors connecting a storage tank to the piping system shall be in accordance with the applicable standards referenced in Table ~~S~~U 18.1. Copper or stainless steel flexible connectors shall not exceed 24 inches (610 mm). PEX, PE-AL-PE, or PE-RT tubing shall not be installed within the first 18 inches (457 mm) of piping connected to a storage tank.

~~S~~U 14.2.2.1 Flexible Connectors. Listed flexible connectors shall be installed in readily accessible locations, unless otherwise indicated in the listing.

~~S~~U 14.3 Safety Devices.

~~S~~U 14.3.1 Pressure Relief Valves. Solar thermal energy system components containing pressurized fluids shall be protected against pressures exceeding design limitations with a pressure relief valve. Each section of the system in which excessive pressures are capable of developing shall have a relief device located so that a section cannot be isolated from a relief device. Pressure and temperature relief valves shall be installed in accordance with the terms of their listing and the manufacturer's installation instructions.

TABLE SU 14.2
MATERIALS FOR SOLAR THERMAL SYSTEM, PIPING, TUBING, AND FITTINGS

MATERIAL	STANDARDS	
	PIPING/TUBING	FITTINGS
Copper/Copper Alloy	ASTM B42, ASTM B43, ASTM B75, ASTM B88, ASTM B135, ASTM B251*, ASTM B302, ASTM B447	ASME B16.15, ASME B16.18, ASME B16.22, ASME B16.23, ASME B16.24, ASME B16.26, ASME B16.29, ASME B16.51, ASSE 1061, ASTM F3226, IAPMO PS 117
Steel	ASTM A53, ASTM A106, ASTM A254	ASME B16.5, ASME B16.9, ASME B16.11, ASTM A420, ASTM F3226, IAPMO PS 117
Gray Iron	—	ASTM A126
Malleable Iron	—	ASME B16.3
Chlorinated Polyvinyl Chloride (CPVC)	ASTM D2846, ASTM F441, ASTM F442, CSA B137.6	ASSE 1061, ASTM D2846, ASTM F437, ASTM F438, ASTM F439, ASTM F1970, CSA B137.6
Polyethylene (PE)	ASTM D1693, ASTM D2513, ASTM D2683, ASTM D2737, ASTM D3035, ASTM D3350, ASTM F714, ASTM F2165, AWWA C901, CSA B137.1, NSF 358-1	ASTM D2609, ASTM D2683, ASTM D3261, ASTM F1055, ASTM F2165, CSA B137.1, NSF 358-1
Cross-Linked Polyethylene (PEX)	ASTM F876, ASTM F2165, ASTM F3253, CSA B137.5, NSF 358-3	ASSE 1061, ASTM F877, ASTM F1055, ASTM F1807, ASTM F1960, ASTM F2080, ASTM F2098, ASTM F2159, ASTM F2165, ASTM F2735, ASTM F3253, ASTM F3347, ASTM F3348, CSA B137.5, NSF 358-3
Polypropylene (PP)	ASTM F2165, ASTM F2389, CSA B137.11, NSF 358-2	ASTM F2165, ASTM F2389, CSA B137.11, NSF 358-2
Polyvinyl Chloride (PVC)	ASTM D1785, ASTM D2241, CSA B137.3	ASTM D2464, ASTM D2466, ASTM D2467, ASTM F1970, CSA B137.2, CSA B137.3
Raised Temperature Polyethylene (PE-RT)	ASTM F2165, ASTM F2623, ASTM F2769, CSA B137.18	ASSE 1061, ASTM D3261, ASTM F1055, ASTM F1807, ASTM F2159, ASTM F2165, ASTM F2735, ASTM F2769, CSA B137.18
Cross-Linked Polyethylene/Aluminum/ Cross-Linked Polyethylene (PEX-AL-PEX)	ASTM F1281, ASTM F2165, CSA B137.10	ASTM F1281, ASTM F1974, ASTM F2165, ASTM F2434, CSA B137.10
Polyethylene/Aluminum/Polyethylene (PE- AL-PE)	ASTM F1282, ASTM F2165, CSA B137.9	ASTM F1282, ASTM F1974, ASTM F2165, CSA B137.9
Stainless Steel	ASTM A269, ASTM A312, ASTM A554, ASTM A778	ASTM F1476, ASTM F1548, ASTM F3226, IAPMO PS 117
Chlorinated Polyvinyl Chloride/Aluminum/ Chlorinated Polyvinyl Chloride (CPVC/AL/CPVC)	ASTM F2855	ASTM D2846

Note:
* Only Type K, L, or M shall be permitted to be installed.

MATERIAL	STANDARDS	
	PIPING/TUBING	FITTINGS
Copper and Copper Alloys	ASTM B42, ASTM B43, ASTM B75, ASTM B88, ASTM B135, ASTM B251[2], ASTM B302, ASTM B447	ASME B16.15, ASME B16.18, ASME B16.22, ASME B16.23, ASME B16.24, ASME B16.26, ASME B16.29, ASME B16.51, ASSE 1061, ASTM F3226, IAPMO/ANSI/CAN Z1117
Ductile Iron	AWWA C115/A21.15, AWWA C151/A21.51	AWWA C110/A21.10[1], AWWA C153/A21.53
Steel	ASTM A53, ASTM A106, ASTM A254	ASME B16.5, ASME B16.9, ASME B16.11, ASTM A420, ASTM F3226, IAPMO IGC 353, IAPMO/ANSI/CAN Z1117
Gray Iron	—	ASTM A126
Malleable Iron	—	ASME B16.3
Chlorinated Polyvinyl Chloride (CPVC)	ASTM D2846, ASTM F441, ASTM F442, CSA B137.6	ASSE 1061, ASTM D2846, ASTM F437, ASTM F438, ASTM F439, ASTM F1970, CSA B137.6
Polyethylene (PE)	ASTM D1693, ASTM D2683, ASTM D2737, ASTM D3035, ASTM D3350, ASTM F714, ASTM F2165, AWWA C901, CSA B137.1, NSF/ANSI 358-1	ASTM D2609, ASTM D2683, ASTM D3261, ASTM F1055, ASTM F2165, CSA B137.1, NSF/ANSI 358-1
Cross-Linked Polyethylene (PEX)	ASTM F876, ASTM F2165, ASTM F3253, CSA B137.5, NSF/ANSI 358-3	ASSE 1061, ASTM F877, ASTM F1055, ASTM F1807, ASTM F1960, ASTM F2080, ASTM F2098, ASTM F2159, ASTM F2165, ASTM F2735, ASTM F3253, ASTM F3347, ASTM F3348, CSA B137.5, NSF/ANSI 358-3
Polypropylene (PP)	ASTM F2165, ASTM F2389, CSA B137.11, NSF/ANSI 358-2	ASTM F2165, ASTM F2389, CSA B137.11, NSF/ANSI 358-2
Polyvinyl Chloride (PVC)	ASTM D1785, ASTM D2241, CSA B137.3	ASTM D2464, ASTM D2466, ASTM D2467, ASTM F1970, CSA B137.2, CSA B137.3
Polyethylene of Raised Temperature (PE-RT)	ASTM F2165, ASTM F2623, ASTM F2769, CSA B137.18	ASSE 1061, ASTM D3261, ASTM F1055, ASTM F1807, ASTM F2159, ASTM F2165, ASTM F2735, ASTM F2769, ASTM F3347, ASTM F3348, CSA B137.18
Cross-Linked Polyethylene/Aluminum/ Cross-Linked Polyethylene (PEX-AL-PEX)	ASTM F1281, ASTM F2165, CSA B137.10	ASTM F1281, ASTM F1974, ASTM F2165, ASTM F2434, CSA B137.10
Polyethylene/Aluminum/Polyethylene (PE-AL-PE)	ASTM F1282, ASTM F2165, CSA B137.9	ASTM F1282, ASTM F1974, ASTM F2165, CSA B137.9
Stainless Steel	ASTM A269, ASTM A312, ASTM A554, ASTM A778	ASTM F1476, ASTM F1548, ASTM F3226, IAPMO IGC 353, IAPMO/ANSI/CAN Z1117
Chlorinated Polyvinyl Chloride/Aluminum/ Chlorinated Polyvinyl Chloride (CPVC/AL/CPVC)	ASTM F2855	ASTM D2846

Notes:

[1] Ductile and gray iron.

[2] Only Type K, L, or M shall be permitted to be installed.

~~S~~U 14.3.2 Pressurized Vessels. Pressurized vessels shall be provided with overpressure protection by means of a listed pressure relief valve installed in accordance with the manufacturer's installation instructions.

~~S~~U 14.3.3 Discharge Piping. The discharge piping serving a temperature relief valve, pressure relief valve, or combination of both shall have no valves, obstructions, or means of isolation and comply with the following:

(1) The discharge pipe shall equal the size of the valve outlet and shall discharge full size to the flood level of the area receiving the discharge and pointing down.

(2) Materials shall be rated at not less than the operating temperature of the system and approved for such use or shall comply with ASME A112.4.1.

(3) The discharge pipe shall discharge independently by gravity through an air gap into the drainage system or outside of the building with the end of the pipe not exceeding 2 feet (610 mm) and not less than 6 inches (152 mm) above the ground and pointing downwards.

(4) The discharge pipe shall discharge in such a manner that does not cause personal injury or structural damage.

(5) No part of such discharge pipe shall be trapped or subject to freezing.

(6) The terminal end of the pipe shall not be threaded.

(7) Discharge from a relief valve into a water heater pan is prohibited.

(8) The discharge termination point shall be readily observable.

~~S~~U 14.3.4 Vacuum Relief Valves. System components that are subjected to a vacuum while in operation or during shutdown shall be protected with vacuum relief valves. Where the piping configuration, equipment location, and valve outlets are located below the storage tank elevation, the system shall be equipped with a vacuum relief valve at the highest point.

~~S~~U 14.3.5 Temperature Regulation. Where a system is capable of providing potable water at temperatures that exceed 140°F (60°C), a thermostatic mixing valve that is in accordance with ASSE 1017 shall be provided to limit the water supplied to the potable hot water distribution system to a temperature of 140°F (60°C) or less.

~~S~~U 14.4 Protection of System Components.

~~S~~U 14.4.1 Materials. System components in contact with heat-transfer mediums shall be approved for such use. Components installed outdoors shall be resistant to ultraviolet radiation.

~~S~~U 14.4.2 Corrosion. Solar thermal energy systems and components subject to corrosion shall be protected in an approved manner. Metal parts exposed to atmospheric conditions shall be of corrosion-resistant material.

~~S~~U 14.4.3 Mechanical Damage. Portions of a solar thermal energy system installed where subjected to mechanical damage shall be guarded against such damage by being installed behind approved barriers or, where located within a garage, be elevated or located out of the normal path of a vehicle, defined as a line perpendicular to the garage vehicle opening to the back wall extending 36 inches

(914 mm) to either side along the back wall and to a height of 48 inches (1219 mm). Protective barriers for energy storage systems (ESS) shall be designed to resist, deflect, or visually deter vehicle impact in accordance with Section U 14.4.3.1 through Section U 14.4.3.3. (See Figure U 14.4.3).

Exception: Where the clear height of the vehicle garage opening is equal to or less than 90 inches (2286 mm), ESS installed at least 36 inches (914 mm) above the finished floor shall not be subject to vehicle impact protection requirements.

U 14.4.3.1 Bollards. Where installed, construction of bollards shall be in accordance with one of the following:

(1) 48 inches (1219 mm) in length by 3 inches (76 mm) in diameter, Schedule 80 steel pipe embedded in a concrete pier 12 inches (305 mm) deep and 6 inches (152 mm) in diameter, with 36 inches (914 mm) of pipe exposed, filled with concrete, and spaced at intervals not exceeding 60 inches (1524 mm). Each bollard shall be located not less than 6 inches (152 mm) from an ESS.

(2) 36 inches (914 mm) in height by 3 inches (76 mm) in diameter, Schedule 80 steel pipe fully welded to an 8 inch (203 mm) by 8 inch (203 mm) by 1⁄4 of an inch (6.4 mm) thick steel plate and bolted to a concrete floor by means of four ½ inch (12.7 mm) concrete anchors with not less than 3 inches (76 mm) of embedment. Spacing shall not exceed 60 inches (1524 mm), and each bollard shall be located not less than 6 inches (152 mm) from the ESS.

(3) Pre-manufactured steel pipe bollards shall be filled with concrete and anchored in accordance with the manufacturer's installation instructions. Spacing between bollards shall not exceed 60 inches (1524 mm). Each bollard shall be located not less than 6 inches (152 mm) from the ESS.

U 14.4.3.2 Wheel Barriers. Where installed, construction of wheel barriers shall be in accordance with one of the following:

(1) 6 inches (152 mm) in height by 6 inches (152 mm) in width, wheel stop made of concrete or polymer, anchored to the concrete floor at intervals of not less than 36 inches (914 mm) and located not less than 54 inches (1372 mm) from the ESS. Not less than two ½ inch (12.7 mm) diameter concrete anchors with 3 inches (76 mm) of embedment per wheel stop shall be used. Spacing between wheel stops shall not exceed 36 inches (914 mm).

(2) Pre-manufactured wheel stops shall be anchored in accordance with the manufacturer's installation instructions.

U 14.4.3.3 Other Approved Methods. Protective barriers installed 24 inches (610 mm) above grade and designed to resist a 2000 pound-force (8896 N) impact in the direction of vehicle travel shall be permitted.

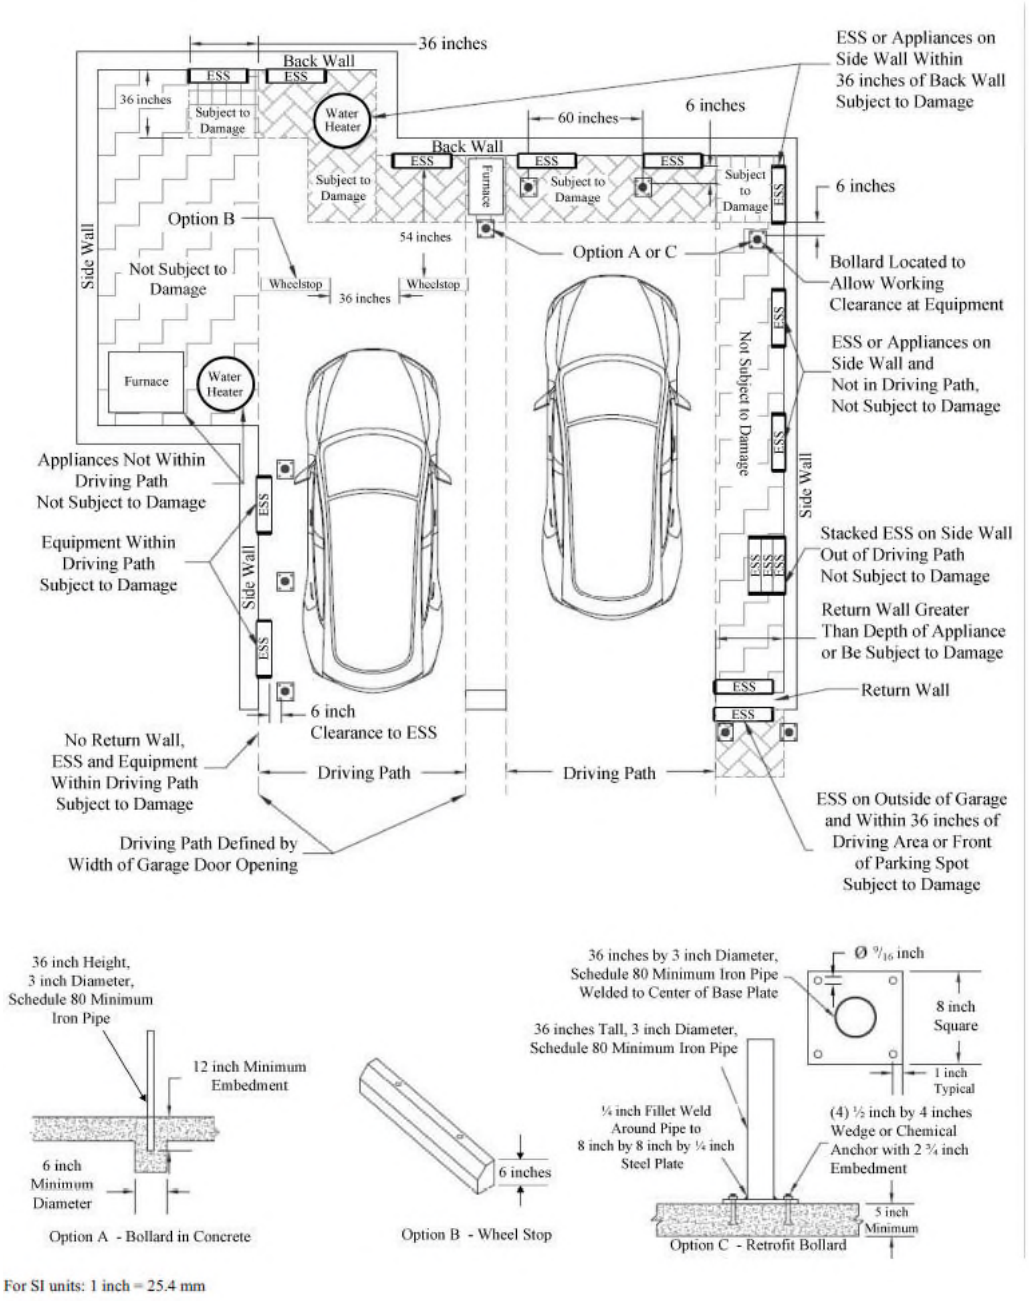


Figure U 14.3.3

PROTECTIVE BARRIERS FOR ESS

~~S~~U 14.4.4 **Freeze Protection**. Unless designed for such conditions, solar thermal energy systems and components that contain liquid as the heat transfer medium shall be protected from freezing, by means of fail-safe freeze protection in accordance with this Section, where the ambient temperature may be less than 46°F (8°C).

~~S~~U 14.4.4.1 **Antifreeze.** Antifreeze shall be used in accordance with the solar thermal system manufacturer's instructions.

~~S~~U 14.4.4.2 **Drainback.** Drainback systems shall drain by gravity and shall be permitted to be installed in applications where the ambient temperature may not be less than -60°F (-51°C).

~~S~~U 14.4.4.3 **Integral Collector Storage.** Integral collector storage systems shall be permitted to be installed in applications where the ambient temperature may not be less than 23°F (-5°C) and the duration of below-freezing episodes exceeding 18 hours. Exposed piping in a solar thermal energy system shall be protected with insulation having a thermal resistance of not less than R-5.0.

~~S~~U 14.4.4.4 **Indirect Thermosiphon.** Indirect thermosiphon systems shall be permitted to be installed in applications where the ambient temperature may not be less than 23°F (-5°C). Exposed piping in a solar thermal energy system shall be protected with insulation having a thermal resistance of not less than R-5.

~~S~~U 14.4.4.5 **Air Heating Systems.** Air solar heating systems shall be permitted to be used in accordance with the manufacturer's instructions.

~~S~~U 14.4.4.6 **Labeling.** A label indicating the method of freeze protection for the system shall be attached to the system in a visible location.

~~S~~U 14.4.4.7 **Piping.** Fittings, pipe slope, and collector shall be designed to allow for manual gravity draining and air filling of solar thermal energy system components and piping. Pipe slope for gravity draining shall be not less than 1⁄4 inch per foot (20.8 mm/m) of horizontal length. Collector header pipes or absorber plate riser tubes internal to the collector shall be sloped in accordance with the manufacturer's instructions. Where a means to drain the system is provided, a drain valve shall be installed.

~~S~~U 14.4.5 **Water Hammer Protection.** The flow of the hydronic piping system shall be designed to prevent water hammer.

U 14.4.6 **Heat Transfer Fluid Quality.** Heat transfer fluids used in closed-loop hydronic systems shall be in accordance with IAPMO/ANSI H1001.1.

U 14.4.6.1 **Ethylene Glycol.** Ethylene glycol shall not be used in one- and two-unit residential systems. In existing systems, where ethylene glycol is used, there shall be no direct or permanent potable water connections. Where a temporary potable water connection is required, a backflow preventer shall be installed.

~~S~~U 14.4.~~6~~7 **Heat Transfer Fluid.** Solar thermal piping shall be identified with an orange background with black uppercase lettering, with the words "CAUTION: HEAT TRANSFER FLUID, DO NOT DRINK." Each solar thermal energy system shall be identified to designate the medium being conveyed. The minimum size of the letters and length of the color field shall comply with Table ~~S~~U 14.4.~~6~~7.

Each outlet on the solar thermal piping system shall be posted with black uppercase lettering as follows:

"CAUTION: HEAT TRANSFER FLUID, DO NOT DRINK."

TABLE ~~S~~U 14.4.~~6~~7

MINIMUM LENGTH OF COLOR FIELD AND SIZE OF LETTERS

OUTSIDE DIAMETER OF PIPE OR COVERING (inches)	MINIMUM LENGTH OF COLOR FIELD (inches)	MINIMUM SIZE OF LETTERS (inches)
½ to 1¼	8	½
1½ to 2	8	¾
2½ to 6	12	1¼
8 to 10	24	2½
Over 10	32	3½

For SI units: 1 inch = 25.4 mm

U 14.4.8 Identification of Chemical Additives. In systems where chemical additives are used, documentation including the following information shall be readily accessible and maintained onsite:

(1) Concentrations

(2) Maintenance requirements

(3) Maintenance log

(4) Safety data sheet (SDS)

~~S~~U 14.4.~~7~~9 Insulation.

~~S~~U 14.4.~~7~~9.1 General. The temperature of surfaces within reach of building occupants shall not exceed 140°F (60°C) unless the surfaces are protected by insulation. Where sleeves are installed, the insulation shall continue full size through them. Coverings and insulation used for piping shall be of material approved for the operating temperature of the system and the installation environment. Where installed

in a plenum, the insulation, jackets and lap-seal adhesives, including pipe coverings and linings, shall have a flame spread index not to exceed 25 and a smoke-developed index not to exceed 50 where tested in accordance with ASTM E84 or UL 723.

~~S~~U 14.4.~~7~~9.2 Heat Loss. Insulation shall be installed on interconnecting solar and hot water piping. The final 5 feet (1524 mm) of the cold water supply line, or the entire length where less than 5 feet (1524 mm), shall be insulated. The insulation ~~thickness shall be in accordance with Table S 14.4.7.3(1) or Table S 14.4.7.3(2), or the insulation installed~~shall have an R-value of not less than R-2.6 degree Fahrenheit hour square foot per British thermal unit (°F•h•ft^2/Btu) (R-0.46 m^2•K/W). Piping, storage tanks, and circulating air ductwork shall be insulated. Ductwork and piping shall be permitted to not be insulated where exposed in conditioned spaces, and the heat loss from such ducts or piping does not otherwise contribute to the heating or cooling load within such space.

Exception: Low temperature, aboveground piping installed for swimming pools, spas, and hot tubs in accordance with the manufacturer's installation instructions unless such piping is located within a building.

~~S~~U 14.4.~~7~~9.3 Piping. Pipes and fittings, other than unions, flanges, or valves, shall be insulated. Insulation material shall be approved for continuous operating temperatures of not less than 220°F (104°C). ~~[See Table S 14.4.7.3(1) and Table S 14.4.7.3(2)].~~

TABLE S 14.4.7.3(1)

MINIMUM PIPE INSULATION

PS inches)	IPE O.D. inches)	INSULATION I.D. (inches)	INSULATION O.D. (inches) INSULATION NOMINAL THICKNESS (inches)*										
			-	-	-	.5	-	.5	-	.5	-	.5	-
½	.84	.86	0 .84	.36	.88	.00	.00	.62	.62	.62	.62	0.75	1.75
¼	.05	.07	1 .06	.36	.88	.00	.00	.62	.62	.62	.62	0.75	1.75
-	.315	.33	1 .32	.88	.50	.50	.56	.62	.62	.62	.62	0.75	1.75
¼	.660	.68	1 .66	.28	.50	.00	.56	.62	.62	.62	.62	0.75	1.75
½	.900	.92	1 .78	.50	.00	.00	.62	.62	.62	.62	0.75	1.75	2.75
-	.375	.41	2 .42	.98	.50	.56	.62	.62	.62	.62	0.75	1.75	2.75
½	.875	.91	2 .88	.48	.00	.62	.62	.62	.62	0.75	1.75	2.75	4.00
-	.500	.53	3 .50	.96	.56	.62	.62	.62	.62	0.75	1.75	2.75	4.00
½	.000	.03	4 .96	.56	.62	.62	.62	.62	0.75	1.75	2.75	2.75	4.00
-	.500	.53	4 .56	.58	.62	.62	.62	.62	0.75	1.75	2.75	4.00	5.00

-	.625	.706	.80	.12	.62	.62	0.75	1.75	2.75	4.00	5.00	6.00	7.00

For SI units: 1 inch = 25 mm

* Thickness values are applicable for calcium silicate, cellular foam plastics, cellular glass, mineral fiber, and perlite preformed insulation materials

TABLE S 14.4.7.3(2)

STANDARD TUBING INSULATION THICKNESS

TUBE SIZE (inches)	TUBE O.D. (inches)	INSULATION I.D. (inches)	INSULATION O.D. (inches) INSULATION NOMINAL THICKNESS (inches)*									
			-	.5	-	.5	-	.5	-	.5	-	
3/8	0.500	0.52	.38	.50	.50	.56	.62	-	-	-	-	-
1/2	0.625	0.64	.88	.50	.50	.56	.62	-	-	-	-	-
3/4	0.875	0.89	.88	.00	.00	.62	.62	.62	.62	0.75	1.75	
1	1.125	1.14	.88	.00	.00	.62	.62	.62	.62	0.75	1.75	
1 1/4	1.375	1.39	.50	.50	.56	.62	.62	.62	.62	0.75	1.75	
1 1/2	1.625	1.64	.50	.50	.56	.62	.62	,62	.62	0.75	1.75	
2	2.125	2.16	.00	.00	.62	.62	.62	.62	0.75	1.75	2.75	
2 1/2	2.625	2.66	.50	.56	.62	.62	.62	.62	0.75	1.75	2.75	

3	3	3.1									
-	.125	6	.00	.61	.62	.62	.62	0.75	1.75	2.75	4.00
3	3	3.6									
½	.625	6	.56	.62	.62	.62	.62	0.75	1.75	2.75	4.00
4	4	4.									
-	.125	16	.62	.62	.62	.62	0.75	1.75	2.75	4.00	5.00
5	5	5.									
-	.125	16	.62	.62	.62	0.75	1.75	2.75	4.00	5.00	6.00
6	6	6.									
-	.125	20	.62	.62	0.75	1.75	2.75	4.00	5.00	6.00	7.00

For SI units: 1 inch = 25 mm

* Thickness values are applicable for calcium silicate, cellular foam plastics, cellular glass, mineral fiber, and perlite preformed insulation materials.

SU 14.4.79.4 Fittings. Fittings shall be insulated with mitered sections, molded fittings, insulating cement, or flexible insulation.

SU 14.4.79.5 Installation. Insulation shall be finished with a jacket or facing with the laps sealed with adhesives or staples so as to secure the insulation on the pipe. Insulation jacket seams shall be on the underside of the piping and shall overlap in accordance with the manufacturer's installation instructions. Joints and seams shall be sealed with a sealant that is approved for both the material and environmental conditions. In lieu of jackets, molded insulation shall be permitted to be secured with 16 gauge galvanized wire ties not exceeding 9 inches (229 mm) on center.

~~S~~U 14.4.~~7~~9.5.1 Exterior Applications. Insulation for exterior applications shall be finished with an approved jacket, coating, or facing with the surfaces and laps sealed. Jacketing, coating, facing, and tape used for exterior applications shall be designed for such use. Where flexible insulation is used, it shall be wrapped and sealed against water penetration. Insulation used for exterior applications shall be resistant to extreme temperatures, UV exposure, and moisture.

~~S~~U 15.0 Specific Requirements.

~~S~~U 15.1 Electrical.

~~S~~U 15.1.1 Wiring. Electrical connections, wiring, and devices shall be installed in accordance with NFPA 70. Electrical equipment, appliances, and devices installed in areas that contain flammable vapors or dusts shall be of a type approved for such environment.

~~S~~U 15.1.2 Controls. Required electrical, mechanical, safety, and operating controls shall be listed or labeled by a listing agency. Electrical controls shall be of such design and construction as to be suitable for installation in the environment in which they are located.

~~S~~U 15.2 Flow Directions. Flow directions shall be permanently affixed on the solar thermal energy system.

~~S~~U 15.3 Attic Installations. An attic space in which solar energy system components are installed shall comply with Section 508.4 of this Code.

~~S~~U 15.4 **Connections to Drainage System Required.** Receptors, drains, appurtenances, and appliances, used to receive or discharge liquid waste, shall be connected to the drainage system of the building or premises in accordance with the requirements of this Code.

~~S~~U 15.5 **Dry Storage Systems.**

~~S~~U 15.5.1 **Waterproofing.** The containment structure for dry thermal storage systems shall be constructed in an approved manner to prevent the infiltration of water or moisture.

~~S~~U 15.5.2 **Detecting Water Intrusion.** The containment structure shall be capable of fully containing spillage or moisture accumulation that occurs. The structure shall have a means, such as a sight glass, to detect spillage or moisture accumulation, and shall be fitted with a drainage device to eliminate spillage.

~~S~~U 15.5.3 **Rock as Storage Material.** Systems utilizing rock as the thermal storage material shall use clean, washed rock that is free of organic material.

~~S~~U 15.5.4 **Odor and Particulate Control.** Thermal storage materials and containment structures, including interior protective coating, shall not impart toxic elements, particulate matter, or odor to areas of human occupancy.

~~S~~U 15.6 **Heat Pumps.** Heat pumps shall ~~be in compliance with Table S 15.6, as applicable. Heat pumps shall also be listed and labeled in accordance with UL 1995 or UL 60335-2-40. Heat pumps shall be fitted with a means to indicate that the compressor is locked out.~~ comply with UL 1995 or UL 60335-2-40. Air-source heat pumps shall also comply with AHRI 210/240. In addition, ground-source heat pumps

shall comply with AHRI/ASHRAE/ISO 13256-1 for water-to-air heat pumps and AHRI/ASHRAE/ISO 13256-2 for water-to-water heat pumps. Heat pumps shall be fitted with a means to indicate that the compressor is locked out.

~~TABLE S 15.6~~

~~TYPE OF HEAT PUMP~~	~~STANDARDS~~	
~~Water-to-Air~~	~~AHRI/ASHRAE/ISO 13256-1~~	
~~Water-to-Water~~	~~AHRI/ASHRAE/ISO 13256-2~~	
~~Air Source~~	~~AHRI 210/240~~	

~~S~~U 16.0 Solar Thermal Energy Systems for Swimming Pool, Spas, and Hot Tubs.

~~S~~U 16.1 Water Chemistry. Where water from a swimming pool, spa, or hot tub is heated by way of circulation through solar collectors, the chemistry of such water shall comply with the requirements of Section ~~S~~U 16.2 and shall be filtered in accordance with Section ~~S~~U 16.3 and Section ~~S~~U 16.3.1 of this Code.

~~S~~U 16.2 Parameters. Parameters for chemicals used within a swimming pool, spa, or hot tub shall be in accordance with Table ~~S~~U 16.2.

TABLE ~~S~~U 16.2
WATER CHEMISTRY

PARAMETER	ACCEPTABLE RANGE
Calcium hardness	200 – 400 parts per million (ppm)
Langelier Saturation Index	0 (+ or - 0.3 acceptable)
pH	7.2 – 7.8
TDS	< 1500 ppm
Total alkalinity	80 – 120 ppm

For SI Units: 1 part per million = 1 mg/L

~~S~~U 16.3 Filter. A filter shall be provided to remove debris from the water entering the solar loop.

Exception: A solar swimming pool, spa, or hot tub heating system with a heat exchanger.

~~S~~U 16.3.1 Location. A filter shall be located upstream of a pump used to direct water to solar collectors.

~~S~~U 16.4 Corrosion Resistant. Glazed solar collectors made of copper shall not be used for solar pool, spa, or hot tub heating.

Exception: Where a heat exchanger is provided between the collector circuit and the swimming pool, spa, or hot tub water.

~~S~~U 17.0 Certificate of Compliance. Upon completion of the solar thermal energy system, the permittee shall sign a Certificate of Compliance with this Code. The Certificate of Compliance shall also list the following information:

(1) Type of freeze protection;

(2) Mixing valve setting degrees Fahrenheit (º F);

(3) Subsystem working pressure (if applicable) pounds per square inch;

(4) Subsystem test pressure (if applicable) pounds per square inch;

(5) Heat exchanger make and model number (if applicable);

(6) Circulating pump over temperature protection shut-off setting degrees Fahrenheit (º F) for one-tank systems where the water heater controls utilize fusible-link type over temperature protection.

This Certificate shall be posted in a conspicuous location at or near the water heater.

~~S~~U 18.0 General.

~~S~~U 18.1 Referenced Standards. The standards listed in Table ~~S~~U 18.1 are referenced in various sections of this Appendix and shall be considered part of the requirements of this Code. The standards are listed herein by the standard number and effective date, the title and application. The application of the referenced standard(s) shall be as specified in Section ~~S~~U 5.2.

SECTION 29. Table S 18.1 is hereby deleted and replaced by Table U 18.1 to read as follows:

~~TABLE S 18.1~~
~~REFERENCED STANDARDS~~

~~STANDARD NUMBER~~	~~STANDARD TITLE~~	~~APPLICATION~~
~~AHRI 210/240-2017~~	~~Performance Rating of Unitary Air-conditioning & Air-source Heat Pump Equipment~~	~~Air-Source Heat Pumps~~
~~AHRI 870-2016~~	~~Performance Rating of Direct Geoexchange Heat Pumps~~	~~Equipment~~
~~AHRI/ASHRAE/ISO 13256-1-1998 (R2012)~~	~~Water-Source Heat Pumps – Testing and Rating for Performance – Part 1: Water-to-Air and Brine-to-Air Heat Pumps~~	~~Water-Source Heat Pumps~~
~~AHRI/ASHRAE/ISO 13256-2-1998 (R2012)~~	~~Water-Source Heat Pumps – Testing and Rating for Performance – Part 2: Water-to-Water and Brine-to-Water Heat Pumps~~	~~Water-Source Heat Pumps~~
~~ASHRAE 34-2019~~	~~Designation and Safety Classification of Refrigerants~~	~~Refrigerant Classifications~~
~~ASHRAE 194-2017~~	~~Method of Test for Direct-Expansion Ground-Source Heat Pumps~~	~~Ground-Source Heat Pumps~~
~~ASME A112.1.2-2012 (R2017)~~	~~Air Gaps in Plumbing Systems (for Plumbing Fixtures and Water-Connected Receptors)~~	~~Backflow Protection~~
~~ASME A112.1.3-2000 (R2015)~~	~~Air Gap Fittings for Use with Plumbing Fixtures, Appliances, and Appurtenances~~	~~Backflow Protection~~
~~ASME A112.4.1-2009 (R2019)~~	~~Water Heater Relief Valve Drain Tubes~~	~~Discharge Piping~~
~~ASME B1.20.1-2013 (R2018)~~	~~Pipe Threads, General Purpose (Inch)~~	~~Joints~~
~~ASME B16.3-2016~~	~~Malleable Iron Threaded Fittings: Classes 150 and 300~~	~~Fittings~~
~~ASME B16.5-2017~~	~~Pipe Flanges and Flanged Fittings: NPS 1/2 Through NPS 24 Metric/Inch~~	~~Fittings~~

ASME B16.9-2018	Factory-Made Wrought Buttwelding Fittings	Fittings
ASME B16.11-2016	Forged Fittings, Socket-Welding and Threaded	Fittings

ASME B16.15-2018	Cast Copper Alloy Threaded Fittings: Classes 125 and 250	Fittings
ASME B16.18-2018	Cast Copper Alloy Solder Joint Pressure Fittings	Fittings
ASME B16.22-2018	Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings	Fittings
ASME B16.23-2016	Cast Copper Alloy Solder Joint Drainage Fittings: DWV	Fittings
ASME B16.24-2016	Cast Copper Alloy Pipe Flanges, Flanged Fittings, and Valves: Classes 150, 300, 600, 900, 1500, and 2500	Fittings
ASME B16.26-2018	Cast Copper Alloy Fittings for Flared Copper Tubes	Fittings
ASME B16.29-2017	Wrought Copper and Wrought Copper Alloy Solder-Joint Drainage Fittings – DWV	Fittings
ASME B16.51-2018	Copper and Copper Alloy Press-Connect Pressure Fittings	Fittings
ASME BPVC Section VIII.1-2019	Rules for Construction of Pressure Vessels Division 1	Miscellaneous
ASME BPVC Section X-2019	Fiber-Reinforced Plastic Pressure Vessels	Pressure Vessel Construction, Pressure Vessels
ASME SA194-2015	Carbon and Alloy Steel Nuts for Bolts for High Pressure or High Temperature Service, or Both	Mounting
ASSE 1013-2011	Reduced Pressure Principle Backflow Preventers and Reduced Pressure Principle Fire Protection Backflow Pre- venters	Backflow Prevention
ASSE 1017-2009	Temperature Actuated Mixing Valves for Hot Water Distribution Systems	Valves
ASSE 1061-2015	Push-Fit Fittings	Fittings
ASSE 1079-2012	Dielectric Pipe Unions	Fittings
ASTM A53/A53M-2018	Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless	Piping
ASTM A106/A106M-2019a	Seamless Carbon Steel Pipe for High-Temperature Service	Piping
ASTM A126-2004 (R2019)	Gray Iron Castings for Valves, Flanges, and Pipe Fittings	Piping
ASTM A254/A254M-2012 (R2019)	Copper-Brazed Steel Tubing	Piping
ASTM A269/A269M-2015a (R2019)	Seamless and Welded Austenitic Stainless Steel Tubing for General Service	Piping
ASTM A312/A312M-2019	Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes	Piping
ASTM A420/A420M-2019a	Piping Fittings of Wrought Carbon Steel and Alloy Steel for Low-Temperature Service	Fittings
ASTM A554-2016	Welded Stainless Steel Mechanical Tubing	Piping

ASTM A778/A778M-2016	Welded, Unannealed Austenitic Stainless Steel Tubular Products	Piping
ASTM B32-2008 (R2014)	Solder Metal	Joints
ASTM B42-2015a	Seamless Copper Pipe, Standard Sizes	Piping
ASTM B43-2015	Seamless Red Brass Pipe, Standard Sizes	Piping
ASTM B75/B75M-2019	Seamless Copper Tube	Piping
ASTM B88-2016	Seamless Copper Water Tube	Piping
ASTM B135/B135M-2017	Seamless Brass Tube	Piping
ASTM B251/B251M-2017	General Requirements for Wrought Seamless Copper and Copper-Alloy Tube	Piping
ASTM B280-2019	Seamless Copper Tube for Air Conditioning and Refrigeration Field Service	Piping
ASTM B302-2017	Threadless Copper Pipe, Standard Sizes	Piping
ASTM B447-2012a	Welded Copper Tube	Piping
ASTM B813-2016	Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube	Joints
ASTM B828-2016	Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings	Joints

ASTM C411-2019	Hot-Surface Performance of High-Temperature Thermal Insulation	Duct Coverings and Linings
ASTM D1693-2015	Environmental Stress-Cracking of Ethylene Plastics	Piping
ASTM D1785-2015^{e1}	Poly(Vinyl Chloride) (PVC) Plastic Pipe, Schedules 40, 80, and 120	Piping
ASTM D2241-2015	Poly(Vinyl Chloride) (PVC) Pressure-Rated Pipe (SDR Series)	Piping
ASTM D2464-2015	Threaded Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80	Fittings
ASTM D2466-2017	Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40	Fittings
ASTM D2467-2015	Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80	Fittings
ASTM D2513-2019	Polyethylene (PE) Gas Pressure Pipe, Tubing, and Fittings	Piping
ASTM D2564-2012 (R2018)	Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems	Joints
ASTM D2609-2015	Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe	Fittings
ASTM D2683-2014	Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe and Tubing	Fittings
ASTM D2737-2012a	Polyethylene (PE) Plastic Tubing	Piping

~~ASTM D2846/D2846M-2019a~~	~~Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems~~	~~Piping~~
~~ASTM D3035-2015~~	~~Polyethylene (PE) Plastic Pipe (DR-PR) Based on Controlled Outside Diameter~~	~~Piping~~
~~ASTM D3139-2019~~	~~Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals~~	~~Joints~~
~~ASTM D3261-2016~~	~~Butt Heat Fusion Polyethylene (PE) Plastic Fittings for Polyethylene (PE) Plastic Pipe and Tubing~~	~~Fittings~~
~~ASTM D3350-2014~~	~~Polyethylene Plastics Pipe and Fittings Materials~~	~~Piping~~
~~ASTM E84-2019b~~	~~Surface Burning Characteristics of Building Materials~~	~~Miscellaneous~~
~~ASTM F437-2015~~	~~Threaded Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80~~	~~Fittings~~
~~ASTM F438-2017~~	~~Socket-Type Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 40~~	~~Fittings~~
~~ASTM F439-2019~~	~~Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80~~	~~Fittings~~
~~ASTM F441/F441M-2015~~	~~Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80~~	~~Piping~~
~~ASTM F442/F442M-2019~~	~~Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe (SDR-PR)~~	~~Piping, Plastic~~
~~ASTM F493-2014~~	~~Solvent Cements for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe and Fittings~~	~~Joints~~
~~ASTM F656-2015~~	~~Primers for Use in Solvent Cement Joints of Poly (Vinyl Chloride) (PVC) Plastic Pipe and Fittings~~	~~Joints~~
~~ASTM F714-2013 (R2019)~~	~~Polyethylene (PE) Plastic Pipe (DR-PR) Based on Outside Diameter~~	~~Piping~~
~~ASTM F876-2019a~~	~~Crosslinked Polyethylene (PEX) Tubing~~	~~Piping~~
~~ASTM F877-2019~~	~~Crosslinked Polyethylene (PEX) Hot- and Cold-Water Distribution Systems~~	~~Piping~~
~~ASTM F1055-2016a~~	~~Electrofusion Type Polyethylene Fittings for Outside Diameter Controlled Polyethylene and Crosslinked Polyethylene (PEX) Pipe and Tubing~~	~~Fittings~~
~~ASTM F1281-2017~~	~~Crosslinked Polyethylene/ Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Pressure Pipe~~	~~Piping~~
~~ASTM F1282-2017~~	~~Polyethylene/Aluminum/Polyethylene (PE-AL-PE) Compo- site Pressure Pipe~~	~~Piping~~
~~ASTM F1476-2007 (R2019)~~	~~Performance of Gasketed Mechanical Couplings for Use in Piping Applications~~	~~Fittings~~
~~ASTM F1548-2001 (R2018)~~	~~Performance of Fittings for Use with Gasketed Mechanical Couplings Used in Piping Applications~~	~~Fittings~~
~~ASTM F1807-2019b~~	~~Metal Insert Fittings Utilizing a Copper Crimp Ring, or Alternate Stainless Steel Clamps, for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) Tubing~~	~~Fittings~~

~~ASTM F1960-2019a~~	~~Cold Expansion Fittings with PEX Reinforcing Rings for Use with Cross-linked Polyethylene (PEX) and Polyethylene of Raised Temperature (PE-RT) Tubing~~	~~Fittings~~
~~ASTM F1970-2019~~	~~Special Engineered Fittings, Appurtenances or Valves for Use in Poly (Vinyl Chloride) (PVC) or Chlorinated Poly~~	~~Piping~~

	(Vinyl Chloride) (CPVC) Systems	
ASTM F1974-2009 (R2015)	Metal Insert Fittings for Polyethylene/Aluminum/Polyethylene and Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene Composite Pressure Pipe	Fittings
ASTM F2080-2019	Cold-Expansion Fittings with Metal Compression Sleeves for Crosslinked Polyethylene (PEX) Pipe and SDR9 Polyethylene of Raised Temperature (PE-RT) Pipe	Fittings
ASTM F2098-2018	Stainless Steel Clamps for Securing SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) to Metal Insert and Plastic Insert Fittings	Fittings
ASTM F2159-2019a	Plastic Insert Fittings Utilizing a Copper Crimp Ring, or Alternate Stainless Steel Clamps for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
ASTM F2165-2019	Flexible Pre-Insulated Plastic Piping	Fittings, Piping and Tubing
ASTM F2389-2019	Pressure-Rated Polypropylene (PP) Piping Systems	Piping
ASTM F2434-2019	Metal Insert Fittings Utilizing a Copper Crimp Ring for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Cross-linked Polyethylene/Aluminum/Cross-linked Polyethylene (PEX-AL-PEX) Tubing	Fittings
ASTM F2620-2019	Heat Fusion Joining of Polyethylene Pipe and Fittings	Joints
ASTM F2623-2019	Polyethylene of Raised Temperature (PE-RT) Systems for Non-Potable Water Applications	Piping
ASTM F2735-2018	Plastic Insert Fittings for SDR9 Cross-linked Polyethylene (PEX) and Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
ASTM F2769-2018	Polyethylene of Raised Temperature (PE-RT) Plastic Hot and Cold-Water Tubing and Distribution Systems	Piping, Fitting
ASTM F2855-2019	Chlorinated Poly (Vinyl Chloride)/Aluminum/Chlorinated Poly (Vinyl Chloride) (CPVC-AL-CPVC) Composite Pressure Tubing	Piping, Plastic
ASTM F3226/F3226M-2019	Metallic Press-Connect Fittings for Piping and Tubing Systems	Fittings
ASTM F3253-2019	Crosslinked Polyethylene (PEX) Tubing with Oxygen Barrier for Hot- and Cold-Water Hydronic Distribution Systems	Piping, Fittings
ASTM F3347-2019a	Metal Press Insert Fittings with Factory Assembled Stainless Steel Press Sleeve for SDR9 Cross-linked Polyethylene (PEX) Tubing	Fittings
ASTM F3348-2019	Plastic Press Insert Fittings with Factory Assembled Stainless Steel Press Sleeve for SDR9 Cross-linked Polyethylene (PEX) Tubing	Fittings
AWS A5.8M/A5.8-2019	Filler Metals for Brazing and Braze Welding	Joints
AWWA C901-2017	Polyethylene (PE) Pressure Pipe and Tubing, 3⁄4 In. (19 mm) Through 3 In. (76 mm), for Water Service	Piping

CSA B137.1-2017	Polyethylene (PE) Pipe, Tubing, and Fittings for Cold-Water Pressure Services	Piping
CSA B137.2-2017	Polyvinylchloride (PVC) Injection-Moulded Gasketed Fittings for Pressure Applications	Fittings
CSA B137.3-2017	Rigid Polyvinylchloride (PVC) Pipe and Fittings for Pressure Applications	Piping, Fittings
CSA B137.5-2017	Crosslinked Polyethylene (PEX) Tubing Systems for Pressure Applications	Piping
CSA B137.6-2017	Chlorinated Polyvinylchloride (CPVC) Pipe, Tubing, and Fittings for Hot- and Cold-Water Distribution Systems	Piping, Fittings
CSA B137.9-2017	Polyethylene/Aluminum/Polyethylene (PE-AL-PE) Composite Pressure-Pipe Systems	Piping
CSA B137.10-2017	Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Composite Pressure-Pipe Systems	Piping
CSA B137.11-2017	Polypropylene (PP-R) Pipe and Fittings for Pressure Applications	Piping
CSA B137.18-2017	Polyethylene of Raised Temperature Resistance (PE-RT) Tubing Systems for Pressure Applications	Piping, Fittings
CSA C22.2 No. 108-2014 (R2019)	Liquid Pumps	Pumps
CSA C448.1-2016	Design and Installation of Ground Source Heat Pump Systems for Commercial and Institutional Buildings	Ground-Source Heat Pumps
CSA C448.2-2016	Design and Installation of Ground Source Heat Pump Systems for Residential and Other Small Buildings	Ground-Source Heat Pumps
CSA/IGSHPA C448-2016	Design and Installation of Ground Source Heat Pump Systems for Commercial and Residential Buildings	Miscellaneous
CSA Z21.10.1-2019	Gas Water Heaters, Volume I, Storage Water Heaters with Input Ratings of 75,000 Btu Per Hour or Less (same as CSA 4.1)	Fuel Gas, Appliances
CSA Z21.10.3-2019	Gas-Fired Water Heaters, Volume III, Storage Water Heaters with Input Ratings Above 75,000 Btu Per Hour, Circulating and Instantaneous (same as CSA 4.3)	Fuel Gas, Appliances
IAPMO PS 117-2019	Press Connections	Fittings
IAPMO S1001.1-2013 (R2019)	Design and Installation of Solar Water Heating Systems	Solar Thermal Systems
ICC 900/SRCC 300-2015	Solar Thermal System Standard	Solar Thermal Systems
ICC 901/SRCC 100-2015	Solar Thermal Collector Standard	Collectors
NFPA 70-2020	National Electrical Code	Miscellaneous
NGWA-01-2014	Water Well Construction Standard	Geothermal
NSF 60-2019	Drinking Water Treatment Chemicals-Health Effects	Backfill

NSF 61-2019	Drinking Water System Components - Health Effects	Miscellaneous
NSF 358-1-2017	Polyethylene Pipe and Fittings for Water-Based Ground-Source "Geothermal" Heat Pump Systems	Piping, Fittings
NSF 358-2-2017	Polypropylene Pipe and Fittings for Water-Based Ground-Source "Geothermal" Heat Pump Systems	Piping, Fittings
NSF 358-3-2016	Cross-Linked Polyethylene (PEX) Pipe and Fittings for Water- Based Ground-Source (Geothermal) Heat Pump Systems	Piping, Fittings
NSF 358-4-2018	Polyethylene of Raised Temperature (PE-RT) Tubing and Fittings for Water-Based Ground-Source (Geothermal) Heat Pump Systems	Piping, Fittings
UL 723-2018	Test for Surface Burning Characteristics of Building Materials	Miscellaneous
UL 778-2016	Motor-Operated Water Pumps (with revisions through January 17, 2019)	Pumps
UL 834-2004	Heating, Water Supply, and Power Boilers – Electric (with revisions through July 17, 2019)	Appliances
UL 1279-2010	Outline of Investigation for Solar Collectors	Electrical
UL 1699B-2018	Photovoltaic (PV) DC Arc-Fault Circuit Protection	Electrical
UL 1703-2002	Flat-Plate Photovoltaic Modules and Panels (with revisions through November 25, 2019)	Electrical
UL 1741-2010	Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources (with revisions through February 15, 2018)	Electrical
UL 1995-2015	Heating and Cooling Equipment (with revisions through August 17, 2018)	Heat Pumps
UL 2523-2009	Solid Fuel-Fired Hydronic Heating Appliances, Water Heaters, and Boilers (with revisions through March 16, 2018)	Fuel Gas, Appliances
UL 2703-2015	Mounting Systems, Mounting Devices, Clamping/Retention Devices, and Ground Lugs for Use with Flat-Plate Photovoltaic Modules and Panels (with revisions through December 16, 2019)	Electrical
UL 2989-2016	Outline of Investigation for Tracer Wire	Tracer Wire
UL 3703-2015	Solar Trackers	Electrical
UL 4703-2014	Photovoltaic Wire	Electrical
UL 6703-2014	Connectors for Use in Photovoltaic Systems (with revisions through December 22, 2017)	Electrical
UL 8703-2011	Outline of Investigation for Concentrator Photovoltaic Mod- ules and Assemblies	Electrical
UL 60335-2-40-2017	Household And Similar Electrical Appliances-Safety- Part 2- 40: Particular Requirements for Electrical Heat Pumps, Air- Conditioners and Dehumidifiers	Heat Pumps
UL 61730-1-2017	Photovoltaic (PV) Module Safety Qualification - Part 1: Requirements for Construction	Electrical
UL 61730-2-2017	Photovoltaic (PV) Module Safety Qualification - Part 2: Requirements for Testing	Electrical
UL 62109-1-2014	Safety of Power Converters for Use in Photovoltaic Power Systems - Part 1: General Requirements (with revisions through April 30, 2019)	Electrical

ASHRAE 90.1-2019	Energy Standard for Buildings Except Low-Rise Residential Buildings	Energy
ASHRAE 93-2010 (RA2014)	Methods of Testing to Determine the Thermal Performance of Solar Collectors	Testing

ASHRAE 95-1981 (RA1987)	Methods of Testing to Determine the Thermal Performance of Solar Domestic Water Heating Systems	Testing
ASHRAE 96-1980 (RA1989)	Thermal Performance of Unglazed Flat-Plate Liquid-Type Solar Collectors	Testing, Collector
ASME A13.1-2015	Scheme for the Identification of Piping Systems	Piping
ASME B16.21-2016	Nonmetallic Flat Gaskets for Pipe Flanges	Joints
ASME B16.34-2017	Valves - Flanged, Threaded, and Welding End	Valves
ASME B16.47-2017	Large Diameter Steel Flanges: NPS 26 Through NPS 60 Metric/Inch	Fittings
ASME BPVC Section IV-2017	Rules for Construction of Heating Boilers	Miscellaneous
ASME BPVC Section IX-2017	Welding, Brazing, and Fusing Qualifications	Certification
ASSE 1010-2004	Water Hammer Arresters	Water Supply Component
ASTM A377-2018	Ductile Iron Pressure Pipe	Piping, Ferrous
ASTM A733-2016	Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples	Piping, Ferrous
ASTM D56-2016a	Flash Point by Tag Closed Cup Tester	Testing
ASTM D93-2019	Flash Point by Pensky-Martens Closed Cup Tester	Testing
ASTM D635-2018	Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position	Testing
ASTM D2235-2004 (R2016)	Solvent Cement for Acrylonitrile-Butadiene-Styrene (ABS) Plastic Pipe and Fittings	Joints
ASTM D2672-2014	Joints for IPS PVC Pipe Using Solvent Cement	Joints
ASTM D2855-2015	Two-Step (Primer and Solvent Cement) Method of Joining Poly (Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) (CPVC) Pipe and Piping Components with Tapered Sockets	Joints
ASTM D3278-1996 (R2011)	Flash Point of Liquids by Small Scale Closed-Cup Apparatus	Testing
ASTM E136-2019a	Assessing Combustibility of Materials Using a Vertical Tube Furnace at 750°C	Furnace
ASTM F480-2014	Thermoplastic Well Casing Pipe and Couplings Made in Standard Dimension Ratios (SDR), SCH 40 and SCH 80	Piping, Plastic
ASTM F891-2016	Coextruded Poly(Vinyl Chloride) (PVC) Plastic Pipe with a Cellular Core	Piping, Plastic

AWS B2.2/B2.2M-2016	Brazing Procedure and Performance Qualification	Certification
AWWA C507-2018	Ball Valves, 6 In. through 60 In. (150 mm Through 1,500 mm)	Valves
BS EN 12975-1-2006 (R2010)	Thermal Solar Systems and Components – Solar Collectors – Part 1: General Requirements	Collector

~~BS EN 12976-1-2017~~	~~Thermal Solar Systems and Components – Factory Made Systems – Part 1: General Requirements~~	~~Solar Thermal Systems~~
~~BS EN 12976-2-2017~~	~~Thermal Solar Systems and Components – Factory Made Systems – Part 2: Test Methods~~	~~Solar Thermal Systems~~
~~BS EN ISO 9806-2017~~	~~Solar Energy – Solar Thermal Collectors – Test Methods~~	~~Collector~~
~~BS EN ISO 9488-2000~~	~~Solar Energy – Vocabulary~~	~~Miscellaneous~~
~~CSA Z21.22-2015~~	~~Relief Valves for Hot Water Supply Systems (same as CSA 4.4)~~	~~Valves~~

TABLE U 18.1
REFERENCED STANDARDS

STANDARD NUMBER	STANDARD TITLE	APPLICATION
	AHRI	
AHRI 210/240-2020	Performance Rating of Unitary Air-conditioning & Air- source Heat Pump Equipment	Air-Source Heat Pumps
AHRI 870-2016	Performance Rating of Direct Geoexchange Heat Pumps	Equipment
AHRI/ASHRAE/ISO 13256-1-1998 (R2012)	Water-Source Heat Pumps – Testing and Rating for Performance – Part 1: Water-to-Air and Brine-to-Air Heat Pumps	Water-Source Heat Pumps
AHRI/ASHRAE/ISO 13256-2-1998 (R2012)	Water-Source Heat Pumps – Testing and Rating for Performance – Part 2: Water-to-Water and Brine-to-Water Heat Pumps	Water-Source Heat Pumps
	ASHRAE	
AHRI/ASHRAE/ISO 13256-1-1998 (R2012)	Water-Source Heat Pumps – Testing and Rating for Performance – Part 1: Water-to-Air and Brine-to-Air Heat Pumps	Water-Source Heat Pumps
AHRI/ASHRAE/ISO 13256-2-1998 (R2012)	Water-Source Heat Pumps – Testing and Rating for Performance – Part 2: Water-to-Water and Brine-to-Water Heat Pumps	Water-Source Heat Pumps
ASHRAE 34-2022	Designation and Safety Classification of Refrigerants	Refrigerant Classifications
ASHRAE 194-2017	Method of Test for Direct-Expansion Ground-Source Heat Pumps	Ground-Source Heat Pumps
	ASME	
ASME A112.1.2-2012 (R2022)	Air Gaps in Plumbing Systems (for Plumbing Fixtures and Water-Connected Receptors)	Backflow Protection
ASME A112.1.3-2000 (R2019)	Air Gap Fittings for Use with Plumbing Fixtures, Appliances, and Appurtenances	Backflow Protection
ASME A112.4.1-2009 (R2019)	Water Heater Relief Valve Drain Tubes	Discharge Piping
ASSE 1070/ASME A112.1070/CSA B125.70- 2020	Water Temperature Limiting Devices	Valves
ASME B1.20.1-2013 (R2018)	Pipe Threads, General Purpose (Inch)	Joints
ASME B16.3-2021	Malleable Iron Threaded Fittings: Classes 150 and 300	Fittings

ASME B16.5-2020	Pipe Flanges and Flanged Fittings: NPS 1⁄2 Through NPS 24 Metric/Inch	Fittings
ASME B16.9-2018	Factory-Made Wrought Buttwelding Fittings	Fittings
ASME B16.11-2021	Forged Fittings, Socket-Welding and Threaded	Fittings
ASME B16.15-2018	Cast Copper Alloy Threaded Fittings: Classes 125 and 250	Fittings
ASME B16.18-2021	Cast Copper Alloy Solder Joint Pressure Fittings	Fittings
ASME B16.22-2021	Wrought Copper and Copper Alloy Solder-Joint Pressure Fit- tings	Fittings
ASME B16.23-2021	Cast Copper Alloy Solder Joint Drainage Fittings: DWV	Fittings
ASME B16.24-2021	Cast Copper Alloy Pipe Flanges, Flanged Fittings, and Valves: Classes 150, 300, 600, 900, 1500, and 2500	Fittings
ASME B16.26-2018	Cast Copper Alloy Fittings for Flared Copper Tubes	Fittings
ASME B16.29-2017	Wrought Copper and Wrought Copper Alloy Solder-Joint Drainage Fittings – DWV	Fittings
ASME B16.51-2021	Copper and Copper Alloy Press-Connect Pressure Fittings	Fittings
ASME BPVC Section VIII.1-2021	Rules for Construction of Pressure Vessels Division 1	Miscellaneous
ASME BPVC Section X-2021	Fiber-Reinforced Plastic Pressure Vessels	Pressure Vessel Construction, Pressure Vessels
ASME SA194-2021	Carbon and Alloy Steel Nuts for Bolts for High Pressure or High Temperature Service, or Both	Mounting
ASSE		
ASSE 1013-2021	Performance Requirements for Reduced Pressure Principle Backflow Prevention Assemblies	Backflow Prevention
ASSE 1017-2009	Performance Requirements for Temperature Actuated Mix- ing Valves for Hot Water Distribution Systems	Valves
ASSE 1061-2020	Performance Requirements for Push-Fit Fittings	Fittings
ASSE 1070/ASME A112.1070/CSA B125.70- 2020	Water Temperature Limiting Devices	Valves
ASSE 1079-2012 (R2021)	Performance Requirements for Dielectric Pipe Unions	Fittings
ASTM		
ASTM A53/A53M-2022	Standard Specification for Pipe, Steel, Black and Hot- Dipped, Zinc-Coated, Welded and Seamless	Piping
ASTM A106/A106M-2019a	Standard Specification for Seamless Carbon Steel Pipe for High-Temperature Service	Piping
ASTM A126-2004 (R2019)	Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings	Piping
ASTM A254/A254M-2012 (R2019)	Standard Specification for Copper-Brazed Steel Tubing	Piping

ASTM A269/A269M-2022	Standard Specification for Seamless and Welded Austenitic Stainless Steel Tubing for General Service	Piping
ASTM A312/A312M-2022a	Standard Specification for Seamless, Welded, and Heavily Cold Worked Austenitic Stainless Steel Pipes	Piping
ASTM A420/A420M-2022	Standard Specification for Piping Fittings of Wrought Car- bon Steel and Alloy Steel for Low-Temperature Service	Fittings
ASTM A554-2021	Standard Specification for Welded Stainless Steel Mechanical Tubing	Piping
ASTM A778/A778M-2022	Standard Specification for Welded, Unannealed Austenitic Stainless Steel Tubular Products	Piping
ASTM B32-2020	Standard Specification for Solder Metal	Joints
ASTM B42-2020	Standard Specification for Seamless Copper Pipe, Standard Sizes	Piping
ASTM B43-2020	Standard Specification for Seamless Red Brass Pipe, Standard Sizes	Piping
ASTM B75/B75M-2020	Standard Specification for Seamless Copper Tube	Piping
ASTM B88-2022	Standard Specification for Seamless Copper Water Tube	Piping
ASTM B135/B135M-2017	Standard Specification for Seamless Brass Tube	Piping
ASTM B251/B251M-2017	Standard Specification for General Requirements for Wrought Seamless Copper and Copper-Alloy Tube	Piping
ASTM B280-2020	Standard Specification for Seamless Copper Tube for Air Conditioning and Refrigeration Field Service	Piping
ASTM B302-2017	Standard Specification for Threadless Copper Pipe, Standard Sizes	Piping
ASTM B447-2012a (R2021)	Standard Specification for Welded Copper Tube	Piping
ASTM B813-2016	Standard Specification for Liquid and Paste Fluxes for Soldering of Copper and Copper Alloy Tube	Joints
ASTM B828-2016	Standard Practice for Making Capillary Joints by Soldering of Copper and Copper Alloy Tube and Fittings	Joints
ASTM C411-2019	Standard Test Method for Hot-Surface Performance of High- Temperature Thermal Insulation	Duct Coverings and Linings
ASTM D1693-2021	Standard Test Method for Environmental Stress-Cracking of Ethylene Plastics	Piping
ASTM D1785-2021a	Standard Specification for Poly(Vinyl Chloride) (PVC) Plas- tic Pipe, Schedules 40, 80, and 120	Piping
ASTM D2241-2020	Standard Specification for Poly(Vinyl Chloride) (PVC) Pres- sure-Rated Pipe (SDR Series)	Piping
ASTM D2464-2015	Standard Specification for Threaded Poly(Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 80	Fittings

ASTM D2466-2021	Standard Specification for Poly(Vinyl Chloride) (PVC) Plas- tic Pipe Fittings, Schedule 40	Fittings
ASTM D2467-2020	Standard Specification for Poly(Vinyl Chloride) (PVC) Plas- tic Pipe Fittings, Schedule 80	Fittings
ASTM D2564-2020	Standard Specification for Solvent Cements for Poly(Vinyl Chloride) (PVC) Plastic Piping Systems	Joints
ASTM D2609-2021	Standard Specification for Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe	Fittings
ASTM D2683-2020	Standard Specification for Socket-Type Polyethylene Fittings for Outside Diameter-Controlled Polyethylene Pipe and Tubing	Fittings
ASTM D2737-2022	Standard Specification for Polyethylene (PE) Plastic Tubing	Piping
ASTM D2846/D2846M- 2019a	Standard Specification for Chlorinated Poly(Vinyl Chloride) (CPVC) Plastic Hot- and Cold-Water Distribution Systems	Piping
ASTM D3035-2022	Standard Specification for Polyethylene (PE) Plastic Pipe (DR-PR) Based on Controlled Outside Diameter	Piping
ASTM D3138-2021	Standard Specification for Solvent Cements for Transition Joints Between Acrylonitrile-Butadiene-Styrene (ABS) and Poly(Vinyl Chloride) (PVC) Non-Pressure Piping Components	Joints
ASTM D3139-2019	Standard Specification for Joints for Plastic Pressure Pipes Using Flexible Elastomeric Seals	Joints
ASTM D3261-2016	Standard Specification for Butt Heat Fusion Polyethylene (PE) Plastic Fittings for Polyethylene (PE) Plastic Pipe and Tubing	Fittings
ASTM D3350-2021	Standard Specification for Polyethylene Plastics Pipe and Fittings Materials	Piping
ASTM E84-2023	Standard Test Method for Surface Burning Characteristics of Building Materials	Miscellaneous
ASTM F437-2021	Standard Specification for Threaded Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80	Fittings
ASTM F438-2017	Standard Specification for Socket-Type Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 40	Fittings
ASTM F439-2019	Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80	Fittings
ASTM F441/F441M-2020	Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80	Piping

ASTM F442/F442M-2020	Standard Specification for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe (SDR-PR)	Piping, Plastic
ASTM F493-2022	Standard Specification for Solvent Cements for Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe and Fittings	Joints
ASTM F656-2021	Standard Specification for Primers for Use in Solvent Cement Joints of Poly (Vinyl Chloride) (PVC) Plastic Pipe and Fittings	Joints
ASTM F714-2022	Standard Specification for Polyethylene (PE) Plastic Pipe (DR-PR) Based on Outside Diameter	Piping
ASTM F876-2023	Standard Specification for Crosslinked Polyethylene (PEX) Tubing	Piping
ASTM F877-2023	Standard Specification for Crosslinked Polyethylene (PEX) Hot- and Cold-Water Distribution Systems	Piping
ASTM F1055-2016a (R2022)	Standard Specification for Electrofusion Type Polyethylene Fittings for Outside Diameter Controlled Polyethylene and Crosslinked Polyethylene (PEX) Pipe and Tubing	Fittings
ASTM F1281-2023	Standard Specification for Crosslinked Polyethylene/ Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Pressure Pipe	Piping
ASTM F1282-2017	Standard Specification for Polyethylene/Aluminum/Poly- ethylene (PE-AL-PE) Composite Pressure Pipe	Piping
ASTM F1476-2007 (R2019)	Standard Specification for Performance of Gasketed Mechanical Couplings for Use in Piping Applications	Fittings
ASTM F1548-2001 (R2018)	Standard Specification for Performance of Fittings for Use with Gasketed Mechanical Couplings Used in Piping Applications	Fittings
ASTM F1807-2023	Standard Specification for Metal Insert Fittings Utilizing a Copper Crimp Ring, or Alternate Stainless Steel Clamps, for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
ASTM F1960-2023	Standard Specification for Cold Expansion Fittings with PEX Reinforcing Rings for Use with Cross-linked Polyethylene (PEX) and Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
ASTM F1970-2023	Standard Specification for Special Engineered Fittings, Appurtenances or Valves for Use in Poly (Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) (CPVC) Systems	Piping
ASTM F1974-2009 (R2020)	Standard Specification for Metal Insert Fittings for Polyethylene/Aluminum/Polyethylene	Fittings

	and Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene Composite Pressure Pipe	
ASTM F2080-2023	Standard Specification for Cold-Expansion Fittings with Metal Compression-Sleeves for Crosslinked Polyethylene (PEX) Pipe and SDR9 Polyethylene of Raised Temperature (PE-RT) Pipe	Fittings
ASTM F2098-2018	Standard Specification for Stainless Steel Clamps for Securing SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) to Metal Insert and Plastic Insert Fittings	Fittings
ASTM F2159-2023a	Standard Specification for Plastic Insert Fittings Utilizing a Copper Crimp Ring, or Alternate Stainless Steel Clamps for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
ASTM F2165-2019	Standard Specification for Flexible Pre-Insulated Plastic Piping	Fittings, Piping and Tubing
ASTM F2389-2023	Standard Specification for Pressure-Rated Polypropylene (PP) Piping Systems	Pipings
ASTM F2434-2019	Standard Specification for Metal Insert Fittings Utilizing a Copper Crimp Ring for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Cross-linked Polyethylene/Aluminum/Cross-linked Polyethylene (PEX-AL-PEX) Tubing	Fittings
ASTM F2620-2020ae2	Standard Practice for Heat Fusion Joining of Polyethylene Pipe and Fittings	Joints
ASTM F2623-2022	Standard Specification for Polyethylene of Raised Temperature (PE-RT) Systems for Non-Potable Water Applications	Piping
ASTM F2735-2021	Standard Specification for Plastic Insert Fittings for SDR9 Cross-linked Polyethylene (PEX) and Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
ASTM F2769-2023	Standard Specification for Polyethylene of Raised Temperature (PE-RT) Plastic Hot and Cold-Water Tubing and Distribution Systems	Piping, Fitting
ASTM F2855-2019	Standard Specification for Chlorinated Poly (Vinyl Chloride)/Aluminum/Chlorinated Poly (Vinyl Chloride) (CPVC- AL-CPVC) Composite Pressure Tubing	Piping, Plastic
ASTM F3226/F3226M-2019	Standard Specification for Metallic Press-Connect Fittings for Piping and Tubing Systems	Fittings
ASTM F3253-2019	Standard Specification for Crosslinked Polyethylene (PEX) Tubing with Oxygen	Piping, Fittings

	Barrier for Hot- and Cold-Water Hydronic Distribution Systems	
ASTM F3347-2023	Standard Specification for Metal Press Insert Fittings with Factory Assembled Stainless Steel Press Sleeve for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
ASTM F3348-2023	Standard Specification for Plastic Press Insert Fittings with Factory Assembled Stainless Steel Press Sleeve for SDR9 Cross-linked Polyethylene (PEX) Tubing and SDR9 Polyethylene of Raised Temperature (PE-RT) Tubing	Fittings
AWS		
AWS A5.8M/A5.8-2019	Filler Metals for Brazing and Braze Welding	Joints
AWS A5.9/A5.9M-2022 (ISO 14343-2017 MOD)	Specification for Bare Stainless Steel Welding Electrodes and Rods	Joints
AWWA		
AWWA C110/A21.10- 2021	Ductile-Iron and Gray-Iron Fittings	Fittings
AWWA C111/A21.11- 2017	Rubber-Gasket Joints for Ductile-Iron Pressure Pipe and Fittings	Joints
AWWA C115/A21.15- 2020	Flanged Ductile-Iron Pipe with Ductile-Iron or Gray-Iron Threaded Flanges	Piping
AWWA C151/A21.51- 2017	Ductile-Iron Pipe, Centrifugally Cast	Piping
AWWA C153/A21.53-2019	Ductile-Iron Compact Fittings	Fittings
AWWA C901-2020	Polyethylene (PE) Pressure Pipe and Tubing, 3⁄4 In. (19 mm) Through 3 In. (76 mm), for Water Service	Piping
CSA		
ASSE 1070/ASME A112.1070/CSA B125.70- 2020	Water Temperature Limiting Devices	Valves
CSA B137.1-2020	Polyethylene (PE) Pipe, Tubing, and Fittings for Cold-Water Pressure Services	Piping
CSA B137.2-2020	Polyvinylchloride (PVC) Injection-Moulded Gasketed Fittings for Pressure Applications	Fittings
CSA B137.3-2020	Rigid Polyvinylchloride (PVC) Pipe and Fittings for Pressure Applications	Piping, Fittings
CSA B137.5-2020	Crosslinked Polyethylene (PEX) Tubing Systems for Pres- sure Applications	Piping
CSA B137.6-2020	Chlorinated Polyvinylchloride (CPVC) Pipe, Tubing, and Fittings for Hot- and Cold-Water Distribution Systems	Piping, Fittings
CSA B137.9-2020	Polyethylene/Aluminum/Polyethylene (PE-AL-PE) Composite Pressure-Pipe Systems	Piping
CSA B137.10-2020	Crosslinked Polyethylene/Aluminum/Crosslinked Polyethylene (PEX-AL-PEX) Composite Pressure-Pipe Systems	Piping

CSA B137.11-2020	Polypropylene (PP-R & PP-RCT) Pipe and Fittings for Pressure Applications	Piping
CSA B137.18-2020	Polyethylene of Raised Temperature Resistance (PE-RT) Tubing Systems for Pressure Applications	Piping, Fittings
CSA C22.2 No. 108-2014 (R2019)	Liquid Pumps	Pumps
ANSI/CSA/IGSHPA C448 Series-2016 (R2021)	Design and Installation of Ground Source Heat Pump Systems for Commercial and Residential Buildings	Ground-Source Heat Pumps
CSA/ANSI Z21.10.1-2019/CSA 4.1-2019	Gas Water Heaters, Volume I, Storage Water Heaters with Input Ratings of 75,000 Btu Per Hour or Less	Fuel Gas, Appliances
CSA/ANSI Z21.10.3-2019/CSA 4.3-2019	Gas-Fired Water Heaters, Volume III, Storage Water Heaters with Input Ratings Above 75,000 Btu Per Hour, Circulating and Instantaneous	Fuel Gas, Appliances
IAPMO		
IAPMO/ANSI H1001.1- 2021	Standard for Quality of Heat Transfer Fluids Used in Hydronics Systems	Heat Transfer Fluid
IAPMO/ANSI/CAN Z1117-2022	Standard for Press Connections	Fittings
IAPMO IGC 353-2019[e1]	Branch Connectors	Fittings
IAPMO S1001.1-2013 (R2019)	Design and Installation of Solar Water Heating Systems	Solar Thermal Systems
ICC		
ICC 900/SRCC 300-2020	Solar Thermal System Standard	Solar Thermal Systems
ICC 901/SRCC 100-2020	Solar Thermal Collector Standard	Collectors
IGSHPA		
ANSI/CSA/IGSHPA C448 Series-2016 (R2021)	Design and Installation of Ground Source Heat Pump Systems for Commercial and Residential Buildings	Ground-Source Heat Pumps
ISO		
AHRI/ASHRAE/ISO 13256-1-1998 (R2012)	Water-Source Heat Pumps – Testing and Rating for Performance – Part 1: Water-to-Air and Brine-to-Air Heat Pumps	Water-Source Heat Pumps
AHRI/ASHRAE/ISO 13256-2-1998 (R2012)	Water-Source Heat Pumps – Testing and Rating for Performance – Part 2: Water-to-Water and Brine-to-Water Heat Pumps	Water-Source Heat Pumps
NFPA		
NFPA 70-2023	National Electrical Code	Miscellaneous
NGWA		
NGWA-01-2014	Water Well Construction Standard	Geothermal
NSF		
NSF/ANSI/CAN 60-2021	Drinking Water Treatment Chemicals-Health Effects	Backfill
NSF/ANSI/CAN 61-2022	Drinking Water System Components - Health Effects	Miscellaneous

NSF/ANSI 358-1-2021	Polyethylene Pipe and Fittings for Water-Based Ground- Source "Geothermal" Heat Pump Systems	Piping, Fittings
NSF/ANSI 358-2-2017	Polypropylene Pipe and Fittings for Water-Based Ground- Source "Geothermal" Heat Pump Systems	Piping, Fittings
NSF/ANSI 358-3-2021	Cross-Linked Polyethylene (PEX) Pipe and Fittings for Water- Based Ground-Source (Geothermal) Heat Pump Systems	Piping, Fittings
NSF/ANSI 358-4-2022	Polyethylene of Raised Temperature (PE-RT) Tubing and Fittings for Water-Based Ground-Source (Geothermal) Heat Pump Systems	Piping, Fittings
NSF/ANSI/CAN 372-2022	Drinking Water System Components - Lead Content	Miscellaneous
SRCC		
ICC 900/SRCC 300-2020	Solar Thermal System Standard	Solar Thermal Systems
ICC 901/SRCC 100-2020	Solar Thermal Collector Standard	Collectors
UL		
UL 98B-2015	Outline of Investigation for Enclosed and Dead-front Switches for use in Photovoltaic Systems	Electrical
UL 248-2019	Low-Voltage Fuses – Part 19: Photovoltaic Fuses (with revisions through February 28, 2020)	Electrical
UL 489B-2016	Molded-Case Circuit Breakers, Molded-Case Switches, and Circuit-Breaker Enclosures for Use with Photovoltaic (PV) Systems (with revisions through May 19, 2021)	Electrical
UL 508I-2015	Outline of Investigation for Disconnect Switches Intended for Use in Photovoltaic Systems	Electrical
UL 723-2018	Test for Surface Burning Characteristics of Building Materials	Miscellaneous
UL 778-2016	Motor-Operated Water Pumps (with revisions through June 29, 2021)	Pumps
UL 834-2004	Heating, Water Supply, and Power Boilers – Electric (with revisions through July 17, 2019)	Appliances
UL 1279-2010	Outline of Investigation for Solar Collectors	Electrical
UL 1699B-2018	Photovoltaic (PV) DC Arc-Fault Circuit Protection (with revisions through May 18, 2021)	Electrical
UL 1703-2002	Flat-Plate Photovoltaic Modules and Panels (with revisions through November 25, 2019)	Electrical
UL 1741-2021	Inverters, Converters, Controllers and Interconnection System Equipment for Use With Distributed Energy Resources (with revisions through October 18, 2022)	Electrical
UL 1995-2022	Heating and Cooling Equipment	Heat Pumps

UL 2523-2009	Solid Fuel-Fired Hydronic Heating Appliances, Water Heaters, and Boilers (with revisions through October 20, 2022)	Fuel Gas, Appliances
UL 2703-2015	Mounting Systems, Mounting Devices, Clamping/Retention Devices, and Ground Lugs for Use with Flat-Plate Photovoltaic Modules and Panels (with revisions through March 24, 2021)	Electrical
UL 2846-2014	Fire Test of Plastic Water Distribution Plumbing Pipe for Visible Flame and Smoke Characteristics (with revisions through January 14, 2021)	Piping
UL 2989-2022	Outline of Investigation for Tracer Wire	Tracer Wire
UL 3703-2015	Solar Trackers (with revisions through April 7, 2020)	Electrical
UL 3730-2014	Photovoltaic Junction Boxes (with revisions through June 11, 2021)	Electrical
UL 3741-2020	Photovoltaic Hazard Control	Electrical
UL 4703-2014	Photovoltaic Wire (with revisions through August 11, 2020)	Electrical
UL 6703-2014	Connectors for Use in Photovoltaic Systems (with revisions through June 10, 2021)	Electrical
UL 7103-2019	Outline of Investigation for Building-Integrated Photovoltaic Roof Coverings	Electrical
UL 8703-2011	Outline of Investigation for Concentrator Photovoltaic Mod- ules and Assemblies	Electrical
UL 60335-2-40-2022	Household and Similar Electrical Appliances-Safety-Part 2- 40: Particular Requirements for Electrical Heat Pumps, Air- Conditioners and Dehumidifiers	Heat Pumps
UL 61730-1-2022	Photovoltaic (PV) Module Safety Qualification - Part 1: Requirements for Construction	Electrical
UL 61730-2-2022	Photovoltaic (PV) Module Safety Qualification - Part 2: Requirements for Testing	Electrical
UL 62109-1-2014	Safety of Power Converters for Use in Photovoltaic Power Systems - Part 1: General Requirements (with revisions through April 30, 2019)	Electrical

SECTION 30. Table S 18.2 is hereby deleted and replaced by Table U 18.2 to read as follows:

~~TABLE S 18.2~~
STANDARDS, PUBLICATIONS, PRACTICES, AND GUIDES

~~DOCUMENT NUMBER~~	~~DOCUMENT TITLE~~	~~APPLICATION~~
~~CSA Z21.24-2015~~	~~Connectors for Gas Appliances (same as CSA 6.10)~~	~~Fuel Gas~~
~~IAPMO IGC 332-2017a~~	~~Hydronic Radiators~~	~~Hydronic Systems~~
~~IEEE 937-2007~~	~~Installation and Maintenance of Lead-Acid Batteries for Photovoltaic (PV) Systems~~	~~Installation and Maintenance, Photovoltaic~~
~~IEEE 1013-2019~~	~~Sizing Lead-Acid Batteries for Stand-Alone Photovoltaic (PV) Systems~~	~~Photovoltaic, Sizing~~
~~IEEE 1361-2014~~	~~Selecting, Charging, Testing, and Evaluating Lead-Acid Batteries Used in Stand-Alone Photovoltaic (PV) Systems~~	~~Testing, Evaluation~~
~~IEEE 1526-2003~~	~~Testing the Performance of Stand-Alone Photovoltaic Systems~~	~~Testing, Photovoltaic~~
~~IEEE 1547-2018~~	~~Interconnection and Interoperability of Distributed Energy Resources with Associated Electric Power Systems Interfaces~~	~~Connections, Photovoltaic~~
~~IEEE 1562-2007~~	~~Array and Battery Sizing in Stand-Alone Photovoltaic (PV) Systems~~	~~Array, Battery, Photo- voltaic~~
~~IEEE 1661-2019~~	~~Test and Evaluation of Lead-Acid Batteries Used in Photovoltaic (PV) Hybrid Power Systems~~	~~Testing and Evaluation, Photovoltaic~~
~~MSS SP-58-2018~~	~~Pipe Hangers and Supports – Materials, Design, Manufacture, Selection, Application, and Installation (including Amendment 1, dated October 17, 2019)~~	~~Fuel Gas~~
~~MSS SP-80-2019~~	~~Bronze Gate, Globe, Angle, and Check Valves~~	~~Valves~~
~~NFPA 54/Z223.1-2018~~	~~National Fuel Gas Code~~	~~Fuel Gas~~
~~NFPA 274-2018~~	~~Test Method to Evaluate Fire Performance Characteristics of Pipe Insulation~~	~~Pipe Insulation~~
~~NSF 14-2018~~	~~Plastic Piping System Components and Related Materials~~	~~Piping, Plastic~~
~~UL 174-2004~~	~~Household Electric Storage Tank Water Heaters (with revisions through December 3, 2019)~~	~~Appliances~~
~~UL 873-2007~~	~~Temperature-Indicating and -Regulating Equipment (with revisions through February 6, 2015)~~	~~Electrical~~
~~UL 916-2015~~	~~Energy Management Equipment~~	~~Electrical~~
~~UL 1453-2016~~	~~Electric Booster and Commercial Storage Tank Water Heaters (with revisions through May 18, 2018)~~	~~Appliances~~
~~UL 60730-1 2016~~	~~Automatic Electrical Controls – Part 1: General Requirements~~	~~Electrical~~

TABLE U 18.2
STANDARDS, PUBLICATIONS, PRACTICES, AND GUIDES

DOCUMENT NUMBER	DOCUMENT TITLE	APPLICATION
	ASHRAE	
ASHRAE 90.1-2019	Energy Standard for Buildings Except Low-Rise Residential Buildings	Energy
ASHRAE 93-2010 (RA2014)	Methods of Testing to Determine the Thermal Performance of Solar Collectors	Testing

ASHRAE 95-1981 (RA1987)	Methods of Testing to Determine the Thermal Performance of Solar Domestic Water Heating Systems	Testing
ASHRAE Handbook-2021	Fundamentals	Electrical
ASHRAE 96-1980 (RA1989)	Thermal Performance of Unglazed Flat-Plate Liquid-Type Solar Collectors	Testing, Collector
ASME		
ASME A13.1-2020	Scheme for the Identification of Piping Systems	Piping
ASME B16.21-2021	Nonmetallic Flat Gaskets for Pipe Flanges	Joints
ASME B16.34-2020	Valves - Flanged, Threaded, and Welding End	Valves
ASME B16.47-2020	Large Diameter Steel Flanges: NPS 26 Through NPS 60 Metric/Inch	Fittings
ASME BPVC Section IV-2021	Rules for Construction of Heating Boilers	Miscellaneous
ASME BPVC Section IX-2021	Welding, Brazing, and Fusing Qualifications	Certification
ASSE		
ASSE 1010-2021	Performance Requirements for Water Hammer Arresters	Water Supply Component
ASTM		
ASTM A377-2018 (R2022)e1	Standard Index of Specifications for Ductile Iron Pressure Pipe	Piping, Ferrous
ASTM A733-2016 (R2022)	Standard Specification for Welded and Seamless Carbon Steel and Austenitic Stainless Steel Pipe Nipples	Piping, Ferrous
ASTM D56-2022	Standard Test Method for Flash Point by Tag Closed Cup Tester	Testing
ASTM D93-2020	Standard Test Method for Flash Point by Pensky-Martens Closed Cup Tester	Testing
ASTM D635-2022	Standard Test Methods for Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position	Testing
ASTM D2235-2022	Standard Specification for Solvent Cement for Acrylonitrile-Butadiene-Styrene (ABS) Plastic Pipe and Fittings	Joints
ASTM D2672-2020^{e1}	Standard Specification for Joints for IPS PVC Pipe Using Solvent Cement	Joints
ASTM D2855-2020	Standard Practice for the Two-Step (Primer and Solvent Cement) Method of Joining Poly (Vinyl Chloride) (PVC) or Chlorinated Poly (Vinyl Chloride) (CPVC) Pipe and Piping Components with Tapered Sockets	Joints
ASTM D3278-2021	Standard Test Method for Flash Point of Liquids by Small Scale Closed-Cup Apparatus	Testing
ASTM E136-2022	Standard Test Method for Assessing Combustibility of Materials Using a Ver- tical Tube Furnace at 750°C	Furnace
ASTM F480-2014 (R2022)	Standard Specification for Thermoplastic Well Casing Pipe and Couplings Made in Standard Dimension Ratios (SDR), SCH 40 and SCH 80	Piping, Plastic
ASTM F891-2016	Standard Specification for Coextruded Poly(Vinyl Chloride) (PVC) Plastic Pipe with a Cellular Core	Piping, Plastic
AWS		
AWS B2.2/B2.2M-2016	Brazing Procedure and Performance Qualification	Certification
AWWA		
AWWA C507-2018	Ball Valves, 6 In. through 60 In. (150 mm Through 1,500 mm)	Valves
BS		

BS EN 12975-1-2006 (R2010)	Thermal Solar Systems and Components – Solar Collectors – Part 1: General Requirements	Collector
BS EN 12976-1-2021	Thermal Solar Systems and Components – Factory Made Systems – Part 1: General Requirements	Solar Thermal Systems
BS EN 12976-2-2019	Thermal Solar Systems and Components – Factory Made Systems – Part 2: Test Methods	Solar Thermal Systems
BS EN ISO 9806-2017	Solar Energy – Solar Thermal Collectors – Test Methods	Collector
BS EN ISO 9488-2022	Solar Energy – Vocabulary	Miscellaneous
CSA		
ANSI Z21.22-2015 (R2020)/CSA 4.4-2015 (R2020)	Relief Valves for Hot Water Supply Systems	Valves
CSA/ANSI Z21.24-2022/CSA 6.10-2022	Connectors for Gas Appliances	Fuel Gas
IAPMO		
IAPMO IGC 332-2017a	Hydronic Radiators	Hydronic Systems
IAPMO IS 34-2020	Installation Standard for Residential Solar Photovoltaic and Energy Storage Systems	Solar PV Systems
IAPMO/ANSI WE•Stand- 2020	Water Efficiency and Sanitation Standard for the Built Environment	Water Conservation
IEEE		
IEEE 937-2019	Installation and Maintenance of Lead-Acid Batteries for Photovoltaic (PV) Systems	Installation and Maintenance, Photovoltaic
IEEE 1013-2019	Sizing Lead-Acid Batteries for Stand-Alone Photovoltaic (PV) Systems	Photovoltaic, Sizing
IEEE 1361-2014	Selecting, Charging, Testing, and Evaluating Lead-Acid Batteries Used in Stand-Alone Photovoltaic (PV) Systems	Testing, Evaluation
IEEE 1526-2020	IEEE Recommended Practice for Testing the Performance of Stand-Alone Photovoltaic Systems	Testing, Photovoltaic
IEEE 1547-2018	Interconnection and Interoperability of Distributed Energy Resources with Associated Electric Power Systems Interfaces	Connections, Photovoltaic
IEEE 1562-2021	Sizing of Stand-Alone Photovoltaic (PV) Systems	Array, Battery, Photovoltaic
IEEE 1661-2019	Test and Evaluation of Lead-Acid Batteries Used in Photovoltaic (PV) Hybrid Power Systems	Testing and Evaluation, Photovoltaic
MSS		
MSS SP-58-2018	Pipe Hangers and Supports – Materials, Design, Manufacture, Selection, Application, and Installation (including Amendment 1, dated October 17, 2019)	Fuel Gas
MSS SP-80-2019	Bronze Gate, Globe, Angle, and Check Valves	Valves
NEMA		
ANSI/NEMA 250-2020	Enclosures for Electrical Equipment (1000 Volts Maximum)	Electrical
NFPA		
NFPA 13D-2022	Installation of Sprinkler Systems in One- and Two-Family Dwellings and Manufactured Homes	Fire Safety
NFPA 54/Z223.1-2021	National Fuel Gas Code	Fuel Gas
NFPA 70E-2021	Electrical Safety in the Workplace	Electrical Safety
NFPA 274-2018	Standard Test Method to Evaluate Fire Performance Characteristics of Pipe Insulation	Pipe Insulation

NSF		
NSF/ANSI 14-2022	Plastics Piping System Components and Related Materials	Piping, Plastic
UL		
UL 174-2004	Household Electric Storage Tank Water Heaters (with revisions through December 16, 2021)	Appliances
UL 916-2015	Energy Management Equipment (with revisions through October 21, 2021)	Electrical
UL 1453-2016	Electric Booster and Commercial Storage Tank Water Heaters (with revisions through May 18, 2018)	Appliances
UL 60730-1 2016	Automatic Electrical Controls – Part 1: General Requirements (with revisions through October 18, 2021)	Electrical

SECTION 31. Abbreviations in Table S 18.1 and Table S 18.2 are amended to read as follows:

ABBREVIATIONS IN TABLE ~~S~~U 18.1 AND TABLE ~~S~~U 18.2

~~**AHRI**~~ ~~Air-Conditioning, Heating, and Refrigeration Institute, 2311 Wilson Boulevard, Suite 400, Arlington, VA22201.~~

~~**ANSI**~~ ~~American National Standards Institute, Inc., 25 W. 43rd Street, 4th Floor, New York, NY 10036.~~

~~**ASHRAE**~~ ~~American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc., 1791 Tullie Circle, NE, Atlanta, GA 30329-2305.~~

~~**ASME**~~ ~~American Society of Mechanical Engineers, Two Park Avenue, New York, NY 10016-5990.~~

~~**ASSE**~~ ~~American Society of Sanitary Engineering, 18927 Hickory Creek Drive, Suite 220, Mokena, IL 60448.~~

~~**ASTM**~~ ~~ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.~~

~~**AWS**~~ ~~American Welding Society, 8669 NW 36 Street, # 130, Miami, FL 33166-6672.~~

~~**AWWA**~~ ~~American Water Works Association, 6666 W. Quincy Avenue, Denver, CO 80235.~~

~~**BSI (BS EN)**~~ ~~British Standard International, 389 Chiswick High Road, London, W4 4AL United Kingdom.~~

~~**CSA**~~ ~~Canadian Standards Association, 178 Rexdale Boulevard, Toronto, ON, Canada M9W 1R3.~~

~~**e1**~~ ~~An editorial change since the last revision or reapproval.~~

~~**IAPMO**~~ ~~International Association of Plumbing and Mechanical Officials, 4755 E. Philadelphia Street, Ontario, CA 91761.~~

~~**ICC**~~ ~~International Code Council, 500 New Jersey Avenue, NW, 6th Floor, Washington, DC 20001.~~

~~**IEEE** The Institute of Electrical and Electronics Engineers, Inc., 3 Park Avenue, 17th Floor, New York, NY 10016-5997.~~

~~**MSS** Manufacturers Standardization Society of the Valve and Fittings Industry, 127 Park Street NE, Vienna, VA 22180.~~

~~**NFPA** National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169-7471.~~

~~**NGWA** National Ground Water Association, 601 Dempsey Road, Westerville, OH 43081.~~

~~**NSF** NSF International, 789 N. Dixboro Road, Ann Arbor, MI 48105.~~

~~**SRCC** Solar Rating and Certification Corporation, 3060 Saturn Street, Suite 100, Brea, CA 92821.~~

~~**UL** Underwriters Laboratories, Inc., 333 Pfingsten Road, Northbrook, IL 60062.~~

AHRI Air-Conditioning, Heating, and Refrigeration Institute, 2311 Wilson Boulevard, Suite 400, Arlington, VA 22201.
ANSI American National Standards Institute, Inc., 25 W. 43rd Street, 4th Floor, New York, NY 10036.
ASHRAE American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc., 1791 Tullie Circle, NE, Atlanta, GA 30329-2305.
ASME American Society of Mechanical Engineers, Two Park Avenue, New York, NY 10016-5990.
ASSE American Society of Sanitary Engineering, 18927 Hickory Creek Drive, Suite 220, Mokena, IL 60448.
ASTM ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.
AWS American Welding Society, 8669 NW 36 Street, # 130, Miami, FL 33166-6672.
AWWA American Water Works Association, 6666 W. Quincy Avenue, Denver, CO 80235.
BSI (BS EN) British Standard International, 12950 Worldgate Drive, Suite 800 Herndon, VA 20170.
CSA Canadian Standards Association, 178 Rexdale Boulevard, Toronto, ON, Canada M9W 1R3.
IAPMO International Association of Plumbing and Mechanical Officials, 4755 E. Philadelphia Street, Ontario, CA 91761.
ICC International Code Council, 500 New Jersey Avenue, NW, 6th Floor, Washington, DC 20001.
IEEE The Institute of Electrical and Electronics Engineers, Inc., 445 and 501 Hoes Lane, Piscataway, NJ 08854.
IGSHPA International Ground Source Heat Pump Association, 312 S. 4th Street, Suite 100, Springfield, IL 62701.
ISO International Organization for Standardization, Chemin de Blandonnet 8, CP 401 - 1214 Vernier, Geneva, Switzerland.

MSS Manufacturers Standardization Society of the Valve and Fittings Industry, 127 Park Street NE, Vienna, VA 22180.
NEMA National Electrical Manufacturers Association, 1300 N. 17th Street, Suite 900, Rosslyn, VA 22209.
NFPA National Fire Protection Association, 1 Batterymarch Park, Quincy, MA 02169-7471.
NGWA National Ground Water Association, 601 Dempsey Road, Westerville, OH 43081.
NSF NSF International, 789 N. Dixboro Road, Ann Arbor, MI 48105.
SRCC Solar Rating and Certification Corporation, 3060 Saturn Street, Suite 100, Brea, CA 92821.
UL Underwriters Laboratories, Inc., 333 Pfingsten Road, Northbrook, IL 60062.

SECTION 32. The provisions of this ordinance contain various changes, modifications, and additions to the 2025 California Plumbing Code. Some of those changes are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the California Building Standards Code.

Pursuant to California Health and Safety Code sections 17958.5, 17958.7, and 18941.5, the Board of Supervisors hereby expressly finds that all of the changes and modifications to requirements contained in the building standards published in the California Building Standards Code that are contained in this ordinance are reasonably necessary because of local climatic, geological, or topographical conditions in the County of Los Angeles due to the potential for seismic activity in the region, topographical conditions that contribute to the spread of wild fires, and climatic conditions that impact air quality, water conservation and increased wild fire risk. In addition, the Board of Supervisors expressly finds that the modifications herein are substantially equivalent to modifications that were previously filed by the County of Los Angeles and were in effect as of September 30, 2025. Without limiting the

foregoing, the County makes additional findings herein:

PLUMBING CODE AMENDMENTS

CODE SECTION	CONDITION	EXPLANATION
Section 304.1	Geological Topographical Climatic	The County of Los Angeles is a densely populated area with buildings constructed within a region where water is scarce and domestic water service is impacted by immoderate and varying weather conditions, including periods of extended drought. The proposed measures will require buildings to be more water efficient and allow greater conservation of domestic water due to these local conditions.
Sections 601.2.3	Geological Topographical Climatic	The County of Los Angeles is a densely populated area with buildings constructed within a region where water is scarce and domestic water service is impacted by immoderate and varying weather conditions, including periods of extended drought. The proposed measures will require buildings to be more water efficient and allow greater conservation of domestic water due to these local conditions.
Section 721.3	Geological Topographical	To allow for the proper operation of existing Los Angeles County sewer infrastructure and establish consistency with Title 20 – Utilities – of the Los Angeles County Code, Division 2 (Sanitary Sewers and Industrial Waste) due to local soil conditions and topography.
Sections 728.1 to 728.6	Geological Topographical	To allow for the proper operation of existing Los Angeles County sewer infrastructure and establish consistency with Title 20 – Utilities – of the Los Angeles County Code, Division 2 (Sanitary Sewers and Industrial Waste) due to local soil conditions and topography.

Table H 101.8	Geological Topographical	To establish more restrictive requirements for protection of local groundwater due to local soil conditions and to provide protections for native, protected oak trees that are consistent with Title 22 – Zoning and Planning – of the Los Angeles County Code, Chapter 22.174 (Oak Tree Permits).
Table H 201.1(1)	Geological Topographical	To establish more restrictive requirements for protection of local groundwater due to local soil conditions, sewer capacity, and sewage treatment.
Table H 201.1(2)	Geological Topographical	To establish consistency with requirements of the County Health Department for sewer capacity and sewage treatment due to local soil conditions.
Table H 201.1(3)	Geological Topographical	To establish consistency with requirements of the County Health Department for sewer capacity and sewage treatment due to local soil conditions.
Table H 201.1(4)	Geological Topographical	To establish consistency with requirements of the County Health Department for sewer capacity and sewage treatment due to local soil conditions.
Section H 301.1	Geological Topographical	To establish more restrictive requirements for protection of local groundwater due to local soil conditions.
Section H 401.3	Geological Topographical	To establish more restrictive requirements for protection of local groundwater due to local soil conditions.
Section H 601.5	Geological Topographical	To establish more restrictive requirements for protection of local groundwater due to local soil conditions.
Section H 601.8	Geological Topographical	To establish more restrictive requirements for protection of local groundwater due to local soil conditions.
Section H 701.2	Geological Topographical	To establish more restrictive requirements for protection of local groundwater due to local soil conditions.

Section H 1001.1	Geological	To establish more restrictive requirements to prevent earth movement based on local soil and seismic conditions.
Section H 1101.6	Geological	To establish more restrictive requirements to prevent earth movement based on local soil and seismic conditions.
Appendix T	Climatic and Topographical	To establish requirements for conservation and disposal of swimming pool water to minimize evaporation and topographical impacts.
Appendix U	Climatic	To establish requirements for solar thermal energy systems based on provisions in the Uniform Solar, Hydronics and Geothermal Code (USHGC), which is developed by the International Association of Plumbing and Mechanical Officials. The County of Los Angeles is a densely populated area, with elevated levels of greenhouse gas emissions. Standards to regulate the installation of solar thermal energy systems will facilitate safe and efficient installations of these systems to improve local air quality, thereby improving the health of the County's residents, businesses and visitors.

SECTION 33. This ordinance shall become operative on January 1, 2026.

[TITLE28PLUMBCODE2025CSCC]

ANALYSIS

This ordinance repeals those provisions of Title 29 – Mechanical Code – of the Los Angeles County Code that incorporated by reference portions of the 2022 California Mechanical Code and replaces them with provisions incorporating by reference portions of the 2025 California Mechanical Code, published by the California Building Standards Commission. Unless deleted or modified herein, the previously enacted provisions of Title 29 continue in effect.

State law requires that the County's Mechanical Code impose the same requirements as are contained in the building standards published in the most recent edition of the California Mechanical Code except for changes or modifications deemed reasonably necessary by the County because of local climatic, geological, or topographical conditions. The changes and modifications to the requirements contained in the building standards published in the 2025 California Mechanical Code that are contained in this ordinance are based upon express findings, contained in the ordinance, that such changes are reasonably necessary due to local climatic, geological, or topographical conditions. These changes and modifications are substantially equivalent to changes and modifications previously filed by the County of Los Angeles, which were in effect as of September 30, 2025.

This ordinance also makes certain modifications to the administrative provisions of Title 29.

DAWYN R. HARRISON
County Counsel

By 

Margaret F. Ambrose
Principal Deputy County Counsel
Public Works Division

MFA:bc

Requested: 8/5/25
Revised: 10/8/25

HOA.105518232.11

ORDINANCE NO. _____

An ordinance amending Title 29 – Mechanical Code – of the Los Angeles County Code by adopting and incorporating by reference portions of the 2025 California Mechanical Code with certain changes and modifications and making other revisions thereto.

The Board of Supervisors of the County of Los Angeles ordains as follows:

SECTION 1. Sections 119.1.2.0 through 119.1.14.0 of Chapter 1, Chapters 2 through 17, and Appendices B, C, and D, of this Title 29 of the Los Angeles County Code, which incorporated by reference and modified portions of the 2022 California Mechanical Code, are hereby repealed.

SECTION 2. Section 100 is hereby amended to read as follows:

100 ADOPTION AND INCORPORATION BY REFERENCE.

Except as hereinafter changed or modified, Sections 1.2.0 through 1.14.0 of Chapter 1, Division I, of that certain Mechanical Code known and designated as the ~~2022~~2025 California Mechanical Code, as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 29 of the Los Angeles County Code, as if fully set forth below, and shall be known as Sections 119.1.2.0 through 119.1.14.0, respectively, of Chapter 1 of Title 29 of the Los Angeles County Code.

Except as hereinafter changed or modified, Chapters 2 through 17, and Appendices B, C, and D, of that certain Mechanical Code known and designated as the ~~2022~~2025 California Mechanical Code, as published by the California Building

Standards Commission, are adopted and incorporated by reference into this Title 29 of the Los Angeles County Code as if fully set forth below, and shall be known as Chapters 2 through 17, and Appendices B, C, and D, of Title 29 of the Los Angeles County Code.

A copy of the ~~2022~~2025 California Mechanical Code shall be at all times maintained by the Chief Mechanical Inspector for use and examination by the public.

SECTION 3. Section 204.0 is hereby amended to read as follows:

204.0 – B –

. . .

Building Code. The ~~building code that is adopted by this jurisdiction. **[HCD1, HCD 2, OSHPD 1, 1R, 2, 3, 4, 5, 6 & SFM]**~~ "Building Code" shall mean the ~~California Building Code, Title 24, Part 2~~most recent edition of Title 26 of the Los Angeles County Code.

. . .

SECTION 4. Section 207.0 is hereby amended to read as follows:

207.0 – E –

. . .

Electrical Code. The "Electrical Code" shall mean the ~~National Electrical Code promulgated by the National Fire Protection Association, as adopted by this jurisdiction. **[HCD 1 & HCD 2]** Whenever the term "Electrical Code" is used in this code, it shall mean the California Electrical Code, Title 24, Part 3~~most recent edition of Title 27 of the Los Angeles County Code.

. . .

SECTION 5. Section 218.0 is hereby amended to read as follows:

218.0 – P –

. . .

Plumbing Code. The "Plumbing Code" shall mean the ~~Uniform Plumbing Code (UPC) promulgated by the International Association of Plumbing and Mechanical Officials (IAPMO), as adopted by this jurisdiction. **[HCD 1 & HCD 2]** Whenever the term "Plumbing Code" is used in this code, it shall mean the California Plumbing Code, Title 24, Part 5~~most recent edition of Title 28 of the Los Angeles County Code.

. . .

SECTION 6. Section 302.2 is hereby amended to read as follows:

302.2 ALTERNATE MATERIALS AND METHODS OF CONSTRUCTION ~~EQUIVALENCY~~AND MODIFICATIONS.

302.2.1 Alternate Materials and Methods of Construction.

Nothing in this ~~c~~Code is intended to prevent the use of systems, methods, or devices of equivalent or superior quality, strength, fire resistance, effectiveness, durability, and safety over those prescribed by this ~~c~~Code. Technical documentation shall be submitted to the Authority Having Jurisdiction to demonstrate equivalency. The Authority Having Jurisdiction shall have the authority to approve or disapprove the system, method, or device for the intended purpose on a case-by-case basis.

. . .

302.2.1.1 Testing.

. . .

302.2.1.1.1 Tests.

. . .

302.2.1.~~2~~1.2 Requests by the Authority Having Jurisdiction.

. . .

302.2.1.2 Application. Application for the use of an alternate material or method of construction shall be submitted in writing to the Chief Mechanical Inspector together with a filing fee of $317.26. When staff review exceeds two hours, an additional fee of $158.63 per hour shall be charged for each hour, or fraction thereof, in excess of two hours.

302.2.2 Modifications. Whenever there are practical difficulties involved in carrying out the provisions of this Code, the Authority Having Jurisdiction shall have the authority to grant modifications on a case-by-case basis, upon application of the owner or the owner's authorized agent, provided that the Authority Having Jurisdiction shall first find that a special individual reason makes the strict letter of this Code impractical, and that the modification is in conformity with the spirit and purpose of this Code, and that such modification does not lessen any health, fire-protection, or other life-safety-related requirements. The details of any action granting modifications shall be recorded and entered in the files of the Authority Having Jurisdiction. The application for approval of a modification shall be in accordance with Section 302.2.1.2.

SECTION 7. Section 501.1 is hereby amended to read as follows:

501.1 Applicability. This ~~c~~Chapter includes requirements for environmental air ducts, product-conveying systems, and commercial hoods and kitchen ventilation. Part I addresses environmental air ducts and product-conveying systems. Part II addresses commercial hoods and kitchen ventilation. Ventilation systems installed to control occupational health hazards shall comply with the requirements of the County Health Officer as defined in Title 11 of the Los Angeles County Code.

SECTION 8. Section 510.1.6 is hereby amended to read as follows:

510.1.6 Bracing and Supports. Duct bracing and supports shall be of noncombustible material, securely attached to the structure, not less than the gauge required for grease-duct construction, and designed to carry gravity and lateral loads within the stress limitations of the ~~b~~Building ~~c~~Code. Bolts, screws, rivets, and other mechanical fasteners shall not penetrate duct walls.

SECTION 9. Section 603.7.1.1 is hereby amended to read as follows:

603.7.1.1 Rectangular Ducts. Supports for rectangular ducts shall be installed on two opposite sides of each duct and shall be welded, riveted, bolted, or metal screwed to each side of the duct at intervals specified.

SECTION 10. Section 1114.4 is hereby added to read as follows:

1114.4 Approvals Required. The method of discharge of systems containing other than group A1 refrigerants shall comply with the pertinent requirements of Title 32 (Fire Code) and Division 2 of Title 20 (Sanitary Sewer and Industrial Waste) of the Los Angeles County Code.

SECTION 11. The provisions of this ordinance contain various changes, modifications, and additions to the 2025 Edition of the California Mechanical Code. Some of these changes are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the California Mechanical Code.

Pursuant to California Health and Safety Code sections 17958.5, 17958.7, and 18941.5, the Board of Supervisors hereby expressly finds that all of the changes and modifications to requirements contained in the building standards published in the California Building Standards Code contained in this ordinance are reasonably necessary because of local climatic, geological, or topographical conditions in the County of Los Angeles due to the potential for seismic activity in the region, topographical conditions that contribute to the spread of wild fires, and climatic conditions that impact air quality and increase the risk of wild fires. In addition, the Board of Supervisors expressly finds that the modifications herein are substantially equivalent to modifications that were previously filed by the County of Los Angeles and were in effect as of September 30, 2025. Without limiting the foregoing, the County makes additional findings herein:

TABLE

MECHANICAL CODE AMENDMENTS		
CODE SECTION	**CONDITION**	**EXPLANATION**
501.1	Climatic	Additional Health Department requirements are necessary due to local air quality concerns.
510.1.6	Geological	High geologic activities, such as seismic events, in the Southern California area necessitate this local amendment for bracing and support.
603.7.1.1	Geological	High geologic activities, such as seismic events, in the Southern California area necessitate this local amendment for bracing and support.
1114.4	Geological	High geologic activities, such as seismic events, in the Southern California area necessitate this local amendment to reduce damage and potential for toxic refrigerant release during a seismic event caused by shifting equipment and to minimize impacts to the sewer system in such an event.

SECTION 12. This ordinance shall become operative on January 1, 2026.

[TITLE29MECHCODE2025CSCC]

ANALYSIS

This ordinance repeals those provisions of Title 30 – Residential Code – of the Los Angeles County Code that incorporated by reference portions of the 2022 Edition of the California Residential Code, and the ordinance replaces them with provisions incorporating by reference portions of the 2025 California Residential Code, published by the California Building Standards Commission, with certain changes and modifications.

State law requires that the County adopt ordinances that contain the same requirements as are contained in the building standards published in the California Residential Code. State law allows the County to change or modify these requirements in compliance with section 17958 of the California Health and Safety Code.

The changes and modifications to requirements contained in the building standards published in the 2025 California Residential Code that are contained in this ordinance are based upon express findings, contained in the ordinance, that such changes are reasonably necessary due to local climatic, geological, or topographical conditions. These changes and modifications are substantially equivalent to changes or modifications previously filed with the California Building Standards Commission by the County of Los Angeles, which were in effect as of September 30, 2025, or that relate to home hardening, in compliance with recent changes to section 17958 of the California Health and Safety Code.

DAWYN R. HARRISON
County Counsel

By
MARGARET F. AMBROSE
Principal Deputy County Counsel

MFA/CBS:bc

Requested: 08/04/25
Revised: 10/22/25

HOA.105522003.7

ORDINANCE NO. _____

An ordinance amending Title 30 – Residential Code – of the Los Angeles County Code, by adopting and incorporating by reference the 2025 California Residential Code, with certain changes and modifications.

The Board of Supervisors of the County of Los Angeles ordains as follows:

SECTION 1. Chapters 2 through 10, Chapter 44, and Appendices AH, AQ, AS, and AZ, of Title 30 of the Los Angeles County Code, which incorporate by reference, and modify, portions of the 2022 California Residential Code, are hereby repealed.

SECTION 2. Chapter 1 is hereby amended to read as follows:

R100 ADOPTION AND INCORPORATION BY REFERENCE

Except as hereinafter changed or modified, Sections 102 through 119 of Chapter 1, Section 1206 of Chapter 12, and Chapters 67, 68, 69, 98, 99, and Appendix J, of Title 26 of the Los Angeles County Code are adopted and incorporated by reference into this Title 30 as if fully set forth below, and shall be known as Sections 102 through 119 of Chapter 1, Section 1206 of Chapter 12, and Chapters 67, 68, 69, 98, 99, and Appendix J, of Title 30 of the Los Angeles County Code.

Except as hereinafter changed or modified, Chapters 2 through 10, Chapter 44, and Appendices ~~AH, AQ, AS, and AZ~~BB, BF, BJ, and CJ, of that certain code known and designated as the ~~2022~~2025 California Residential Code, as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 30 as if fully set forth below, and shall be known as Chapters 2 through 10,

Chapter 44, and Appendices ~~AH, AQ, AS, and AZ~~BB, BF, BJ, and CJ, of Title 30 of the Los Angeles County Code. A copy of the ~~2022~~2025 California Residential Code shall be at all times maintained by the Building Official for use and examination by the public.

R101 TITLE, PURPOSE, AND INTENT

. . .

R101.3 Scope.

The provisions of this Code shall apply to the construction, alteration, movement, enlargement, replacement, repair, equipment, use and occupancy, location, removal, demolition, and grading of detached one- and two-family dwellings and townhouses not more than three stories above grade plane in height with a separate means of egress and their accessory structures that are located within the unincorporated territory of the County of Los Angeles and to such work or use by the County of Los Angeles in any incorporated city.

Exceptions:

. . .

2. Owner-occupied lodging houses with five or fewer guestrooms shall be permitted to be constructed in accordance with the Los Angeles County Residential Code for one- and two-family dwellings when equipped with a fire sprinkler system in accordance with Section ~~R313~~R309.

. . .

SECTION 3. Section R301.1.3.2 is hereby amended to read as follows:

R301.1.3.2 Woodframe structures ~~greater than two-stories~~.

The ~~b~~Building ~~o~~Official shall require construction documents to be approved and stamped by a California licensed architect or engineer for all dwellings of woodframe construction more than two stories and basement in height located in Seismic Design Category A, B, or C. Notwithstanding other sections of law, the law establishing these provisions is found in Business and Professions Code Sections 5537 and 6737.1.

The Building Official shall require construction documents to be approved and stamped by a California licensed architect or engineer for all structural aspects of dwellings of woodframe construction more than one story in height or with a basement located in Seismic Design Category D_0, D_1, or D_2 or E.

SECTION 4. Section R301.1.5 is hereby added to read as follows:

R301.1.5 Seismic design provisions for buildings constructed on or into slopes steeper than one unit vertical in three units horizontal (33.3 percent slope).

The design and construction of new buildings and additions to existing buildings when constructed on or into slopes steeper than one unit vertical in three units horizontal (33.3 percent slope) shall comply with Section 1613.6 of the Los Angeles County Building Code.

SECTION 5. Section R301.2 is hereby amended to read as follows:

R301.2 Climatic and geographic design criteria.

Buildings shall be constructed in accordance with the provisions of this ~~c~~Code as limited by the provisions of this ~~s~~Section. ~~Additional criteria shall be established by the local jurisdiction and set forth~~Consult with the Building Official regarding additional criteria in Table R301.2.

SECTION 6. Section R301.2.2.6 is hereby amended to read as follows:

R301.2.2.6 Irregular buildings.

. . .

1. **Shear wall or braced wall offsets out of plane.** Conditions where exterior shear wall lines or braced wall panels are not in one plane vertically from the foundation to the uppermost story in which they are required.

~~**Exception:** For wood light-frame construction, floors with cantilevers or setbacks not exceeding four times the nominal depth of the wood floor joists are permitted to support braced wall panels that are out of plane with braced wall panels below provided that all of the following are satisfied:~~

~~1. Floor joists are nominal 2 inches by 10 inches (51 mm by 254 mm) or larger and spaced not more than 16 inches (406 mm) on center.~~

~~2. The ratio of the back span to the cantilever is not less than 2 to 1.~~

~~3. Floor joists at ends of braced wall panels are doubled.~~

~~4. For wood-frame construction, a continuous rim joist is connected to ends of cantilever joists. Where spliced, the rim joists shall be spliced using a galvanized~~

~~metal tie not less than 0.058 inch (1.5 mm) (16 gage) and 11/2 inches (38 mm) wide fastened with six 16d nails on each side of the splice; or a block of the same size as the rim joist and of sufficient length to fit securely between the joist space at which the splice occurs, fastened with eight 16d nails on each side of the splice.~~

~~5. Gravity loads carried at the end of cantilevered joists are limited to uniform wall and roof loads and the reactions from headers having a span of 8 feet (2438 mm) or less.~~

2. **Lateral support of roofs and floors.** Conditions where a section of floor or roof is not laterally supported by shear walls or braced wall lines on all edges.

Exception: Portions of floors that do not support shear walls, braced wall panels above, or roofs shall be permitted to extend not more than 6 feet (1829 mm) beyond a shear wall or braced wall line.

3. **Shear wall or braced wall offsets in plane.** Conditions where the end of a braced wall panel occurs over an opening in the wall below~~ and extends more than 1 foot (305 mm) horizontally past the edge of the opening. This provision is applicable to shear walls and braced wall panels offset in plane and to braced wall panels offset out of plane in accordance with the exception to Item 1~~.

~~**Exception:** For wood light-frame wall construction, one end of a braced wall panel shall be permitted to extend more than 1 foot (305 mm) over an opening not more than 8 feet (2438 mm) in width in the wall below provided that the opening includes a header in accordance with all of the following:~~

~~1. The building width, loading condition and framing member species limitations of Table R602.7(1) shall apply.~~

~~2. The header is composed of:~~

~~2.1 Not less than one 2x12 or two 2x10 for an opening not more than 4 feet (1219 mm) wide.~~

~~2.2. Not less than two 2x12 or three 2x10 for an opening not more than 6 feet (1829 mm) in width.~~

~~2.3. Not less than three 2x12 or four 2x10 for an opening not more than 8 feet (2438 mm) in width.~~

~~3. The entire length of the braced wall panel does not occur over an opening in the wall below.~~

4. **Floor and roof opening.** Conditions where an opening in a floor or roof exceeds the lesser of 12 feet (3658 mm) or 50 percent of the least floor or roof dimension.

5. **Floor level offset.** Conditions where portions of a floor level are vertically offset.

~~**Exceptions:**~~

~~1. Framing supported directly by continuous foundations at the perimeter of the building.~~

~~2. For wood light-frame construction, floors shall be permitted to be vertically offset where the floor framing is lapped or tied together as required by section R502.6.1.~~

. . .

SECTION 7. Section R301.2.2.11 is hereby added to read as follows:

R301.2.2.11 Anchorage of mechanical, electrical, or plumbing components and equipment.

Mechanical, electrical, or plumbing components and equipment shall be anchored to the structure. Anchorage of the components and equipment shall be designed to resist loads in accordance with the Los Angeles County Building Code and ASCE 7, except where the component is positively attached to the structure and flexible connections are provided between the component and associated ductwork, piping, and conduit; and either:

1. The component weighs 400 pounds (1,780 N) or less and has a center of mass located 4 feet (1.22 m) or less above the supporting structure; or

2. The component weighs 20 pounds (89N) or less or, in the case of a distributed system, 5 pounds per foot (73 N/m) or less.

SECTION 8. Table R302.1(2) is hereby amended to read as follows:

TABLE R302.1(2)—
EXTERIOR WALLS—DWELLINGS, TOWNHOUSES *AND ACCESSORY BUILDINGS WITH AUTOMATIC RESIDENTIAL FIRE SPRINKLER PROTECTION*

EXTERIOR WALL ELEMENT		MINIMUM FIRE-RESISTANCE RATING	MINIMUM FIRE SEPARATION DISTANCE
Walls	Fire-resistance rated	1 hour—tested in accordance with ASTM E119, UL 263 or Section 703.2.2 of the *California Building Code* with exposure from the outside	0 feet
	Not fire-resistance rated	0 hours	3 feet[a]
Projections	Not allowed	NA	< 2 feet
	Fire-resistance rated	1 hour on the underside, or heavy timber, or fire-retardant-treated wood[b, c]	2 feet[a]
	Not fire-resistance rated	0 hours	3 feet
Openings in walls	Not allowed	NA	< 3 feet
	Unlimited	0 hours	3 feet[a]
Penetrations	All	Comply with Section R302.4	< 3 feet
		None required	3 feet[a]

For SI: 1 foot = 304.8 mm

NA = Not Applicable.

a. Reserved.~~For residential subdivisions where all dwellings and townhouses are equipped throughout with an automatic sprinkler system installed in accordance with Section R309, the fire separation distance for exterior walls not fire-resistance rated and for fire-resistance-rated projections shall be permitted to be reduced to 0 feet, and unlimited unprotected openings and penetrations shall be permitted, where the adjoining lot provides an open setback yard that is 6 feet or more in width on the opposite side of the property line.~~

. . .

SECTION 9. Section R337.1 is hereby added to read as follows:

R337.1 Modifications to the California Wildland-Urban Interface Code.

Chapter 5 of the California Wildland-Urban Interface Code shall be modified as indicated in Sections 337.1.1 through 337.1.7 and shall apply to all buildings and structures as provided in this section.

SECTION 10. Section R337.1.1 is hereby added to read as follows:

337.1.1 California Wildland-Urban Interface Code, Section 501.1.

Modify the California Wildland-Urban Interface Code Section 501.1 to read as follows:

501.1 Scope and Application.

New b~~B~~uildings and structures in a wildland-urban interface area shall be constructed in accordance with the ~~California Building~~ Residential Code and this Code. Additions, alterations, or repairs made to existing buildings erected, constructed, or moved within a Fire Hazard Severity Zone or Wildland-Urban Interface area shall be constructed in accordance with the Residential Code and this code. New buildings for which an application for a building permit is submitted on or after July 1, 2008, and any additions, alterations, or repairs made to existing buildings for which an application for a building permit is submitted on or after January 1, 2026, located in any Fire Hazard Severity Zone or Wildland-Urban Interface area shall comply with all sections of the Residential Code and this Code.

Exceptions:

1. Group U accessory structures not exceeding 120 square feet (11m^2) in floor area where located not less than 50 feet (15 240 mm) from applicable buildings.
2. Group U agricultural buildings not less than 50 feet (15 240 mm) from applicable buildings.

501.1.1 Alternates for materials, design, tests, and methods of construction.

The Building Official is permitted to modify the provisions of this Chapter for site-specific conditions in accordance with Chapter 1, Section 104.2.2 of the California Wildland-Urban Interface Code.

SECTION 11. Section R337.1.2 is hereby added to read as follows:

337.1.2 California Wildland-Urban Interface Code, Section 503.1

Modify the California Wildland-Urban Interface Code Section 503.1 to read as follows:

503.1 General.

Buildings and structures hereafter constructed, modified or relocated into or within wildland-urban interface areas shall meet the construction requirements in accordance with Chapter 5. Materials required to be ignition-resistant building materials shall comply with the requirements of Section 503.2.

Exceptions:

1. New accessory buildings and miscellaneous structures complying with Section 504.11.
2. Reserved.~~Additions to and remodels of buildings originally constructed prior to July 1, 2008.~~
3. Group C occupancy special buildings conforming to the limitations specified in Section 450.4.1 of the ~~California~~ Building Code.

SECTION 12. Section R337.1.3 is hereby added to read as follows:

337.1.3 California Wildland-Urban Interface Code, Section 503.2.3

Modify the California Wildland-Urban Interface Code Section 503.2.3 to read as follows:

503.2.3 Reserved.~~Fire-retardant-treated wood roof coverings.~~

~~Roof assemblies containing fire-retardant-treated wood shingles and shakes shall comply with the requirements of Section 1505.6 of the California Building Code and shall be classified as Class A roof assemblies as required in Section 1505.2 of the California Building Code.~~

SECTION 13. Section R337.1.4 is hereby added to read as follows:

337.1.4 California Wildland-Urban Interface Code, Section 503.3.1

Modify the California Wildland-Urban Interface Code Section 503.3.1 to read as follows:

503.3.1 Qualification by testing.

Material and material assemblies tested in accordance with the requirements of Section 503 shall be accepted for use when the results and conditions of those tests are met. Product evaluation testing of material and material assemblies shall be approved or listed by the State Fire Marshal, the Building Official, or identified in a current report issued by an approved agency.

SECTION 14. Section R337.1.5 is hereby added to read as follows:

337.1.5 California Wildland-Urban Interface Code, Section 503.3.4

Modify the California Wildland-Urban Interface Code Section 503.3.4 to read as follows:

503.3.4 Reserved.~~Fire-retardant-treated wood shingles and shakes.~~

~~Fire-retardant-treated wood shingles and shakes shall be approved and listed by the State Fire Marshal in accordance with Section 208(c), Title 19 California Code of Regulations.~~

SECTION 15. Section R337.1.6 is hereby added to read as follows:

337.1.6 California Wildland-Urban Interface Code, Section 504.2.1

Modify the California Wildland-Urban Interface Code Section 504.2.1 to read as follows:

504.2.1 Roof covering voids.

Where there is a void under the roof covering it shall comply with Section 504.2.1.1 or 504.2.1.2. Roof coverings shall be Class A as specified in the Building Code. Wood shingles and wood shakes are prohibited in any Fire Hazard Severity Zone regardless of classification.

SECTION 16. Section R337.1.7 is hereby added to read as follows:

337.1.7 California Wildland-Urban Interface Code, Section 504.5.2

Modify the California Wildland-Urban Interface Code Section 504.5.2 to read as follows:

504.5.2 Exterior wall coverings.

Exterior wall coverings shall comply with one or more of the following requirements:

1. Noncombustible material.
2. Ignition-resistant building material labeled for exterior use.
3. Fire-retardant treated wood labeled for exterior use and complying with the requirements of Section 2303.2 of the ~~California~~ Building Code.
4. Reserved.~~Fire-retardant-treated wood shingles and shakes which have been qualified in accordance with Section 1505.6 of the California Building Code for use as "Class B" roof covering shall be an acceptable alternative wall covering material where installed over solid sheathing.~~

Exception:

Exterior wall coverings which are a component of an approved wall assembly complying with Section 504.5.

SECTION 17. Section R401.1 is hereby amended to read as follows:

R401.1 Application.

. . .

Wood foundations in Seismic Design Category D_0, D_1, or D_2 shall ~~be designed in accordance with accepted engineering practice~~not be permitted.

Exception: In non-occupied, single-story, detached storage sheds and similar uses other than carport or garage, provided the gross floor area does not exceed 200 square feet, the plate height does not exceed 12 feet in height above the grade plane at any point, and the maximum roof projection does not exceed 24 inches.

SECTION 18. Section R403.1.2 is hereby amended to read as follows:

R403.1.2 Continuous footing in seismic design categories D_0, D_1 and D_2.

Exterior walls and required interior braced wall panels of buildings located in Seismic Design Categories D_0, D_1 and D_2 shall be supported by continuous solid or fully grouted masonry or concrete footings ~~in accordance with Table R403.1.2. Other footing materials or systems shall be designed in accordance with accepted engineering practice.~~

SECTION 19. Section R403.1.3.6 is hereby amended to read as follows:

R403.1.3.6 Isolated concrete footings.

In detached one- and two-family dwellings located in Seismic Design Category A, B, or C that are three stories or less in height and constructed with stud bearing walls, isolated plain concrete footings supporting columns or pedestals are permitted.

SECTION 20. Section R403.1.5 is hereby amended to read as follows:

R403.1.5 Slope.

The top surface of footings shall be level. The bottom surface of footings shall not have a slope exceeding 1 unit vertical in 10 units horizontal (10-percent slope). Footings shall be stepped where it is necessary to change the elevation of the top surface of the footings or where the slope of the bottom surface of the footings will exceed one unit vertical in 10 units horizontal (10-percent slope).

For structures located in Seismic Design Category D_0, D_1, or D_2, stepped footings shall be reinforced with two No. 4 reinforcing bars. Two bars shall be located at the top and bottom of the footings as shown in Figure R403.1.5.

SECTION 21. Figure R403.1.5 is hereby added to read as follows:

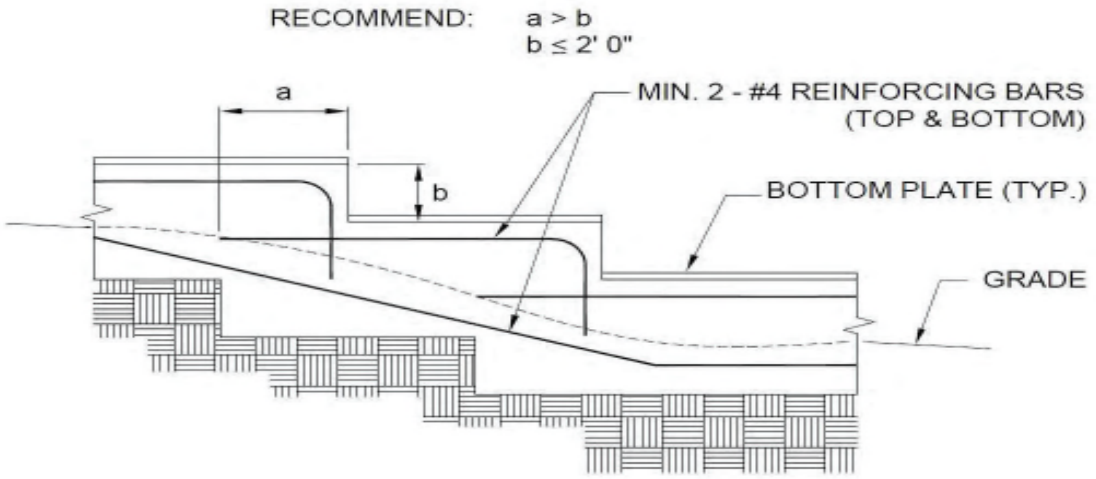


FIGURE R403.1.5
STEPPED FOOTING

SECTION 22. Section R404.2 is hereby amended to read as follows:

R404.2 Wood foundation walls.

Wood foundation walls shall be constructed in accordance with the provisions of Sections R404.2.1 through R404.2.6 and with the details shown in Figures R403.1(2) and R403.1(3). Wood foundation walls shall not be used for structures located in Seismic Design Category D_0, D_1, or D_2.

SECTION 23. Section R501.2 is hereby amended to read as follows:

R501.2 Requirements.


Floor construction shall be capable of accommodating all loads in accordance with Section R301 and of transmitting the resulting loads to the supporting structural elements. Mechanical or plumbing fixtures and equipment shall be attached or anchored to the structure in accordance with Section R301.2.2.11.

SECTION 24. Section R503.2.4 is hereby added to read as follows:

R503.2.4 Openings in horizontal diaphragms.

Openings in horizontal diaphragms with a dimension perpendicular to the joist that is greater than 4 feet (1.2 m) shall be constructed in accordance with Figure R503.2.4.

SECTION 25. Figure R503.2.4 is hereby added to read as follows:

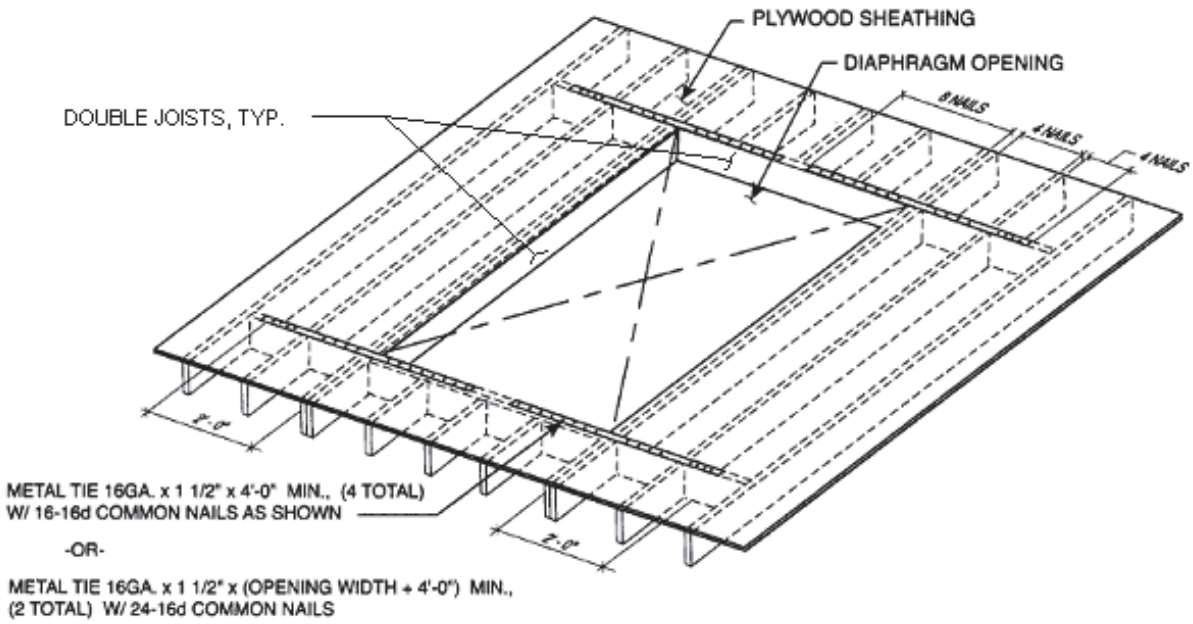

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

FIGURE R503.2.4

OPENING IN HORIZONTAL DIAPHRAGMS

Notes:

a. Blockings shall be provided beyond headers.

b. Metal ties not less than 0.058 inch [1.47 mm (16 galvanized gage)] by 1.5 inches (38 mm) wide with eight 16d common nails on each side of the header-joist intersection. The metal ties shall have a minimum yield of 33,000 psi (227 MPa).

c. Openings in diaphragms shall be further limited in accordance with Section R301.2.2.6.

SECTION 26. Table R602.3(1) is hereby amended to read as follows:

TABLE R602.3(1) -- FASTENING SCHEDULE

. . .

a. Nails are smooth-common, box or deformed shanks except where otherwise stated. Nails used for framing and sheathing connections are carbon steel and shall have minimum average bending yield strengths as shown: 80 ksi for shank diameter of 0.192 inch (20d common nail), 90 ksi for shank diameters larger than 0.142 inch but not larger than 0.177 inch, and 100 ksi for shank diameters of 0.142 inch or less. Connections using nails ~~and staples~~ of other materials, such as stainless steel, shall be designed by accepted engineering practice or approved under Section ~~R104.2.2~~104.2.8. Use of staples in roof, floor, subfloor, and braced wall panels shall be prohibited in Seismic Design Category D_0, D_1, or D_2.

. . .

SECTION 27. Table R602.3(2) is hereby amended to read as follows:

TABLE R602.3(2)

ALTERNATE ATTACHMENTS TO TABLE R602.3(1)

. . .

b. Staples shall have a minimum crown width of 7/16-inch except as noted. Use of staples in roof, floor, subfloor, and braced wall panels shall be prohibited in Seismic Design Category D_0, D_1, or D_2.

. . .

SECTION 28. Section R602.3.2 is hereby amended to read as follows:

R602.3.2 Top plate.

. . .

Exception: In other than Seismic Design Category D_0, D_1, or D_2, a~~A~~ single top plate used as an alternative to a double top plate shall comply with the following:

. . .

SECTION 29. Table R602.3.2 is hereby amended to read as follows:

TABLE R602.3.2
SINGLE TOP-PLATE SPLICE CONNECTION DETAILS

CONDITION	TOP-PLATE SPLICE LOCATION			
	Corners and intersecting walls		Butt joints in straight walls	
	Splice plate size	Minimum nails each side of joint	Splice plate size	Minimum nails each side of joint
~~Structures in SDC A, C, and in S~~ ~~D_0, D_1~~ and ~~D_2~~ with braced wall line spacing less than 25 feet	3" × 6" × 0.036" galvanized steel plate or equivalent	~~(6)~~ 8d box (2½" × 0.113") nails	3" × 12" × 0.036" galvanized steel plate or equivalent	~~(12)~~ 8d box (2½" × 0.113") nails
~~Structures in SDC D_0, D_1 and D_2 with braced wall line spacing greater than or equal to 25 feet~~	~~3" × 8" by 0.036" galvanized steel plate or equivalent~~	~~(8) 8d box (2½" × 0.113") nails~~	~~6" × 16" × 0.036" galvanized steel plate or equivalent~~	~~(16) 8d box (2½" × 0.113") nails~~

For SI: 1 inch = 25.4 mm, 1 psf = 47.8 mm

SECTION 30. Section R602.10.2.3 is hereby amended to read as follows:

R602.10.2.3 Minimum number of braced wall panels.



Braced wall lines with a length of 16 feet (4877 mm) or less shall have not less than two braced wall panels of any length or one braced wall panel equal to 48 inches (1219 mm) or more. Braced wall lines greater than 16 feet (4877 mm) shall have not less than two braced wall panels. In Seismic Design Category D_0, D_1, or D_2, no braced wall panel shall have a contributing length less than 48 inches in length or as required in Section R602.10.3, whichever is greater.

SECTION 31. Table R602.10.3(3) is hereby amended to read as follows:

TABLE R602.10.3(3)


BRACING REQUIREMENTS BASED ON SEISMIC DESIGN CATEGORY

TABLE R602.10.3(3)
BRACING REQUIREMENTS BASED ON SEISMIC DESIGN CATEGORY

• WALL HEIGHT = 10 FEET • 10 PSF FLOOR DEAD LOAD • 15 PSF ROOF/CEILING DEAD LOAD • BRACED WALL LINE SPACING ≤ 25 FEET			MINIMUM TOTAL LENGTH (FEET) OF BRACED WALL PANELS REQUIRED ALONG EACH BRACED WALL LINE[a, g]				
Seismic Design Category[b]	Story Location	Braced Wall Line Length (feet)[c]	Method LIB[d]	Method GB[e]	Methods DWB, SFB, PBS, PCP, HPS, CS-SFB[e]	Methods WSP, ABW[f], PFH[f] and PFG[e, f]	Methods CS-WSP, CS-G, CS-PF
C (townhouses only)		10	2.5	2.5	2.5	1.6	1.4
		20	5.0	5.0	5.0	3.2	2.7
		30	7.5	7.5	7.5	4.8	4.1
		40	10.0	10.0	10.0	6.4	5.4
		50	12.5	12.5	12.5	8.0	6.8
		10	NP	4.5	4.5	3.0	2.6
		20	NP	9.0	9.0	6.0	5.1
		30	NP	13.5	13.5	9.0	7.7
		40	NP	18.0	18.0	12.0	10.2
		50	NP	22.5	22.5	15.0	12.8
		10	NP	6.0	6.0	4.5	3.8
		20	NP	12.0	12.0	9.0	7.7
		30	NP	18.0	18.0	13.5	11.5
		40	NP	24.0	24.0	18.0	15.3
		50	NP	30.0	30.0	22.5	19.1
D_1		10	NP	~~2.8~~ 5.6	~~2.8~~ 5.6	1.8	1.6
		20	NP	~~5.5~~ 11.0	~~5.5~~ 11.0	3.6	3.1
		30	NP	~~8.3~~ 16.6	~~8.3~~ 16.6	5.4	4.6
		40	NP	~~11.0~~ 22.0	~~11.0~~ 22.0	7.2	6.1
		50	NP	~~13.8~~ 27.6	~~13.8~~ 27.6	9.0	7.7
		10	NP	~~5.3~~ NP	~~5.3~~ NP	3.8	3.2
		20	NP	~~10.5~~ NP	~~10.5~~ NP	7.5	6.4
		30	NP	~~15.8~~ NP	~~15.8~~ NP	11.3	9.6
		40	NP	~~21.0~~ NP	~~21.0~~ NP	15.0	12.8
		50	NP	~~26.3~~ NP	~~26.3~~ NP	18.8	16.0
		10	NP	~~7.3~~ NP	~~7.3~~ NP	5.3	4.5
		20	NP	~~14.5~~ NP	~~14.5~~ NP	10.5	9.0
		30	NP	~~21.8~~ NP	~~21.8~~ NP	15.8	13.4
		40	NP	~~29.0~~ NP	~~29.0~~ NP	21.0	17.9
		50	NP	~~36.3~~ NP	~~36.3~~ NP	26.3	22.3

(continued)

TABLE R602.10.3(3)—continued
BRACING REQUIREMENTS BASED ON SEISMIC DESIGN CATEGORY

• WALL HEIGHT = 10 FEET • 10 PSF FLOOR DEAD LOAD • 15 PSF ROOF/CEILING DEAD LOAD • BRACED WALL LINE SPACING ≤ 25 FEET			MINIMUM TOTAL LENGTH (FEET) OF BRACED WALL PANELS REQUIRED ALONG EACH BRACED WALL LINE[a, g]				
Seismic Design Category[a]	Story Location	Braced Wall Line Length (feet)[c]	Method LIB[d]	Method GB[i]	Methods DWB, SFB, PBS, PCP, HPS, CS-SFB[e]	Methods WSP, ABW[f], PFH[f] and PFG[e, f]	Methods CS-WSP, CS-G, CS-PF
D_1		10	NP	~~3.0~~ 6.0	~~3.0~~ 6.0	2.0	1.7
		20	NP	~~6.0~~ 12.0	~~6.0~~ 12.0	4.0	3.4
		30	NP	~~9.0~~ 18.0	~~9.0~~ 18.0	6.0	5.1
		40	NP	~~12.0~~ 24.0	~~12.0~~ 24.0	8.0	6.8
		50	NP	~~15.0~~ 30.0	~~15.0~~ 30.0	10.0	8.5
		10	NP	~~6.0~~ NP	~~6.0~~ NP	4.5	3.8
		20	NP	~~12.0~~ NP	~~12.0~~ NP	9.0	7.7
		30	NP	~~18.0~~ NP	~~18.0~~ NP	13.5	11.5
		40	NP	~~24.0~~ NP	~~24.0~~ NP	18.0	15.3
		50	NP	~~30.0~~ NP	~~30.0~~ NP	22.5	19.1
		10	NP	~~8.5~~ NP	~~8.5~~ NP	6.0	5.1
		20	NP	~~17.0~~ NP	~~17.0~~ NP	12.0	10.2
		30	NP	~~25.5~~ NP	~~25.5~~ NP	18.0	15.3
		40	NP	~~34.0~~ NP	~~34.0~~ NP	24.0	20.4
		50	NP	~~42.5~~ NP	~~42.5~~ NP	30.0	25.5
D_2[h]		10	NP	~~4.0~~ 8.0	~~4.0~~ 8.0	2.5	2.1
		20	NP	~~8.0~~ 16.0	~~8.0~~ 16.0	5.0	4.3
		30	NP	~~12.0~~ 24.0	~~12.0~~ 24.0	7.5	6.4
		40	NP	~~16.0~~ 32.0	~~16.0~~ 32.0	10.0	8.5
		50	NP	~~20.0~~ 40.0	~~20.0~~ 40.0	12.5	10.6
		10	NP	~~7.5~~ NP	~~7.5~~ NP	5.5	4.7
		20	NP	~~15.0~~ NP	~~15.0~~ NP	11.0	9.4
		30	NP	~~22.5~~ NP	~~22.5~~ NP	16.5	14.0
		40	NP	~~30.0~~ NP	~~30.0~~ NP	22.0	18.7
		50	NP	~~37.5~~ NP	~~37.5~~ NP	27.5	23.4
	Three-story dwelling	10	NP	NP	NP	NP	NP
		20	NP	NP	NP	NP	NP
		30	NP	NP	NP	NP	NP
		40	NP	NP	NP	NP	NP
		50	NP	NP	NP	NP	NP
	Cripple wall below one- or two-story dwelling	10	NP	NP	NP	7.5	6.4
		20	NP	NP	NP	15.0	12.8
		30	NP	NP	NP	22.5	19.1
		40	NP	NP	NP	30.0	25.5
		50	NP	NP	NP	37.5	31.9

(continued)

For SI: 1 inch – 25.4 mm, 1 foot = 304.8 mm, 1 pound per square foot = 0.0479 kPa.

NP – Not Permitted

. . .

i. Methods GB and PCP braced wall panel h/w ratio shall not exceed 1:1 in SDC D_0, D_1 and D_2. Methods DWB, SFB, PBS, and HPS are not permitted in D_0, D_1 or D_2.

SECTION 32. Table R602.10.4 is hereby amended to read as follows:

TABLE R602.10.4

BRACING METHODS

TABLE R602.10.4
BRACING METHODS [1]

	METHODS, MATERIAL	MINIMUM THICKNESS	FIGURE	CONNECTION CRITERIA[2]	
				Fasteners	Spacing
Intermittent Bracing Methods	**LIB** Let-in-bracing	1 × 4 wood or approved metal straps at 45° to 60° angles for maximum 16" stud spacing		Wood: 2-8d common nails or 3-8d (2½" long x 0.113" dia.) nails	Wood: per stud and top and bottom plates
				Metal strap: per manufacturer	Metal: per manufacturer
	DWB Diagonal wood boards	¾" (1" nominal) for maximum 24" stud spacing		2-8d (2½" long × 0.113" dia.) nails or 2 - 1¾" long staples	Per stud
	WSP Wood structural panel (See Section R604)	~~7/16"~~ 15/32"	8d common (2 1/2"x0.131) nails 3/8" edge distance to panel edge	~~Exterior sheathing per Table R602.3(3)~~	6" edges 12" field
			8d common (2 1/2"x0.131) nails 3/8" edge distance to panel edge	~~Interior sheathing per Table R602.3(1) or R602.3(2)~~	~~Varies by fastener~~ 6" edges 12" field
	BV-WSP[3] Wood structural panels with stone or masonry veneer (See Section R602.10.6.5)	⅜"	See Figure R602.10.6.5	8d common (2½" × 0.131) nails	4" at panel edges 12" at intermediate supports 4" at braced wall panel end posts
	SFB Structural fiberboard sheathing	½" or 25/32" for maximum 16" stud spacing		1½" long × 0.12" dia. (for ½" thick sheathing) 1¾" long × 0.12" dia. (for 25/32" thick sheathing) galvanized roofing nails	3" edges 6" field
	GB Gypsum board	½"		Nails or screws per Table R602.3(1) for exterior locations	For all braced wall panel locations: 7" edges (including top and bottom plates) 7" field
				Nails or screws per Table R702.3.5 for interior locations	
	PBS Particleboard sheathing (See Section R605)	⅜" or ½" for maximum 16" stud spacing		For ⅜" 6d common (2" long × 0.113" dia.) nails For ½", 8d common (2½" long × 0.131" dia.) nails	3" edges 6" field
	PCP Portland cement plaster	See Section R703.7 for maximum 16" stud spacing		1½" long, 11 gage, 0.120" dia., ½" dia. head nails or ⅞" long, 16 gage staples	6" o.c. on all framing members
	HPS Hardboard panel siding	7/16" for maximum 16" stud spacing		0.092" dia., 0.225" dia. head nails with length to accommodate 1½" penetration into studs	4" edges 8" field
	ABW Alternate braced wall	⅜"		See Section R602.10.6.1	See Section R602.10.6.1

(continued)

TABLE R602.10.4—continued
BRACING METHODS [1]

	METHODS, MATERIAL	MINIMUM THICKNESS	FIGURE	CONNECTION CRITERIA[a]	
				Fasteners	Spacing
Intermittent Bracing Methods	**PFH** Portal frame with hold-downs	7/16"		See Section R602.10.6.2	See Section R602.10.6.2
	PFG Portal frame at garage	7/16"		See Section R602.10.6.3	See Section R602.10.6.3
Continuous Sheathing Methods	**CS-WSP** Continuously sheathed wood structural panel	3/8" 15/32"	8d common (2 1/2"x0.131) nails 3/8" edge distance to panel edge	~~Exterior sheathing per Table R602.3(3)~~	6" edges 12" field
			8d common (2 1/2"x0.131) nails 3/8" edge distance to panel edge	~~Interior sheathing per Table R602.3(1) or R602.3(2)~~	~~Varies by fastener~~ 6" edges 12" field
	CS-G[b,c] Continuously sheathed wood structural panel adjacent to garage openings	3/8" 15/32"		See Method CS-WSP	See Method CS-WSP
	CS-PF Continuously sheathed portal frame	7/16" 15/32"		See Section R602.10.6.4	See Section R602.10.6.4
	CS-SFB[d, f] Continuously sheathed structural fiberboard	1/2" or 25/32" for maximum 16" stud spacing		1 1/2" long × 0.12" dia. (for 1/2" thick sheathing) 1 3/4" long × 0.12" dia. (for 25/32" thick sheathing) galvanized roofing nails	3" edges 6" field

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 degree = 0.0175 rad, 1 pound per square foot = 47.8 N/m², 1 mile per hour = 0.447 m/s.

a. Adhesive attachment of wall sheathing, including Method CS, shall not be permitted in Seismic Design Categories D_0, D_1, D_2 and E.

b. Applies to panels next to garage door opening where supporting gable end wall or roof load only. Shall only be used on one wall of the garage. In Seismic Design Categories D_0, D_1, and D_2, roof covering dead load shall not exceed 5 psf.

c. Garage openings adjacent to a Method CS-G panel shall be provided with a header in accordance with Table R602.7(1). A full-height clear opening shall not be permitted adjacent to a Method CS-G panel.

d. Method CS-SFB does not apply in Seismic Design Categories D_0, D_1, and D_2.

e. Method applies to detached one- and two-family dwellings in Seismic Design Categories D_0 through D_2 only.

f. Methods GB and PCP braced wall panel hold-down shall not exceed 1,000 lbs in SDC D_0, D_1, or D_2. Methods LIB, OWB, SFB, PBS, HPS, and PPC are not permitted in SDC D_0, D_1, or D_2.

g. Use of staples in braced wall panels shall be prohibited in SDC D_0, D_1, or D_2.

SECTION 33. Table R602.10.5 is hereby amended to read as follows:

TABLE R602.10.5

MINIMUM LENGTH OF BRACED WALL PANELS

TABLE R602.10.5
MINIMUM LENGTH OF BRACED WALL PANELS

METHOD (See Table R602.10.4)		MINIMUM LENGTH[a] (inches)					CONTRIBUTING LENGTH (inches)
		Wall Height					
		8 feet	9 feet	10 feet	11 feet	12 feet	
DWB, WSP, SFB, PBS, PCP, HPS, BV-WSP		48	48	48	53	58	Actual[b]
GB		48	48	48	53	58	Double sided = Actual Single sided = 0.5 × Actual
LIB		55	62	69	NP	NP	Actual[b]
ABW	SDC A, B and C, ultimate design wind speed < 140 mph	28	32	34	38	42	48
	SDC D_0, D_1 and D_2, ultimate design wind speed < 140 mph	32	32	34	NP	NP	
CS-G		24	27	30	33	36	Actual[b]
CS-WSP, CS-SFB	Adjacent clear opening height (inches)						
	≤ 64	24	27	30	33	36	Actual[b]
	68	26	27	30	33	36	
	72	27	27	30	33	36	
	76	30	29	30	33	36	
	80	32	30	30	33	36	
	84	35	32	32	33	36	
	88	38	35	33	33	36	
	92	43	37	35	35	36	
	96	48	41	38	36	36	
	100	—	44	40	38	38	
	104	—	49	43	40	39	
	108	—	54	46	43	41	
	112	—	—	50	45	43	
	116	—	—	55	48	45	
	120	—	—	60	52	48	
	124	—	—	—	56	51	
	128	—	—	—	61	54	
	132	—	—	—	66	58	
	136	—	—	—	—	62	
	140	—	—	—	—	66	
	144	—	—	—	—	72	
METHOD (See Table R602.10.4)		Portal header height					
		8 feet	9 feet	10 feet	11 feet	12 feet	
PFH	Supporting roof only	~~16~~ 24	~~16~~ 24	~~16~~ 24	Note c	Note c	48
	Supporting one story and roof	24	24	24	Note c	Note c	
PFG		24	27	30	Note d	Note d	1.5 × Actual[b]
CS-PF	SDC A, B and C	16	18	20	Note e	Note e	1.5 × Actual[b]
	SDC D_0, D_1 and D_2	~~16~~ 24	~~18~~ 24	~~20~~ 24	Note e	Note e	Actual[b]

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 mile per hour = 0.447 m/s.
NP = Not Permitted.

. . .

SECTION 34. Figure R602.10.6.1 is amended to read as follows:


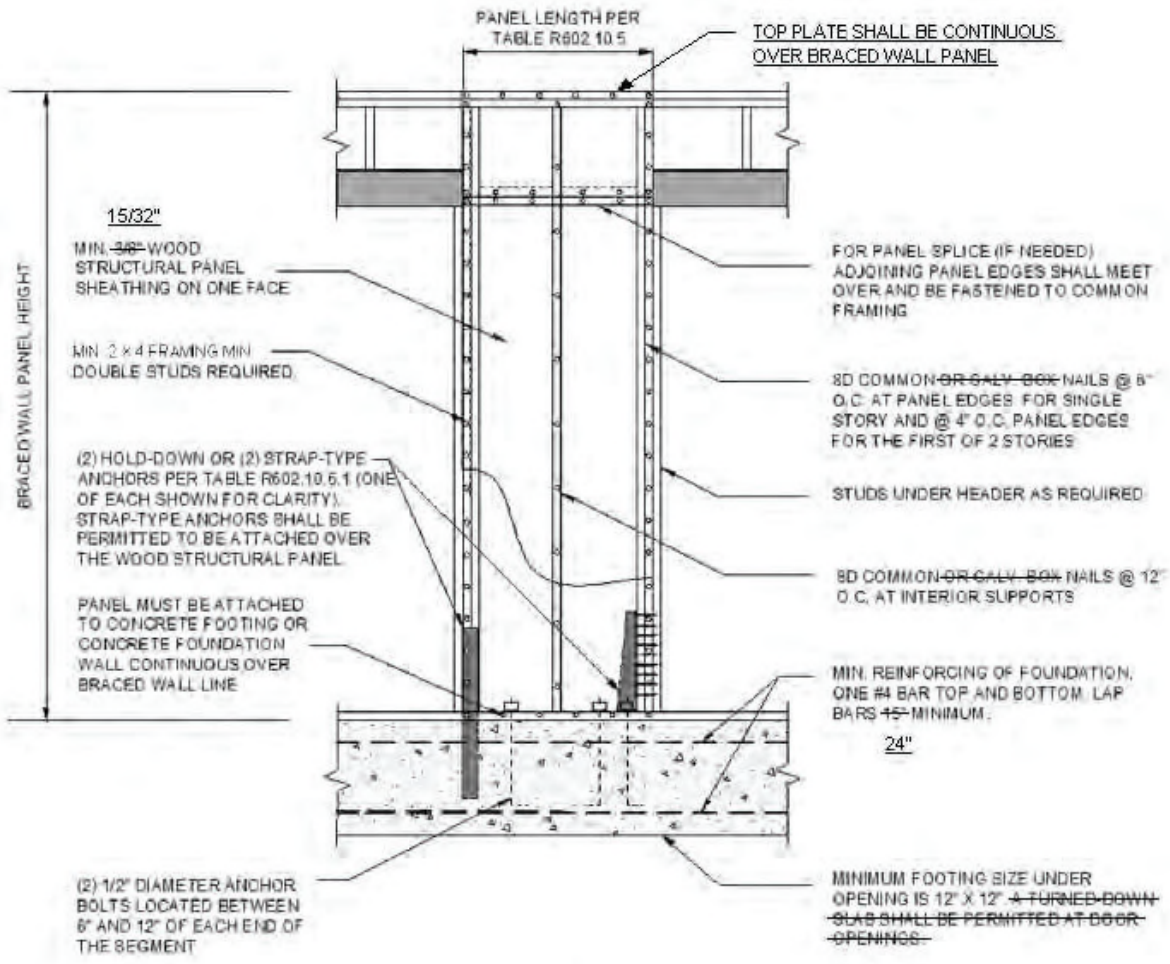


FIGURE R602.10.6.1
METHOD ABW—ALTERNATE BRACED WALL PANEL


SECTION 35. Figure R602.10.6.2 is hereby amended to read as follows:

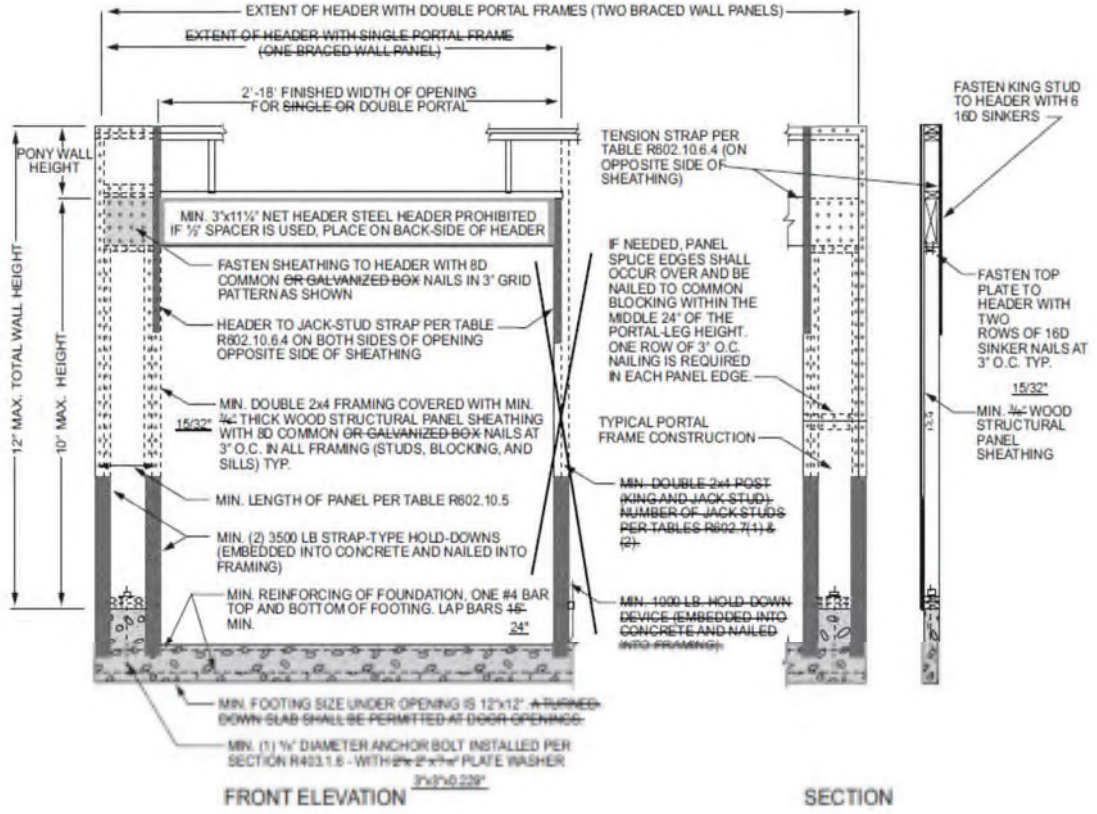

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

FIGURE R602.10.6.2
METHOD PFH—PORTAL FRAME WITH HOLD-DOWNS
AT DETACHED GARAGE DOOR OPENINGS

SECTION 36. Figure R602.10.6.4 is hereby amended to read as follows:

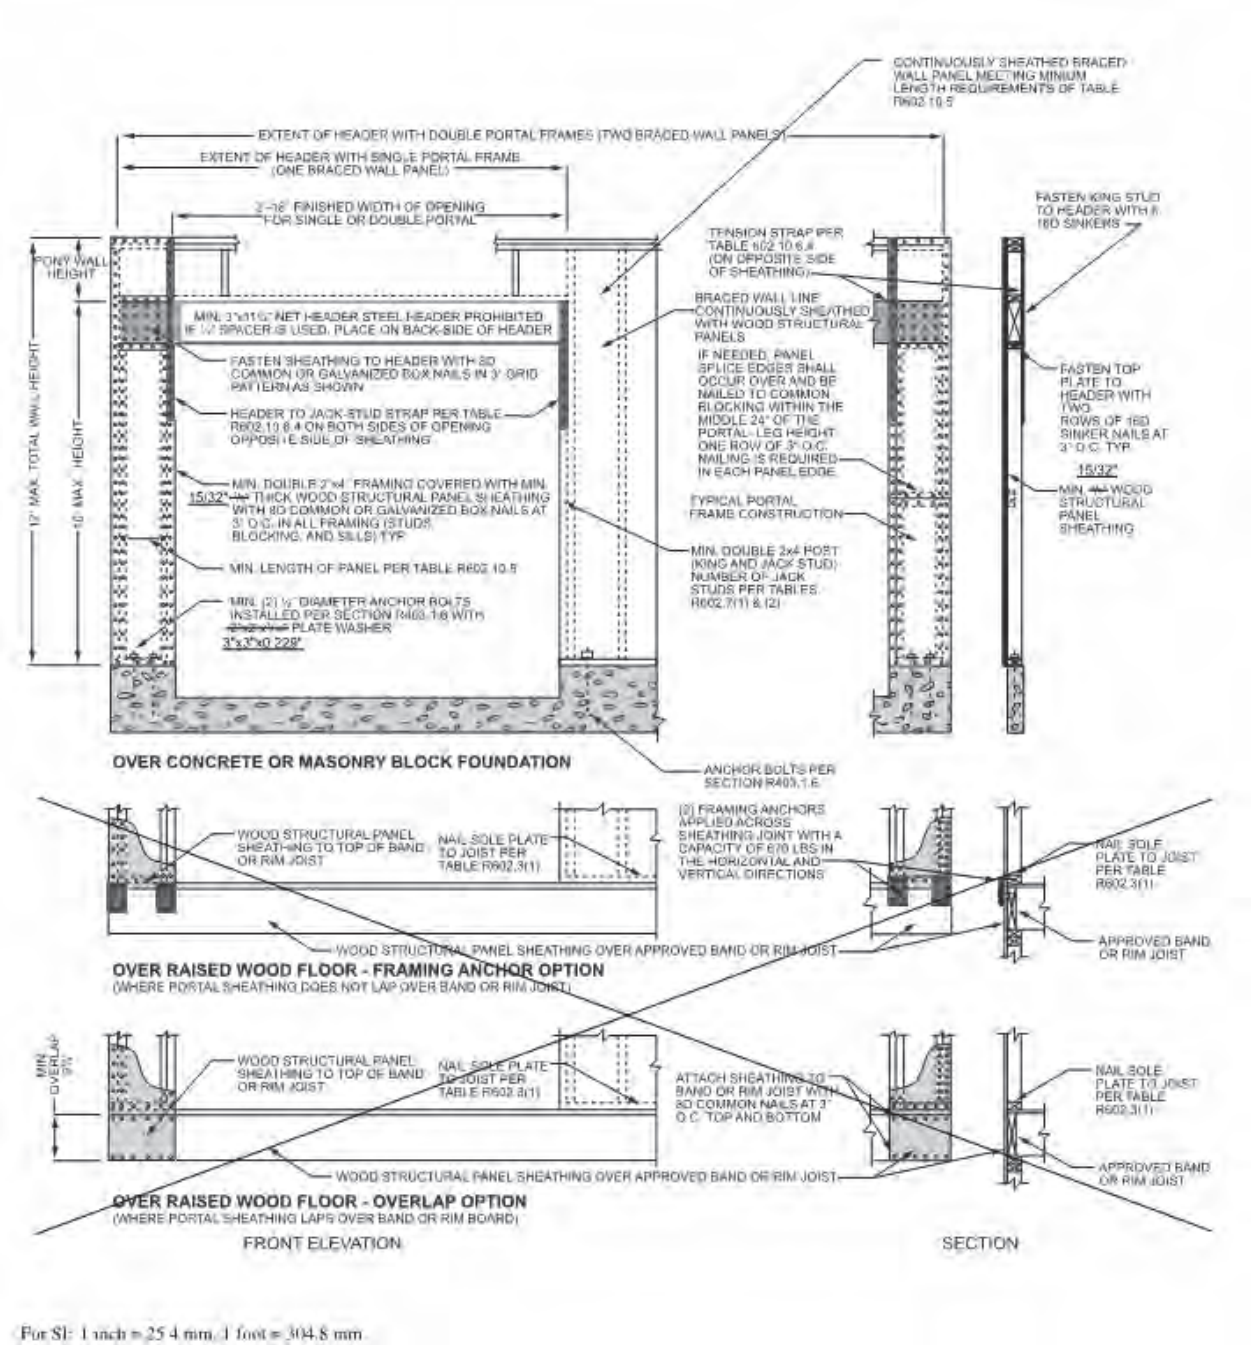

For SI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

FIGURE R602.10.6.4
METHOD CS-PF—CONTINUOUSLY SHEATHED PORTAL FRAME PANEL CONSTRUCTION

SECTION 37. Section R606.4.4 is hereby amended to read as follows:

R606.4.4 Parapet walls.

Unreinforced solid masonry parapet walls shall not be less than 8 inches (203 mm) thick and their height shall not exceed four times their thickness. Unreinforced hollow unit masonry parapet walls shall be not less than 8 inches (203 mm) thick, and their height shall not exceed three times their thickness. Masonry parapet walls in areas subject to wind loads of 30 pounds per square foot (1.44 kPa), or located in Seismic Design Category D_0, D_1, or D_2, or on townhouses in Seismic Design Category C shall be reinforced in accordance with Section R606.12.

SECTION 38. Section R606.12.2.2.3 is hereby amended to read as follows:

R606.12.2.2.3 Reinforcement requirements for masonry elements.

Masonry elements listed in Section R606.12.2.2.2 shall be reinforced in either the horizontal or vertical direction as shown in Figure R606.11(2) and in accordance with the following:

1. Horizontal reinforcement. Horizontal joint reinforcement shall consist of ~~not less than two longitudinal W1.7 wires spaced not more than 16 inches (406 mm) for walls greater than 4 inches (102 mm) in width and not less than one longitudinal W1.7 wire spaced not more than 16 inches (406 mm) for walls not exceeding 4 inches (102 mm) in width; or~~not less than one No. 4 bar spaced not more than 48 inches (1219 mm). ~~Where two longitudinal wires of joint reinforcement are used, the space between these wires shall be the widest that the mortar joint will~~

~~accommodate.~~Horizontal reinforcement shall be provided within 16 inches (406 mm) of the top and bottom of these masonry elements.

2. Vertical reinforcement. Vertical reinforcement shall consist of not less than one No. 4 bar spaced not more than 48 inches (1219 mm). Vertical reinforcement shall be located within ~~16~~8 inches (~~406~~203 mm) of the ends of masonry walls.

SECTION 39. Section R803.2.4 is hereby added to read as follows:

R803.2.4 Openings in horizontal diaphragms.

Openings in horizontal diaphragms shall conform with Section R503.2.4.

SECTION 40. Section R1001.3.1 is hereby amended to read as follows:

R1001.3.1 Vertical reinforcing.

For chimneys up to 40 inches (1016 mm) wide, four No. 4 continuous vertical bars adequately anchored into the concrete foundation shall be placed between wythes of solid masonry or within the cells of hollow unit masonry and grouted in accordance with Section R606. Grout shall be prevented from bonding with the flue liner so that the flue liner is free to move with thermal expansion. For chimneys more than 40 inches (1016 mm) wide, two additional No. 4 vertical bars adequately anchored into the concrete foundation shall be provided for each additional flue incorporated into the chimney or for each additional 40 inches (1016 mm) in width or fraction thereof.

SECTION 41. Section BJ106.1 is hereby amended to read as follows:

BJ106.1 General.

In other than Seismic Design Category D_0, D_1, D_2, E, or F, p~~P~~lastered strawbale walls shall be permitted to be used as structural walls in accordance with the prescriptive provisions of this ~~s~~Section.

SECTION 42. Section CJ101.1 is hereby amended to read as follows:

CJ101.1 Scope.

This appendix ~~shall be applicable~~applies to emergency housing and emergency housing facilities, as defined in Section CJ102, when and to the extent that the County of Los Angeles Board of Supervisors ("Board") finds, by motion, resolution, or otherwise, that this appendix applies to a specific state of emergency, local emergency, or declaration of shelter crisis.

SECTION 43. Section CJ102.1 is hereby amended to read as follows:

CJ102.1 General.

. . .

ENFORCING AGENCY. The Building Official as defined in Section 104.3 of this Code.

. . .

SECTION 44. Section CJ103.1 is hereby amended to read as follows:

CJ103.1 General.

Emergency sleeping cabins, emergency transportable housing units, membrane structures and tents constructed and/or assembled in accordance with this appendix, shall be occupied only during the duration of the declaration of state of emergency, local emergency, or shelter crisis.

. . .

SECTION 45. Section CJ103.4 is hereby amended to read as follows:

CJ103.4 Fire and life safety requirements not addressed in this appendix.

If not otherwise addressed in this appendix, fire and life safety measures, including, but not limited to, means of egress, fire separation, fire sprinklers, smoke alarms, and carbon monoxide alarms, shall be determined and enforced by the enforcing agency in consultation with the Departments of Public Health, Fire, and other pertinent County departments, as applicable.

SECTION 46. Section CJ106.1 is hereby amended to read as follows:

CJ106.1 General.

. . .

Tents and membrane structures shall be provided with means of ventilation (natural and/or mechanical) allowing for adequate air replacement, as determined by the enforcing agency.

SECTION 47. Section CJ107.1 is hereby amended to read as follows:

CJ107.1 General.

Emergency housing shall comply with the applicable requirements in the ~~California~~ Building Code, Chapter 11B and/or the US Access Board Final Guidelines for Emergency Transportable Housing as determined by the enforcing agency.

. . .

SECTION 48. Section CJ110.1.1 is hereby added to read as follows:

CJ110.1.1 Backflow prevention.

Backflow prevention devices shall be provided in accordance with Section 602.3 of the Plumbing Code.

SECTION 49. Section CJ110.1.2 is hereby added to read as follows:

CJ110.1.2 Drinking fountains.

An adequate number of drinking fountains, bottle fillers or drinking facilities shall be provided as determined by the enforcing agency.

SECTION 50. Section CJ110.3 is hereby amended to read as follows:

CJ110.3 Toilet and bathing facilities.

. . .

The maximum travel distance from any sleeping and/or living area to the toilet facility shall not exceed 300 feet (91.4 m) or as determined by the enforcing agency.

SECTION 51. The provisions of this ordinance contain various changes, modifications, and additions to the 2025 Edition of the California Residential Code. Some of these changes are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the California Building Standards Code.

Pursuant to California Health and Safety Code sections 17958.5, 17958.7, and 18941.5, the Board of Supervisors hereby expressly finds that all of the changes and modifications to requirements contained in the building standards published in the California Building Standards Code contained in this ordinance are reasonably necessary because of local climatic, geological, or topographical conditions in the County of Los Angeles due to the potential for seismic activity in the region, topographical conditions that contribute to the spread of wild fires, and climatic conditions that impact air quality and increase the risk of wild fires. In addition, the Board of Supervisors expressly finds that the modifications herein are substantially equivalent to modifications that were previously filed by the County of Los Angeles and were in effect as of September 30, 2025, or that relate to home hardening. Without limiting the foregoing, the County makes additional findings herein:

Code Section	Condition	Explanation of Amendment
R301.1.3.2	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. After the 1994 Northridge Earthquake, the Wood Frame Construction Joint Task Force recommended that the quality of woodframe construction needed to be greatly improved. The Task Force recommended that structural plans be prepared by the engineer or architect so that plan

Code Section	Condition	Explanation of Amendment
		examiners, building inspectors, contractors, and special inspectors may logically follow and construct the seismic force-resisting systems as presented in the construction documents. For buildings or structures located in Seismic Design Category D_0, D_1, D_2, or E that are subject to a greater level of seismic forces, the requirement to have a California licensed architect or engineer prepare the construction documents is intended to minimize or reduce structural deficiencies that may cause excessive damage or injuries in woodframe buildings. Involvement of a registered professional will minimize the occurrence of structural deficiencies such as plan and vertical irregularities, improper shear transfer of the seismic force-resisting system, missed details or connections important to the structural system, and the improper application of the prescriptive requirements of the California Residential Code.
R301.1.5	Geological Topographical	Due to the local topographical and geological conditions of the sites within the greater Los Angeles region and their susceptibility to earthquakes, this technical amendment is required to address and clarify special needs for buildings constructed on hillside locations. A joint Structural Engineers Association of Southern California (SEAOSC) and Los Angeles City Joint Task Force investigated the performance of hillside building failures after the Northridge Earthquake. Numerous hillside failures resulted in loss of life and millions of dollars in damage. These criteria were developed to minimize the damage to these structures and have been in use by the City and County of Los Angeles for several years.
R301.2.2.6	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. Due to the high geologic activities in the Southern California area and the necessary higher level of performance required for buildings and structures, this local amendment limits the type of irregular conditions as specified in the California Residential Code. Such limitations are recommended to reduce structural damage in the event of an

Code Section	Condition	Explanation of Amendment
		earthquake. The County of Los Angeles and cities in this region have implemented these extra measures to maintain the structural integrity of the framing of the shear walls and all associated elements when designed for high levels of seismic loads.
R301.2.2.11	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. Due to the high geologic activity in the Southern California area and the necessary higher level of performance required for buildings and structures, this local amendment limits the potential anchorage and supporting frame failure resulting from additional weight. There is no limitation for weight of mechanical and plumbing fixtures and equipment in the International Residential Code. Requirements from ASCE 7 and the International Building Code would permit equipment weighing up to 400 lbs. when mounted at 4 feet or less above the floor or attic level without engineering design. Where equipment exceeds this requirement, it is the intent of this amendment that a registered design professional be required to analyze if the floor support is adequate and structurally sound.
Table R302.1(2)	Climatic	This amendment will not allow unprotected openings (openings that do not resist the spread of fire) to be in the exterior wall of a residential building that is located on a property line. This amendment is necessary due to local climatic conditions. The hot, dry weather conditions of late summer in combination with the Santa Ana winds creates an extreme fire danger. Residential buildings with unprotected openings located on a property line may permit fires to spread from the inside of the building to adjacent properties and likewise from exterior properties to the interior of the building.
R337.1.1 R337.1.2	Climatic	Clarifies the application of Chapter 5 of the California Wildland Interface Code to harden additions, alterations, and/or relocated buildings. Many areas of the County have been designated as Fire Hazard Severity Zones due to the increased risk of fire caused by low humidity, strong winds, and dry vegetation. Additions, alterations, and/or relocated

Code Section	Condition	Explanation of Amendment
		buildings have the same fire risk as new buildings.
R337.1.3 R337.1.5 R337.1.6	Climatic	Disallows the use of wood-shingle/wood-shake roofs due to the increased risk of fire in the County caused by low humidity, strong winds, and dry vegetation in high fire severity zones in order to further harden residential buildings against fire risk.
R337.1.7	Climatic	Disallows the use of Class B wood-shingle/wood-shake roofs due to the increased risk of fire in the County caused by low humidity, strong winds, and dry vegetation in high fire severity zones in order to further harden residential buildings against fire risk.
R401.1	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. Wood foundations, even those that are preservative-treated, encounter a higher risk of deterioration when contacting the adjacent ground. The required seismic anchorage and transfer of lateral forces into the foundation system necessary for 2-story structures and foundation walls could become compromised at varying states of wood decay. In addition, global structure overturning moment and sliding resistance is reduced when utilizing wood foundations as opposed to conventional concrete or masonry systems. However, non-occupied, single-story storage structures pose significantly less risk to human safety and may utilize the wood foundation guidelines specified in this Chapter.
R403.1.2 R403.1.3.6 R403.1.5 Figure R403.1.5	Climatic Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. These amendments require minimum reinforcement in continuous footings and stepped footings to address the problem of poor performance of plain or under-reinforced footings during a seismic event. These amendments implement the recommendations of SEAOSC and the Los Angeles City Joint Task Force resulting from their investigation of the 1994 Northridge Earthquake. Interior walls can easily be called upon to resist over half of the seismic loading imposed on simple buildings or structures. Without a continuous foundation to support the braced wall line, seismic

Code Section	Condition	Explanation of Amendment
		loads would be transferred through other elements such as non-structural concrete slab floors, wood floors, etc. Requiring interior braced walls to be supported by continuous foundations is intended to reduce or eliminate the poor performance of buildings or structures.
R404.2	Climatic Geological	No substantiating data has been provided to show that wood foundations are effective in supporting structures and buildings during a seismic event while being subject to deterioration caused by the presence of water and other materials detrimental to wood foundations in the soil. Wood foundations, when they are not properly treated and protected against deterioration, have performed very poorly and have led to slope failures. Most contractors are typically accustomed to construction in dry weather in the Southern California region and are not generally familiar with the necessary precautions and treatment of wood that makes it suitable for both seismic events and wet applications. With the higher seismic demand placed on buildings and structures in this region, coupled with the dryer weather conditions, it is the intent of this amendment to reduce or eliminate potential problems resulting from the use of wood footings and foundations.
R501.2	Geological	Due to the high geologic activities in the Southern California area and the necessary higher level of performance required for buildings and structures, this local amendment limits the potential anchorage and supporting frame failure resulting from additional weight. There is no limitation for weight of mechanical and plumbing fixtures and equipment in the International Residential Code. Requirements from ASCE 7 and the International Building Code would permit equipment weighing up to 400 lbs. when mounted at 4 feet or less above the floor or attic level without engineering design. Where equipment exceeds this requirement, it is the intent of this amendment that a registered design professional be required to analyze if the floor support is adequate and structurally sound.

Code Section	Condition	Explanation of Amendment
R503.2.4 Figure R503.2.4	Geological	Section R502.10 of the Code does not provide any prescriptive criteria to limit the maximum floor opening size, nor does Section R503 provide any details to address the issue of shear transfer near larger floor openings. With the higher seismic demand placed on buildings and structures in this region, it is important to ensure that a complete load path is provided to reduce or eliminate potential damage caused by seismic forces. Requiring blocking with metal ties around larger floor openings and limiting opening size is consistent with the requirements of Section R301.2.2.6.
Table R602.3(1) Table R602.3(2)	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. In September 2007, limited cyclic testing data was provided to the ICC Los Angeles Chapter Structural Code Committee showing that stapled wood structural shear panels do not exhibit the same behavior as the nailed wood structural shear panels. The test results of the stapled wood structural shear panels demonstrated lower strength and drift than the nailed wood structural shear panel test results. Therefore, the use of staples as fasteners for shear walls sheathed with other materials shall not be permitted without being substantiated by cyclic testing.
R602.3.2 Table R602.3.2	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. The County of Los Angeles and cities in this region have taken extra measures to maintain the structural integrity of the framing of the shear walls when designed for high levels of seismic loads by eliminating single top plate construction. The performance of modern day braced wall panel construction is directly related to an adequate load path extending from the roof diaphragm to the foundation system.
R602.10.2.3	Geological	The greater Los Angeles region is a densely populated area having buildings and structures constructed over and near a vast array of fault systems capable of producing major earthquakes, including, but not limited, to the 1994 Northridge

Code Section	Condition	Explanation of Amendment
		Earthquake. Plywood shear walls with high aspect ratio experienced many failures during the Northridge Earthquake. This proposed amendment specifies a minimum braced wall length to meet an aspect ratio consistent with other sections of the California Residential Code, and to assure that new buildings and additions to existing buildings are designed and constructed in accordance with the scope and objectives of the California Residential Code. This is intended to improve the performance level of buildings and structures that are subject to the higher seismic demands and reduce and limit potential damage to property. This proposed amendment reflects the recommendations by SEAOSC and the Los Angeles City Joint Task Force that investigated the poor performance observed during the 1994 Northridge Earthquake.
Table R602.10.3(3)	Geological	Due to the high geologic activities in the Southern California area and the necessary higher level of performance of buildings and structures, this local amendment reduces or eliminates the allowable shear values for shear walls sheathed with lath, plaster, or gypsum board. The poor performance of such shear walls sheathed with other materials in the 1994 Northridge Earthquake was investigated by SEAOSC and the Los Angeles City Joint Task Force. The County of Los Angeles and cities in this region have taken extra measures to maintain the structural integrity of the framing of the shear walls when designed for high levels of seismic loads.
Table R602.10.4	Geological	3/8" thick 3 ply-plywood shear walls experienced many failures during the Northridge Earthquake. This amendment specifies minimum WSP sheathing thickness and nail size and spacing, so as to provide a uniform standard of construction to improve the performance level of buildings and structures, given the potential for higher seismic demands placed on buildings or structure in this region. This proposed amendment reflects the recommendations by SEAOSC and the Los Angeles City Joint Task Force following the 1994 Northridge Earthquake. In September 2007, cyclic testing data was provided to

Code Section	Condition	Explanation of Amendment
		the Los Angeles Chapter Structural Code Committee showing that stapled wood structural shear panels underperformed nailed wood structural shear panels. Test results of the stapled wood structural shear panels appeared much lower in strength and drift than the nailed wood structural shear panel test results.
Table R602.10.5	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. The poor performance of such shear walls sheathed in the 1994 Northridge Earthquake was investigated by SEAOSC and the Los Angeles City Joint Task Force. The County of Los Angeles and cities in this region have taken extra measures to maintain the structural integrity with respect to the "maximum shear wall aspect ratios" of the framing of the shear walls when designed for high levels of seismic loads. This amendment is consistent with the shear wall aspect ratio provision of Section 4.3.3 of AWC SDPWS-2021.
Figure R602.10.6.1	Geological	3/8" thick 3 ply-plywood shear walls experienced many failures during the Northridge Earthquake. The poor performance of shear walls in the 1994 Northridge Earthquake was investigated by SEAOSC and the Los Angeles City Joint Task Force. Box nails were observed to cause massive and multiple failures of the typical 3/8" thick 3 ply-plywood during the Northridge Earthquake. The County of Los Angeles and cities in this region have taken extra measures to maintain the structural integrity of the framing of the shear walls when designed for high levels of seismic loads. The performance of modern day braced wall panel construction is directly related to an adequate load path extending from the roof diaphragm to the foundation system.
Figure R602.10.6.2	Geological	3/8" thick 3 ply-plywood shear walls experienced many failures during the Northridge Earthquake. The poor performance of such shear walls in the 1994 Northridge Earthquake was investigated by SEAOSC and the Los Angeles City Joint Task Force. The County of Los Angeles and cities in this region have taken extra measures to maintain the structural

Code Section	Condition	Explanation of Amendment
		integrity of the framing of the shear walls when designed for high levels of seismic loads. Box nails were observed to cause massive and multiple failures of typical 3/8-inch thick plywood during the Northridge Earthquake. This change to the minimum lap splice requirement is consistent with Section 25.5 of ACI 318-19.
Figure R602.10.6.4	Geological	3/8" thick 3 ply-plywood shear walls experienced many failures during the Northridge Earthquake. The poor performance of such shear walls in the 1994 Northridge Earthquake was investigated by SEAOSC and the Los Angeles City Joint Task Force. The County of Los Angeles and cities in this region have taken extra measures to maintain the structural integrity of the framing of the shear walls when designed for high levels of seismic loads. The proposal in which "washers shall be a minimum of 0.229 inch by 3 inches by 3 inches in size" is consistent with Section R602.11.1 of the California Residential Code and Section 2308.7.1 of the California Building Code.
R606.4.4	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. The addition of the word "or" will prevent the use of unreinforced parapets in Seismic Design Category D_0, D_1, or D_2, or on townhouses in Seismic Design Category C.
R606.12.2.2.3	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. Reinforcement using longitudinal wires for buildings and structures located in high seismic areas is not as ductile as deformed rebar. Having vertical reinforcement closer to the ends of masonry walls helps to improve the seismic performance of masonry buildings and structures.
R803.2.4	Geological	Section R802 of the Code does not provide any prescriptive criteria to limit the maximum size of roof openings, nor does Section R803 provide any details to address the issue of shear transfer near larger roof openings. With the higher seismic demand placed on buildings and structures in this region, it is important to ensure that a complete load path is provided to

Code Section	Condition	Explanation of Amendment
		reduce or eliminate potential damage caused by seismic forces. Requiring blocking with metal ties around larger roof openings and limiting the size of openings is consistent with the requirements of Section R301.2.2.6.
R1001.3.1	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. The performance of fireplaces/chimneys without anchorage to the foundation has been observed to be inadequate during major earthquakes. The lack of anchorage to the foundation results in overturn or displacement.
Appendix BJ BJ106.1	Geological	Los Angeles County is prone to seismic activity due to the existence of active faults in the Southern California area. Due to the limited seismic performance information on strawbale construction, this amendment is intended to limit the higher risk strawbale construction poses in a high seismic region.
Appendix CJ CJ101.1, CJ102.1, CJ103.1, CJ103.4, CJ107.1	Administrative, Climatic, Geologic, Topographical	Adoption of this appendix is necessary because strict compliance with state and local standards and laws would prevent, hinder, or delay the mitigation of the effects of a declared shelter crisis or other emergency. The modifications to this appendix are administrative in nature, to provide clarification of various provisions of the language of this voluntary Appendix.
CJ106.1	Climatic	Los Angeles County is subject to extreme temperatures, and many of these membrane structures will be erected and occupied during severe weather events. It is necessary to include this amendment to ensure the safety, health, and comfort of the occupants is maintained during extreme heat and cold.
CJ110.1.1, CJ110.1.2	Administrative	These sections are simply a cross reference to the State Plumbing Code requirement for user convenience and is not adding a new building standard nor enacting a more restrictive requirement. To the extent findings are requested, see prefatory language in this Section.
CJ110.3	Climatic	The County may utilize mobile restroom facilities that are physically separate from the living facilities. Due

Code Section	Condition	Explanation of Amendment
		to the potential for severe local weather conditions, with extreme temperatures or torrential rain, the distance to the restroom facilities required for the comfort, safety, and health of displaced people should be reduced to 300 feet or as determined by the Building Official.

SECTION 45. This ordinance shall become operative on January 1, 2026.

[TITLE30RESDCODE2025CSCC]

ANALYSIS

This ordinance repeals those provisions of Title 31 – Green Building Standards Code – of the Los Angeles County Code that incorporated by reference portions of the 2022 Edition of the California Green Building Standards Code, and the ordinance replaces them with provisions incorporating by reference portions of the 2025 California Green Building Standards Code, as published by the California Building Standards Commission, with certain changes and modifications.

State law requires that the County adopt ordinances that contain the same requirements as are contained in the building standards published in the most recent edition of the California Green Building Standards Code. State law allows the County to change or modify these requirements in compliance with section 17958 of the California Health and Safety Code.

The changes and modifications to requirements contained in the building standards published in the 2025 California Green Building Standards Code that are contained in this ordinance are based upon express findings, contained in the ordinance, that such changes are reasonably necessary due to local climatic, geological, or topographical conditions. These changes and modifications are substantially equivalent to changes or modifications previously filed with the California Building Standards Commission by the County of Los Angeles, which were in effect as of September 30, 2025.

DAWYN R. HARRISON
County Counsel

By

MARGARET AMBROSE
Senior Deputy County Counsel
Public Works Division

MA/bc
Requested: 8/6/25
Revised: 10/1/25

HOA.105511798.7

ORDINANCE NO. _____

An ordinance amending Title 31 – Green Building Standards Code – of the Los Angeles County Code by adopting and incorporating by reference the 20~~22~~25 California Green Building Standards Code with certain changes and modifications, and making other revisions thereto.

The Board of Supervisors of the County of Los Angeles ordains as follows:

SECTION 1. Chapters 2 through 8, and Appendix A4 and Appendix A5, of this Title 31 of the Los Angeles County Code, which incorporate by reference and modify portions of the 20~~19~~22 California Green Building Standards Code, are hereby repealed.

SECTION 2. Section 100 is hereby amended to read as follows:

100 ADOPTION AND INCORPORATION BY REFERENCE

Except as hereinafter changed or modified, Sections 102 through 119 of Chapter 1 of Title 26 of the Los Angeles County Code are adopted and incorporated by reference into this Title 31 as if fully set forth below, and shall be known as Sections 102 through 119 of Chapter 1 of Title 31 of the Los Angeles County Code.

Except as hereinafter changed or modified, Chapters 2 through 8, and Appendix A4 and Appendix A5, of that certain code known and designated as the 20~~22~~25 California Green Building Standards Code, as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 31, as if fully set forth below, and shall be known as Chapters 2 through 8, and Appendix A4 and Appendix A5, of Title 31 of the Los Angeles County Code.

A copy of the 20~~22~~25 California Green Building Standards Code shall be at all times maintained by the Building Official for use and examination by the public.

SECTION 3. Section 202 is hereby amended to read, in alphabetical order, as follows:

202 DEFINITIONS

. . .

COOL ROOF. A roofing material that reduces heat gain through the roof and has either high thermal emittance and high solar reflectance, or low thermal emittance and exceptionally high solar reflectance, as specified in Title 24, Part 6, of the California Energy Code.

COOL ROOF RATING COUNCIL or CRRC. The entity recognized by the California Energy Commission to rate and certify the reflectance and emittance values of roofing products.

. . .

DEVELOPMENT. Any activity requiring discretionary or non-discretionary land use or construction approval from the County that results in the creation, addition, modification, or replacement of impervious surface area, that is not part of routine maintenance activity. Development includes, but is not limited to, land subdivisions; the construction, installation, addition, or replacement of a building or structure; expansion of a building footprint; and land-disturbing activities related to structural or impervious surfaces. Development shall not include routine maintenance of original lines and grades and/or hydraulic capacity.

. . .

SECTION 4. Section 301 is hereby amended to read as follows:

301 GENERAL

301.1 Scope.

Buildings and structures shall be designed to include the green building measures ~~specified as mandatory in the application checklists contained in this code. Voluntary green building measures are also included in the application checklists and may be included in the design and construction of structures covered by this code, but are not required unless adopted by a city, county or city and county as specified in Section 101.7~~indicated in Sections 301.1.1, 301.2, and 301.3.

301.1.1 ~~Additions and alterations~~Residential construction. [HCD]

The mandatory provisions of Chapter 4 shall be applied to newly constructed low-rise and high-rise residential buildings and structures six stories or less and additions to or alterations of existing residential buildings~~ where the addition or alteration increases the building's conditioned area, volume or size~~. The requirements shall apply only to and/or within the specified area of the addition or alteration.

. . .

Newly constructed high-rise residential buildings of seven stories or greater shall comply with Section 301.3.

. . .

301.3 Nonresidential ~~additions and alterations~~construction.

[BSC - CG]

. . .

301.3.3 Nonresidential buildings greater than or equal to 25,000 square feet.

In addition to the requirements of Section 301.3, any newly constructed nonresidential building greater than or equal to 25,000 square feet shall comply with all requirements of Section A5.601.2.4 Tier 1. Roofing materials shall comply with Tier 2 requirements of Table A5.106.11.2.3 [BSC].

Exceptions:

1. Compliance with Section A5.601.2.3 shall be voluntary.

2. High-rise residential buildings of seven stories or greater shall comply with Table A4.106.5.1(4) in lieu of Table A5.106.11.2.3.

SECTION 5. Section 4.106.4 is hereby amended to read as follows:

. . .

4.106.4.1 New one- and two-family dwellings and townhouses with attached private garages.

For each dwelling unit, install a listed raceway ~~to accommodate~~and a dedicated 208/240-volt branch circuit. The raceway shall not be less than trade size 1 (nominal 1- inch inside diameter). The raceway shall originate at the main service or subpanel and shall terminate into a listed ~~cabinet, box, or other enclosure~~attachment plug in close proximity to the proposed location of an EV charger. Raceways are required to be

continuous at enclosed, inaccessible or concealed areas and spaces. The service panel and/or subpanel shall provide ~~capacity to install~~ a 40-ampere 208/240-volt minimum dedicated branch circuit and ~~space(s) reserved to permit installation of~~ a branch circuit overcurrent protective device.

~~Exception: A raceway is not required if a minimum 40-ampere 208/240-volt dedicated EV branch circuit is installed in close proximity to the proposed location of an EV charger at the time of original construction in accordance with the *California Electrical Code*.~~

4.106.4.1.1 Identification.

The service panel or subpanel circuit directory shall identify the overcurrent protective device ~~space(s) reserved~~ for future EV charging as "EV CAPABLE". The raceway termination location shall be permanently and visibly marked as "EV CAPABLE".

. . .

SECTION 6. Section 4.106.5 is hereby added to read as follows:

4.106.5 Low-impact development (LID).

New development or alterations to existing developed sites shall comply with Chapter 12.84 of Title 12 of the Los Angeles County Code.

SECTION 7. Section 4.106.6 is hereby added to read as follows:

4.106.6 Cool roof for reduction of heat island effect.

Roofing materials for conditioned and unconditioned spaces shall comply with the solar reflectance and thermal emittance requirements of this Section.

Exceptions:

1. Roof repair.

2. Roof replacement when the roof area being replaced is equal to or less than fifty (50) percent of the total roof area.

3. Installation of building-integrated photovoltaics.

4. Installation of a steep-sloped roof (roof slope > 2:12) in climate zone 16 on other than a low-rise multifamily building.

5. Additions resulting in less than 500 square feet of added roof area or less than fifty (50) percent of the total roof area, whichever is greater.

6. Roof construction that has a thermal mass over the roof membrane, including areas of vegetated (green) roofs, weighing at least 25 pounds per square foot.

4.106.6.1 Solar reflectance.

Roofing materials shall have a minimum 3-year aged solar reflectance equal to or greater than the values specified in Table 4.106.6(1) and Table 4.106.6(2).

Solar reflectance values shall be based on the aged reflectance value of the roofing product or the equation in Section A4.106.5.1, if the CRRC testing for aged solar reflectance is not available.

4.106.6.2 Thermal emittance.

Roofing materials shall have a CRRC initial or aged thermal emittance equal to or greater than the values specified in Table 4.106.6(1) and Table 4.106.6(2).

4.106.6.3 Solar reflectance index alternative.

Roofing materials having a Solar Reflectance Index (SRI) equal to or greater than the values specified in Table 4.106.6(1) and Table 4.106.6(2) may be used as an alternative to compliance with the 3-year aged solar reflectance and thermal emittance values.

SRI values used to comply with this Section shall be calculated using the SRI Calculation Worksheet (SRI-WS) developed by the California Energy Commission or in compliance with ASTM E1980-01, as specified in the current California Energy Code. Solar reflectance values used in the SRI-WS shall be based on the aged reflectance value of the roofing product or the equation in Section A4.106.5.1, if the CRRC-certified aged solar reflectance is not available. Certified thermal emittance used in the SRI-WS may be either the initial value or the aged value listed by the CRRC.

Note: The Solar Reflectance Index Calculation Worksheet (SRI-WS) is available by contacting the Energy Standards Hotline at 1-800-772-3300, website at www.energy.ca.gov or by email at Title24@energy.ca.gov.

SECTION 8. Tables 4.106.6(1) and 4.106.6(2) are hereby added to read as follows:

TABLE 4.106.6(1) – LOW-RISE RESIDENTIAL

ROOF SLOPE	MINIMUM 3-YEAR AGED SOLAR REFLECTANCE	THERMAL EMITTANCE	SRI
≤2:12	0.65	0.85	78
>2:12	0.25	0.85	20

TABLE 4.106.6(2) – HIGH RISE RESIDENTIAL BUILDINGS, HOTELS AND MOTELS

ROOF SLOPE	MINIMUM 3-YEAR AGED SOLAR REFLECTANCE	THERMAL EMITTANCE	SRI
≤2:12	0.65	0.75	78
>2:12	0.25	0.75	20

SECTION 9. Section 4.408 is hereby amended to read as follows:

4.408 CONSTRUCTION WASTE REDUCTION, DISPOSAL AND RECYCLING

4.408.1 Construction waste management.

Newly-constructed projects and additions and alterations to existing buildings shall ~~R~~recycle and/or salvage for reuse a minimum of sixty-five (65) percent of the non-hazardous construction and demolition ~~waste~~debris in accordance with either Section 4.408.2, 4.408.3, or 4.408.4, or meet a ~~more stringent~~ local construction and demolition waste management ordinance, whichever is more stringent. Calculate the amount of materials diverted by weight or by volume, but not by both.

. . .

SECTION 10. Section 5.106.3 is hereby added to read as follows:

5.106.3 Low-impact development (LID).

New development or alterations to existing developed sites shall comply with Chapter 12.84 of Title 12 of the Los Angeles County Code.

SECTION 11. Section 5.106.11 is hereby added to read as follows:

5.106.11 Cool roof for reduction of heat island effect.

Roofing materials for conditioned and unconditioned spaces shall comply with the solar reflectance and thermal emittance requirements of this Section.

Exceptions:

1. Roof repair.

2. Roof replacement when the roof area being replaced is equal to or less than fifty (50) percent of the total roof area.

3. Installation of building-integrated photovoltaics.

4. Additions resulting in less than 500 square feet of added roof area or less than fifty (50) percent of the total roof area, whichever is greater.

5. Roof construction that has a thermal mass over the roof membrane, including areas of vegetated (green) roofs, weighing at least 25 pounds per square foot.

5.106.11.1 Solar reflectance.

Roofing materials shall have a minimum 3-year aged solar reflectance equal to or greater than values specified in Table 5.106.11.

Solar reflectance values shall be based on the aged reflectance value of the roofing product or the equation in Section A5.106.11.2.1, if the CRRC testing for aged solar reflectance is not available.

5.106.11.2 Thermal emittance.

Roofing material shall have a CRRC initial or aged thermal emittance equal to or greater than the values specified in Table 5.106.11.

5.106.11.3 Solar reflectance index alternative.

Roofing material having a Solar Reflectance Index (SRI) equal to or greater than the values specified in Table 5.106.11 may be used as an alternative to compliance with the 3-year aged solar reflectance and thermal emittance values.

SRI values used to comply with this Section shall be calculated using the SRI Calculation Worksheet (SRI-WS) developed by the California Energy Commission or in compliance with ASTM E1980-11, as specified in the current California Energy Code. Solar reflectance values used in the SRI-WS shall be based on the aged reflectance value of the roofing product or the equation in Section A5.106.11.2.1, if the CRRC-certified aged solar reflectance is not available. Certified thermal emittance used in the SRI-WS may be either the initial value or the aged value listed by the CRRC.

Note: The Solar Reflectance Index Calculation Worksheet (SRI-WS) is available by contacting the Energy Standards Hotline at 1-800-772-3300, website at www.energy.ca.gov or by email at Title24@energy.ca.gov.

SECTION 12. Table 5.106.11 is hereby added to read as follows:

TABLE 5.106.11

ROOF SLOPE	MINIMUM 3-YEAR AGED SOLAR REFLECTANCE	THERMAL EMITTANCE	SRI
≤2:12	0.68	0.85	82
>2:12	0.28	0.85	27

SECTION 13. Section 5.408.1 is hereby amended to read as follows:

5.408.1 Construction waste management.

Newly-constructed projects and additions and alterations to existing buildings shall ~~R~~recycle and/or salvage for reuse a minimum of sixty-five (65) percent of the non-hazardous construction and demolition ~~waste~~debris in accordance with Section 5.408.1.1, 5.408.1.2, or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent. Calculate the amount of materials diverted by weight or volume, but not by both.

SECTION 14. Appendix A4 is hereby amended to read as follows:

APPENDIX A4

RESIDENTIAL VOLUNTARY MEASURES

~~Some of t~~The measures contained in this appendix are not mandatory ~~unless adopted by a city, county or city and county as specified in Section 101.7 and provide additional measures that~~except to the extent indicated elsewhere in this Code. ~~d~~Designers, builders, and property owners ~~may wish~~are encouraged to consider all of these measures during the planning, design, and construction process.

SECTION 15. Section A4.108.1 is hereby amended to read as follows:

A4.108.1 Innovative concepts and local environmental conditions.

The provisions of this ~~c~~Code are not intended to prevent the use of any alternate material, appliance, installation, device, arrangement, method, design, or method of construction not specifically prescribed by this ~~c~~Code. ~~This code does not limit the~~

~~authority of city, county, or city and county government to make necessary changes to the provisions contained in this code pursuant to Section 101.7.1.~~

SECTION 16. Section A4.306.1 is hereby amended to read as follows:

A4.306.1 Innovative concepts and local environmental conditions.

The provisions of this ~~c~~Code are not intended to prevent the use of any alternate material, appliance, installation, device, arrangement, method, design, or method of construction not specifically prescribed by this ~~c~~Code. ~~This code does not limit the authority of city, county, or city and county government to make necessary changes to the provisions contained in this code pursuant to Section 101.7.1.~~

SECTION 17. Section A4.411.1 is hereby amended to read as follows:

A4.411.1 Innovative concepts and local environmental conditions.

The provisions of this ~~c~~Code are not intended to prevent the use of any alternate material, appliance, installation, device, arrangement, method, design, or method of construction not specifically prescribed by this ~~c~~Code. ~~This code does not limit the authority of city, county, or city and county government to make necessary changes to the provisions contained in this code pursuant to Section 101.7.1.~~

SECTION 18. Section A4.509.1 is hereby amended to read as follows:

A4.509.1 Innovative concepts and local environmental conditions.

The provisions of this ~~c~~Code are not intended to prevent the use of any alternate material, appliance, installation, device, arrangement, method, design, or method of construction not specifically prescribed by this ~~c~~Code. ~~This code does not limit the~~

~~authority of city, county, or city and county government to make necessary changes to the provisions contained in this code pursuant to Section 101.7.1.~~

SECTION 19. Section A4.601.1 is hereby amended to read as follows:

A4.601.1 Scope.

The measures contained in this appendix are not mandatory ~~unless adopted by a city, county, or city and county as specified in Section 101.7~~except to the extent indicated elsewhere in this Code. The provisions of this ~~s~~Section outline means of achieving enhanced construction or reach levels by incorporating additional green building measures. In order to meet one of the tier levels, designers, builders or property owners are required to incorporate additional green building measures necessary to meet the threshold of each level.

SECTION 20. Section A4.601.2 is hereby amended to read as follows:

A4.601.2 Prerequisite measures.

Tier 1 and Tier 2 thresholds require compliance with the mandatory provisions of this ~~c~~Code and incorporation of the required prerequisite measures listed in Section A4.601.4.2 for Tier 1 and A4.601.5.2 for Tier 2. ~~Prerequisite measures are also identified in the Residential Occupancies Application Checklist in Section A4.602.~~

~~As specified in Section 101.7, additional prerequisite measures may be included by the enforcing agency to address specific local environmental conditions and may be listed in the Innovative Concepts and Local Environmental Conditions portions of the checklist.~~

SECTION 21. Section A4.602 is hereby amended to read as follows:

RESIDENTIAL OCCUPANCIES APPLICATION CHECKLIST

. . .

~~[1]Green building measures listed in this table may be mandatory if adopted by a city, county, or city and county as specified in Section 101.7.~~Reserved.

. . .

SECTION 22. Section A4.701.1 is hereby amended to read as follows:

A4.701.1 General.

The voluntary measures of this ~~c~~Code are designed and promulgated to be adopted by reference and made mandatory by local ordinance~~ pursuant to Section 101.7~~. Jurisdictions wishing to adopt the voluntary provisions of this ~~c~~Code as an enforceable regulation governing structures and premises should ensure that certain factual information is included in the adopting ordinance and that the measures are appropriate and achievable and are considered to be suitable as mandatory by the city, county, or city and county. The following sample adoption ordinance addresses several key elements of a code adoption ordinance, including the information required for insertion into ~~the~~such code text.

. . .

SECTION 23. The Appendix A5 heading is hereby amended to read as follows:

APPENDIX A5

NON-RESIDENTIAL VOLUNTARY MEASURES

The measures contained in this appendix are not mandatory ~~unless adopted by a city, county, or city and county as specified in Section 101.7 and provide additional measures that~~except to the extent indicated elsewhere in this Code. ~~d~~Designers, builders and property owners ~~may wish~~are encouraged to consider all of these measures during the planning, design, and construction process.

SECTION 24. Section A5.601.1 is hereby amended to read as follows:

A5.601.1 Scope.

The measures contained in this appendix are not mandatory ~~unless adopted by local government as specified in Section 101.7~~except to the extent indicated elsewhere in this Code. The provisions of this ~~s~~Section outline means of achieving enhanced construction or reach levels by incorporating additional green building measures for newly constructed nonresidential buildings as well as additions and alterations. In order to meet one of the tier levels, designers, builders or property owners are required to incorporate additional green building measures necessary to meet the threshold of each level. Refer to the provisions in Section 301.3 for non-residential ~~additions and alterations~~construction scope and application.

SECTION 25. The provisions of this ordinance contain various changes, modifications, and additions to the 20~~22~~25 Edition of the California Green Building Standards Code. Some of these changes are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the California Green Building Standards Code.

Pursuant to California Health and Safety Code sections 17958.5, 17958.7, and 18941.5, the Board of Supervisors hereby expressly finds that all of the changes and modifications to requirements contained in the building standards published in the California Building Standards Code that are contained in this ordinance are reasonably necessary because of local climatic, geological, or topographical conditions in the County of Los Angeles due to the potential for seismic activity in the region, topographical conditions that contribute to the spread of wild fires, and climatic conditions that impact air quality and increase the risk of wild fires. In addition, the Board of Supervisors expressly finds that the modifications herein are substantially equivalent to modifications that were previously filed by the County of Los Angeles and were in effect as of September 30, 2025. Without limiting the foregoing, the County makes additional findings herein:

GREEN BUILDING STANDARDS CODE AMENDMENTS		
CODE SECTION	**CONDITION**	**EXPLANATION**
301.1, 301.1.1	Climatic and Topographic	Environmental resources in the County of Los Angeles are scarce due to varying, and occasionally immoderate, temperatures and weather conditions. Expanding the scope of the mandatory requirements of this Code for all residential additions and alterations, and for residential buildings of seven stories or greater in height, will achieve a greater reduction in greenhouse gases, higher efficiencies of energy, water, and material usage, and improved environmental air quality.
301.3, 301.3.3	Climatic and Topographic	Environmental resources in the County of Los Angeles are scarce due to varying, and occasionally immoderate, temperatures and weather conditions. Expanding the scope of the mandatory requirements of this Code for nonresidential buildings and residential buildings of seven stories or greater in height that are greater than or equal to 25,000 square feet in floor area will achieve a greater reduction in greenhouse gases, higher efficiencies of energy, water, and material usage, and improved environmental air quality.
4.106.4.1, 4.106.4.1.1,	Climatic	The County of Los Angeles is a densely populated area with elevated levels of greenhouse gas emissions. The proposed modification to increase the number of EV charging spaces and stations will help to promote the use of electric vehicles and significantly reduce local air and noise pollution and greenhouse gas emissions, thereby improving the health of the County's residents, businesses, and visitors.
4.106.5	Climatic and Topographic	The County of Los Angeles is a densely populated area having residential buildings constructed within a region where water is scarce and maintaining storm water runoff quality is required. The proposed low-impact development measures will allow greater

GREEN BUILDING STANDARDS CODE AMENDMENTS		
CODE SECTION	**CONDITION**	**EXPLANATION**
		conservation of rain water, increase in groundwater recharge, reduction of storm water runoff, and improvement in storm water runoff quality.
4.106.6, 4.106.6.1, 4.106.6.2, 4.106.6.3, Table 4.106.6(1) Table 4.106.6(2)	Climatic	Environmental resources in the County of Los Angeles are scarce due to varying, and occasionally immoderate, temperatures and weather conditions. Adding mandatory requirements for cool roofs for residential occupancies will achieve a greater reduction in greenhouse gases, higher efficiencies of energy, and improved environmental air quality.
5.106.3	Climatic and Topographic	The County of Los Angeles is a densely populated area having buildings constructed within a region where water is scarce and maintaining storm water runoff quality is required. The proposed low-impact development measures will allow greater conservation of rain water, increase in groundwater recharge, reduction of storm water runoff, and improvement in storm water runoff quality.
5.106.11, 5.106.11.1, 5.106.11.2, 5.106.11.3, Table 5.106.11	Climatic	Environmental resources in the County of Los Angeles are scarce due to varying, and occasionally immoderate, temperatures and weather conditions. Adding mandatory requirements for cool roofs for nonresidential occupancies will achieve a greater reduction in greenhouse gases, higher efficiencies of energy, and improved environmental air quality.
A5.601.1	Climatic and Topographic	Environmental resources in the County of Los Angeles are scarce due to varying, and occasionally immoderate, temperatures and weather conditions. Expanding the scope of the mandatory requirements of this Code for nonresidential buildings and residential buildings of seven stories or greater in height that are greater than or equal to 25,000 square feet in floor area will achieve a greater reduction in

GREEN BUILDING STANDARDS CODE AMENDMENTS		
CODE SECTION	**CONDITION**	**EXPLANATION**
		greenhouse gases, higher efficiencies of energy, water, and material usage, and improved environmental air quality.

SECTION 26. This ordinance shall become operative on January 1, 2026.

[TITLE31GREENBUILDCODE2025CSCC]

ANALYSIS

This ordinance repeals those provisions of Title 33 – Existing Building Code – of the Los Angeles County Code that incorporated by reference portions of the 2022 California Existing Building Code and replaces them with provisions incorporating by reference portions of the 2025 California Existing Building Code, published by the California Building Standards Commission, with certain changes and modifications. Unless deleted or modified herein, the previously enacted provisions of Title 33 continue in effect.

State law requires that the County's Existing Building Code impose the same requirements as are contained in the building standards published in the most recent edition of the California Existing Building Code. State law allows the County to change or modify these requirements in compliance with section 17958 of the California Health and Safety Code.

The changes and modifications to requirements contained in the building standards published in the 2025 California Existing Building Code that are contained in this ordinance are based upon express findings, contained in the ordinance, that such changes are reasonably necessary due to local climatic, geological, or topographical conditions. These changes and modifications are substantially equivalent to changes or modifications previously filed by the County of Los Angeles, which were in effect as of September 30, 2025.

DAWYN R. HARRISON
County Counsel

By
MARGARET F. AMBROSE
Principal Deputy County Counsel
Public Works Division

MFA/bc:

Requested: 07/31/25
Revised: 10/22/25

HOA.105518009.9

ORDINANCE NO. _____

An ordinance amending Title 33 – Existing Building Code – of the Los Angeles County Code, to adopt and incorporate by reference the 20~~22~~25 California Existing Building Code, with certain changes and modifications.

The Board of Supervisors of the County of Los Angeles ordains as follows:

SECTION 1. Chapters 2 through 5, 15, and 16, and Appendix A, Chapters A1, A3, A4, and A5, of this Title 33 of the Los Angeles County Code, which incorporated by reference and modified portions of the 20~~19~~22 California Existing Building Code, are hereby repealed.

SECTION 2. Chapter 1 is hereby amended to read as follows:

100 ADOPTION AND INCORPORATION BY REFERENCE

Except as hereinafter changed or modified, Sections 102 through 119 of Chapter 1 of Title 26 of the Los Angeles County Code are adopted and incorporated by reference into this Title 33 of the Los Angeles County Code as if fully set forth below, and shall be known as Sections 102 through 119 of Chapter 1 of Title 33 of the Los Angeles County Code.

Except as hereinafter changed or modified, Chapters 2 through ~~5~~11, 14, 15, and 16, and Appendix A, Chapters A1, A3, A4, and A5, of that certain code known and designated as the ~~2022~~2025 California Existing Building Code, as published by the California Building Standards Commission, are adopted and incorporated by reference into this Title 33, as if fully set forth below, and shall be known as Chapters 2

through ~~5~~11, 14, 15 and 16, and Appendix A, Chapters A1, A3, A4, and A5, of Title 33 of the Los Angeles County Code.

A copy of the ~~2022~~2025 California Existing Building Code shall be at all times maintained by the Building Official for use and examination by the public.

SECTION 3. Section 302.6 is hereby added to read as follows:

302.6 Parapets and appendages.

302.6.1 General compliance. Whenever the Building Official determines by inspection that, as a result of inadequate construction or bracing to resist horizontal forces, an existing parapet or appendage attached to and supported by an exterior wall of a building is likely to become a hazard to life or property in the event of earthquake disturbance, and such parapet or appendage is not an immediate hazard or danger, as described in Section 102, the Building Official may provide the owner of the building or other person or agent in control of the building, where such parapet or other appendage exists, with a written notice specifying the hazards and the inadequacies of the construction or bracing. The owner of the building or other person or agent in control of the building shall, within 12 months from the date of such written notice, eliminate the hazard as set forth below. Any person receiving notice as set out in this Section may appeal, in the manner provided by Section 102.4, to the Building Board of Appeals.

302.6.2 Wall anchor. The parapet or appendage shall be removed and the remainder of the wall shall be anchored at the roof line, or it shall be reconstructed so that it will conform structurally as nearly as practicable to the requirements of Chapter 16 of the Building Code, or it shall be otherwise braced and strengthened in a manner satisfactory to the Building Official, so that it will resist a reasonable degree of horizontal forces without becoming dislodged or at risk of falling.

302.6.3 Inspection of existing condition. Where, in the opinion of the Building Official, it is necessary to open a portion of a roof, wall, or ceiling of a building in order to determine the structural condition of any parapet or appendage, the Building Official may order the owner to make such opening, and the owner shall comply with said order at the owner's sole cost and expense.

SECTION 4. Section 302.7 is hereby added to read as follows:

302.7 Existing glass. Whenever the Building Official determines by inspection that an existing glass installation, in rooms having an occupant load of more than 100 persons or a means of egress serving an occupant load of more than 100 persons, as determined by Chapter 10 of the Building Code, is likely to become a hazard in the event of accidental human impact, as described in Section 2406.4 of the Building Code, and such installation does not comply with the provisions for glazing in such locations, the Building Official may provide the owner of the building or other person or agent in control of the building where such glazing exists with a written notice of such condition. The owner of the building or other person or agent in control of the

building shall, within 90 days after receiving said notice, replace such glass or otherwise cause the installation to conform to the requirements of the Building Code.

SECTION 5. Section A401.2 is hereby amended to read as follows:

A401.2 Scope. The provisions of this ~~c~~Chapter ~~apply to~~may be used for voluntary seismic improvements to existing buildings of wood construction that contain residential occupancies and are assigned to Risk Category II, and where the structure has a soft, weak, or open-front wall line, and there exists one or more stories above.

SECTION 6. Section A403.1 is hereby amended to read as follows:

[BS] A403.1 General. Modifications required by the provisions in this ~~c~~Chapter shall be designed in accordance with the ~~California~~ Building Code provisions for new construction, except as modified by this ~~c~~Chapter.

Exception: Buildings for which the prescriptive measures provided in Section A404 apply and are used.

Alteration of the existing lateral force-resisting system or vertical load-carrying system shall not reduce the strength or stiffness of the existing structure, unless the altered structure would remain in conformance to the ~~b~~Building ~~c~~Code and this ~~c~~Chapter.

SECTION 7. Section A404.1 is hereby amended to read as follows:

[BS] A404.1 Limitation. These prescriptive measures shall apply only to two-story buildings and only when deemed appropriate by the ~~code~~Building ~~o~~Official. These prescriptive measures rely on rotation of the second floor diaphragm to distribute the seismic load between the side and rear walls around a ground floor open area. In the absence of an existing floor diaphragm of wood structural panel or diagonal sheathing at the top of the first story, a new wood structural panel diaphragm of minimum thickness of ¾ inch (19.1 mm) and with 10d common nails at 6 inches (152 mm) on center shall be applied. A California licensed architect or engineer shall demonstrate compliance with the requirements of Section A404.1 and shall approve and stamp the construction documents.

SECTION 8. Section A405.1 is hereby amended to read as follows:

[BS] A405.1 New materials. New materials shall meet the requirements of the ~~California~~ Building Code, except where allowed by this ~~c~~Chapter.

SECTION 9. Section A407.1 is hereby amended to read as follows:

[BS] A407.1 Structural observation.

Structural observation, in accordance with Section 1704.6 of the ~~California~~ Building Code, is required, regardless of seismic design category, height, or other conditions. Structural observation shall include visual observation of work for conformance to the approved construction documents and confirmation of existing conditions assumed during design.

SECTION 10. Section A407.3 is hereby amended to read as follows:

[BS] A407.3 Testing and inspection.

Structural testing and inspection for new construction materials, submittals, reports and certificates of compliance shall be in accordance with Sections 1704 and 1705 of the ~~California~~ Building Code. Work done to comply with this ~~c~~Chapter shall not be eligible for Exceptions 1, 2, or 3 of Section 1704.2 of the ~~California~~ Building Code or for the exception to Section 1705.13.2 of the ~~California~~ Building Code.

SECTION 11. The provisions of this ordinance contain various changes, modifications, and additions to the 2025 Edition of the California Existing Building Code. Some of these changes are administrative in nature in that they do not constitute changes or modifications to requirements contained in the building standards published in the California Existing Building Code.

Pursuant to California Health and Safety Code sections 17958.5, 17958.7, and 18941.5, the Board of Supervisors hereby expressly finds that all of the changes and modifications to requirements contained in the building standards published in the California Building Standards Code contained in this ordinance are reasonably necessary because of local climatic, geological, or topographical conditions in the County of Los Angeles due to the potential for seismic activity in the region, topographical conditions that contribute to the spread of wild fires, and climatic conditions that impact air quality and increase the risk of wild fires. In addition, the Board of Supervisors expressly finds that the modifications herein are substantially equivalent to modifications that were previously filed by the County of Los Angeles and

were in effect as of September 30, 2025. Without limiting the foregoing, the County makes additional findings herein:

EXISTING BUILDING CODE AMENDMENTS		
CODE SECTION	**CONDITION**	**EXPLANATION**
302.6.1 to 302.6.3	Geologic	The greater Los Angeles/Long Beach region is a densely populated area having buildings constructed over and near a vast array of fault systems capable of producing major earthquakes, including, but not limited to, the 1994 Northridge Earthquake. The purpose of the amendments is to prevent inadequate construction or bracing to increase resistance to horizontal forces, thus minimizing hazards to life or property in the event of an earthquake.
302.7	Geologic	The greater Los Angeles/Long Beach region is a densely populated area having buildings constructed over and near a vast array of fault systems capable of producing major earthquakes, including, but not limited to, the 1994 Northridge Earthquake. The purpose of the amendment is to minimize injuries caused by shattering glass in the event of an earthquake.
A401.2	Geologic, Administrative, Voluntary Appendix	The greater Los Angeles/Long Beach region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, including, but not limited to, the 1994 Northridge Earthquake. The purpose of this amendment is to provide voluntary building standards to constituents that are performing seismic retrofitting for existing structures.
A404.1	Administrative, Geologic, Voluntary Appendix	The greater Los Angeles/Long Beach region is situated over a vast array of earthquake fault systems capable of producing major earthquakes, including, but not limited to, the 1994 Northridge Earthquake. The purpose of this amendment is to provide voluntary building standards to constituents that are performing seismic retrofitting for existing structures. Due to these factors, the County requires a licensed

EXISTING BUILDING CODE AMENDMENTS		
CODE SECTION	**CONDITION**	**EXPLANATION**
		architect or engineer stamp and approval of the construction documents.

SECTION 12. This ordinance shall become operative on January 1, 2026.

[TITLE33EXISTBUILDCODE2025CSCC]

NOTICE OF HEARING
REGARDING ORDINANCES AMENDING TITLES 26 - BUILDING CODE, 27 - ELECTRICAL CODE, 28 - PLUMBING CODE, 29 - MECHANICAL CODE, 30 - RESIDENTIAL CODE, 31 - GREEN BUILDING STANDARDS CODE, AND 33 - EXISTING BUILDING CODE OF THE LOS ANGELES COUNTY CODE

NOTICE IS HEREBY GIVEN that a public hearing will be held by the Board of Supervisors regarding the adoption of ordinances amending Titles 26 - Building Code, 27 - Electrical Code, 28 - Plumbing Code, 29 - Mechanical Code, 30 - Residential Code, 31 - Green Building Standards Code, and 33 - Existing Building Code of the Los Angeles County Code.

Said hearing will be held in the Hearing Room of the Board of Supervisors, Room 381B, Kenneth Hahn Hall of Administration, 500 West Temple Street (corner of Temple Street and Grand Avenue), Los Angeles, California, 90012, on November 25, 2025, at 9:30 a.m.

The proposed ordinances will amend Titles 26 - Building Code, 27 - Electrical Code, 28 - Plumbing Code, 29 - Mechanical Code, 30 - Residential Code, 31 - Green Building Standards Code, and Title 33 - Existing Building Code of the Los Angeles County Code by repealing the provisions contained in these Titles, which had incorporated by reference the 2022 Edition of the California Building Standards Code and replacing them with provisions incorporating by reference the applicable portions of the 2025 Edition of the California Building Standards Code, published by the California Building Standards Commission, with certain changes and modifications.

Copies of the applicable portions of the 2025 Edition of the California Building Standards Code, published by the California Building Standards Commission, are on file with the Executive Office of the Board and are available for public inspection and also available at the following website link: https://www.dgs.ca.gov/BSC/Codes.

Notice is further given that at the conclusion of the hearing, the Board of Supervisors may adopt the proposed ordinances, decline to adopt the proposed ordinances, or make amendments to the ordinances that are justified by the evidence presented and warranted by local conditions.

If you do not understand this notice or need more information, please call Ms. Jennifer Dang of Public Works, Building and Safety Division, at (626) 458-2679. Our office hours are Monday through Thursday from 7 a.m. to 5:45 p.m.

Upon (7) business day notice, the County can provide program information and publications in alternate formats or make other accommodations for people with disabilities. In addition, documents are available at the Kenneth Hahn Hall of Administration in Los Angeles (500 West Temple Street), which is accessible to individuals with disabilities. Individuals requiring reasonable accommodations, interpretation services, and materials in other languages or in an alternate format may submit a request to Public Works free of charge at (626) 979-5333 at least seven (7) business days prior to the meeting. Hours of operation are Monday - Thursday from

7 a.m. - 5 p.m. Requests outside of the 7-day time frame will be accommodated to the extent feasible. Individuals with hearing or speech impairment may use California Relay Service 711.

Para acomodaciones razonables de ADA (Ley de Estadounidenses con Discapacidades) y Adaptación del Título VI, servicios de interprete y materiales en otros idiomas, por favor contactarse con Obras Publicas al (626) 979-5333. Este servicio es gratuito.

- Link to Los Angeles County Building Code 2026 Edition (Title 26 of the Los Angeles County Code)
  https://library.municode.com/ca/los_angeles_county/codes/code_of_ordinances?nodeId=TIT26BUCO

IRWINDALE CITY COUNCIL CHAMBERS **DECEMBER 10, 2025**
5050 N. IRWINDALE AVENUE **WEDNESDAY**
IRWINDALE, CALIFORNIA 91706 **7:31 P.M.**

The Irwindale **SUCCESSOR AGENCY TO THE IRWINDALE COMMUNITY REDEVELOPMENT AGENCY** met in regular session at the above time and place.

ROLL CALL:
Present: Councilmembers Mark A. Breceda, Larry G. Burrola, Manuel R. Garcia, Mayor Pro Tem Albert F. Ambriz, Mayor H. Manuel Ortiz

Also Present: Julian A. Miranda, City Manager; Jamie Traxler, Assistant City Attorney; Theresa Olivares, Assistant City Manager; Christopher Hofford, Chief of Police; Kambiz Borhani, Director of Finance / City Treasurer; Marilyn Simpson, Community Development Director; Eddie Chan, Director of Engineering / Building Official; Elizabeth Rodriguez, Public Services Director; Mary Hull, Human Resources Manager, and Laura Nieto, Chief Deputy City Clerk

AB 2449 DISCLOSURES
None.

CONSENT CALENDAR
A motion was made by Councilmember Breceda, seconded by Councilmember Burrola, to approve the Consent Calendar. The motion was unanimously approved.

ITEM NO. 21A
MINUTES OF THE REGULAR MEETING HELD JULY 23, 2025

The minutes were approved.

ITEM 21B
WARRANTS / DEMANDS/ PAYROLL

The warrants/demands/payroll were approved.

ITEM 21C
CONSIDERATION OF RESOLUTION NO. SA 2025-109-3697 OF THE CITY OF IRWINDALE AS SUCCESSOR AGENCY TO THE IRWINDALE COMMUNITY REDEVELOPMENT AGENCY APPROVING A RECOGNIZED OBLIGATION PAYMENT SCHEDULE AND ADMINISTRATIVE BUDGET FOR JULY 1, 2026 THROUGH JUNE 30, 2027

Resolution No. SA 2025-109-3697 entitled “A RESOLUTION OF THE CITY COUNCIL OF THE CITY OF IRWINDALE AS SUCCESSOR AGENCY TO THE IRWINDALE COMMUNITY REDEVELOPMENT AGENCY APPROVING A RECOGNIZED OBLIGATION PAYMENT SCHEDULE AND ADMINISTRATIVE BUDGET FOR THE TWELVE-MONTH FISCAL PERIOD BEGINNING JULY 1, 2026 AND ENDING JUNE 30, 2027” was adopted.

END OF CONSENT CALENDAR

SPONTANEOUS COMMUNICATIONS
There were no speakers.

ADJOURNMENT
There being no further business to conduct, the meeting was adjourned at 7:32 p.m.

_____
Laura M. Nieto, MMC
Chief Deputy City Clerk

IRWINDALE CITY COUNCIL CHAMBERS **DECEMBER 10, 2025**
5050 N. IRWINDALE AVENUE **WEDNESDAY**
IRWINDALE, CALIFORNIA 91706 **7:32 P.M.**

The Irwindale **HOUSING AUTHORITY** met in regular session at the above time and place.

ROLL CALL:
Present: Board Members Albert F. Ambriz; Mark A. Breceda, Manuel R. Garcia;
Vice Chair H. Manuel Ortiz; Chair Larry G. Burrola

Also present: Julian A. Miranda, Executive Director; Adrian Guerra, General Counsel; Theresa Olivares, Assistant Executive Director; Christopher Hofford, Chief of Police; Kambiz Borhani, Director of Finance / City Treasurer; Marilyn Simpson, Community Development Director; Elizabeth Rodriguez, Public Services Director; Eddie Chan, Director of Engineering / Building Official; Mary Hull, Human Resources Manager, and Laura Nieto, and Chief Deputy City Clerk

AB 2449 DISCLOSURES
None.

CONSENT CALENDAR

A motion was made by Vice Chair Ambriz, seconded by Board Member Breceda, to approve the Consent Calendar. The motion was unanimously approved.

ITEM NO. 25A
MINUTES OF THE REGULAR MEETING HELD JULY 23, 2025

The minutes of the meeting held July 23, 2025, were approved as presented.

ITEM NO. 25B
SB 341 COMPLIANCE REPORT FOR FISCAL YEAR (FY) 2024-2025

The SB 341 Compliance Report for FY 2024-2025 was received and filed; it was directed that such report be filed with the City of Irwindale City Clerk's office and the California Department of Housing and Community Development.

SPONTANEOUS COMMUNICATIONS
There were no speakers.

ADJOURNMENT
There being no further business to conduct, the meeting was adjourned at 7:33 p.m.

_____
Laura M. Nieto, MMC
Chief Assistant Authority Secretary